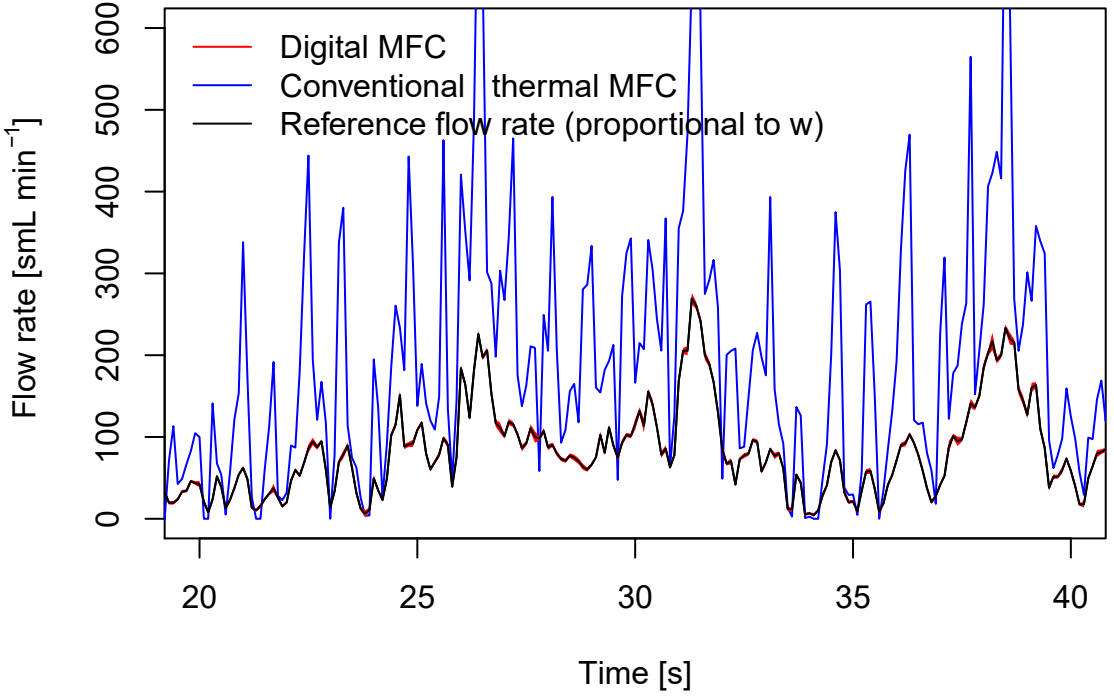
Digital MFC
Conventional thermal MFC
Reference flow rate (proportional to w)
Flow rate [smL min^{-1}]
0
100
200
300
400
500
600
20
25
30
35
40
Time [s]