



Simulation and detection efficiency analysis for measurements of polar mesospheric clouds using a spaceborne wide-field-of-view ultraviolet imager

Ke Ren², Haiyang Gao^{1,2}, Shuqi Niu², Shaoyang Sun², Leilei Kou^{1,2}, Yanqing Xie³, Liguang Zhang³, and Lingbing Bu^{1,2}

¹Key Laboratory for Aerosol-Cloud-Precipitation of China Meteorological Administration, Nanjing University of Information Science & Technology, Nanjing, 210044, China

²School of Atmospheric Physics, Nanjing University of Information Science & Technology, Nanjing, 210044, China

³Shanghai Academy of Spaceflight Technology, Shanghai, 201109, China

Correspondence: Haiyang Gao (gaohy@nuist.edu.cn)

Received: 28 August 2023 – Discussion started: 15 May 2024

Revised: 20 June 2024 – Accepted: 27 June 2024 – Published: 23 August 2024

Abstract. The variation trends and characteristics of polar mesospheric clouds (PMCs) are important for studying the evolution of atmospheric systems and understanding various atmospheric dynamic processes. Through observation and analysis of PMCs, we can gain a comprehensive understanding of the mechanisms driving atmospheric processes, providing a scientific basis and support for addressing climate change. Ultraviolet (UV) imaging technology, adopted by the Cloud Imaging and Particle Size (CIPS) instrument on board the Aeronomy of Ice in the Mesosphere (AIM) satellite, has significantly advanced the research on PMCs. Due to the retirement of the AIM satellite, there is currently no concrete plan for next-generation instruments based on the CIPS model, resulting in a discontinuity in the observation data sequence.

In this study, we propose a compact and cost-effective wide-field-of-view ultraviolet imager (WFUI) that can be integrated into various satellite platforms for future PMC observation missions. A forward model was built to evaluate the detection capability and efficiency of the WFUI. CIPS and Solar Occultation for Ice Experiment (SOFIE) data were fused to reconstruct a three-dimensional PMC scene as the input background. Based on the scattering and extinction characteristics of ice particles and atmospheric molecules, the radiative transfer was calculated using the solar radiation path through the atmosphere and PMCs. The optical system and satellite platform parameters of the WFUI were selected according to CIPS, enabling the calculation of the number of

photons received by the WFUI. The actual detection signal is then simulated by photoelectric conversion, and the PMC information can be obtained by removing detector noise. Subsequently, a comparison with the input background field was conducted to compute and analyze the detection efficiency. Additionally, a sensitivity analysis of the instrument and platform parameters was conducted.

Simulations were performed for both individual orbits and for the entire PMC seasons. The research results demonstrate that the WFUI performs well in PMC detection and has high detection efficiency. Statistical analysis of the detection efficiency using data from 2008 to 2012 revealed an exponential relationship between the ice water content (IWC) of PMCs and detection efficiency. During the initial and final durations of the PMC season, when the IWC was relatively low, the detection efficiency remained limited. However, as the season progressed and the IWC increased, the detection efficiency significantly improved. We note that regions at lower latitudes exhibited a lower IWC and, consequently, lower detection efficiency. In contrast, regions at higher latitudes, with a greater IWC, demonstrated better detection efficiency. Additionally, the sensitivity analysis results suggest that increasing the satellite orbit altitude and expanding the field of view (FOV) of the WFUI both contribute to improving the detection efficiency.

1 Introduction

Polar mesosphere clouds (PMCs), also referred to as noctilucent clouds (NLCs), as observed from the ground, are the highest ice clouds in Earth's atmosphere, boasting an average thickness of 2–5 km. PMCs generally form at approximately 83 km in high latitudes and are highly sensitive to the ambient atmosphere. Thus, the long-term trend in PMC variation is considered an indicator of long-term changes in temperature and water vapor content in Earth's atmosphere (DeLand and Thomas, 2015, 2019; Hervig et al., 2001, 2016; Thomas et al., 1989). Prior research has indicated that the frequency and observed brightness of PMCs in the mid-latitudinal areas have increased over the past half century (Miao et al., 2022; Kaifler et al., 2018). PMCs are extremely sensitive to changes in the atmospheric temperature and respond to planetary, tidal, and gravity waves in the upper atmosphere (Gao et al., 2018; Liu et al., 2015; Stevens et al., 2010). The variation trends and characteristics of PMCs are important for studying the evolution of atmospheric systems and understanding various atmospheric dynamic processes.

Satellite-borne instrumental observations provide global coverage. Generally, occultation, nadir, and limb-viewing modes have their own advantages and are adopted for different purposes. The Solar Occultation for Ice Experiment (SOFIE) on board the Aeronomy of Ice in the Mesosphere (AIM) satellite utilizes the occultation mode to observe the extinction properties of ice particles with 16 bands and inverts the mass density, radius, and other parameter profiles of the PMCs (Gordley et al., 2009). The detection sensitivity is excellent, particularly for small ice particles, and the vertical spatial resolution is as high as 0.2 km. However, the number of observation samples was limited; only two observations could be obtained at sunrise and sunset during each orbit. In comparison, the limb-viewing mode obtains PMC profiles by scattering solar ultraviolet (UV) light using ice particles. The NOAA SBUV (Solar Backscatter Ultraviolet Radiometer), Odin OSIRIS (Optical Spectrograph and Infra-Red Imaging System), Envisat SCIAMACHY (SCanning Imaging Absorption spectroMeter for Atmospheric CHartographY), and the Himawari-8 AHI (Advanced Himawari Imager) can be used to obtain the global distribution of PMCs using onion peeling, tomography, and other inversion technologies (DeLand et al., 2006; Broman et al., 2019; Savigny et al., 2004; Tsuda et al., 2018, 2021). Through these data, the understanding of the formation, evolution, and response of PMCs to climatic and background atmospheric conditions has been significantly enhanced.

The Cloud Imaging and Particle Size (CIPS) device on board the AIM satellite is an instrument that adopts the nadir mode and uses UV imaging technology to observe PMCs (McClintock et al., 2009). CIPS obtains a cloud map with a large horizontal range by recording the scattering of light through the atmosphere and ice particles (Rusch et al., 2009). It can provide panoramic cloud images, temperature, water

vapor content, atmospheric dust density, and other data at a latitude of 45–85° daily in the PMC season. For the first time, near-ultraviolet albedo data from PMCs have shown a panoramic cloud picture covering the entire polar region. The commendable reliability of the data products has been widely recognized (Russell et al., 2009; Lumpe et al., 2013). Small-scale structures within various cloud layers can be observed using CIPS images with a high spatial resolution (Chandran et al., 2010, 2012; Gao et al., 2018). This further enhances our understanding of the impacts of small-scale gravity waves on PMCs. Owing to its large coverage, it has also improved the understanding of PMCs for large-scale dynamic processes, such as tidal waves, planetary waves, and even microphysical features (France et al., 2018; Liu et al., 2016; Rusch et al., 2017). Nonetheless, the small sampling volume corresponding to the field of view (FOV) of each pixel/bin of CIPS resulted in relatively weakly scattered echo signals. Therefore, it is not sensitive to clouds with low ice water content (IWC) and smaller particles (Bailey et al., 2015). This causes significant inconsistencies in distinguishing the onset of the PMC seasons, especially when compared with observations such as those from SOFIE and the SBUV (Bardeen et al., 2010; Benze et al., 2009, 2011). Thus, it is necessary to systematically evaluate the detection efficiency of UV imaging technologies, such as CIPS, to observe PMCs. However, CIPS is the only nadir-viewing instrument to use multiple views of the same location and phase function effects to identify PMCs. SBUV-type instruments also use nadir viewing and UV wavelengths but with only one large pixel.

Therefore, the lack of other comparisons of the same type of data also makes it difficult to assess the detection efficiency.

AIM has ended its service, and the next generation of instruments based on UV imaging technology is not currently planned. This is not conducive to further research on PMCs. To address this issue, we propose a wide-field-of-view ultraviolet imager (WFUI) designed to be compact, cost-effective, and integrated into various satellite platforms for future PMC observation missions. The main objective of this study was to construct a set of forward models for the WFUI. Section 2 describes the simulation method and its details. A three-dimensional PMC model was established as the detection target in Sect. 3 based on both CIPS and SOFIE data. Section 4 presents the simulation results and further discussion, and a concluding summary is provided in Sect. 5.

2 Simulation method

2.1 Observation geometry and principles

Similar to CIPS, the WFUI was designed as a nadir camera to image sunlight-scattering signals by ice particles of PMCs in the 265 nm UV band. Figure 1a demonstrates the reason

for using the 265 nm UV band for the WFUI. The designated band of UV radiation from the sun in space first reaches the PMCs and is scattered by the ice particles of the PMCs with a radius of 5–100 nm. The scattered light within the FOV of the WFUI was received and imaged. The calculation results obtained from the Line-By-Line Radiative Transfer Model (LBLRTM) software, shown in Fig. 1b, indicate that the atmospheric transmittance of solar radiation with wavelengths of 265 nm above 70 km was close to 1. This implies that the radiation can almost reach the PMCs without significant loss.

The satellite data indicate that total ozone varies strongly with latitude over the globe, with the largest values occurring at middle and high latitudes during most of the year. In the Antarctic, a pronounced minimum in total ozone is observed during spring. Typical values vary between 200 and 500 DU (Dobson units) over the globe, with a global average abundance of about 300 DU (Salawitch et al., 2023). Calculations show that even lower concentrations of ozone can effectively absorb solar UV radiation. This prevents UV radiation from altitudes below 40 km, which is scattered by the ground, lower atmosphere, and cloud/aerosol layer, from being detected, ensuring that it does not interfere with the detection signal at the PMC altitude. The curve in Fig. 1c demonstrates strong absorption of the atmosphere below 70 km with wavelengths of 265 nm. This absorption is primarily attributed to the distribution of ozone in the stratosphere at altitudes ranging from 20 to 40 km, with a peak concentration occurring at altitudes ranging from 20 to 25 km (the distribution of ozone transmission with altitude is shown in Fig. 1d).

In addition, the scattering of UV radiation by atmospheric molecules from 40 to 80 km causes weak interference in the detection of PMCs. Studies have found that after the AIM satellite's orbit was lowered, it could detect Rayleigh scattering of 265 nm radiation at altitudes around 50–55 km when there were no PMCs. Coherent perturbations to the observed Rayleigh scattering signal on scales of tens to hundreds of kilometers generally indicate GW-induced (gravity wave) variations in the neutral density and/or ozone near 50–55 km (Randall et al., 2017). However, when the satellite is in a higher orbit, these perturbations can generally be disregarded for the detection signals. Previous studies on AIM satellite's detection of PMCs have also not focused extensively on this issue.

The WFUI, designed to be mounted on a sun-synchronous orbiting satellite, captures images at regular intervals (tens of seconds). Sequential images with overlapping areas can be synthesized to cover the entire orbit using multiple photographs. The camera utilizes an array of CCD (charge-coupled device) sensors and employs coating technology to enhance the quantum efficiency of the sensor in the UV band. As depicted in Fig. 1a, because the WFUI was mounted on the satellite platform, the line-of-sight direction had an inclination angle ranging from 30–50° with the satellite orbit. The projection area in the PMC altitude layer resembles a sector, resulting in substantial variation in the projection area

corresponding to each pixel of the CCD sensor. An identical light-sensitive unit corresponds to a smaller area in proximity to the imager and a significantly larger area further away from the imager. The specific calculation method is described in the following sections.

2.2 Forward model for simulation

The forward model is a comprehensive simulation of the instrument. It provides not only theoretical support for the design of the instrument but also necessary prior information and forward operators for subsequent data inversion. This study constructed a forward model consisting of seven submodules: reconstructed three-dimensional PMC datasets, properties of ice particle scattering and extinction, calculations of atmospheric radiative transfer, the WFUI optical system and satellite platform model, detector signal calculation, and parameter sensitivity analysis. Figure 2 illustrates the principle and logical structure of the seven submodules of the forward model. By utilizing 7 years of CIPS horizontal cloud images and SOFIE vertical profile data for reconstruction and fusion, a three-dimensional PMC dataset was established as the detection target of the forward model. The optical properties, such as the phase function and scattering cross-section of the ice particles and atmospheric molecules, were calculated. The observation model was integrated into the atmospheric radiative transfer calculation, and the number of photons received by the WFUI was computed using the parameters of the WFUI optical system and satellite platform as the inputs. A CCD array detector model was constructed to simulate the actual signal detected through photoelectric conversion, and the signal-to-noise ratio was obtained. The effective signals were extracted from the simulated detection results and compared and verified with the detection target to calculate and analyze the detection efficiency. A sensitivity analysis of multiple input parameters evaluated their impact on the detection performance. The key computational processes and key information in each module are listed in Sect. 2.3–2.6.

2.3 Optical properties

The PMCs are composed of ice particles ranging from 5 to 100 nm in size. Owing to the limited number density of ice particles ($\sim 10^3 \text{ km}^{-3}$), the scattering effect outweighs the extinction absorption effect. Physical quantities, such as the scattering phase function, scattering cross-section, and extinction cross-section, were introduced to describe the scattering intensity. These parameters are primarily influenced by the particle size, shape, and wavelength of the incident light. It is widely acknowledged that ice particles in PMCs are nonspherical in shape. In computational analyses, these nonspherical particles are treated as randomly oriented ellipsoids (Baumgarten et al., 2002). The axial ratio (A_R) represents the ratio of the horizontal axis to the rotation axis of an

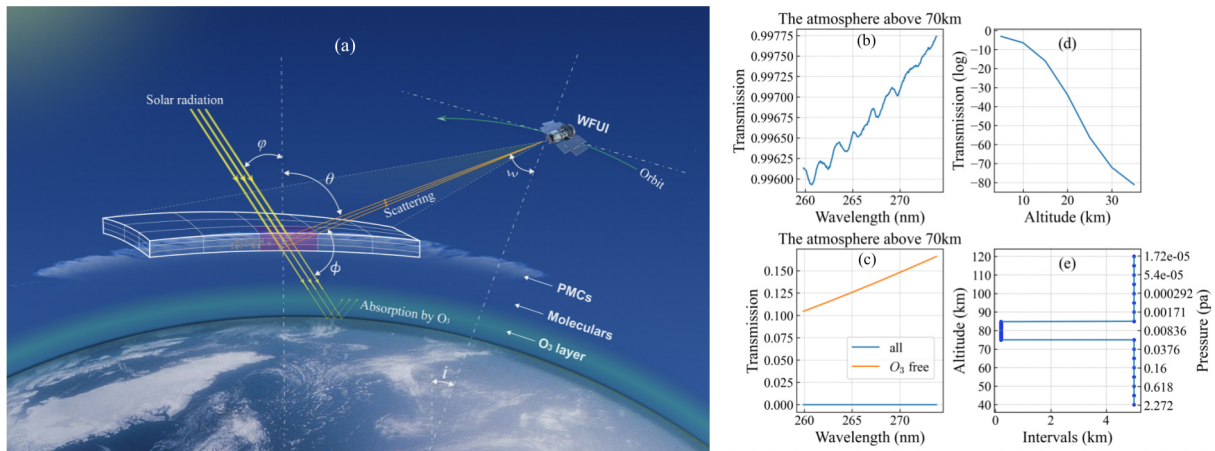


Figure 1. Principle of the WFUI for PMC observation. (a) Observation geometry (the figure was created by us). (b–c) Atmospheric transmittances above and below 70 km, respectively, for the wavelength of 265 nm. (d) The distribution of ozone transmission with altitude. (e) The vertical distribution of atmospheric levels with corresponding heights and approximated pressures.

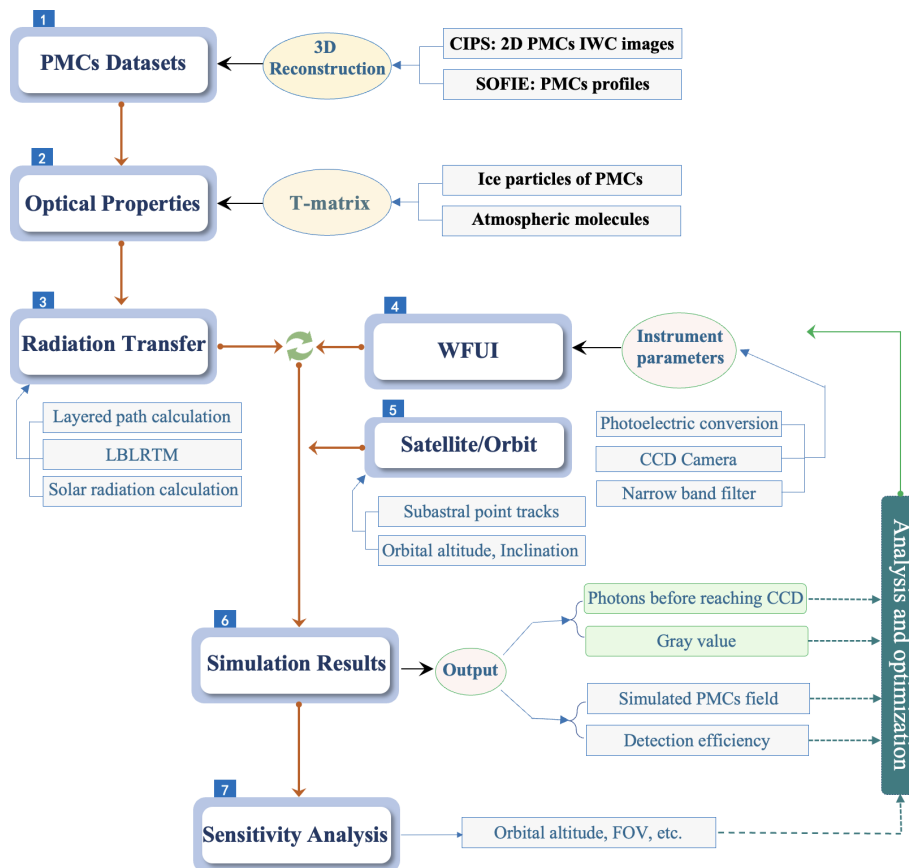


Figure 2. The overall framework and principles of the forward model and the logical structures among the seven submodules.

ellipsoid and effectively characterizes the degree of particle nonsphericity. The A_R of ice particles in PMCs lies in the range of approximately 2 to 5 or 0.2 to 0.5. Using ground-based and satellite observations in 2007, the A_R of ice particles in PMCs most closely approximates 0.5 or 2 and the scattering characteristics of ice particles are essentially similar for both A_R values of 0.5 and 2 (Rapp et al., 2007).

In this study, the T-matrix method was utilized to calculate the scattering properties of nonspherical particles (Xie et al., 2020). This method is applicable to a wide range of uniformly symmetric particles and is one of the most powerful, widely used methods for conducting rigorous calculations of light scattering from resonant nonspherical particles. The scattering cross-section, extinction cross-section, and scattering phase function at a wavelength of 265 nm with particle radii ranging from 5 to 100 nm and an A_R value of 0.5, 2, and 3 were calculated by the T-matrix method. In Fig. 3, for $A_R = 0.5$ and 2, the scattering and extinction cross-sections of ice particles are essentially the same, while they are slightly smaller for $A_R = 3$. For particles with a radius greater than 40 nm, smaller wavelengths resulted in decreased scattering and extinction cross-sections. For ice particles, the scattering and extinction cross-sections are essentially identical, indicating that extinction is predominantly caused by scattering.

The extinction and scattering of solar radiation by atmospheric molecules also influence the detection of PMC signals. The optical properties of atmospheric molecules can be calculated by the following equations:

$$P = \frac{\rho RT_a}{M}, \tag{1}$$

$$N_a = 3\,000\,000 \frac{P}{K T_a}, \tag{2}$$

$$m = \left(6432.8 + \frac{2949810}{146 - \lambda_0^{-2}} + \frac{25540}{41 - \lambda_0^{-2}} \right) \div 10^8 + 1, \tag{3}$$

$$Q_a = \frac{8}{3.14} \times \frac{8\pi^4 r^6}{\lambda_0^4} \left(\frac{m^2 - 1}{m^2 + 2} \right)^2 (1 + \cos^2 \alpha), \tag{4}$$

$$\sigma_a = \frac{128\pi^5 r^6}{3\lambda_0^4} \left(\frac{m^2 - 1}{m^2 + 2} \right)^2, \tag{5}$$

where P , ρ , R , and T_a denote the atmospheric pressure, atmospheric density, proportionality constant, and atmospheric temperature, respectively; M , N_a , K , and m are the atmospheric molar mass, number density of atmospheric molecules, Boltzmann's constant, and complex refractive index of atmospheric molecules, respectively; λ_0 represents the center wavelength of the WFUI; Q_a and σ_a are the scattering phase function and scattering cross-section of the atmospheric molecules, respectively; and r is the average radius of the atmospheric molecules. The atmospheric density and temperature data were calculated using the NRLMSISE-00

atmosphere model. The calculation results were compiled into a database for the forward model.

2.4 Solar radiation

Solar radiation was crucial for our simulation because the WFUI signal relies on the scattering of solar radiation by ice particles. The WFUI was designed as a UV camera, so we utilized observed daily average solar UV spectral data to calculate solar radiation. This data can be acquired from the Laboratory for Atmospheric and Space Physics (LASP) Solar Irradiance Data Center (<https://lasp.colorado.edu/lisird/>, last access: 3 June 2024). The dataset covers the wavelength range of 120.5–499.5 nm in 1 nm bins, spanning from 8 November 1978 to 24 July 2022. It was generated by merging public irradiance data from nine satellite instruments. Subsequently, the radiation intensity within the spectral range covered by the WFUI was obtained by coupling with the instrument parameters. The solar radiation, S , for specific bands at the altitude of the PMCs (approximately 83 km) can be calculated as follows:

$$S = \sum_{\lambda=\lambda_2}^{\lambda=\lambda_1} (E_\lambda \times t_\lambda) = \sum_{\lambda=\lambda_2}^{\lambda=\lambda_1} \left(E_\lambda \times \frac{t_{\text{fmax}}}{1 + \left[\frac{2(\lambda - \lambda_0)}{\text{FWHM}} + \frac{\lambda}{\text{FWHM}} \frac{\theta_0^2}{n_e^2} \right]^2} \right), \tag{6}$$

where E_λ is daily average solar spectra and t_λ represents lens transmittance, which is a function of λ . t_{fmax} is the peak transmittance; FWHM is the full width at half maximum of the WFUI; λ_0 is the central wavelength of the WFUI; and λ represents the incident wavelength, with its value ranging within λ_0 plus or minus FWHM. The individual photon energy is $E_0 = hc/\lambda$, where $h = 6.62 \times 10^{-34}$ J s and $c = 3 \times 10^8$ m s⁻¹. Taking 1 nm as the interval, the number of photons (N_0) per second per unit area received at the altitude of the PMCs (approximately 83 km) within a specific band was calculated.

2.5 Radiation transfer calculation

When sunlight is transmitted through atmospheric media, if its optical thickness is small, single scattering can be employed to calculate the scattered-light intensity and polarization characteristics. The optical thickness of PMCs is usually 0–0.3, which is consistent with the approximation of single-scattering calculations. Generally, mean optical depth of PMCs from observation can be ~ 0.04 – 0.05 , and the maximum value can reach 0.2–0.3 (Lubken et al., 2024). Due to the presence of PMCs within the altitude range of 75 to 85 km, the altitude range of 75–85 km is meticulously segmented into 50 layers, each with intervals of 0.2 km. The altitude range of 40–75 km was divided into seven layers

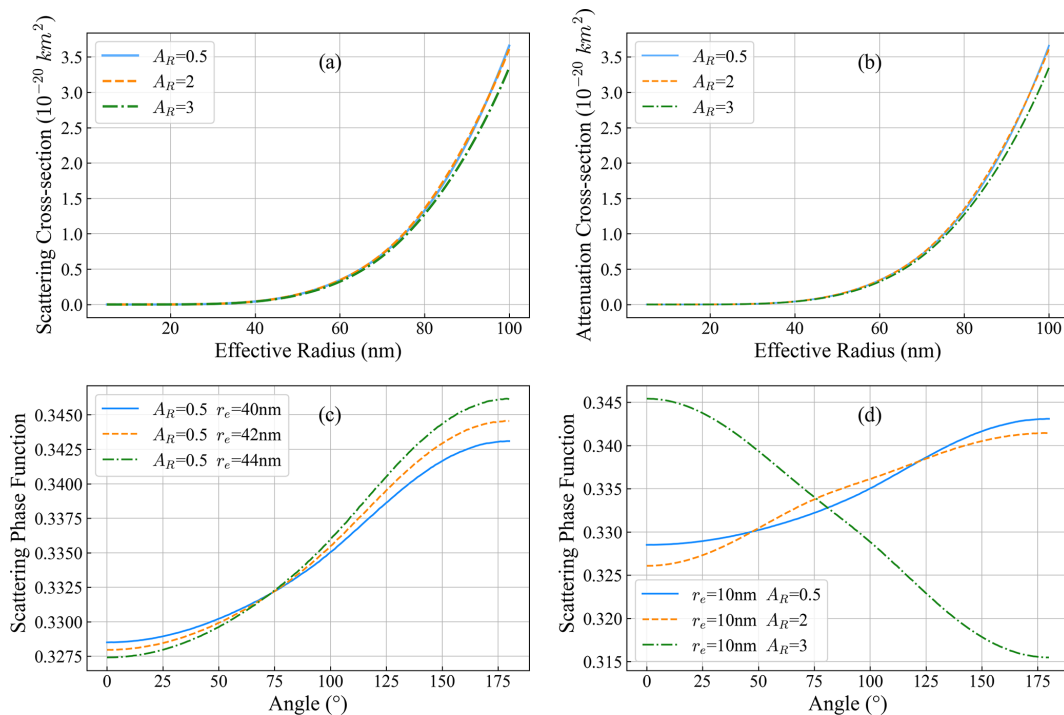


Figure 3. Panels (a) and (b) show the scattering and extinction cross-section regarding the particle effective radius (r_e), respectively, at different axis ratios ($A_R = 0.5, 2, 3$). Panel (c) denotes the scattering phase function at a wavelength of 265 nm for different r_e values, while panel (d) denotes the scattering phase function at $r_e = 10$ nm for different A_R values.

at 5 km intervals, and 85–120 km was divided into seven layers at 5 km intervals, resulting in a total of 64 layers (Fig. 1e). This approach to altitude layer segmentation not only maintains the accuracy of the calculation results but also effectively improves computational efficiency. As solar light passes through each layer, some photons are scattered or absorbed, whereas the remaining photons pass through the next layer. The remaining photons then undergo scattering as they enter subsequent layers. A small number of photons are scattered in the direction of the satellite-borne detector; after multiple interactions with both atmospheric and PMC scattering and absorption, they are received by the detector lens.

When the WFUI observes PMCs, the spacecraft view angle, ω , is defined as the angle between the line-of-sight (LOS) vector and the spacecraft nadir. The parameters of the WFUI were based on those of the AIM satellites, with ω set at 30° . The most important quantities for describing the scattering geometry and hence the relevant CIPS radiative transfer problem are the solar zenith angle, φ ; view angle, θ ; and scattering angle, ϕ . The satellite operates in a polar orbit 600 km above Earth. Based on the radius of Earth and the altitude of PMCs, the angle between the satellite to the center of Earth and PMCs to the center of Earth can be calculated to be approximately 2.7° , resulting in a value of θ at 32.7° . The solar zenith angle was constant throughout the season, ranging from the point of the descending node (approximately 20°) to the transiting endpoint of the ascending portion of the or-

bit (approximately 105°). By utilizing CIPS data, the solar zenith angle can be obtained for different positions, and the scattering angle can then be calculated as $180^\circ - \theta - \varphi$.

Each position corresponds to an IWC and ϕ . Both scattering and extinction coefficients can be calculated from the optical properties (see Sect. 2.3). The radiative transfer characteristics of the entire atmosphere from 40 to 120 km can be obtained through the path integral of sunlight through the atmosphere and PMCs. Consequently, the number of photons, N_p , received per second per unit area at different locations can be determined:

$$N_p = N_0 \times (\beta_{sa} + \beta_{si}) \exp\left(-2 \int_{h_1}^{h_2} (\beta_{ea} + \beta_{ei}) dh\right), \quad (7)$$

$$\beta_{si} = \int_{r=5}^{r=40} \sigma_i(r) \times Q_i(r, \phi) \times N_i(r, h_c, IWC), \quad (8)$$

$$\beta_{sa} = \sigma_a \times Q_a(\phi) \times N_a(h_c \text{Lat}), \quad (9)$$

where Q_i and σ_i denote the scattering phase function and scattering cross-section of ice particles, respectively; Q_a and σ_a represent the scattering phase function and scattering cross-section of atmospheric molecules, respectively; N_i corresponds to the scaled spectral distribution related to different heights and IWC, whereas N_a indicates the concentration of molecules related to different altitudes and latitudes; and N_0 represents the number of photons received per sec-

ond per unit area at the altitude of the PMCs (approximately 83 km) (see Sect. 2.4 for the calculation procedure). The scattering coefficient was computed as the product of the scattering cross-section, molecular number concentration, and scattering phase function. As both ice particles and atmospheric molecules exhibit weak absorption at 265 nm, the extinction coefficient can be substituted with the scattering coefficient.

2.6 Image calibration

The longitude and latitude of the ground track of the AIM satellite can be calculated according to the longitude and latitude information from CIPS data. We assumed that the satellite carrying the WFUI operates in the same orbit and captures images at a fixed time interval, T_M . The satellite moves around Earth at different operating speeds depending on its orbital altitude. The operating speed, V , is determined by $V = \sqrt{u/(R_0 + H)}$, where u is the Keplerian constant, with a value of $398\,610\text{ km}^3\text{ s}^{-2}$ and R_0 is the radius of Earth. When the orbital altitude of the satellite was 600 km, its operating speed was calculated to be 7.56 km s^{-1} . After the simulated satellite traveled a fixed distance ($V \times T_M$) along the ground track, the WFUI captured an image. The exposure time for the CCD camera to capture an image was 0.75 s, during which the satellite covered a distance of 5.67 km along its orbit, spanning an area corresponding to multiple pixels. This discrepancy is known as the phase-shift error. Data corresponding to multiple pixels were averaged to reduce the impact of the phase-shift error.

On-orbit calibration primarily focuses on camera flat fielding and normalization. Owing to the nonuniformity of the light source, response difference of the photosensitive unit, and other factors, the CCD camera may capture an image with an uneven gray value for a target with a uniform gray value. The center of the image exhibited the highest gray value, which decreased as the image moved toward the edge. Therefore, it is necessary to perform flat-field processing on the gray values obtained from the simulated WFUI. After normalizing the image center to 1, a pixel-by-pixel correction factor should be provided that can be applied to each image during the calibration process. For the CCD camera carried by the WFUI, the correction factor follows as a cosine function, with the center of the image assigned a value of 1 and the pixels located on the farthest edges of the circle having a correction factor of $\cos(90^\circ - \omega)$. However, more accurate flat-field coefficients should be obtained by experimental calibration after instrument development is complete. Ideally, obtaining an accurate estimate of the Δ flat field requires a uniformly illuminated camera image. The on-orbit condition is best approximated at the subsolar point and in nadir-viewing geometry. Images are captured multiple times throughout the year at the subsolar point with the camera for calibration of other images. For each measured subsolar image, a simulated image is calculated from a Rayleigh scattering forward model using identical viewing geometry. The

measured image is then divided by the model image and the resulting ratio is normalized to unity at the image center to isolate the pixel-to-pixel variation.

2.7 Optoelectronic conversion of signals

After entering the optical system, the radiative photons undergo a photoelectric conversion process in the CCD sensor, transforming them into electrical signals. The number of electrons obtained per pixel is denoted by N_{ele} , which comprises two components: N_{sca} represents the number of electrons obtained through the photoelectric conversion of solar radiation photons by scattering, and N_{noise} represents the number of electrons converted by various types of noise in the imager. Subsequently, the electrons are converted into a digital signal by an analog-to-digital converter in accordance with the conversion factor, also known as the gray value, U . The gray value serves as a parameter for measuring the brightness of each pixel in a gray image. In our model, CCD cameras have advanced to produce 16-bit gray-value images, offering a gray value ranging from 0 to 2^{16} , with a richer color expression. The formula for calculating the gray value is as follows:

$$U = \frac{N_{\text{ele}}}{C_{\text{ADU}}} = \frac{N_{\text{sca}} + N_{\text{noise}}}{C_{\text{ADU}}}, \quad (10)$$

$$N_{\text{sca}} = \eta \times T_e \times R_{\text{at}} \times N_p \times W \times H, \quad (11)$$

$$N_{\text{noise}} = \sqrt{\sigma_s^2 + \sigma_D^2 + \sigma_R^2}, \quad (12)$$

where C_{ADU} denotes the analog-to-digital conversion coefficient; η denotes the quantum efficiency of the CCD camera, estimated to be approximately 80 %, indicating that approximately 80 % of the photons can be converted into electrons following the Poisson distribution; T_e is the exposure time of the CCD camera; R_{at} denotes the photon receiving efficiency, given by $R_{\text{at}} = \frac{\pi(D_c/2)^2}{4\pi(H-h_0)^2}$, where D_c represents the diameter of the lens of the WFUI and h_0 is the altitude of the PMCs (approximately 83 km); and N_p refers to the number of photons received per second per unit area by the WFUI (the calculation process is detailed in Sect. 2.5).

Here, P_W and P_H represent the spatial resolutions of the WFUI: P_W denotes the length covered by each pixel along the satellite orbit, while P_H is the length covered by each pixel across the satellite orbit. The CCD camera carried by the WFUI had a resolution of 1360×1360 px. To expedite image processing and enhance the signal-to-noise ratio, adjacent 4×8 px (32 px) were merged, resulting in a final image size of 170×340 px (across-orbit \times along-orbit). The spatial resolutions corresponding to the pixels were similarly merged, with smaller spatial resolutions in regions closer to the imager and larger spatial resolutions in regions farther from the imager. Using the principles of similar triangles, the minimum spatial resolution was calculated to

be 1.2×2.4 km, while the maximum spatial resolution was 6.7×5.3 km.

Detector noise includes the photon shot noise, dark current noise, and readout noise. The photon shot noise is related to the number of photons reaching the detector pixels, denoted by $\sigma_s = \sqrt{N_{\text{sca}}}$. The dark current noise is independent of the signal level and is associated with the performance of the detector itself, with a value of $10 (e^-) s^{(-1)} \text{px}^{(-1)}$. The readout noise arises from electronic processes during the transfer of charge from the pixel out of the camera, with a value of $3.9 (e^-) s^{(-1)} \text{px}^{(-1)}$. All three noise types were treated as Gaussian noise, indicating that their probability density functions followed a Gaussian distribution.

3 Three-dimensional reconstruction of PMCs

3.1 Data

The AIM satellite works in a sun-synchronous orbit with an Equator crossing time of approximately noon local time. The CIPS instrument employs four UV imaging cameras with a wide field of view centered in the nadir. CIPS is a four-camera UV imager that makes hemispheric-scale measurements of PMCs. The details of the instrument performance and the data quality were given by Carstens et al. (2013) and Lumpe et al. (2013). The strength of CIPS is to provide the PMC maps (occurrence frequency, albedo, IWC, and particle radius) with high horizontal resolution and coverage of summer polar. This work uses the CIPS level 2 orbit IWC maps, in which 1 d includes 15 rectangular images for 15 orbits. Data at this level provide a higher-level summary and give an averaged spatial resolution of 5×5 km throughout the orbit strip. In this work, we used seven PMC seasons in Northern Hemisphere during the years 2008–2014.

SOFIE performs satellite solar occultation measurements to determine vertical profiles of PMC properties as well as the surrounding temperature, pressure, and abundance of H_2O . It observes 15 sunrise solar occultations at a latitude range of 65 to 86° N in the Northern Hemisphere and 15 sunset solar occultations at latitudes from 63 to 78° S in the Southern Hemisphere. The field of view (FOV) is about 1.5×4.3 km (vertical \times horizontal). Detectors are sampled at 20 Hz, which corresponds to ~ 145 m vertical spacing or roughly 10 times oversampling. The line of sight (LOS) through the PMC layer at 83 km is ~ 290 km. The more precise data from version 1.3 are used in this work, in which the profiles have the finest vertical resolution of less than 0.2 km (Hervig et al., 2009; Marshall et al., 2011; Stevens et al., 2012).

3.2 Reconstruction method

The three-dimensional structural information of PMCs serves as a crucial input background field for the forward model. To reconstruct a 7-year three-dimensional PMC field,

a combination of horizontal two-dimensional CIPS cloud field data and SOFIE vertical profile data was used. The IWC played a crucial role in establishing the correspondence between cloud microphysical parameters.

Statistical analyses were conducted on the data of IWC, ice mass content (M_{ice}), effective radius (r_e), and particle size spectrum width (d_r) in the Northern Hemisphere detected by SOFIE carried by the AIM satellite from 2008 to 2014. Interestingly, the distributions of M_{ice} , r_e , and d_r corresponding to different IWC values conform to a Gaussian distribution, and the fitting results are as follows:

$$M_{\text{ice}}(h') = a_m e^{-\frac{(h'-b_m)^2}{2c_m^2}}, \quad (13)$$

$$r_e(h') = a_{re} e^{-\frac{(h'-b_{re})^2}{2c_{re}^2}}, \quad (14)$$

$$d_r(h') = a_{dr} e^{-\frac{(h'-b_{dr})^2}{2c_{dr}^2}}, \quad (15)$$

where h' is the altitude. The distribution of a_i values follows the power function distribution, while the distribution of b_i and c_i values conforms to the exponential function distribution. The data were fitted, and the resulting image is shown in Fig. 4. The fitted functions are listed in Table 1.

In most previous studies on PMCs, the particle size distribution has been described as a log-normal distribution (Thomas and McKay, 1985). The log-normal distribution is described by the concentration, effective radius, and distribution width. Rapp and Thomas (2006) recently demonstrated that PMC particle size distribution can be more accurately represented using a Gaussian distribution, which is described by the concentration, effective radius, and particle size spectral width. Each altitude at each IWC value corresponds to a scale spectral parameter, N_i :

$$N_i(r) = a_N e^{-\frac{4 \ln 2 (r-r_e)^2}{d_r^2}}. \quad (16)$$

The distributions of r_e and d_r have notable regularity, which can be obtained by fitting, whereas the distribution of the concentration (a_N) shows less regularity.

Assuming that the axis ratio of the ice particles is 2 and the volume of a single ice particle is $4/3\pi ab^2$, where a is the long axis and b is the short axis ($a:b = A_R = 2$), the radius (r) is given by $(a+b)/2$. Subsequently, the volume of a single PMC particle was obtained as $V = 64/81\pi r^3$. As the ice particle has a density of 0.92 g cm^{-3} , the mass of a single particle can be expressed as $m = \rho V$. Accordingly, the mass of N_i particles is given by $m_i = \rho V \times N_i$. The concentration can be calculated as follows:

$$a_N = \frac{M_{\text{ice}}}{\sum_{r=5}^{r=100} \frac{10^{-21} \times 0.92 \times 64\pi r^3}{81} e^{-\frac{4 \ln 2 (r-r_e)^2}{d_r^2}}}. \quad (17)$$

Based on the IWC measured at each location by CIPS, the profiles of the ice mass content and scale spectral distribu-

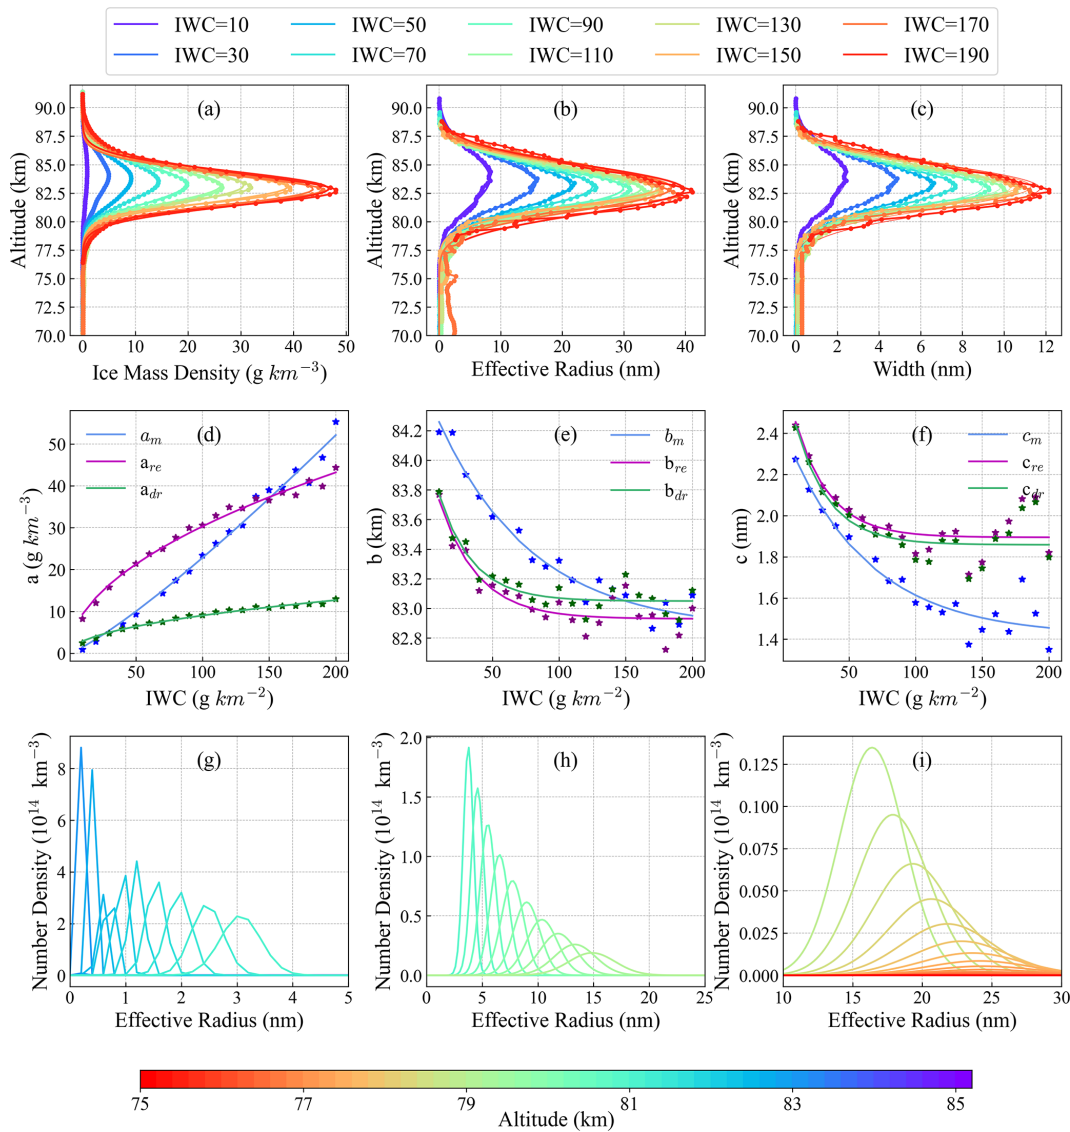


Figure 4. (a–f) Data fitting of the ice mass content, effective radius, and particle size spectrum width. (g–i) Scale spectrum distribution at different heights (75–85 km) when $IWC = 100\ g\ km^{-2}$.

Table 1. Fitted expressions for the ice mass content, effective radius, and particle size spectrum width were obtained.

	a_i	b_i	c_i
M_{ice}	$0.094 \times IWC^{1.191}$	$1.616 \times e^{-\frac{IWC}{70.700}} + 82.856$	$1.010 \times e^{-\frac{IWC}{61.037}} + 1.417$
r_e	$2.215 \times IWC^{0.521}$	$1.166 \times e^{-\frac{IWC}{30.226}} + 82.875$	$0.817 \times e^{-\frac{IWC}{26.044}} + 1.905$
d_r	$0.933 \times IWC^{0.482}$	$1.069 \times e^{-\frac{IWC}{25.169}} + 83.049$	$0.867 \times e^{-\frac{IWC}{25.006}} + 1.859$

tion at each altitude can be derived, which leads to the structure of the three-dimensional cloud field. When the IWC is $100\ g\ km^{-2}$, the scale spectrum distribution can be plotted for the height range of 75–85 km at 0.2 km intervals (see Fig. 4g–i).

The results in Fig. 5 present an illustrative example from the CIPS data on 8 August 2009, for the 10th orbit. Based on the IWC at each location (Fig. 5a), we obtained the IWC, effective radius, and particle size spectral width at different altitudes at each location. For the altitude range of 81–85 km, we derived the distributions of the ice mass content, effective

radius, and particle size spectral width at 1 km intervals, as shown in Fig. 5b–d, respectively. The results in Fig. 5e–g represent the profiles taken at a latitude of 70° N. For this orbit, the PMCs near 70° N were more prominent and exhibited higher intensity. Both the three-dimensional images and profiles indicate that the peaks of the PMCs were mainly present at an altitude of approximately 83 km.

4 Simulation result

4.1 Instrument description and parameters

Unlike CIPS, which employs four UV CCD cameras, the WFUI employs only one UV CCD camera, resulting in a smaller payload size, a reduced power supply, and diminished data transmission requirements. This design allows for greater flexibility in installing satellites that are not specifically dedicated to PMC detection, such as remote sensing and meteorological satellites. The CCD camera within the WFUI captures scattered light from various regions of the PMCs and converts it into electronic signals for recording. The spatial area covered by each pixel of the CCD camera on the image sensor was determined by its FOV in the optical system and the satellite altitude. The focal length of the ultraviolet imaging camera determines the FOV of the WFUI: $FOV = 2\xi \times \xi_0/1000/f/2$, where ξ denotes screen resolution, ξ_0 denotes single-pixel size, and f denotes focal distance. The filter constitutes another essential optical element featuring a chosen central wavelength of 265 nm and a full width at half maximum (FWHM) of 15 nm. By applying the filter parameters to Eq. (6), the number of photons received per second per unit area of altitude of the PMCs was derived. The WFUI is designed to be integrated into sun-synchronous satellites that fly approximately 15 orbits per day, each of which can capture elongated images. In practice, each elongated image of an orbit comprised 25 individual images captured using a CCD camera. Each orbit took approximately 20 min to achieve coverage at latitudes greater than 50°, with an average horizontal spatial resolution of 5 × 5 km.

4.2 Simulation results for orbits

The geographical data required for simulating the detector signal of a single orbit were sourced from CIPS level 2 data, encompassing latitude, longitude, local time, solar zenith angle, and other relevant information. Based on these data, the number of photons, N_{ph} , per second per unit area of the WFUI at each position throughout the orbit can be calculated.

Taking the first orbit on 3 August 2011 as an example, the process for detecting PMCs by the WFUI was simulated. Figure 6c shows the IWC detected by CIPS. Assuming that the PMCs detected by CIPS reflected the actual conditions, a simulated IWC corresponding to a single CCD camera shot

was obtained (Fig. 6a). The number of photons at the respective positions was determined by calculating the optical characteristics and radiative transfer. The number of photons captured by the WFUI in a single shot was obtained by calculating the coverage of a single image according to each imager parameter (Fig. 6b) at a spatial resolution of 5 × 5 km. The number of photons was then determined based on the calculated resolution of each CCD pixel, yielding the distribution shown in Fig. 6d, which represents the number of photons for 170 × 340 individual pixels. Using the formula from Sect. 2.7, the gray values for 170 × 340 px were computed; after error correction, the gray values were obtained for Fig. 6e. The detectable information of the PMC was derived by subtracting the noise twice from the data in Fig. 6e (Fig. 6g). The region of 170 × 340 px was subdivided into 1700 × 3400 px, with the gray value of each pixel reduced to 1/100 of its original value. Subsequently, the spatial resolution was downsized by a factor of 10 in both P_W and P_H PW and PH. These adjusted values were then merged to achieve a 5 × 5 km spatial resolution, aligning with the latitude and longitude data from CIPS, thus simulating the detected PMCs on the map (Fig. 6h). Figure 6f illustrates the simulated PMCs captured along the orbit of the AIM satellite using the simulated WFUI. Figure 6i was obtained after denoising.

Comparing Fig. 6c with Fig. 6i, the WFUI cannot detect all PMCs, and its detection efficiency is less than 100%. Owing to the stochastic nature of noise, information regarding the PMCs may be obscured. If the gray value remains greater than 0 after subtracting the noise, there are PMCs at that location. The detection efficiency is calculated as the ratio of the number of data points with detected PMCs in the simulated signal to the number of data points with PMCs in the input PMC field. Taking the first orbit on 3 August 2011 as an example (Fig. 6) for the calculation, the detection efficiency of PMCs by the WFUI was determined to be 81.09%:

detection efficiency =

$$\frac{\text{number of data points with simulated signals greater than 0}}{\text{number of data points with positive IWC in the input PMC field}} \quad (18)$$

We note that the construction of the three-dimensional PMC field relies primarily on a diverse range of data provided by SOFIE. SOFIE exhibits excellent sensitivity and detection capability for smaller ice particles. However, owing to the constraints posed by the detection principles, instrument characteristics, and orbital factors of CIPS, its sensitivity to small particles is comparatively limited. Consequently, when employing the IWC of the PMCs detected by CIPS as the input background, the spatial structure of the reconstructed three-dimensional PMC field was essentially derived from the PMC structures detected by SOFIE. The resulting simulated signals were based on the detection data from either CIPS or the WFUI. One outcome of this approach is the potential for the WFUI to be unable to detect PMCs when the input PMC field exhibits a lower IWC values.

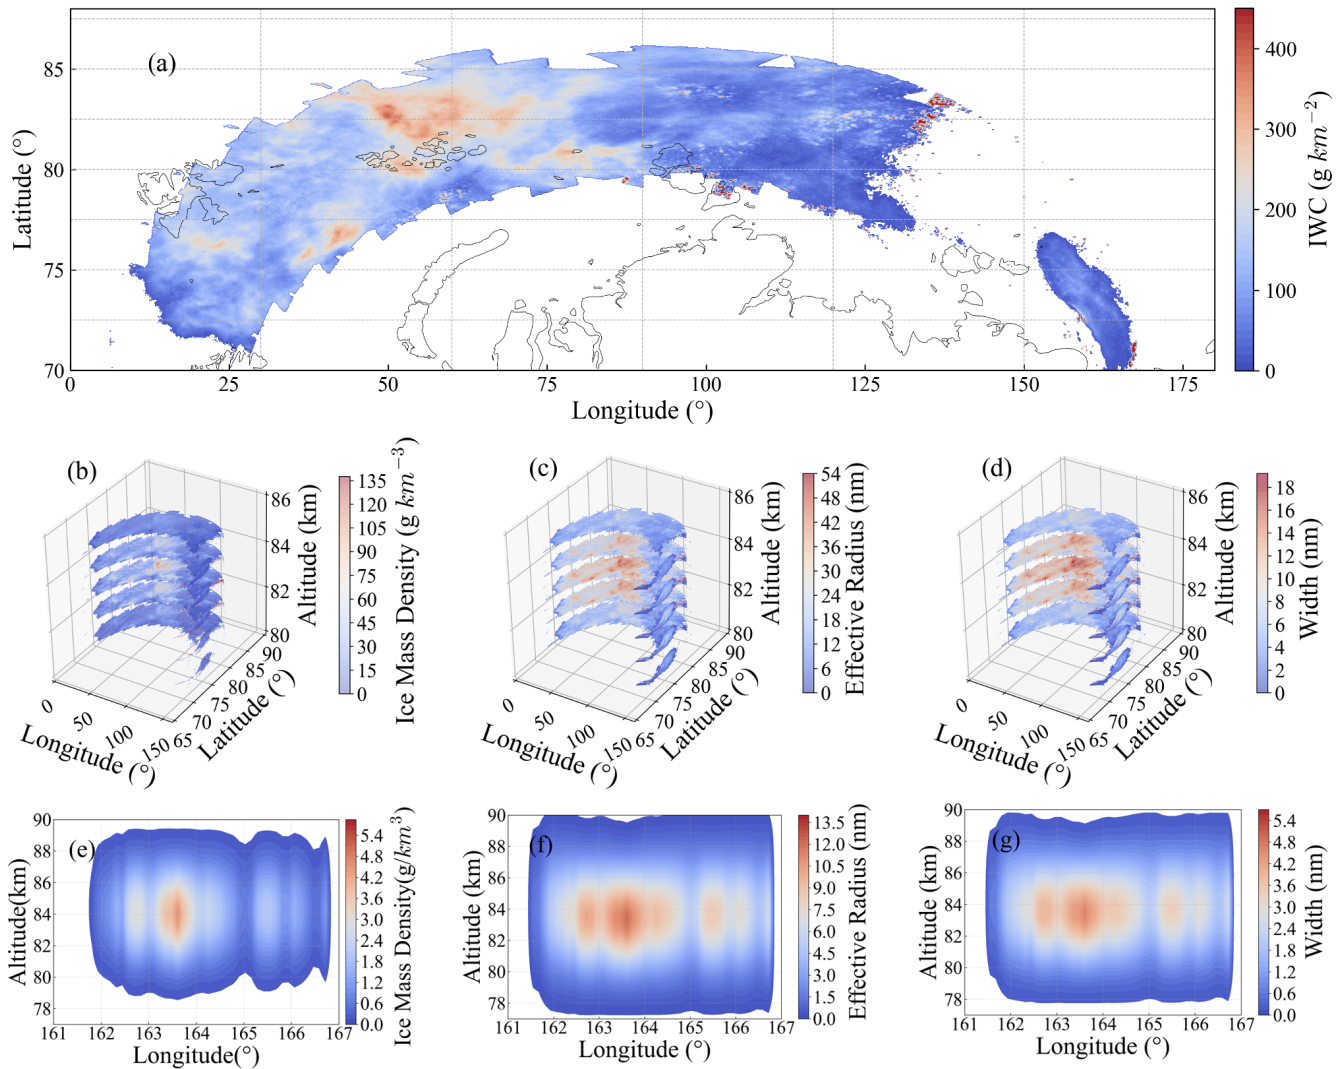


Figure 5. (a) IWC distribution of the 10th orbit on 8 August 2009. (b–d) Three-dimensional diagrams of M_{ice} , r_e , and d_r at different heights. (e–g) Changes in M_{ice} , r_e , and d_r with altitude and latitude.

On 3 August 2011, CIPS had 15 orbits covering the Northern Hemisphere. The IWC values from these 15 orbits were combined to form the background distribution of PMCs for that day, as shown in Fig. 7a. Following the processing steps outlined in Fig. 6 for simulating the detection of PMCs by the WFUI, data from 15 orbits were processed to obtain gray values by removing noise. Combining the gray values from these 15 orbits results in information on the PMCs detected by the WFUI, as shown in Fig. 7b.

4.3 Detection efficiency analysis for PMC seasons

The geographical data required for simulating the detector signal for the PMC season were sourced from the CIPS level 3 data, encompassing latitude, IWC, solar zenith angle, and other relevant information. Based on these data, the number of photons, N_{ph} , per second per unit area of the WFUI for

the PMC season can be calculated. The processing method for level 3 data was essentially the same as that for level 2 data. As the level 3 data are the overall results after averaging, there is no need for image calibration, such as phase shift and flat field. The resolution was 5×5 km, and the detection efficiency per orbit during the PMC season was calculated.

Statistical analysis of the IWC and detection efficiency from 2008 to 2012 revealed daily average variations. Given that PMCs often appear in the Northern Hemisphere from mid-May to August, around the time of the summer solstice, the timescale is described in terms of days relative to the summer solstice. As shown in Fig. 8a–b, PMCs are scarce, with a relatively low IWC at the beginning of the PMC season, making them susceptible to being overwhelmed by noise, resulting in lower WFUI detection efficiency. As the PMC season progressed, the occurrence of PMCs gradually increased, accompanied by a higher IWC. Noise becomes in-

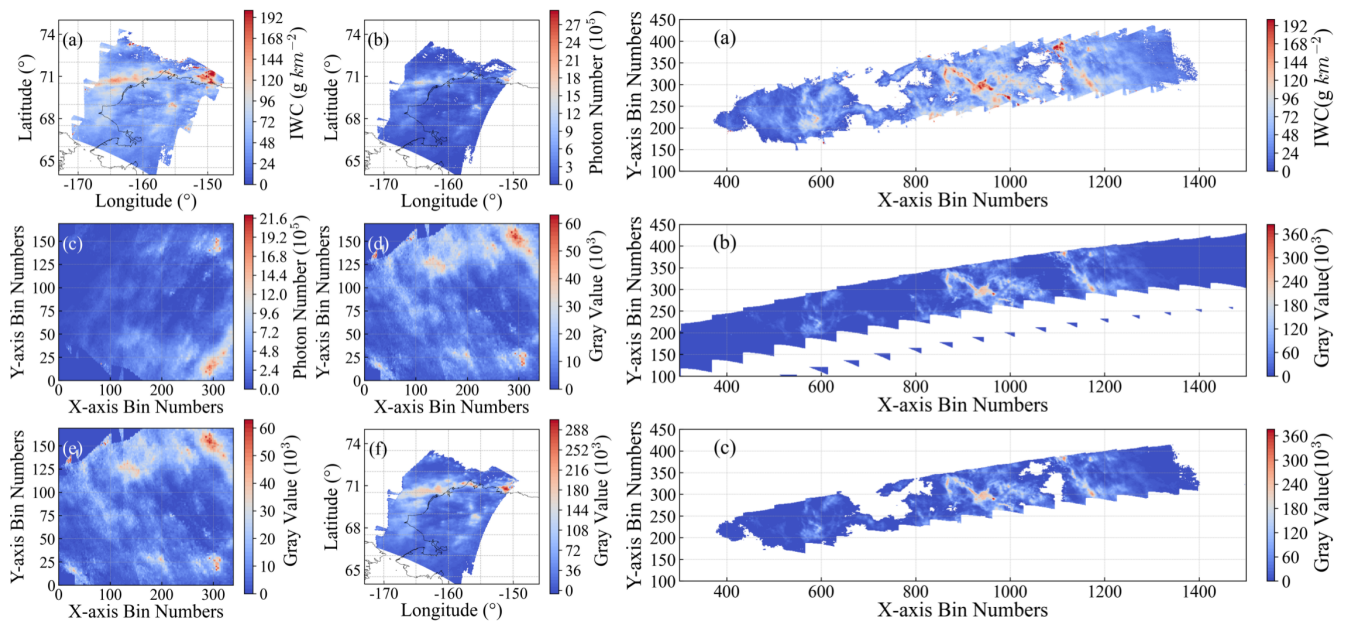


Figure 6. (a) Distribution of IWC with latitude and longitude for a single image detected by CIPS. (b) Distribution of the photon number with latitude and longitude for a single image detected by the WFUI. (c) IWC of the orbit detected by CIPS. (d) Photon number corresponding to the single-image pixels. (e) Gray value corresponding to the single-image pixels. (f) Gray value of the orbit detected by the WFUI. (g) Gray value of the single image after the denoising process. (h) Distribution of the gray value with latitude and longitude for the single image after the denoising process. (i) Gray value of the orbit after the denoising process of the WFUI.

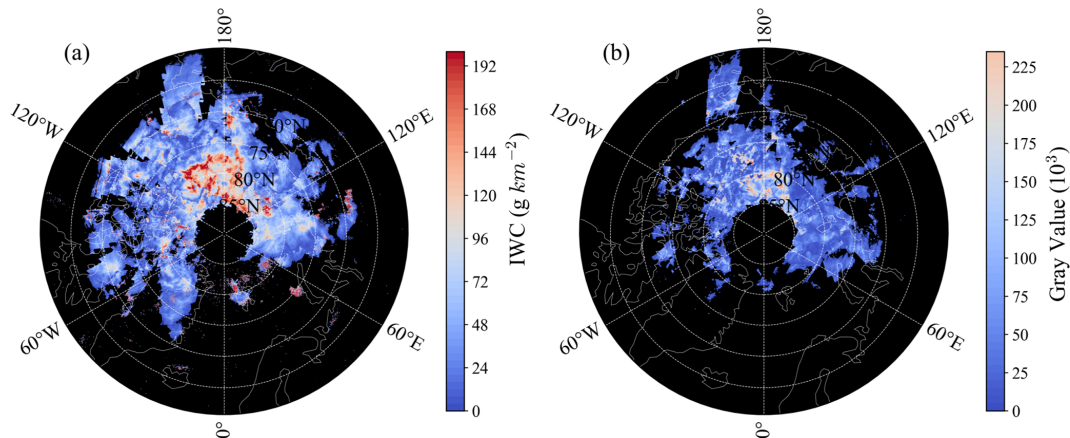


Figure 7. (a) Distribution of IWC on 3 August 2011, detected by CIPS. (b) Simulated distribution of the gray value.

sufficient to mask the PMC information, leading to an increase in the detection efficiency.

Furthermore, statistical analysis of data from 2008 to 2012 allowed for the examination of variations in the IWC and detection efficiency with latitude in the Northern Hemisphere. As depicted in Fig. 8c–f, the IWC of PMCs at lower latitudes is relatively low. Owing to limited data availability in lower-latitude regions, the amplitude of the IWC fluctuations with latitude is relatively large, with no prominent trend. However, in general, the IWC tends to increase with increasing latitude, along with a corresponding increase in detection efficiency.

A similar trend was observed in the Southern Hemisphere, with both the IWC and detection efficiency increasing with increasing latitude. Additionally, in the Southern or Northern Hemisphere, the IWC tends to remain stable beyond 80° latitude and the detection efficiency remains generally constant or even slightly decreases.

By fitting the correlation curve between the detection efficiency, η_d , and IWC from 2008 to 2012, the resulting relationship is given by

$$\eta_d = -2.211 \times e^{-\frac{\text{IWC}}{86.580}} + 1.299. \quad (19)$$

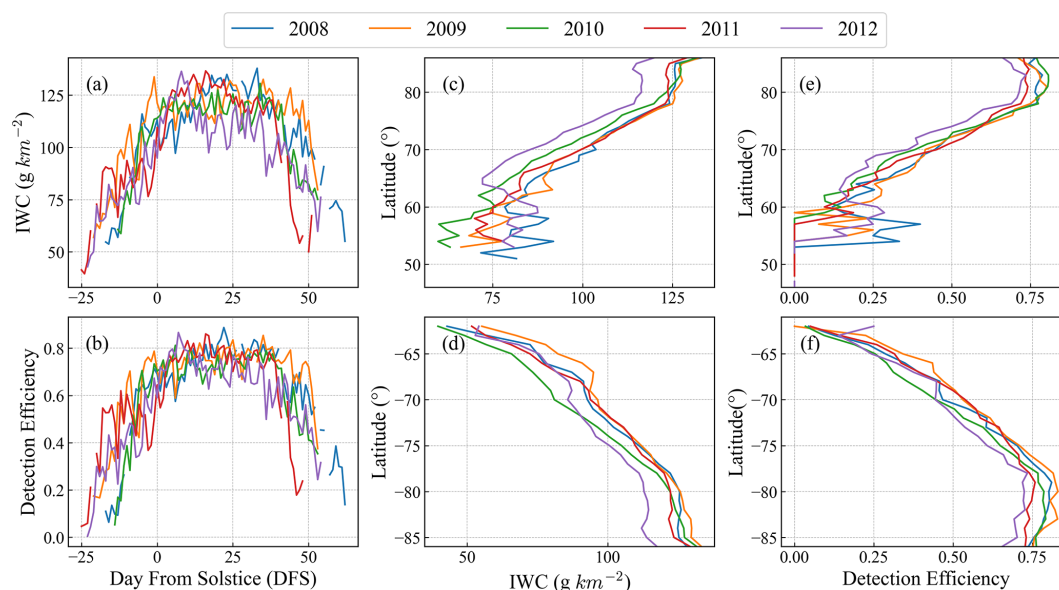


Figure 8. (a) Average daily variation in IWC in the PMC season from 2008 to 2012. (b) Average daily variation in detection efficiency in the PMC season. (c) Variation in IWC with latitude in the Northern Hemisphere during the PMC season from 2008 to 2012. (d) Variation in IWC with latitude in the Southern Hemisphere. (e) Variation in detection efficiency with latitude in the Northern Hemisphere. (f) Variation in detection efficiency with latitude in the Southern Hemisphere.

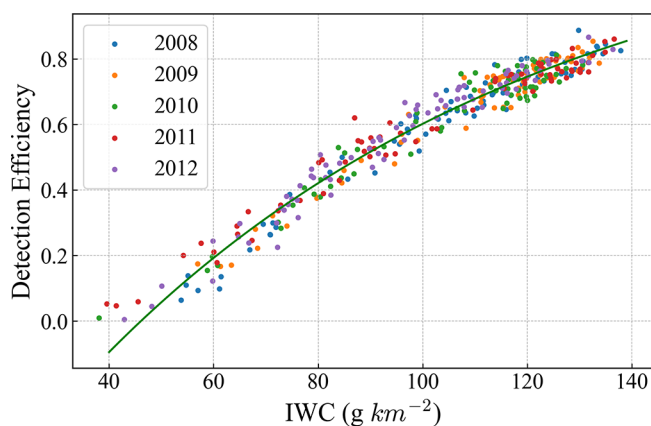


Figure 9. Correlation between IWC and detection efficiency in the PMC season for both hemispheres.

From Fig. 9, there is a strong correlation between the IWC of the PMCs and the detection efficiency, with the numerical distribution following an exponential function pattern. When the IWC was relatively low, the detection efficiency increased rapidly as the IWC increased. However, once the IWC reached a higher level, the rate of increase in the detection efficiency decreased with further increments in the IWC. This analysis and the results shown in Fig. 8b, e, and f suggest that the WFUI would be less effective in observing the early and late portions of a typical PMC season, as well as latitudes equatorward of 65° .

4.4 Parameter sensitivity analysis and discussion

A parameter sensitivity analysis is necessary to examine the influence of various simulated parameters on the WFUI simulation results and select the appropriate parameters more precisely to achieve enhanced PMC detection and improved detection efficiency. This analysis alters the FOV of the WFUI and the satellite altitude to observe variations in the detection efficiency.

The FOV of the WFUI could be adjusted by modifying the focal length. As the FOV increased, the pixel resolution of areas closer to the WFUI changed minimally, whereas the pixel resolution of farther areas increased. The area captured by the WFUI in a single shot forms an isosceles trapezoidal shape. As the FOV expands, the two base angles of the trapezoid decrease, thereby increasing the coverage area. Conversely, with a smaller FOV, the range detected by the WFUI becomes limited, preventing complete coverage of the simulated PMC field and reducing detection efficiency. Enlarging the FOV aids in capturing the simulated cloud field more effectively, leading to improved detection efficiency. Furthermore, increasing the CCD pixel resolution amplified the strength of the PMC signal, making it less sensitive to interference from noise signals, thereby enhancing the detection efficiency. Increasing the FOV further improves the detection efficiency. However, an excessively large FOV may lead to the capture of areas where a significant presence of PMCs is unlikely, resulting in resource wastage. Additionally, when the CCD pixel resolution is excessively high, the accuracy of PMC detection may decrease.

The satellite velocity, V , varies with changes in the satellite altitude, H , given by $V = \sqrt{\frac{GM_e}{R_e + H}}$, where G is the gravitational constant, M_e is the mass of Earth, and R_e is the radius of Earth. As orbit altitude increases, satellite speed decreases, resulting in smaller phase shifts during image capture with the same exposure time, and reduced distances moved with the same measurement cadence. We can adjust the exposure time and measurement cadence to maintain the geolocation of the observations. In addition, while altering the satellite altitude, factors such as photon reception efficiency and CCD pixel resolution change. When holding other parameters constant, a higher orbital altitude results in a lower R_{at} and a higher CCD pixel resolution. Given the more substantial variation in the CCD resolution, its impact on the gray values becomes more pronounced, inevitably leading to an increase in the PMC detection efficiency. However, an excessively high CCD pixel resolution may not be favorable for detecting PMCs. Therefore, when adjusting the satellite altitude, we must modify the FOV of the WFUI concurrently to ensure that the change in the covered area between parameter variations remains moderate.

In this study, AIM satellite data from the 2009 PMC season were used, spanning 114 d and encompassing a total of 1756 orbits. To reduce computational time, one orbit was randomly selected each day for sampling. Specifically, scenarios were considered where the satellite altitude was 600 km, with the FOV of the WFUI ranging from 54 to 66°, as well as cases with an FOV of 60° and satellite altitudes ranging from 500 to 800 km. Furthermore, the detection efficiency of the PMCs was analyzed for situations in which the satellite orbital altitude and imaging instrument FOV were 500 km and 67°, 550 km and 63°, 600 km and 60°, 650 km and 57°, 700 km and 53°, 750 km and 50°, and 800 km and 48°. For a comprehensive analysis, the entire PMC season was divided into five periods, with 15 d before and after as the early and late stages, respectively; the remaining data-forming periods were 27 d each, namely the early–mid, mid, and mid–late periods. The results presented in Fig. 10 were obtained by analyzing the data from these five periods. During the early and late periods of the PMC season, when PMC occurrence was relatively low, variations in the parameters had a smaller impact on the detection efficiency. However, in the early, mid, and mid–late periods, when PMC occurrence was higher, the effect of increasing satellite altitude on detection efficiency was clearly evident. Simultaneously, an observable trend of increased detection efficiency was also apparent with the enlargement of the FOV of the WFUI.

The distribution of PMCs exhibits a strong latitude dependency. To further investigate the impact of parameter changes on detection efficiency at different latitudes, we conducted a sensitivity analysis of detection efficiency for PMCs across various latitudes and seasonal periods. Specifically, we divided the latitude range from 55 to 85° into 5° intervals and analyzed the detection efficiency of PMCs during various pe-

riods using the same orbit and parameters. The results are shown in Fig. 11. Figure 11 shows that during the early and late stages of PMC season, parameter changes have a minimal impact on detection efficiency across different latitudes. During the early stage of the PMC season, the appearance of PMCs is infrequent and faint, resulting in a detection efficiency of less than 10 % during this period. However, during the early–mid, mid, and mid–late stages of the PMC season, parameter changes significantly affect detection efficiency in the latitude range of 65 to 85°, while the impact is relatively limited in the latitude range of 55 to 65°.

The WFUI with only one camera cannot achieve the level of CIPS with four cameras when detecting small particles in weak PMCs. However, using a single camera significantly reduces costs and minimizes payload space. Also, the WFUI has the potential to be installed on multiple CubeSats to detect the same sampling PMC region with a varying scattering angle when different CubeSats are orbiting in the same orbit with a certain delay time interval. This would allow for obtaining multiple views of each position from different scattering angles, thereby improving the detection of weaker PMCs.

5 Conclusion

The variation trend and characteristics of PMCs have significance for studying the evolution of atmospheric systems and understanding various atmospheric dynamic processes. UV imaging technology has been proven to have good application prospects in detecting PMCs. In this study, we proposed the WFUI and built a forward model to evaluate the detection capability and efficiency. CIPS and SOFIE data were fused to reconstruct the three-dimensional PMC scene as the input background. Based on calculations of the optical properties, radiative transfer, and detection processing, the actual detection signal was simulated by photoelectric conversion. A comparison with the input background field was conducted to compute and analyze the detection efficiency. The results have shown the following.

1. In the initial durations of the PMC season, the relatively low IWC within PMCs leads to a constrained detection efficiency for the WFUI. As the PMC season progresses, the IWC of PMCs gradually increases, resulting in a significant increase in the detection efficiency. The relationship between IWC and detection efficiency follows an exponential function distribution.
2. As the latitude increases, there is an observable upward trend in the IWC of PMCs, which directly influences the variations in detection efficiency. Once latitude surpasses 80°, IWC stabilizes and the detection efficiency at this time also remains basically unchanged or even slightly decreases.
3. The increase in satellite altitude will improve the detection efficiency. In addition, an increase in the FOV of

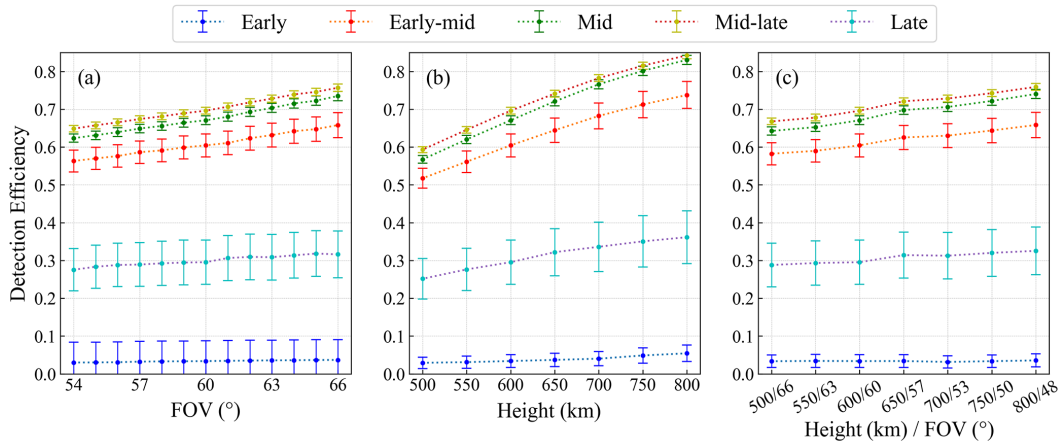


Figure 10. (a) Variation in detection efficiency with the FOV at different times. (b) Variation in detection efficiency with satellite altitude. (c) Variation in detection efficiency with simultaneous changes in the FOV and satellite altitude.

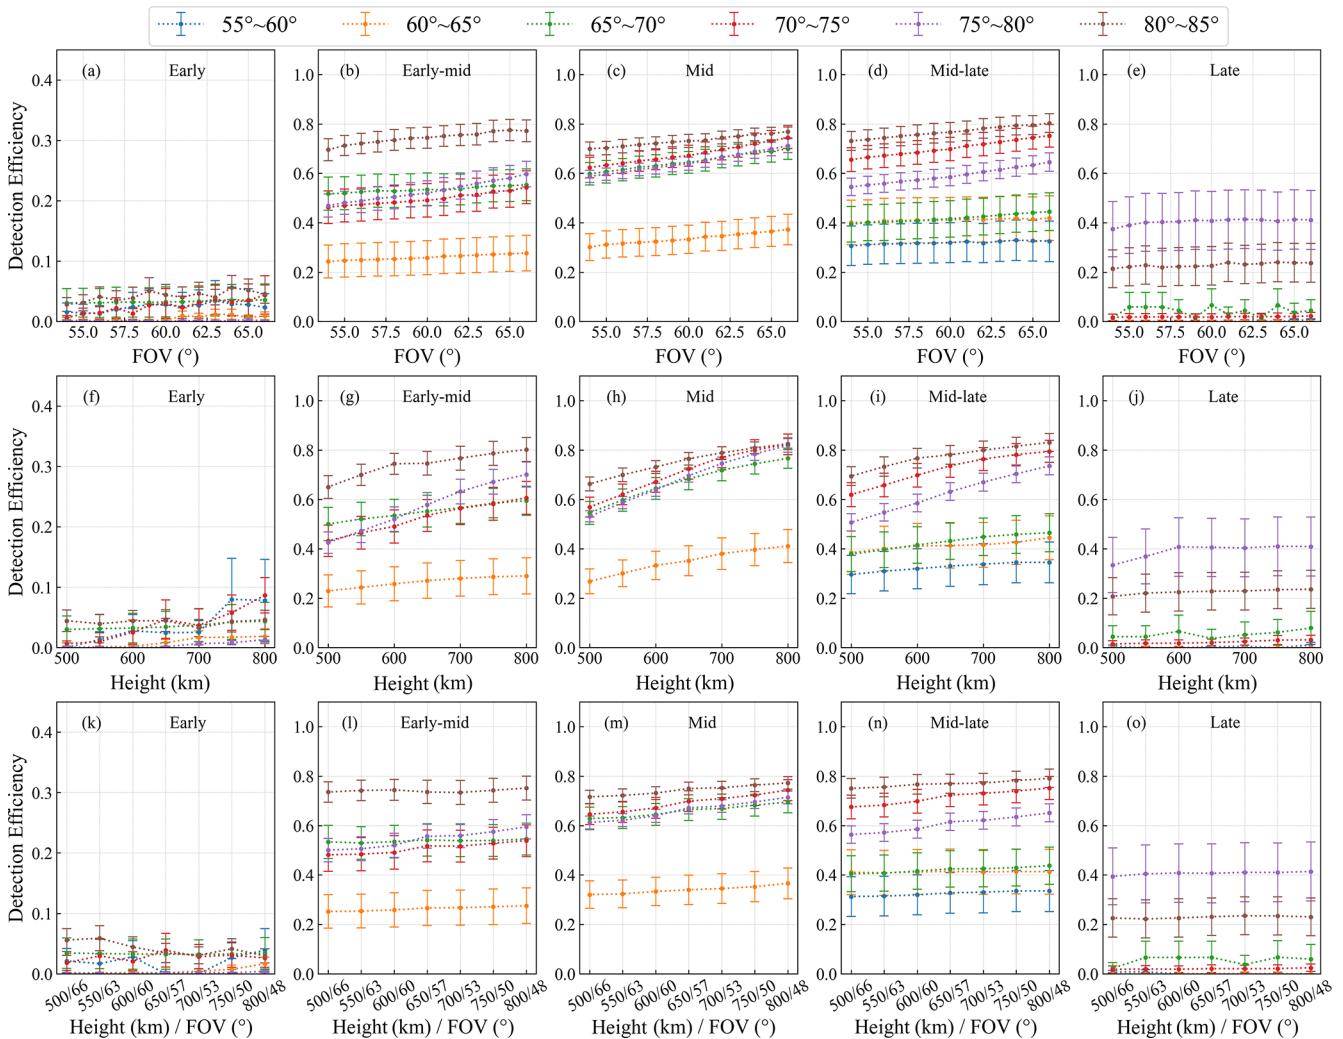


Figure 11. (a–e) Variation in detection efficiency with the FOV at different latitudes during different periods. (f–j) Variation in detection efficiency with the satellite altitude at different latitudes during different periods. (k–o) Variation in detection efficiency with simultaneous changes in the FOV and satellite altitude at different latitudes during different periods.

Table 2. Input parameters for the forward model of the WFUI.

Unit	Parameter	Symbol	Reference value
Satellite	Mean altitude	H	600 km
	Mean orbital velocity	V	7.56 km s^{-1}
	Spacecraft view angle	ω	30°
Filter	Central wavelength	λ_0	265 nm
	Filter FWHM	FWHM	15 nm
	Refractive index of glass base	n_e	2.0
	Peak transmittance	t_{fmax}	0.6
CCD camera	Measurement cadence	T_M	43 s
	Exposure times	T_e	0.75 s
	Focal length	f	23.5 mm
	CCD diagonal	D_C	38 mm
	Iris	F	1.625
	FOV	$\Delta\theta$	60°
	Single-pixel size	ξ_0	$20 \mu\text{m} \times 20 \mu\text{m}$
	Screen resolution	ξ	1360×1360
	Quantum efficiency	η	0.80
	Analog-to-digital unit	C_{ADU}	7
	Number of pixel column	μ	16 bit

the WFUI will also lead to an increase in detection efficiency.

The WFUI instrument primarily consists of a CCD camera and a lens, which is designed to be compact and allows for greater flexibility in installation on satellites not specifically dedicated to detecting PMCs. According to the estimation of the instrument parameters shown in Table 2, the size of the entire instrument is around 3 L and it is relatively lightweight. This allows for the possibility of deploying the instrument on a three-unit CubeSat.

Data availability. The SOFIE PMC data are now available to the public in the form of summary files containing data for each PMC season at https://sofie.gats-inc.com/getdata_pmc (NASA, 2024a). The AIM CIPS PMC data are now available to the public in the form of summary files containing data for each PMC season at <http://lasp.colorado.edu/aim> (NASA, 2024b). The NRLMSISE-00 Atmosphere Model is available at <https://ccmc.gsfc.nasa.gov/modelweb/models/nrlmsise00.php> (NRL, 2024). The daily average solar UV spectral data were acquired from the LASP Solar Irradiance Data Center (<https://doi.org/10.25980/L27Z-XD34>, Laboratory for Atmospheric and Space Physics, 2005).

Author contributions. Conceptualization: HG. Formal analysis: KR, HG. Methodology: KR, HG, SN. Resources: LK, LB, SS. Validation: KR. Visualization: KR. Writing (original draft): KR. Writing (review and editing): HG.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. The authors acknowledge funding from the National Key Research and Development Program of China (grant no. 2021YFC2802502). The financial support by the National Natural Science Foundation of China (grant no. 42374223) and the Shanghai Aerospace Science and Technology Innovation Fund (grant no. SAST2023-027) is also acknowledged.

Financial support. This research has been supported by the National Key Research and Development Program of China (grant no. 2021YFC2802502), the National Natural Science Foundation of China (grant no. 42374223), and the Shanghai Aerospace Science and Technology Innovation Fund (SAST2023-027).

Review statement. This paper was edited by Cheng Liu and reviewed by three anonymous referees.

References

- Baumgarten, G., Fricke, K. H., and Cossart, G. V.: Investigation of the shape of noctilucent cloud particles by polarization lidar technique, *Geophys. Res. Lett.*, 29, 8-1–8-4, <https://doi.org/10.1029/2001GL013877>, 2002.
- Bailey, S. M., Thomas, G. E., Hervig, M. E., Lumpe, J. D., Randall, C. E., Carstens, J. N., Thurairajah, B., Rusch, D. W., Russell, J. M., and Gordley, L. L.: Comparing nadir and limb observations of polar mesospheric clouds: The effect of the assumed particle size distribution, *J. Atmos. Sol.-Terr. Phys.*, 127, 51–65, <https://doi.org/10.1016/j.jastp.2015.02.007>, 2015.
- Bardeen, C. G., Toon, O. B., Jensen, E. J., Hervig, M. E., Randall, C. E., Benze, S., Marsh, D. R., and Merkel, A.: Numerical simulations of the three-dimensional distribution of polar mesospheric clouds and comparisons with Cloud Imaging and Particle Size (CIPS) experiment and the Solar Occultation For Ice Experiment (SOFIE) observations, *J. Geophys. Res.-Atmos.*, 115, D10204, <https://doi.org/10.1029/2009JD012451>, 2010.
- Benze, S., Randall, C. E., DeLand, M. T., Thomas, G. E., Rusch, D. W., Bailey, S. M., Russell, J. M., McClintock, W., Merkel, A. W., and Jeppesen, C.: Comparison of polar mesospheric cloud measurements from the Cloud Imaging and Particle Size experiment and the solar backscatter ultraviolet instrument in 2007, *J. Atmos. Sol.-Terr. Phys.*, 71, 365–372, <https://doi.org/10.1016/j.jastp.2008.07.014>, 2009.
- Benze, S., Randall, C. E., DeLand, M. T., Thomas, G. E., Bailey, S. M., Russell, J. M., and Merkel, A. W.: Evaluation of AIM CIPS measurements of Polar Mesospheric Clouds by comparison with SBUV data, *J. Atmos. Sol.-Terr. Phys.*, 73, 2065–2072, <https://doi.org/10.1016/j.jastp.2011.02.003>, 2011.

- Broman, L., Benze, S., Gumbel, J., Christensen, O. M., and Randall, C. E.: Common volume satellite studies of polar mesospheric clouds with Odin/OSIRIS tomography and AIM/CIPS nadir imaging, *Atmos. Chem. Phys.*, 19, 12455–12475, <https://doi.org/10.5194/acp-19-12455-2019>, 2019.
- Carstens, J. N., Bailey, S. M., Lumpe, J. D., and Randall, C. E.: Understanding uncertainties in the retrieval of polar mesospheric clouds from the cloud imaging and particle size experiment in the presence of a bright Rayleigh background, *J. Atmos. Sol.-Terr. Phys.*, 104, 197–212, <https://doi.org/10.1016/j.jastp.2013.08.006>, 2013.
- Chandran, A., Rusch, D. W., Merkel, S. W., Palo, S. E., Thomas, G. E., Taylor, M. J., Bailey, S. M., and Russell III, J. M.: Polar mesospheric cloud structures observed from the cloud imaging and particle size experiment on the Aeronomy of Ice in the Mesosphere spacecraft: Atmospheric gravity waves as drivers for longitudinal variability in polar mesospheric cloud occurrence, *J. Geophys. Res.-Atmos.*, 115, D13102, <https://doi.org/10.1029/2009JD013185>, 2010.
- Chandran, A., Rusch, D. W., Thomas, G. E., Palo, S. E., Baumgarten, G., Jensen, E. J., and Merkel, A. M.: Atmospheric gravity wave effects on polar mesospheric clouds: A comparison of numerical simulations from CARMA 2D with AIM observations, *J. Geophys. Res.-Atmos.*, 117, D20104, <https://doi.org/10.1029/2012JD017794>, 2012.
- Deland, M. T. and Thomas, G. E.: Updated PMC trends derived from SBUV data, *J. Geophys. Res.-Atmos.*, 120, 2140–2166, <https://doi.org/10.1002/2014JD022253>, 2015.
- Deland, M. T. and Thomas, G. E.: Evaluation of space traffic effects in SBUV polar mesospheric cloud data, *J. Geophys. Res.-Atmos.*, 124, 4203–4221, <https://doi.org/10.1029/2018JD029756>, 2019.
- DeLand, M. T., Shettle, E. P., Thomas, G. E., and Olivero, J. J.: Spectral measurements of PMCs from SBUV/2 instruments, *J. Atmos. Sol.-Terr. Phys.*, 68, 65–77, <https://doi.org/10.1016/j.jastp.2005.08.006>, 2006.
- France, J. A., Randall, C. E., Lieberman, R. S., Harvey, V. L., Eckermann, S. D., Siskind, D. E., Lumpe, J. D., Bailey, S. M., Carstens, J. N., and Russell III, J. M.: Local and remote planetary wave effects on polar mesospheric clouds in the Northern Hemisphere in 2014, *J. Geophys. Res.-Atmos.*, 123, 5149–5162, <https://doi.org/10.1029/2017JD028224>, 2018.
- Gao, H. Y., Li, L. C., Bu, L. B., Zhang, Q. L., Tang, Y. H., and Wang, Z.: Effect of small-scale gravity waves on polar mesospheric clouds observed from CIPS/AIM, *J. Geophys. Res.-Space*, 123, 4026–4045, <https://doi.org/10.1029/2017JA024855>, 2018.
- Gordley, L. L., Hervig, M. E., Fish, C., Russell, J. M., Bailey, S., Cook, J., Hansen, S., Shumway, A., Paxton, G., Deaver, L., Marshall, T., Burton, J., Magill, B., Brown, C., Thompson, E., and Kemp, J.: The solar occultation for ice experiment, *J. Atmos. Sol.-Terr. Phys.*, 71, 300–315, <https://doi.org/10.1016/j.jastp.2008.07.012>, 2009.
- Hervig, M. E., Pagan, K. L., and Foschi, P. G.: Analysis of polar stratospheric cloud measurements from AVHRR, *J. Geophys. Res.-Atmos.*, 106, 10363–10374, <https://doi.org/10.1029/2000JD900736>, 2001.
- Hervig, M. E., Gordley, L. L., Deaver, L. E., Siskind, D. E., Stevens, M. H., Russell, J. M., Bailey, S. M., Megner, L., and Bardeen, C. G.: First satellite observations of meteoric smoke in the middle atmosphere, *Geophys. Res. Lett.*, 36, L18805, <https://doi.org/10.1029/2009GL039737>, 2009.
- Hervig, M. E., Berger, M. E., and Mark, E.: Decadal variability in PMCs and implications for changing temperature and water vapor in the upper mesosphere, *J. Geophys. Res.-Atmos.*, 121, 2383–2392, <https://doi.org/10.1002/2015JD024439>, 2016.
- Kaifler, N., Kaifler, B., Wilms, H., Rapp, M., Stober, G., and Jacobi, C.: Mesospheric Temperature During the Extreme Midlatitude Noctilucent Cloud Event on 18/19 July 2016, *J. Geophys. Res.-Atmos.*, 123, 13775–13789, <https://doi.org/10.1029/2018JD029717>, 2018.
- Laboratory for Atmospheric and Space Physics: LASP Interactive Solar Irradiance Datacenter, Laboratory for Atmospheric and Space Physics, <https://doi.org/10.25980/L27Z-XD34>, 2005.
- Liu, X., Yue, J., Xu, J., Yuan, W., Russell III, J. M., and Hervig, M. E.: Five-day waves in polar stratosphere and mesosphere temperature and mesospheric ice water measured by SOFIE/AIM, *J. Geophys. Res.-Atmos.*, 120, 3872–3887, <https://doi.org/10.1002/2015JD023119>, 2015.
- Liu, X., Yue, J., Xu, J., Yuan, W., Russell, J. M., Hervig, M. E., and Nakamura, T.: Persistent longitudinal variations in 8 years of CIPS/AIM polar mesospheric clouds, *J. Geophys. Res.-Atmos.*, 121, 8390–8409, <https://doi.org/10.1002/2015JD024624>, 2016.
- Lubken, F. J., Baumgarten, G., Grygalashvyly, M., and Vellalassery, A.: Absorption of solar radiation by noctilucent clouds in a changing climate, *Geophys. Res. Lett.*, 51, e2023GL107334, <https://doi.org/10.1029/2023GL107334>, 2024.
- Lumpe, J. D., Bailey, S. M., Carstens, J. N., Randall, C. E., Rusch, D. W., Thomas, G. E., Nielsen, K., Jeppesen, C., McClintock, W. E., Merkel, A. W., Riesberg, L., Templeman, B., Baumgarten, G., and Russell, J. M.: Retrieval of polar mesospheric cloud properties from CIPS: Algorithm description, error analysis and cloud detection sensitivity, *J. Atmos. Sol.-Terr. Phys.*, 104, 167–196, <https://doi.org/10.1016/j.jastp.2013.06.007>, 2013.
- Marshall, B. T., Deaver, L. E., Thompson, R. E., Gordley, L. L., McHugh, M. J., Hervig, M. E., and Russell III, J. M.: Retrieval of temperature and pressure using broadband solar occultation: SOFIE approach and results, *Atmos. Meas. Tech.*, 4, 893–907, <https://doi.org/10.5194/amt-4-893-2011>, 2011.
- McClintock, W. E., Rusch, D. W., Thomas, G. E., Merkel, A. W., Lankton, M. R., Drake, V. A., Bailey, M. S., and Russell III, J. M.: The cloud imaging and particle size experiment on the aeronomy of ice in the mesosphere mission: Instrument concept, design, calibration and on-orbit performance, *J. Atmos. Sol.-Terr. Phys.*, 71, 340–355, <https://doi.org/10.1016/j.jastp.2008.10.011>, 2009.
- Miao, J., Gao, H., Kou, L., Zhang, Y., Li, Y., Chu, Z., Bu, L. B., and Wang, Z.: A case study of midlatitude noctilucent clouds and its relationship to the secondary-generation gravity waves over tropopause inversion layer, *J. Geophys. Res.-Atmos.*, 127, e2022JD036912, <https://doi.org/10.1029/2022JD036912>, 2022.
- NASA (National Aeronautics and Space Administration): SOFIE (Solar Occultation For Ice Experiment), https://sofie.gats-inc.com/getdata_pmc, last access: 8 December 2024a.
- NASA (National Aeronautics and Space Administration): The Cloud Imaging and Particle Size (CIPS) instrument, <http://lasp.colorado.edu/aim>, last access: 8 December 2024b.

- NRL (US Naval Research Laboratory): The NRLMSISE-00 Atmosphere Model, <https://ccmc.gsfc.nasa.gov/modelweb/models/nrlmsise00.php>, last access: 8 December 2024.
- Randall, C. E., Carstens, J., France, J. A., Harvey, V. L., Hoffmann, L., Bailey, S. M., Alexander, M. J., Lumpe, J. D., Yue, J., Thurairajah, B., Siskind, D. E., Zhao, Y., Taylor, M. J., and Russell, J. M.: New AIM/CIPS global observations of gravity waves near 50–55 km, *Geophys. Res. Lett.*, 44, 7044–7052, <https://doi.org/10.1002/2017GL073943>, 2017.
- Rapp, M. and Thomas, G. E.: Modeling the microphysics of mesospheric ice particles: Assessment of current capabilities and basic sensitivities, *J. Atmos. Sol.-Terr. Phys.*, 68, 715–744, <https://doi.org/10.1016/j.jastp.2005.10.015>, 2006.
- Rapp, M., Thomas, G. E., and Baumgarten, G.: Spectral properties of mesospheric ice clouds: Evidence for non-spherical particles, *J. Geophys. Res.-Atmos.*, 112, D03211, <https://doi.org/10.1029/2006JD007322>, 2007.
- Rusch, D., Thomas, G., Merkel, A., Olivero, J., Chandran, A., Lumpe, J., Carstans, J., Randall, C., Bailey, S., and Russell, J.: Large ice particles associated with small ice water content observed by AIM CIPS imagery of polar mesospheric clouds: Evidence for microphysical coupling with small-scale dynamics, *J. Atmos. Sol.-Terr. Phys.*, 162, 97–105, <https://doi.org/10.1016/j.jastp.2016.04.018>, 2017.
- Rusch, D. W., Thomas, G. E., McClintock, W., Merkel, A. W., Bailey, S. M., Russell III, J. M., Randall, C. E., Jeppesen, C., and Callan, M.: The cloud imaging and particle size experiment on the aeronomy of ice in the mesosphere mission: Cloud morphology for the northern 2007 season, *J. Atmos. Sol.-Terr. Phys.*, 71, 356–364, <https://doi.org/10.1016/j.jastp.2008.11.005>, 2009.
- Russell, J. M., Bailey, S. M., Gordley, L. L., Rusch, D. W., Horanyi, M., Hervig, M. E., Thomas, G. E., Randall, C. E., Siskind, D. E., Stevens, M. H., Summers, M. E., Taylor, M. J., Englert, C. R., Espy, P. J., McClintock, W. E., and Merkel, A. W.: The Aeronomy of Ice in the Mesosphere (AIM) mission: Overview and early science result, *J. Atmos. Sol.-Terr. Phys.*, 71, 289–299, <https://doi.org/10.1016/j.jastp.2008.08.011>, 2009.
- Salawitch, R. J., McBride, L. A., Thompson, C. R., Fleming, E. L., McKenzie, R. L., Rosenlof, K. H., Doherty, S. J., and Fahey, D. W.: Twenty Questions and Answers About the Ozone Layer: 2022 Update, Scientific Assessment of Ozone Depletion: 2022, 75 pp., <https://csl.noaa.gov/assessments/ozone/2022> (last access: 3 June 2024), 2023.
- Savigny, C. V., Kokhanovsky, A., Bovensmann, H., Eichmann, K. U., Kaiser, J., Noel, S., Rozanov, A. V., Skupin, J., and Burrows, J. P.: NLC detection and particle size determination: first results from SCIAMACHY on ENVISAT, *Adv. Space Res.*, 34, 851–856, <https://doi.org/10.1016/j.asr.2003.05.050>, 2004.
- Stevens, M. H., Stevens, D. E., Eckermann, S. D., Coy, L., McCormack, J. P., Englert, C. R., Hoppel, K. W., Nielsen, K., Kochenash, A. J., Hervig, M. E., Randall, C. E., Lumpe, J., Bailey, S. M., Rapp, M., and Hoffmann, P.: Tidally induced variations of polar mesospheric cloud altitudes and ice water content using a data assimilation system, *J. Geophys. Res.-Atmos.*, 115, D18209, <https://doi.org/10.1029/2009JD013225>, 2010.
- Stevens, M. H., Lossow, S., Fiedler, J., Baumgarten, G., Lubken, F. J., Hallgren, K., Hartogh, P., Randall, C. E., Lumpe, J., Bailey, S. M., Niciejewski, R., Meier, R. R., Plane, J., Kochenash, A. J., Murtagh, D. P., and Englert, C. R.: Bright polar mesospheric clouds formed by main engine exhaust from the space shuttle’s final launch, *J. Geophys. Res.-Atmos.*, 117, 19206, <https://doi.org/10.1029/2012JD017638>, 2012.
- Thomas, G. E. and McKay, C. P.: On the mean particle size and water content of polar mesospheric clouds, *Planet. Space Sci.*, 33, 1209–1224, [https://doi.org/10.1016/0032-0633\(85\)90077-7](https://doi.org/10.1016/0032-0633(85)90077-7), 1985.
- Thomas, G. E., Olivero, J. J., Jensen, E. J., Schroeder, W., and Toon, O. B.: Relation between increasing methane and the presence of ice clouds at the mesopause, *Nature*, 338, 490–492, <https://doi.org/10.1038/338490a0>, 1989.
- Tsuda, T. T., Hozumi, Y., Kawaura, K., Hosokawa, K., Suzuki, H., and Nakamura, T.: Initial report on polar mesospheric cloud observations by Himawari-8, *Atmos. Meas. Tech.*, 11, 6163–6168, <https://doi.org/10.5194/amt-11-6163-2018>, 2018.
- Tsuda, T. T., Hozumi, Y., Kawaura, K., Tatsuzawa, K., Ando, Y., Hosokawa, K., Suzuki, H., Murata, K. T., Nakamura, T., Yue, J., and Nielsen, K.: Detection of polar mesospheric clouds utilizing Himawari-8/AHI full-disk images, *Earth Space Sci.*, 9, e2021EA002076, <https://doi.org/10.1029/2021EA002076>, 2021.
- Xie, T., Chen, M. T., Chen, J., Lu, F., and An, D. W.: Scattering and absorption characteristics of non-spherical cirrus cloud ice crystal particles in terahertz frequency band, *Chinese Phys. B*, 29, 074101, <https://doi.org/10.1088/1674-1056/ab84d3>, 2020.