

Integrated method for the measurement of trace nitrogenous atmospheric bases

D. Key, J. Stihle, J.-E. Petit, C. Bonnet, L. Depernon, O. Liu, S. Kennedy, R. Latimer, M. Burgoyne, D. Wanger, A. Webster, S. Casunuran, S. Hidalgo, M. Thomas, J. A. Moss, and M. M. Baum

Oak Crest Institute of Science, Pasadena, California, USA

Received: 13 August 2011 – Published in Atmos. Meas. Tech. Discuss.: 21 September 2011

Revised: 7 December 2011 – Accepted: 14 December 2011 – Published: 20 December 2011

Abstract. Nitrogenous atmospheric bases are thought to play a key role in the global nitrogen cycle, but their sources, transport, and sinks remain poorly understood. Of the many methods available to measure such compounds in ambient air, few meet the current need of being applicable to the complete range of potential analytes and fewer still are convenient to implement using instrumentation that is standard to most laboratories. In this work, an integrated approach to measuring trace, atmospheric, gaseous nitrogenous bases has been developed and validated. The method uses a simple acid scrubbing step to capture and concentrate the bases as their phosphite salts, which then are derivatized and analyzed using GC/MS and/or LC/MS. The advantages of both techniques in the context of the present measurements are discussed. The approach is sensitive, selective, reproducible, as well as convenient to implement and has been validated for different sampling strategies. The limits of detection for the families of tested compounds are suitable for ambient measurement applications (e.g., methylamine, 1 pptv; ethylamine, 2 pptv; morpholine, 1 pptv; aniline, 1 pptv; hydrazine, 0.1 pptv; methylhydrazine, 2 pptv), as supported by field measurements in an urban park and in the exhaust of on-road vehicles.

1 Introduction

Nitrogenous atmospheric bases are thought to play a key role in the global nitrogen cycle, but their sources, transport, and sinks remain poorly understood. Few studies have addressed the chemistry and evolution of these compounds in the atmosphere and much uncertainty surrounds the range of atmospheric concentrations as a function of land use.

The US Environmental Protection Agency (EPA) has recently shifted to a multi-pollutant approach to air quality management (2008, 2010), that will likely affect how nitrogenous bases are monitored and regulated in the future. Emerging technologies in the stationary and mobile source sectors will potentially constitute new sources of atmospheric nitrogenous bases. For example, carbon-dioxide-capture technologies from the emissions of fossil fuel power plants rely heavily on organic amino compounds (Choi et al., 2009). In 2010, the EPA's Tier 2 NO_x standard (2000) for on-road heavy duty diesel engines went into effect requiring the use of suitable NO_x reduction technologies such as urea injection or selective catalytic reduction (SCR).

Ammonia (NH₃), the predominant atmospheric base, plays a crucial role in determining the acid-neutralizing capacity of tropospheric air masses (Jacob et al., 1986a, b). Airborne sulfuric and nitric acid, which are produced by the atmospheric oxidation of sulfur dioxide (SO₂) and nitrogen dioxide (NO₂), respectively (Seinfeld and Pandis, 2006), react with gaseous NH₃ to afford fine particles (aerosol fraction with a mass median aerodynamic diameter of 2.5 μm or less, PM_{2.5}) of ammonium bisulfate (NH₄HSO₄), ammonium sulfate [(NH₄)₂SO₄], and ammonium nitrate (NH₄NO₃) (Russell et al., 1983, 1988a, b; Russell and Cass, 1986; Brost et al., 1988). Those secondary air pollution particles are well-known to degrade visibility *via* efficient light scattering (Larson and Cass, 1989; Horvath, 1991, 1993; Malm et al., 1994; Eldering et al., 1996; Malm et al., 1996; Barthelmie and Pryor, 1998), leading to the dense haze common to many polluted urban atmospheres. Atmospheric NH₃ emissions from anthropogenic sources are increasingly coming under scrutiny as associated environmental impacts are becoming better understood (Sutton et al., 1998). Evidence is mounting (Asman et al., 1998; Schjorring, 1998) that dry and wet deposition of NH₃ and its salts can adversely affect terrestrial (Friedland et al., 1991; Pearson and Stewart, 1993; Fangmeier et al., 1994; Sutton et al., 1994, 1995a, b;



Correspondence to: M. M. Baum
(m.baum@oak-crest.org)

Hornung and Sutton, 1995; Bobbink et al., 1998; Pearson and Soares, 1998; Wyers and Erisman, 1998) and aquatic (Asman and Berkowicz, 1994; Lee et al., 1998; Spokes et al., 2000) ecosystems. Deposited NH_3 disturbs soil nutrient balance (Hornung and Sutton, 1995) and can contribute toward soil acidification following nitrification (Wyers and Erisman, 1998).

Studies on the significance and atmospheric composition of other nitrogenous bases aside from NH_3 are scarce. The sources, fluxes, and dynamics of atmospheric amines, including gas-phase reactions, gas-to-particle conversion and deposition have been discussed in recent reviews (Ge et al., 2011a, b). Low-molecular-weight amines are emitted to the atmosphere by widespread and diverse sources (Ge et al., 2011a), including industrial emissions (Akyuz and Atu, 2006), vehicle exhaust (Cadle and Mulawa, 1980; Cadle et al., 1980), cattle feedlots (Mosier et al., 1973; Schade and Crutzen, 1995), waste incinerators (Leach et al., 1999), and sewage treatment plants (Pehlivanoglu-Mantas and Sedlak, 2006; Hwang et al., 1995). Once emitted into the atmosphere, amines are chemically transformed through reactions with oxidants such as hydroxyl radicals and ozone. Aromatic amines absorb radiation at wavelengths above 290 nm and, therefore, can be photolytically active in the troposphere. A major reason for the current interest in atmospheric amines is driven by their potential role in particle formation, as discussed by Ge et al. (2011a, b). Aliphatic amines have been detected in both urban and rural atmospheric aerosols (Murphy et al., 2007). Laboratory and field studies suggest that aminium salts contribute significantly to nanoparticle growth (Barsanti et al., 2009; Smith et al., 2010) and must be accounted for in climate models. Methanesulfonic acid (MSA) is present in significant quantities in air and has been used as a biogenic tracer. Salts of MSA and aliphatic amines are becoming recognized as important emissions in the marine environment and are implicated in aerosol formation.

Another class of alkaline, volatile compounds of concern are classified here as *activated primary amines* (X-NH_2 , where $\text{X}=\text{NR}^1\text{R}^2$, OR). Hydrazine ($\text{X}=\text{NH}_2$), methylhydrazine ($\text{X}=\text{NHCH}_3$), and hydroxylamine ($\text{X}=\text{OH}$) are high-energy propellants used in large volumes for aerospace operations. These compounds also have a number of industrial applications, including in the synthesis of polymers, pesticides, pharmaceuticals, and chemotherapeutic agents (Schmidt, 2001), as etchants in microstructure fabrication (Mazzoni and Davis, 1991), and as additives to steam boiler water (Danielson and Conroy, 1982). Hydroxylamine also has been detected in emissions from a municipal incinerator, a waste collection center, and a sewage treatment plant (Leach et al., 1999). Little is known about the atmospheric fate of these activated primary amines, but it is expected to be dominated by the oxidative lability of the N-N and N-O bonds. The health effects associated with the inhalation of hydrazines have been studied in laboratory animals and include damage to internal organs, creation

of blood abnormalities, irreversible deterioration of the nervous system, and documented teratogenic and mutagenic effects (Wald et al., 1984; Vernot et al., 1985; Choudhary and Hansen, 1998). These findings have led to the National Institute for Occupational Safety and Health (NIOSH) recommended exposure limits (RELs) for hydrazine and methylhydrazine of 30 and 40 parts per billion (ppb), respectively (1995). Far less is known about the health effects of hydroxylamine and no REL has been published to date.

Numerous techniques have been described for the capture and analysis of a wide range of basic nitrogenous compounds. Most of these reports, however, are focused on a specific subset of this compound class, such as low-molecular weight aliphatic amines or methylhydrazines. An integrated approach is described here that is based on one method for capturing the gas-phase compounds and commonly used analytical instrumentation for analyzing the derivatized compound mixtures. Much effort was dedicated to making the methods reliable and convenient to implement. The approach is designed to provide the research community with a sensitive, selective, and reproducible and has been validated for different sampling applications.

2 Measurement strategy

The approach to the measurement of trace atmospheric bases discussed here is shown schematically in Fig. 1. All bases are collected as their aminium phosphite salts using standard sampling devices such as impingers and denuders. The concentration of the trapped salts is quantified off-line in the laboratory. Ammonium concentrations are determined colorimetrically using the indophenol blue method. Primary and secondary organic amines are converted to the corresponding 2,4-dinitroaniline derivatives by reaction with 2,4-dinitrofluorobenzene (DNFB) and activated primary amines are derivatized with 2-furaldehyde. The derivatized products are analyzed by high-performance liquid chromatography-tandem mass spectrometry (LC/MS) and/or gas chromatography-tandem mass spectrometry (GC/MS). The methods were developed to be compatible with both instruments to maximize the usefulness to laboratories equipped with only one of these two chromatographic systems.

It should be noted that while the derivatization schemes are based on known chemistries, published methods did not afford sufficient reliability and sensitivity when they were attempted in the context of the current report. Significant effort has been dedicated to maximizing the recovery efficiency, reproducibility, and sensitivity of these systems, as discussed in detail below. The optimized methods presented under Sect. 3 and in Figs. 3 and 5.

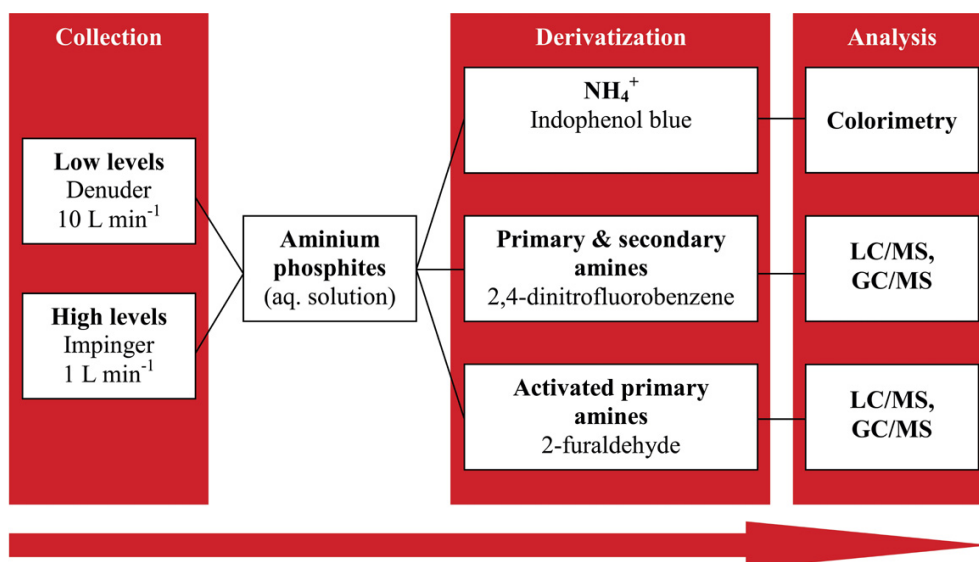


Fig. 1. Schematic representation of the measurement strategy for trace atmospheric bases.

2.1 Instrumentation methods

For LC/MS, an Agilent 1100 LC system interfaced to an Agilent 1100 mass selective detector with an electrospray ionization (ESI) source was used in conjunction with a C8 100A Kinetex (Phenomenex, 2.1×100 mm, $2.6 \mu\text{m}$ particle size) column. Details of LC/MS methods are given in the Supplement.

For GC/MS, a 7890A gas chromatograph with 5975C Inert XL EI/CI mass selective detector (Agilent Technologies) was used under EI mode. Early method development was also carried out on a 5890 Series II GC with 5972 mass selective detector. A 5890 Series II GC (Agilent Technologies) with nitrogen-phosphorous detector (NPD) was used for determining detection limits using NPD. For all GC analyses, an Agilent DB-5 MS (L, 30 m, ID, 0.25 mm , DF, $0.5 \mu\text{m}$) was used. Details of GC/MS methods are given in the Supplement.

Experimental details on denuder and impinger efficiency tests are provided in the Supplement.

2.2 Safety considerations

All toxic materials were handled in fume hoods using standard safety protocols and were destroyed with appropriate chemical scrubbers prior to their release to the environment or were stored and collected by a hazardous materials contractor. Measurements of vehicle exhaust did not expose the instrument operator(s) to significant levels of emissions.

3 Results and discussion

3.1 Improved colorimetric NH_4^+ analysis

Several iterations (USEPA, 1999; APHA, 2005) on the well-known Berthelot (indophenol) reaction (Searle, 1984) were compared to determine the most useful system for atmospheric NH_3 measurements. It was found that the American Public Health Association standard method (APHA, 2005) afforded the most reliable results (data not shown). Briefly, the method involves the reaction of NH_3 , hypochlorite, and phenol, catalyzed by sodium nitroprusside to form indophenol, an intensely blue dye. When the concentration of samples were expected to exceed the dynamic range of the method ($1.50 \text{ mg l}^{-1} \text{ NH}_4^+$), they were diluted with 0.04 % phosphorous acid solution prior to color development. Aliquots (three replicates, $295 \mu\text{l}$) from each color-developed (2 h in the dark) sample were transferred to adjacent wells of a flat bottom 96-well plate ($340 \mu\text{l}$ working volume). For each plate, aliquots (three replicates, $295 \mu\text{l}$) from the following color-developed samples were also included: five standards (0.10 – $1.0 \text{ mg l}^{-1} \text{ NH}_4^+$), deionized water, and appropriate controls. The absorbance of the plates was measured at 631, 632, 633, 634, 635, and 800 nm using a Spectra Max PLUS 384 microplate spectrophotometer (Molecular Devices). For each sample, the reading at 800 nm was subtracted from the average of the readings in the 631–635 nm range to compensate for any baseline effects. The values from each triplicate group of samples then were averaged into a final absorbance value that was converted into the concentration of NH_4^+ using the linear calibration curve generated with each set of samples.

The 96-well plate format described here allows five standards, six samples, and six diluted samples to be measured with three replicates each in a single instrument read. Dilution is sometimes necessary when collecting atmospheric NH_3 using annular denuders and one hour integration times at 101 min^{-1} gas flow rates (USEPA, 1999). The standard deviation on the three replicates typically was below 2 milli-absorbance units (mAU) and the slope of standard curves on successive days of measurements using fresh standards fell within a 5 % (1 SD) variance envelope. The method is convenient, allows a large number of samples to be processed in parallel with standards, and is ideally suited for atmospheric measurements, as discussed below. The limit of detection (LOD) for NH_4^+ obtained using this method was found to be 0.1 mg l^{-1} (3 SD, 6 replicates, 0.84 mg l^{-1} standard).

3.2 Derivatization and analysis of amines

A broad palette of derivatization methods has become available to the analytical chemist specifically for amine analysis by GC (Kataoka, 1996). The best choice of method is highly dependent on the target amines and on the sample matrix. For the purposes of atmospheric measurements, it was desirable to carry out the derivatization reaction in an aqueous medium with the amines present as their protonated salts. This ensures compatibility with standard atmospheric collection methods, and allows the amines to be stored in a stable form for post-collection analysis. The two most attractive methods that meet these requirements are nucleophilic substitution reactions with either DNFB or benzenesulfonyl chloride. Both approaches have been reported for the analysis of amines in aqueous samples (Day et al., 1966; Hamano et al., 1980; Sacher et al., 1997). Amine trapping as substituted 2,4-dinitroanilines was chosen due to the reported simplicity of the reaction, the apparent ease of separation of products from other components of the reaction mixture, and the broad specificity of DNFB in its reaction with nucleophiles (Kataoka, 1996). In addition to NH_3 , primary and secondary amines, thiols, imidazoles, and hydroxylated compounds (e.g., phenol) all form the corresponding DNFB derivative, enhancing the potential value of the method in the context of analyzing poorly characterized trace pollutants in air.

The derivatization of amines using alkali-buffered DNFB, also known as Sanger's reagent in amino acid analysis (Sanger, 1949), has been carried out in the presence (Day et al., 1966; Kallinger and Niessner, 1999) and absence (Sacher et al., 1997) of organic co-solvents. The addition of a co-solvent is desirable to optimize reaction kinetics, as DNFB is poorly water soluble. On the other hand, the presence of an organic co-solvent means that only highly non-polar organic solvents (e.g., hexane or cyclohexane) can be used to extract the derivatized amine product from the aqueous phase without forming an intractable emulsion. This limitation seems to be overlooked frequently in the literature and

leads to significant losses of 2,4-dinitroanilines derived from low-molecular-weight amines such as NH_3 , methylamine, and ethylamine, common components of many environmental samples. The derivatization experiments in our laboratory using ammonium chloride as the test system resulted in no detectable derivatization product using either hexane or cyclohexane as the organic extraction solvent; methylamine yielded low quantities (<20 % recovery) of the desired product under analogous conditions. In an isolated account, Kallinger and Niessner (Kallinger and Niessner, 1999) reported extraction efficiencies of 33 % and 85 % for methylamine and ethylamine DNFB products, respectively, using cyclohexane. Other, less polar aliphatic amines afforded quantitative recovery with cyclohexane extraction, although these estimates need to be tempered by observed recoveries exceeding 135 %, which is likely due to solvent evaporation. Clearly, these existing methods are unsatisfactory in the context of the present report, and alternative work-up procedures are required.

The approach initially under investigation in our laboratory made use of a mixed solvent system for the derivatization reaction, followed by solvent evaporation in a Speed-Vac concentrator system. The residue then was re-dissolved in an immiscible aqueous-organic solvent system, allowing for extraction of the target analytes. This approach afforded mixed results related to poor recovery efficiencies and reproducibility for polar amines.

Microwave irradiation has been shown to accelerate the rate of reaction of poorly nucleophilic amines with DNFB (Elder and Holtz, 1996). Three amines were compared using a heating block (20 min for the first step and 30 min for the second step) and microwave heating (2 min for the first step and 3 min for the second step) of the reaction medium: methylamine, nucleophilic and polar; diethylamine, nucleophilic and non-polar; and aniline, non-nucleophilic and non-polar. The results of reproducibility and yield experiments using these heating approaches are shown in the Supplement. These data indicate that microwave irradiation does not have a significant impact on the overall yield of the derivatized product, but affords less reproducible results than with the heating block method. While the microwave method is significantly faster than the heat block method, the latter affords more reliable data and is recommended. A programmable oven has been used subsequently to ensure more stable temperature control.

Experiments were carried out to minimize deterioration of GC performance in splitless mode due to column overload from repeated injection of excess DNFB and other non-volatile reaction components. The amount of nonvolatile material could be visualized by heating $10\text{ }\mu\text{l}$ of reaction mixture at $225\text{ }^\circ\text{C}$ (injector temperature) for 3 min on a Pyrex microscope slide. Ethyl acetate solutions containing the derivatized amines were subjected to the following two sample clean-up approaches: (1) filtrations through columns of sodium carbonate (1 cm), silica (0.5 cm), and sodium sulfate

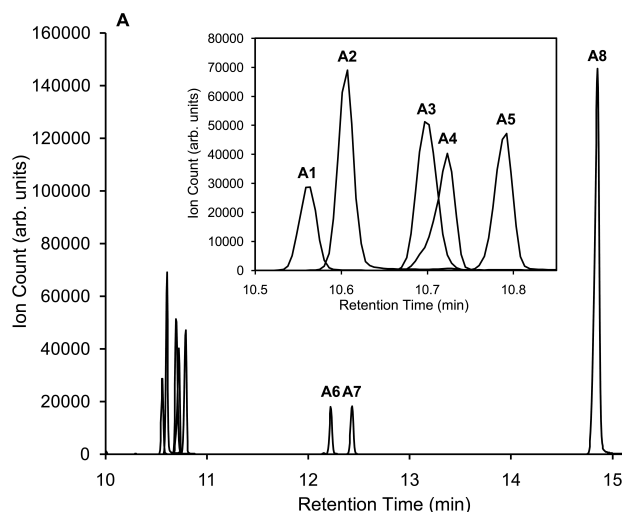


Fig. 2a. Chromatogram from a derivatized mixture of amines analyzed by GC/MS. Inset: expanded view of the peaks in the 10.5–11.0 min range. (A1), m/z 211, dimethylamine; (A2), m/z 183, ammonia; (A3), m/z 239, diethylamine; (A4), m/z 225, ethylmethylamine; (A5), m/z 197, methylamine; (A6), m/z 239, *n*-butylamine; (A7), m/z 253, morpholine; (A8), m/z 259, aniline.

(1 cm); and (2) extractions with 1 M sodium carbonate solution and deionized water followed by drying with sodium sulfate. A range of permutations was evaluated within each approach and was assessed for residual volatile material as described above. Purification of the DNFB by chromatography on silica gel prior to use also significantly reduced the non-volatile compounds, as well as the impurities in the organic extracts (by GC/MS and GC/NPD). In separate experiments, a mixture of methylamine, diethylamine, and aniline in 0.04 % phosphorous acid was kept constant while the following four parameters were varied independently: the volume of DNFB solution (20–125 μ l, 10 μ l increments), volume of sodium hydroxide solution (50–200 μ l, 25 μ l increments), heating time (first and second stage, 20–60 min). The yield of all three 2,4-dinitroaniline products was maximized under the conditions described below and in Fig. 3.

Having optimized the heating conditions and the relative amounts of reagents, *p*-dioxane, the commonly-used DNFB solvent in the Sanger reaction, and tetrahydrofuran (THF) were compared as co-solvents in the reaction. Both were freshly distilled. It was found that reactions with THF significantly reduced the number of extraneous peaks in chromatograms of the organic extracts. The nature of the organic solvent used to extract the derivatized amines from the reaction medium was also investigated. The motivation behind these experiments was to maximize extraction efficiency while using a solvent that could be concentrated by evaporation in a controlled fashion using a SpeedVac. Ethyl acetate, *iso*-propyl acetate, and *n*-butyl acetate were compared, with the best results being obtained with *iso*-propyl acetate.

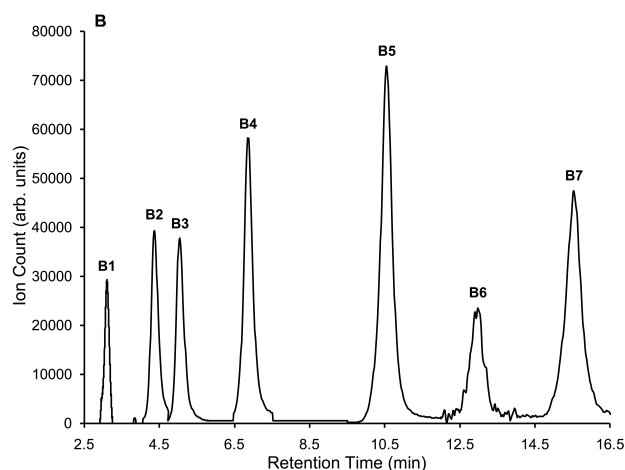


Fig. 2b. Chromatogram from a derivatized mixture of amines analyzed by LC/MS. (B1), methylamine (m/z 198); (B2), morpholine (m/z 254); (B3), dimethylamine (m/z 212); (B4), ethylmethylamine (m/z 226); (B5), diethylamine (m/z 240); (B6), aniline (m/z 260); (B7), *n*-butylamine (m/z 240).

Reproducibility and yield data for the optimized derivatization method are presented in Table 2. These data clearly illustrate the reliability of the new method. The observed reaction yields are excellent for all amines, except ammonia, which affords the most polar product likely leading to extraction losses. These results compare favorably to those reported by Kallinger and Niessner (Kallinger and Niessner, 1999).

Chromatograms obtained from a complex mixture of low-molecular weight amines derivatized as their 2,4-dinitroaniline derivatives are shown in Fig. 2. These results suggest amines of atmospheric relevance are resolvable, although ethylmethylamine and diethylamine separation may require additional chemometric treatment should they both be present in significant amounts (Fig. 2a, inset).

A number of experiments were carried out to maximize the sensitivity of the method. Initially, 0.5 ml of acidic amine solution was derivatized and extracted with 1 ml of organic solvent, which was injected into the GC with no additional concentration. The reaction was scaled up by a factor of three and four (1.5 and 2.0 ml of acidic amine solution, respectively) with no statistically significant loss in efficiency (methylamine, diethylamine, aniline; four replicates each). The impact of the organic solvent volume on extraction efficiency also was studied for the reaction based on 2 ml of amine solution. It was found that 2 ml ethyl acetate gave a lower standard deviation on the mean than 4 ml (methylamine, diethylamine, aniline; four replicates each). When 2 ml of organic solvent was used in the extraction of the derivatized amines, ca. 1.5 ml remain after the washing and drying steps. A 1.2 ml aliquot of this solution was concentrated by factors of 3, 5, and 10 on a SpeedVac,

Table 1. Sensitivity of Analytical Methods to Compounds of Trace Atmospheric Amino Compounds; LOD_{analytical}, analytical sensitivity (3 SD); LOD_{air}, corresponding sensitivity in a sampled air stream assuming 3 h of sampling at 101 min⁻¹.

| Analyte | GC/MS | | LC/MS | |
|-----------------------|---|---------------------------|---|---------------------------|
| | LOD _{analytical} (µg l ⁻¹) | LOD _{air} (pptv) | LOD _{analytical} (µg l ⁻¹) | LOD _{air} (pptv) |
| hydrazine | 0.3 | 1.5 | 3 × 10 ⁻² | 0.1 |
| methylhydrazine | 25 | 74 | 0.6 | 2 |
| hydroxylamine | 0.15 × 10 ³ | 0.6 × 10 ³ | 5 | 20 |
| methylamine | 0.3 | 1.5 | 0.3 | 1 |
| ethylamine | 0.5 | 2 | 0.7 | 2 |
| <i>n</i> -propylamine | 0.7 | 1.5 | 0.4 | 1 |
| <i>n</i> -butylamine | 0.6 | 1 | 0.3 | 0.5 |
| methylethylamine | 0.5 | 1 | 0.2 | 0.5 |
| dimethylamine | 0.4 | 1 | 0.4 | 1 |
| diethylamine | 0.6 | 1 | 1 | 2 |
| morpholine | 0.7 | 1 | 2 | 4 |
| aniline | 0.7 | 1 | 0.3 × 10 ² | 0.4 × 10 ² |

Table 2. Reproducibility and Yield of the Optimized DNFB Amine Derivatization Method. Yields are calculated based on recovery of derivatized products relative to standards of authentic samples of known concentration.

| Amine | Variability (%) ^a | Yield (%) ^b |
|--------------|------------------------------|------------------------|
| ammonia | 2.8 | 60 |
| methylamine | 1.6 | 98 |
| diethylamine | 1.9 | 115 ^c |
| aniline | 2.6 | 99 |

^a Calculated as the standard deviation from five replicates divided by the mean; ^b mean of five replicates; ^c exceeds 100 % due to solvent evaporation.

and the reproducibility was determined to be statistically equivalent to the corresponding solution prior to evaporation (methylamine, diethylamine, aniline; four replicates each). When ethyl acetate, *iso*-propyl acetate, and *n*-butyl acetate were compared, the most reliable sample concentration was achieved with *iso*-propyl acetate. In summary, reaction scale up and sample concentration were used to increase the mass of amine derivatives injected into the GC/MS by a factor of 20 compared to the previous method. The LODs included in Table 1 correspond to this latest method. The LODs obtained by GC/NPD were either the same as by GC/MS, or lower by a factor of 3, depending on the compound.

Summary of optimized method (Fig. 3):

To a solution of H₃PO₃ (0.04 % w/v, pH 2.4, 2 ml) in a 10-mm test tube containing the amine sample was added borate buffer (aqueous sodium tetraborate decahydrate, 2.5 % w/v, pH 9.3, 1 ml) followed by the 2,4-dinitrofluorobenzene

(DNFB) reagent (2 ml DNFB in 25 ml tetrahydrofuran, THF, 140 µl). The mixture was sonicated until a homogenous solution was obtained, mixed by vortex agitation for 20 s, heated at 60 °C for 60 min in a GC oven, and allowed to cool to room temperature over the course of 10 min. To the mixture was added sodium hydroxide (2 M, 350 µl) followed by further heating at 60 °C for 60 min. The mixture was cooled to room temperature and a 150 µl aliquot was added to a 250 µl glass insert in a standard 2-ml autosampler vial for analysis by LC/MS (see Supplement for conditions).

For GC/MS analysis, isopropyl acetate containing 1-fluoronaphthalene (20 µg l⁻¹, 2 ml) was added to the derivatized aqueous sample, followed by vortex agitation for 20 s. The organic (top) layer that formed on standing was transferred to a 15-ml conical tube followed by addition of sodium carbonate solution (1 M, 1 ml). The two components were mixed by vortex agitation for 20 s and centrifuged for 3 min to separate the two phases. The organic layer was transferred to a 15-ml conical tube and deionized water (1 ml) was added. The two components were mixed by vortex agitation for 20 s and centrifuged for 3 min. The organic layer was removed, washed with deionized water a second time, and added to the top of a Pasteur pipette plugged with glass wool and a 3-cm column of anhydrous sodium sulfate. An aliquot (1.2 ml) of the dry isopropyl acetate solution was concentrated to ca. 120 µl (10×) using a Model SVC100H Speed-Vac system (Savant) and added to a 250 µl glass insert in a standard 2-ml autosampler vial for analysis by GC/MS (see Supplement for conditions).

3.3 Derivatization and analysis of activated primary amines (X-NH₂)

Derivatization of X-NH₂ compounds is typically achieved *via* a condensation reaction with an electron-rich aldehyde

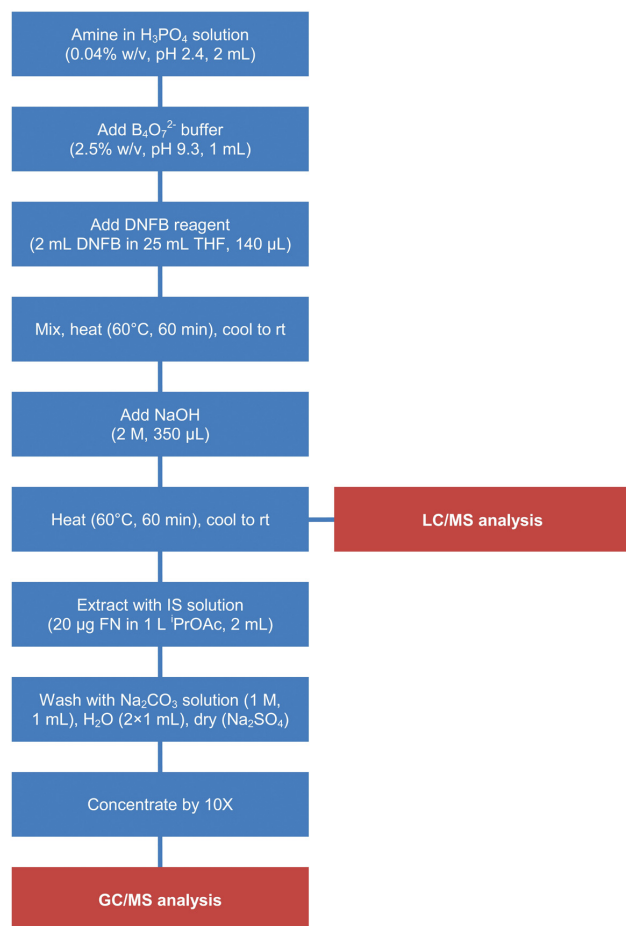


Fig. 3. Flowchart summary of the amine derivatization procedure. H_3PO_4 , phosphorous acid; $\text{B}_4\text{O}_7^{2-}$, sodium tetraborate decahydrate; DNFB, 2,4-dinitrofluorobenzene; NaOH, sodium hydroxide; IS, internal standard; FN, 1-fluoronaphthalene; $i\text{PrOAc}$, *iso*-propyl acetate; Na_2CO_3 , sodium carbonate; Na_2SO_4 , sodium sulfate.

such as 4-*N,N*-dimethylaminobenzaldehyde (Watt and Chrisp, 1952; McKennis and Yard, 1954; Gamble and Hoffman, 1967; Gamble, 1968; Amlathe and Gupta, 1988), salicylaldehyde (Abdou et al., 1977; Kester and Danielson, 1984), 4-hydroxybenzaldehyde (Kirchherr, 1993), 3,4-dimethoxybenzaldehyde (Kaveeshwar and Gupta, 1992), 2-hydroxy-1-naphthaldehyde (Manes et al., 1987), and 2,3-naphthalene dicarboxaldehyde (Collins and Rosephrsson, 1993). While the equilibrium in this system generally is strongly towards the hydrazone/oxime, high concentrations of water can favor the reverse reaction, leading to potential trapping inefficiencies. Four sets of conditions (see Supplement) were investigated in the derivatization of target X-NH_2 compounds. Given that derivatization involves a condensation reaction, it was unexpected that the best yield of both products was obtained in aqueous phosphorous acid solution. Chromatograms of the three X-NH_2 compounds of interest, derivatized with 2-furaldehyde, is given in Fig. 4.

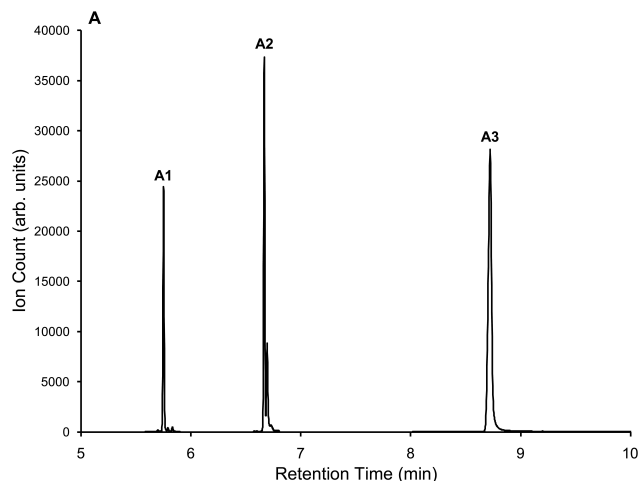


Fig. 4a. Chromatogram of X-NH_2 compound mixture in H_3PO_4 derivatized with 2-furaldehyde analyzed by GC/MS. (A1), hydroxylamine (m/z 111, oxime); (A2), methylhydrazine (m/z 124, *N*-methylhydrazine); (A3), hydrazine (m/z 188, azine).

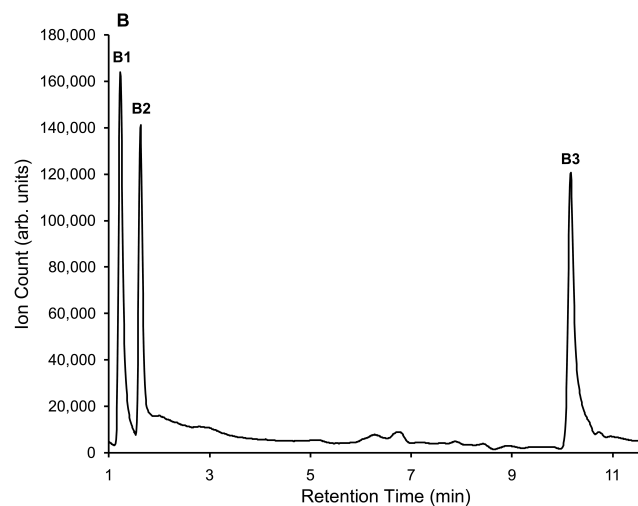


Fig. 4b. Chromatogram of X-NH_2 compound mixture in H_3PO_4 derivatized with 2-furaldehyde analyzed by LC/MS. (B1), methylhydrazine (m/z 125, *N*-methylhydrazine); (B2), hydroxylamine (m/z 112, oxime); (B3), hydrazine (m/z 189, azine).

As with the amine derivatization reactions with DNFB, efforts were dedicated towards minimizing the amount of low volatility compounds injected onto the column. The dependence of derivatization efficiency on the amount of 2-furaldehyde used in the reaction was investigated in the 25–125 μL range. A five-fold reduction (from 125 to 25 μL) was achieved without negatively impacting the yield of the corresponding condensation products.

The reproducibility of the method described above was investigated for all three X-NH_2 compounds and the results are presented in Table 3. During these tests it was

Table 3. Reproducibility of the Activated Primary Amine Derivatization Method.

| Compound | Peak area reproducibility (%) ^a |
|-----------------|--|
| hydrazine | 1.3 |
| methylhydrazine | 1.0 |
| hydroxylamine | 0.7 |

^a Calculated as the standard deviation from five replicates divided by the mean.

suspected that methylhydrazine contained significant trace impurities, such as amines and hydrazines. The purity of commercial methylhydrazine is listed as 98 %. Methylhydrazine (1.37 mM, 63.3 mg l⁻¹, 72.3 µl l⁻¹ in 0.04 % aqueous H₃PO₃) was derivatized with DNFB and 2-furaldehyde (*n* = 4). Hydrazine, diethylamine, methylamine, aniline, and ammonia standards all were derivatized as one batch and analyzed by GC/MS. The methylhydrazine standard was found to contain ammonia (0.7 % mole fraction), methylamine (11.6 % mole fraction), and hydrazine (2.3 % mole fraction).

As with amine derivatization, the sensitivity of the method was maximized through a series of experiments. Initially, 3 ml of acidic amine solution was derivatized and extracted with 1 ml of organic solvent, which was injected into the GC with no additional concentration. The reaction was scaled up by a factor of two and three (6 and 9 ml of acidic solution, respectively) with no statistically significant loss in efficiency (hydrazine, methylhydrazine, hydroxylamine; four replicates each). When 2 ml of organic solvent was used in the extraction of the derivatized X-NH₂ compounds, ca. 1.7 ml remain after the drying step. A 1.2 ml aliquot of this solution was concentrated by factor of 3, 5, and 10 on a SpeedVac, and the reproducibility was determined to be statistically equivalent to the corresponding solution prior to evaporation (hydrazine, methylhydrazine, hydroxylamine; four replicates each). When ethyl acetate, *iso*-propyl acetate, and *n*-butyl acetate were compared, the most reliable sample concentration was achieved with *iso*-propyl acetate. In summary, reaction scale up and sample concentration were used to increase the amount of amine derivatives injected into the GC/MS by a factor of 10 compared to the previous method. The LODs included in Table 1 correspond to this latest method.

Summary of optimized method (Fig. 5):

To a solution of H₃PO₃ (0.04 % w/v, pH 2.4, 6 ml) of the X-NH₂ compound(s) in a 10-mm test tube was added 2-furaldehyde (50 µl). The mixture was mixed by vortex agitation for 20 s and heated for 2 h at 50 °C in a GC oven and a 150 µl aliquot was added to a 250 µl glass insert in a

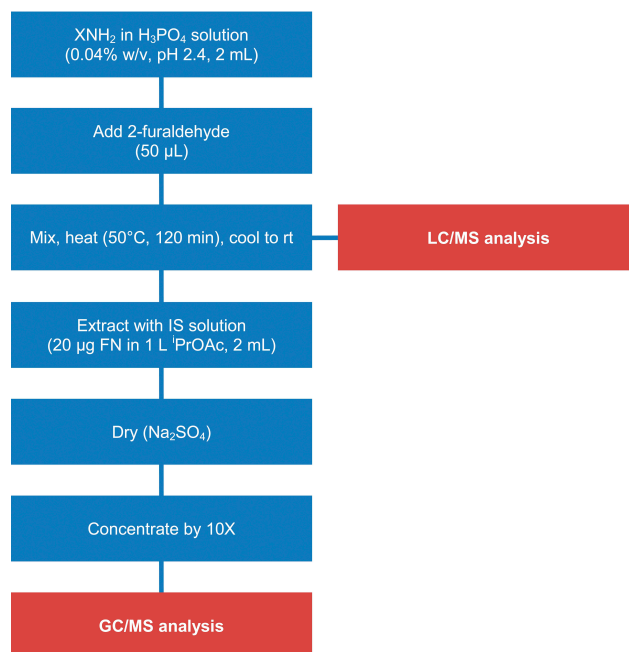


Fig. 5. Flowchart summary of the X-NH₂ derivatization procedure. H₃PO₄, phosphorous acid; IS, internal standard; FN, 1-fluoronaphthalene; *i*PrOAc, *iso*-propyl acetate; Na₂SO₄, sodium sulfate.

standard 2-mL autosampler vial for analysis by LC/MS (see Supplement for conditions).

For GC/MS analysis, the aqueous phase was extracted with a solution of 1-fluoronaphthalene (20 µg l⁻¹, 2 ml) in isopropyl acetate followed by vortex agitation for 20 s. The organic (top) layer that formed on standing was removed and added to the top of a Pasteur pipette plugged with glass wool and a 3-cm column of anhydrous sodium sulfate. An aliquot (1.2 ml) of the dry isopropyl acetate solution was concentrated to ca. 120 µl (10×), added to a 250-µl glass insert in a standard 2-ml autosampler vial, and analyzed by GC/MS (see Supplement for conditions).

3.4 Denuder efficiency tests

Annular denuders are used routinely to sample reactive gases in the atmosphere with high efficiency (Allegrini et al., 1987; Koutrakis et al., 1988; Williams et al., 1992; Perrino et al., 2001; Clemetshaw, 2004). These devices are inexpensive and can be coated with acid or alkaline sorbents to efficiently concentrate reactive gases for subsequent characterization. Efficiency tests with citric acid-coated annular denuders as per EPA Compendium Method IO-4.2 (USEPA, 1999), however, failed to afford the high expected efficiencies. Perrino and Gherardi studied the performance of citric acid, oxalic acid, and phosphorous acid as denuder coating layers for the determination of atmospheric NH₃ and found that phosphorous acid afforded the best performance (Perrino

Table 4. Collection Efficiencies, Measured in N₂ (CE_{ambient}) and in Undiluted Vehicle Exhaust (CE_{exhaust}), for Volatile Bases by Midget Impingers.

| Amine | Collection efficiencies (<i>n</i> = 3) | |
|-----------------|---|---------------------------|
| | CE _{ambient} (%) | CE _{exhaust} (%) |
| ammonia | 100 ± 0 | 95.0 ± 2.4 |
| methylamine | 99.7 ± 0.5 | 100 ± 0.0 |
| diethylamine | 99.5 ± 0.7 | 99.0 ± 1.0 |
| aniline | 99.9 ± 0.1 | 92.5 ± 1.3 |
| hydrazine | 99.1 ± 2.1 | 98.7 ± 0.7 |
| methylhydrazine | 99.4 ± 1.0 | N/A ^a |
| hydroxylamine | 99.0 ± 1.8 | 100 ± 0.0 |

^a Unstable under the conditions used.**Table 5.** Measured amine concentration ranges from ambient air and vehicle exhaust field studies.

| Analyte | Concentration ranges | |
|-----------------------|----------------------|---------------------------|
| | Ambient air | Undiluted vehicle exhaust |
| ammonia | 9–16 ppbv | 0.1–80 ppmv |
| methylamine | 25–40 pptv | 1.9–166 ppbv |
| ethylamine | 43–84 pptv | 1.2–7.0 ppbv |
| <i>n</i> -propylamine | 1.6–4.6 pptv | 0.4–2.2 ppbv |
| <i>n</i> -butylamine | 0–6 pptv | n.d. ^a |
| methylethylamine | 5–9 pptv | n.d. ^a |
| diethylamine | 0–28 pptv | n.d. ^a |

^a Not detected.

and Gherardi, 1999). These authors also reported that the citric acid coating did not efficiently retain collected NH₃. When 990 ppbv NH₃ was flowed (101 min⁻¹, 30 min) directly through two phosphorous acid-coated denuders in series, a collection efficiency of 99.4 ± 0.7 % (1 SD, four replicates), determined by comparing the NH₃ collected in the second, overflow, denuder with the amount collected in the first (Eq. S1 in Supplement) was obtained. The mass of NH₃ collected in the first denuder was quantitative (i.e., equivalent to the predicted mass).

3.5 Impinger efficiency tests

Midget impingers are commonly used in air quality studies to concentrate the target gas-phase analytes in a suitable liquid collection medium. In order to maintain consistent conditions with the above denuder tests it was important to determine the H₃PO₃ content and pH of the aqueous denuder rinse solutions and to maintain identical conditions in the impinger experiments. A H₃PO₃ solution (1 % w/v) was used to coat six denuders, which were found to retain 0.401 ± 0.056 g (mean ± 1 SD) of the coating solution, or 4 mg of phosphorous acid, on the surface. When these denuders were dried

and rinsed with DI-H₂O (2 × 5 ml), the pH of the six rinse solutions was found to be 2.60 ± 0.02 (mean ± 1SD). A 0.04 % solution of phosphorous acid in DI-H₂O was found to have a pH of 2.39, and this solution was used in the impinger efficiency evaluation. The collection efficiency of 0.04 % w/v aqueous H₃PO₃ for a range of volatile bases of atmospheric relevance was determined in two test matrices: N₂ and undiluted light duty vehicle exhaust. The experimental design (see Supplement) proved to be both simple and reliable. Locating two independent impingers in series allows their collection efficiency to be tested quantitatively (Dasgupta et al., 1988) without requiring the exact integrated mass of analyte passed through the scrubbers to be known. The results of these tests are presented in Table 4 and show quantitative collection efficiencies for all analytes tested.

Annular denuders and impingers were chosen as collection systems to concentrate nitrogenous bases from gas-phase sources due to their low cost, wide-scale adoption, and ease of use. For applications with air sampling flow rate restrictions, but with high analyte concentrations (e.g., undiluted vehicle exhaust), the impingers are more appropriate. Note that typically ten times more material is collected in an annular denuder than in a midget impinger as a result of the difference in air-flow rates (101 min⁻¹ versus 11 min⁻¹) that can be used with these devices. The volume of two successive denuder rinses is the same as that used in an impinger: 10 ml. Liquid diffusion scrubbers (Frenzel, 1994; Chang et al., 2003; Takenaka et al., 2004) and wet effluent diffusion denuders (Simon and Dasgupta, 1993, 1995; Dasgupta et al., 1997; Boring et al., 1999; Zhang et al., 2003; Takeuchi et al., 2004) can also be used if semi-automated sample collection is desired. In cases where low concentrations of the target alkaline gases are anticipated and high sampling flow rates are possible (e.g., ambient air) the annular denuders are recommended.

3.6 Implications to atmospheric measurements

While the methods described here are also applicable to samples collected in water and soil, the primary focus of the present work is on measurements in a gaseous matrix. The 0.1 mg l^{-1} LOD for NH_3 obtained with the colorimetric method (see Sect. 3.1) corresponds to an LOD_{air} of 0.8 ppbv with 3 h sampling at 101 min^{-1} . This is sufficiently low for measurements in an urban setting, where ambient levels typically exceed 10 ppbv (*vide infra*). The LODs calculated for analytical samples, $\text{LOD}_{\text{analytical}}$ in Table 1, correspond to the minimum detectable concentration in the aqueous denuder rinse or impinger solution. The corresponding atmospheric concentrations, LOD_{air} , are shown in Table 1 and assume collection using an annular denuder (101 min^{-1} sample flow rate, 3 h). The analytes in Table 1 have LOD_{air} values in the low pptv range, sufficiently low to detect ambient levels in an urban environment for some compounds, e.g., methylamine (Chang et al., 2003) and to monitor emission hot spots of the remaining bases (Ge et al., 2011a). Longer sampling times such as 24 h to afford daily averages lead to increased collected analyte masses and correspondingly lower LODs.

The results also offer a direct comparison of two common analytical techniques, LC/MS and GC/MS, both with inherent advantages. LC/MS afforded significantly higher sensitivity for the activated primary amines and provided a less labor intensive sample preparation, as the derivatized mixtures could be analyzed directly and did not require extraction with organic solvents followed by washing, drying, and concentration steps. GC/MS instrumentation still is more accessible in many laboratories than LC/MS, is easier to use, and allows mass spectra of unknown compounds to be matched to large databases.

The methods were evaluated in the field under two scenarios: ambient air and undiluted vehicle exhaust. Ambient air in Hermon Park (Los Angeles, CA, USA) was sampled (101 min^{-1}) for three-hour periods between 4 and 7 pm over the course of five days in September 2009 through a phosphorous acid coated denuders and the denuder extracts were analyzed as described above. The results are summarized in Table 5.

Undiluted, on-road tailpipe emission measurements on a fleet of 10 vehicles were carried out in April 2011. The vehicles were tested for 5 min at idle followed by an 19.5 km on-road circuit chosen to mimic a range of common driving conditions. The results are shown in Table 5. Control scrubbers, prepared as above, that were capped and not exposed to flowing air showed no detectable levels of these compounds.

These results not only illustrate the usefulness of the technique described here, but also show that the measurements could be carried out without interferences from other components of the complex ambient air and raw vehicle exhaust mixtures.

4 Conclusions

An integrated approach to measuring trace atmospheric nitrogenous bases has been developed and validated. The method uses a simple acid scrubbing step to capture and concentrate the bases as their phosphite salts, which then are derivatized and analyzed using GC/MS and LC/MS. The approach is sensitive, selective, reproducible, as well as convenient to implement and has been validated for different sampling strategies. The limits of detection for the families of tested compounds are suitable for ambient measurement applications, as supported by field measurements.

Supplementary material related to this article is available online at:

<http://www.atmos-meas-tech.net/4/2795/2011/amt-4-2795-2011-supplement.pdf>.

Acknowledgements. This research was carried out under the sponsorship (Research Agreement Number #4735-RFPA04-6/05-9) of the Health Effects Institute (HEI), an organization jointly funded by the United States Environmental Protection Agency (EPA) (Assistance Award No. R-82811201) and certain motor vehicle and engine manufacturers. The contents of this article do not necessarily reflect the view of HEI, or its sponsors, nor do they necessarily reflect the views and policies of EPA or motor vehicle and engine manufacturers. The authors are grateful for this support and thank the National Science Foundation (CHE-0723265) and the Ralph M. Parsons Foundation for instrumentation funding support. We also thank the National Science Foundation Research Experiences for Undergraduates program (CHE-0552713) for funding support (D. K., R. L., S. C., S. H.) and the Ecole Supérieure de Chimie Organique et Minérale (ESCOM, France) for placing students (J. S., J.-E. P., C. B., L. D.) at Oak Crest.

Edited by: D. Brunner

References

- Abdou, H. M., Medwick, T., and Bailey, L. C.: Determination of Hydrazine and 1,1-Dimethylhydrazine, Separately or in Mixtures, by High-pressure Liquid Chromatography, *Anal. Chim. Acta*, 93, 221–226, 1977.
- Akyuz, M. and Atu, S.: Simultaneous Determination of Aliphatic and Aromatic amines in Water and Sediment Samples by Ion-pair Extraction and Gas Chromatography-mass Spectrometry, *J. Chromatogr. A*, 1129, 88–94, 2006.
- Allegrini, I., Desantis, F., Dipalo, V., Febo, A., Perrino, C., Posanzini, M., and Liberti, A.: Annular Denuder Method for Sampling Reactive Gases and Aerosols in the Atmosphere, *Sci. Total Environ.*, 67, 1–16, 1987.
- Amlathe, S. and Gupta, V. K.: Spectrophotometric Determination of Trace Amounts of Hydrazine in Polluted Water, *Analyst*, 113, 1481–1483, 1988.
- APHA: Standard Methods for the Examination of Water and Wastewater, 21st Ed., APHA, AWWA, WFE, Washington, DC, 4–114 pp., 2005.

- Asman, W. A. H. and Berkowicz, R.: Atmospheric Nitrogen Deposition to the North-Sea, *Mar. Pollut. Bull.*, 29, 426–434, 1994.
- Asman, W. A. H., Sutton, M. A., and Schjorring, J. K.: Ammonia: Emission, Atmospheric Transport and Deposition, *New Phytol.*, 139, 27–48, 1998.
- Barsanti, K. C., McMurry, P. H., and Smith, J. N.: The potential contribution of organic salts to new particle growth, *Atmos. Chem. Phys.*, 9, 2949–2957, doi:10.5194/acp-9-2949-2009, 2009.
- Barthelmie, R. J. and Pryor, S. C.: Implications of Ammonia Emissions for Fine Aerosol Formation and Visibility Impairment – A Case Study from the Lower Fraser Valley, British Columbia, *Atmos. Environ.*, 32, 345–352, 1998.
- Bobbink, R., Hornung, M., and Roelofs, J. G. M.: The Effects of Air-borne Nitrogen Pollutants on Species Diversity in Natural and Semi-natural European Vegetation, *J. Ecol.*, 86, 717–738, 1998.
- Boring, C. B., Poruthoor, S. K., and Dasgupta, P. K.: Wet Effluent Parallel Plate Diffusion Denuder Coupled Capillary Ion Chromatograph for the Determination of Atmospheric Trace Gases, *Talanta*, 48, 675–684, 1999.
- Brost, R. A., Delany, A. C., and Huebert, B. J.: Numerical Modeling of Concentrations and Fluxes of HNO_3 , NH_3 , and NH_4NO_3 Near the Surface, *J. Geophys. Res.-Atmos.*, 93, 7137–7152, 1988.
- Cadle, S. H. and Mulawa, P. A.: Low-molecular Weight Aliphatic Amines in Exhaust from Catalyst-equipped Cars, *Environ. Sci. Technol.*, 14, 718–723, 1980.
- Cadle, S. H., Nebel, G. J., and Williams, R. L.: Measurements of Unregulated Emissions from General Motors' Light-duty Vehicles, SAE Technical Pap. Ser., 790694, 1980.
- Chang, I. H., Lee, C. G., and Lee, D. S.: Development of an Automated Method for Simultaneous Determination of Low Molecular Weight Aliphatic Amines and Ammonia in Ambient Air by Diffusion Scrubber Coupled to Ion Chromatography, *Anal. Chem.*, 75, 6141–6146, 2003.
- Choi, S., Drese, J. H., and Jones, C. W.: Adsorbent Materials for Carbon Dioxide Capture from Large Anthropogenic Point Sources, *ChemSusChem*, 2, 796–854, doi:10.1002/cssc.200900036, 2009.
- Choudhary, G. and Hansen, H.: Human Health Perspective on Environmental Exposure to Hydrazines: A Review, *Chemosphere*, 37, 801–843, 1998.
- Clemmshaw, K. C.: A Review of Instrumentation and Measurement Techniques for Ground-based and Airborne Field Studies of Gas-phase Tropospheric Chemistry, *Crit. Rev. Environ. Sci. Technol.*, 34, 1–108, 2004.
- Collins, G. E. and Rosepehrsson, S. L.: Sensitive, Fluorescent Detection of Hydrazine via Derivatization with 2,3-Naphthalene Dicarboxaldehyde, *Anal. Chim. Acta*, 284, 207–215, 1993.
- Danielson, N. D. and Conroy, C. M.: Fluorometric Determination of Hydrazine and Ammonia Separately or in Mixtures, *Talanta*, 29, 401–404, 1982.
- Dasgupta, P. K., Dong, S., Hwang, H., Yang, H. C., and Genfa, Z.: Continuous Liquid-phase Fluorometry Coupled to a Diffusion Scrubber for the Real-time Determination of Atmospheric Formaldehyde, Hydrogen Peroxide and Sulfur Dioxide, *Atmos. Environ.*, 22, 949–963, 1988.
- Dasgupta, P. K., Ni, L. Z., Poruthoor, S. K., and Hinds, D. C.: A Multiple Parallel Plate Wetted Screen Diffusion Denuder for High-flow Air Sampling Applications, *Anal. Chem.*, 69, 5018–5023, 1997.
- Day, E. W., Golab, T., and Koons, J. R.: Determination of Micro Quantities of C1-C4 Primary and Secondary Amines by Electron Affinity Detection, *Anal. Chem.*, 38, 1053–1057, 1966.
- Documentation for Immediately Dangerous to Life or Health Concentrations (IDLH): NIOSH Chemical Listing and Documentation of Revised IDLH Values, available at: <http://www.cdc.gov/niosh/idlh/intridl4.html>, last access: 29 April 2010, 1995.
- Elder, J. W. and Holtz, K. M.: Microwave Microscale Organic Experiments, *J. Chem. Educ.*, 73, A104–A105, 1996.
- Eldering, A., Hall, J. R., Hussey, K. J., and Cass, G. R.: Visibility Model Based on Satellite-generated Landscape Data, *Environ. Sci. Technol.*, 30, 361–370, 1996.
- Fangmeier, A., Hadwigerfangmeier, A., Vandereerden, L., and Jager, H. J.: Effects of Atmospheric Ammonia on Vegetation – A Review, *Environ. Pollut.*, 86, 43–82, 1994.
- Frenzel, W.: Permeation Denuder for Sampling and Continuous Analysis of Gases .1. System Configuration, Basic Studies and Application to Atmospheric Ammonia and Sulfur Dioxide, *Anal. Chim. Acta*, 291, 305–320, 1994.
- Friedland, A. J., Miller, E. K., Battles, J. J., and Thorne, J. F.: Nitrogen Deposition, Distribution and Cycling in a Sub-alpine Spruce-fir Forest in the Adirondacks, New York, USA, *Biogeochemistry*, 14, 31–55, 1991.
- Gamble, D. S. and Hoffman, I.: Photometric Analysis of Trace Amounts of Hydrazine with p-Dimethylaminobenzaldehyde. Chemical Equilibria, *Can. J. Chem.*, 45, 2813–2819, 1967.
- Gamble, D. S.: Photometric Analysis of Trace Amounts of Hydrazine with p-Dimethylamino-Benzaldehyde. Chemical Equilibria .2, *Can. J. Chem.*, 46, 1365–1371, 1968.
- Ge, X. L., Wexler, A. S., and Clegg, S. L.: Atmospheric Amines – Part I. A Review, *Atmos. Environ.*, 45, 524–546, 2011a.
- Ge, X. L., Wexler, A. S., and Clegg, S. L.: Atmospheric Amines – Part II. Thermodynamic Properties and Gas/particle Partitioning, *Atmos. Environ.*, 45, 561–577, 2011b.
- Hamano, T., Mitsuhashi, Y., and Matsuki, Y.: Improved Gas Chromatographic Method for the Quantitative Determination of Secondary Amines as Sulfonamides Formed by Reaction with Benzenesulfonyl Chloride, *J. Chromatogr.*, 190, 462–465, 1980.
- Hornung, M. and Sutton, M. A.: Impacts of Nitrogen Deposition in Terrestrial Ecosystems, *Atmos. Environ.*, 29, 3395–3396, 1995.
- Horvath, H.: Spectral Extinction Coefficients of Background Aerosols in Europe, North and South America – A Comparison, *Atmos. Environ. A*, 25, 725–732, 1991.
- Horvath, H.: Atmospheric Light Absorption – A Review, *Atmos. Environ. A*, 27, 293–317, 1993.
- Hwang, Y., Matsuo, T., Hanaki, K., and Suzuki, N.: Identification and Quantification of Sulfur and Nitrogen-containing Odorous Compounds In Wastewater, *Water Res.*, 29, 711–718, 1995.
- Jacob, D. J., Munger, J. W., Waldman, J. M., and Hoffmann, M. R.: The H_2SO_4 - HNO_3 - NH_3 System at High Humidities and in Fogs. 1. Spatial and Temporal Patterns in the San-Joaquin Valley of California, *J. Geophys. Res.-Atmos.*, 91, 1073–1088, 1986a.
- Jacob, D. J., Waldman, J. M., Munger, J. W., and Hoffmann, M. R.: The H_2SO_4 - HNO_3 - NH_3 System at High Humidities and in Fogs. 2. Comparison of Field Data with Thermodynamic Calculations, *J. Geophys. Res.-Atmos.*, 91, 1089–1096, 1986b.

- Kallinger, G. and Niessner, R.: Laboratory Investigation of Annular Denuders as Sampling System for the Determination of Aliphatic Primary and Secondary Amines in Stack Gas, *Mikrochim. Acta*, 130, 309–316, 1999.
- Kataoka, H.: Derivatization Reactions for the Determination of Amines by Gas Chromatography and their Applications in Environmental Analysis, *J. Chromatogr. A*, 733, 19–34, 1996.
- Kaveeshwar, R. and Gupta, V. K.: A New Spectrophotometric Method for the Determination of Hydrazine in Environmental Samples, *Fresenius J. Anal. Chem.*, 344, 114–117, 1992.
- Kester, P. E. and Danielson, N. D.: Determination of Hydrazine and 1,1-Dimethylhydrazine as Salicylaldehyde Derivates by Liquid-chromatography with Electrochemical Detection, *Chromatographia*, 18, 125–128, 1984.
- Kirchherr, H.: Determination of Hydrazine in Human Plasma by High-performance Liquid Chromatography, *J. Chromatogr.-Biomed. Appl.*, 617, 157–162, 1993.
- Koutrakis, P., Wolfson, J. M., Slater, J. L., Brauer, M., Spengler, J. D., Stevens, R. K., and Stone, C. L.: Evaluation of an Annular Denuder Filter Pack System to Collect Acidic Aerosols and Gases, *Environ. Sci. Technol.*, 22, 1463–1468, 1988.
- Larson, S. M. and Cass, G. R.: Characteristics of Summer Midday Low Visibility Events in the Los Angeles Area, *Environ. Sci. Technol.*, 23, 281–289, 1989.
- Leach, J., Blanch, A., and Bianchi, A. C.: Volatile Organic Compounds in an Urban Airborne Environment Adjacent to a Municipal Incinerator, Waste Collection Centre and Sewage Treatment Plant, *Atmos. Environ.*, 33, 4309–4325, 1999.
- Lee, D. S., Halliwell, C., Garland, J. A., Dollard, G. J., and Kingdon, R. D.: Exchange of Ammonia at the Sea Surface – A Preliminary Study, *Atmos. Environ.*, 32, 431–439, 1998.
- Malm, W. C., Sisler, J. F., Huffman, D., Eldred, R. A., and Cahill, T. A.: Spatial and Seasonal Trends in Particle Concentration and Optical Extinction in the United States, *J. Geophys. Res.-Atmos.*, 99, 1347–1370, 1994.
- Malm, W. C., Molenar, J. V., Eldred, R. A., and Sisler, J. F.: Examining the Relationship among Atmospheric Aerosols and Light Scattering and Extinction in the Grand Canyon Area, *J. Geophys. Res.-Atmos.*, 101, 19251–19265, 1996.
- Manes, J., Campillos, P., Font, G., Martre, H., and Prognon, P.: Extraction – Spectrophotometric Determination of Hydrazine with 2-Hydroxy-1-naphthaldehyde, *Analyst*, 112, 1183–1184, 1987.
- Mazzoni, D. L. and Davis, C. C.: Trace Detection of Hydrazines By Optical Homodyne Interferometry, *Appl. Opt.*, 30, 756–764, 1991.
- McKennis, H. and Yard, A. S.: Determination of Methylhydrazine, *Anal. Chem.*, 26, 1960–1963, 1954.
- Mosier, A. R., Andre, C. E., and Viets, F. G.: Identification of Aliphatic Amines Volatilized from Cattle Feedyard, *Environ. Sci. Technol.*, 7, 642–644, 1973.
- Multi-Pollutant Analyses and Technical Support Documents, available at: <http://www.epa.gov/airmarkt/progsregs/cair/multi.html>, last access: 30 April 2010, 2010.
- Murphy, S. M., Sorooshian, A., Kroll, J. H., Ng, N. L., Chhabra, P., Tong, C., Surratt, J. D., Knipping, E., Flagan, R. C., and Seinfeld, J. H.: Secondary aerosol formation from atmospheric reactions of aliphatic amines, *Atmos. Chem. Phys.*, 7, 2313–2337, doi:10.5194/acp-7-2313-2007, 2007.
- Pearson, J. and Stewart, G. R.: The Deposition of Atmospheric Ammonia and Its Effects on Plants, *New Phytol.*, 125, 283–305, 1993.
- Pearson, J. and Soares, A.: Physiological Responses of Plant Leaves to Atmospheric Ammonia and Ammonium, *Atmos. Environ.*, 32, 533–538, 1998.
- Pehlivanoglu-Mantas, E. and Sedlak, D. L.: Wastewater-derived Dissolved Organic Nitrogen: Analytical Methods, Characterization, and Effects – A Review, *Crit. Rev. Environ. Sci. Technol.*, 36, 261–285, doi:10.1080/10643380500542780, 2006.
- Perrino, C. and Gherardi, M.: Optimization of the Coating Layer for the Measurement of Ammonia by Diffusion Denuders, *Atmos. Environ.*, 33, 4579–4587, 1999.
- Perrino, C., Ramirez, D., and Allegrini, I.: Monitoring Acidic Air Pollutants near Rome by Means of Diffusion Lines: Development of a Specific Quality Control Procedure, *Atmos. Environ.*, 35, 331–341, 2001.
- Russell, A. G., McRae, G. J., and Cass, G. R.: Mathematical Modeling of the Formation and Transport of Ammonium Nitrate Aerosol, *Atmos. Environ.*, 17, 949–964, 1983.
- Russell, A. G. and Cass, G. R.: Verification of a Mathematical Model for Aerosol Nitrate and Nitric Acid Formation and Its Use for Control Measure Evaluation, *Atmos. Environ.*, 20, 2011–2025, 1986.
- Russell, A. G., McCue, K. F., and Cass, G. R.: Mathematical Modeling of the Formation of Nitrogen-containing Pollutants. 2. Evaluation of the Effect of Emission Controls, *Environ. Sci. Technol.*, 22, 1336–1347, 1988a.
- Russell, A. G., McCue, K. F., and Cass, G. R.: Mathematical Modeling of the Formation of Nitrogen-containing Air Pollutants. 1. Evaluation of an Eulerian Photochemical Model, *Environ. Sci. Technol.*, 22, 263–270, 1988b.
- Sacher, F., Lenz, S., and Brauch, H. J.: Analysis of Primary and Secondary Aliphatic Amines in Waste Water and Surface Water by Gas Chromatography Mass Spectrometry after Derivatization with 2,4-Dinitrofluorobenzene or Benzenesulfonyl Chloride, *J. Chromatogr. A*, 764, 85–93, 1997.
- Sanger, F.: The Terminal Peptides of Insulin, *Biochem. J.*, 45, 563–574, 1949.
- Schade, G. W. and Crutzen, P. J.: Emission of Aliphatic Amines from Animal Husbandry and their Reactions - Potential Source of N₂O And HCN, *J. Atmos. Chem.*, 22, 319–346, 1995.
- Schjorring, J. K.: Atmospheric Ammonia and Impacts of Nitrogen Deposition: Uncertainties and Challenges, *New Phytol.*, 139, 59–60, 1998.
- Schmidt, E. W.: Hydrazine and its Derivatives : Preparation, Properties, Applications, 2 Ed., Wiley-Interscience, New York, 2232 pp., 2001.
- Searle, P. L.: The Berthelot or Indophenol Reaction and Its Use in the Analytical Chemistry of Nitrogen – a Review, *Analyst*, 109, 549–568, 1984.
- Seinfeld, J. H. and Pandis, S. N.: Atmospheric Chemistry and Physics: From Air Pollution to Climate Change, 2 Ed., Wiley-Interscience, New York, 2006.
- Simon, P. K. and Dasgupta, P. K.: Wet Effluent Denuder Coupled Liquid Ion Chromatography Systems – Annular and Parallel-Plate Denuders, *Anal. Chem.*, 65, 1134–1139, 1993.
- Simon, P. K. and Dasgupta, P. K.: Continuous Automated Measurement of Gaseous Nitrous And Nitric Acids and Particulate Nitrite and Nitrate, *Environ. Sci. Technol.*, 29, 1534–1541, 1995.

- Smith, J. N., Barsanti, K. C., Friedli, H. R., Ehn, M., Kulmala, M., Collins, D. R., Scheckman, J. H., Williams, B. J., and McMurry, P. H.: Observations of Ammonium Salts in Atmospheric Nanoparticles and Possible Climatic Implications, *Proc. Natl. Acad. Sci. USA*, 107, 6634–6639, 2010.
- Spokes, L. J., Yeatman, S. G., Cornell, S. E., and Jickells, T. D.: Nitrogen deposition to the Eastern Atlantic Ocean. The Importance of South-easterly Flow, *Tellus Ser. B-Chem. Phys. Meteorol.*, 52, 37–49, 2000.
- Sutton, M. A., Asman, W. A. H., and Schjorring, J. K.: Dry Deposition of Reduced Nitrogen, *Tellus Ser. B-Chem. Phys. Meteorol.*, 46, 255–273, 1994.
- Sutton, M. A., Fowler, D., Burkhardt, J. K., and Milford, C.: Vegetation Atmosphere Exchange of Ammonia: Canopy Cycling and the Impacts of Elevated Nitrogen Inputs, *Water Air Soil Pollut.*, 85, 2057–2063, 1995a.
- Sutton, M. A., Schjorring, J. K., and Wyers, G. P.: Plant Atmosphere Exchange of Ammonia, *Philos. Trans. R. Soc. Lond. Ser. A-Math. Phys. Eng. Sci.*, 351, 261–276, 1995b.
- Sutton, M. A., Lee, D. S., Dollard, G. J., and Fowler, D.: Atmospheric Ammonia: Emission, Deposition and Environmental Impacts – Introduction, *Atmos. Environ.*, 32, 269–271, 1998.
- Takenaka, N., Terada, H., Oro, Y., Hiroi, M., Yoshikawa, H., Okitsu, K., and Bandow, H.: A New Method for the Measurement of Trace Amounts of HONO in the Atmosphere Using an Air-dragged Aqua-membrane-type Denuder and Fluorescence Detection, *Analyst*, 129, 1130–1136, 2004.
- Takeuchi, M., Li, J. Z., Morris, K. J., and Dasgupta, P. K.: Membrane-based Parallel Plate Denuder for the Collection and Removal of Soluble Atmospheric Gases, *Anal. Chem.*, 76, 1204–1210, 2004.
- The Multi-pollutant Report: Technical Concepts & Examples, US Environmental Protection Agency, Washington, D.C., 58, 2008.
- USEPA: Compendium Method IO-4.2 – Determination of Reactive Acidic and Basic Gases and Strong Acidity of Atmospheric Fine Particles ($<2.5\mu\text{m}$), United States Environmental Protection Agency, Office of Research & Development, Research Triangle Park, NCEPA/625/R-96/010a, 1999.
- Vernot, E. H., Macewen, J. D., Bruner, R. H., Haun, C. C., Kinkad, E. R., Prentice, D. E., Hall, A., Schmidt, R. E., Eason, R. L., Hubbard, G. B., and Young, J. T.: Long-term Inhalation Toxicity of Hydrazine, *Fund. Appl. Toxicol.*, 5, 1050–1064, 1985.
- Wald, N., Boreham, J., Doll, R., and Bonsall, J.: Occupational Exposure to Hydrazine and Subsequent Risk of Cancer, *Br. J. Ind. Med.*, 41, 31–34, 1984.
- Watt, G. W. and Chrisp, J. D.: A Spectrophotometric Method for the Determination of Hydrazine, *Anal. Chem.*, 24, 2006–2008, 1952.
- Williams, E. J., Sandholm, S. T., Bradshaw, J. D., Schendel, J. S., Langford, A. O., Quinn, P. K., Lebel, P. J., Vay, S. A., Roberts, P. D., Norton, R. B., Watkins, B. A., Buhr, M. P., Parrish, D. D., Calvert, J. G., and Fehsenfeld, F. C.: An Intercomparison of 5 Ammonia Measurement Techniques, *J. Geophys. Res.-Atmos.*, 97, 11591–11611, 1992.
- Wyers, G. P. and Erisman, J. W.: Ammonia Exchange over Coniferous Forest, *Atmos. Environ.*, 32, 441–451, 1998.
- Zhang, G. F., Slanina, S., Boring, C. B., Jongejan, P. A. C., and Dasgupta, P. K.: Continuous Wet Denuder Measurements of Atmospheric Nitric and Nitrous Acids during the 1999 Atlanta Supersite, *Atmos. Environ.*, 37, 1351–1364, 2003.