

**Semi-automatic CS
analysis**

A. M. Horseman et al.

This discussion paper is/has been under review for the journal Atmospheric Measurement Techniques (AMT). Please refer to the corresponding final paper in AMT if available.

Systematic and rapid extraction of direct downwelling irradiance estimates from Campbell-Stokes sunshine recorder archives

A. M. Horseman^{1,*}, T. Richardson¹, A. T. Boardman¹, W. Tych¹, R. Timmis², and A. R. MacKenzie³

¹Lancaster Environment Centre, Lancaster University, Lancaster, LA1 4YQ, UK

²Environment Agency, Air Science Team, c/o Lancaster Environment Centre, Lancaster University, Lancaster, LA1 4YQ, UK

³School of Geography, Earth & Environmental Sciences, University of Birmingham, Edgbaston, B15 2TT, UK

* now at: Met Office, Fitzroy Road, Exeter, EX1 3PB, UK

Received: 3 October 2012 – Accepted: 19 November 2012 – Published: 5 December 2012

Correspondence to: A. R. MacKenzie (a.r.mackenzie@bham.ac.uk)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

An improved, semi-automatic method for analysing the cards from the widely used Campbell-Stokes sunshine recorder is described. We show how the application of inexpensive commercial equipment and practices can simply and robustly build an archive of high-quality card images and manipulate them into a form suitable for easy further analysis. Rectified and registered digital images are produced, with the card's midday marker in the middle of the longest side, and with a temporal scaling of 150 px h^{-1} . The method improves on previous, mostly manual, analyses by simplifying and automating steps into a process capable of handling thousands of cards in a practical time-scale.

A prototype method of extraction of data from this archive is then tested by comparison with records from a co-located pyrheliometer at a resolution of the order of minutes. The comparison demonstrates that the Campbell-Stokes recorder archive contains a time series of downwelling solar-irradiance-related data with similar characteristics to that of benchmark pyrheliometer data from the baseline solar radiation network. A universal transfer function for card burn to direct downwelling short-wave radiation is still some way off and is the subject of ongoing research. Until such time as a universal transfer function is available, specific functions for extracting data in particular circumstances offer a useful way forward. The new image-capture method offers a practical way to exploit the worldwide sets of long-term Campbell-Stokes recorder data to create a time series of solar irradiance and atmospheric aerosol loading metrics reaching back over 100 yr from the present day.

1 Introduction

Several studies have examined the evidence for links between recent changes in climate and changes in the amount of solar insolation reaching the earth's surface (Stanhill and Cohen, 2001; Stanhill, 2005; Wild, 2009, 2012; Wild et al., 2009). Some authors have associated these changes with changes in the amount of atmospheric aerosols

AMTD

5, 8729–8757, 2012

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



(e.g. Ruckstuhl and Norris, 2009; Gilgen et al., 2009). Widespread reductions and increases in radiation at the earth's surface due to aerosol changes over long periods are termed "dimming" and "brightening", respectively. Typically, the spatial scales of "dimming and brightening" changes range from "regional" to "global" (e.g. 100s to 10 000s km) and their temporal scales range from decades to century (10–100 yr), for example Xia (2010); Pinker et al. (2005); Ruckstuhl et al. (2008).

Studies of long-term dimming and brightening are mostly based on data acquired since the international geophysical year (1957/1958) (Wild, 2009) and, as Wild (2005) observes, data quality was a problem for the purpose of trend analysis until the establishment of the baseline solar radiation network in 1992. Here we describe a method that may be used to fill this significant data gap by estimating amounts of direct solar radiation from long-term measurements of bright sunshine that have been conducted at globally-dispersed locations over the past century or more.

The Campbell-Stokes sunshine recorder was developed in 1880 by Sir George Stokes, as a modification to an earlier (1853) design by John Campbell. With further minor modifications instruments of the Campbell-Stokes recorder pattern have been used in many parts of the world as the standard instrument for recording bright sunshine for over 100 yr, which makes it a good source of long-term, self-consistent data. Over the years, instruments of the Campbell-Stokes pattern have been constructed by a number of makers, for instance Negretti and Zambra (see <http://www.bl.uk/onlinegallery/onlineex/evancoll/a/014eva000000000u07235000.html>). The use of instruments of the Campbell-Stokes recorder type can be reported using the maker's names (e.g Bentley, 2011) instead of that of the developers, but the design of these instruments is so simple and reliable that the method we describe here is applicable to any instrument approximately following the Campbell-Stokes recorder pattern. The current UK Met. Office standard instrument consists of an optical-quality glass sphere of 101.6 mm nominal diameter and focal length 74.9 mm mounted in a bronze frame. The frame also carries three pairs of slots designed to hold pieces of card at the focal point of the sphere, with three different patterns of card being provided for use at different times of year. During

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Semi-automatic CS
analysis**

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



periods of bright sunshine the sun's insolation chars the card at the focal point diametrically opposite the sun. As the sun moves across the sky, the focal point moves across the card producing a burned track on the card, such that any point on the track can be associated with a time of day. Figure 1 shows a portion of a well-charred card that demonstrates how the width of the card burn (orthogonal to the progress of the burn track) can vary. The burn is typically wider/narrower in the vertical (i.e. at right angles to the track) when the direct insolation is stronger/weaker. It follows that the instrument is effectively recording the rapid fluctuations of direct insolation as it is affected by atmospheric processes, e.g. clouds, aerosols, and the path-length of sunshine through the atmosphere subject, of course, to instrumental efficiencies and lags.

In everyday use the burn signal is normally integrated by the meteorological observer and reported as total hours of bright sunshine per day, where bright sunshine is defined as an occurrence of direct insolation above a threshold intensity needed to char a standard recorder card. Painter (1981) notes a correlation between sunshine duration measured by the Campbell-Stokes recorder at Kew Observatory and a co-located pyrhelimeter. It has long been recognised that increased clear-sky atmospheric opacity can prevent charring of the recorder card following the Lambert–Beer law (Maurer and Dorno, 1914), and also that the overall duration of bright sunshine is not a direct measure of clear-sky atmospheric opacity because of obscuration by clouds. Helmes and Jaenicke (1984, 1986) and Jaenicke and Kasten (1978) developed a method to measure atmospheric turbidity based on the lowest solar elevation that produces charring under clear skies, which worked well for the polluted conditions of mid-twentieth century Northern Europe, so long as concurrent observations of cloudiness were available. More recently the method described by Horseman et al. (2008) showed how some of this card-burn information can be extracted and related to atmospheric aerosol loading using a process that targets periods of low solar elevation towards the ends of the day (when the paths of sunshine through the atmosphere are relatively long) and that does not need the concurrent cloud occurrence data required by the Helmes and Jaenicke (1986) method.

Semi-automatic CS analysis

A. M. Horseman et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

The development of inexpensive digital image processing offers the prospect that cards can be analysed in more detail/depth for information on bright sunshine which may be converted to radiation estimates. Both Boardman (2010) and Wood and Harrison (2011) describe how a digital image of a card can be analysed to quantify the amount of burn and linked to strength of insolation that caused it at temporal resolutions of the order of minutes. The widespread and long-term use of the Campbell-Stokes recorder makes it theoretically possible to obtain a time series of solar insolation variation reaching back over 100 yr and over a range of sites covering different climates, latitudes and longitudes. However, the construction of a long-term record of insolation is still limited; the by-eye analysis method of Horseman et al. (2008) is constrained by the subjectivity of human observation and the scanning processes of Boardman (2010) and Wood and Harrison (2011) take a significant amount of time to perform.

Here we show how inexpensive scanning equipment can be used to facilitate the extraction of a metric related to direct downwelling short-wave radiation from bright sunshine cards. We show that this information has similar characteristics to direct sunshine measurements made concurrently by pyrheliometer. The method can be used to extract information from many cards covering long periods and many stations and so has the potential to fill the information gap on radiation trends for dimming and brightening studies. A subsidiary design aim was to make the data capture process robust so that in future it would be possible for a consistent archive to be built by network of agencies or even by volunteer “citizen scientists”. As a test of this semi-automatic method, we have processed cards from the meteorological station at Lerwick in the Shetland Islands, Scotland. Lerwick was chosen as it has a long Campbell-Stokes recorder card archive and, as a member of the baseline solar radiation network, maintains a pyrheliometer which can be used for comparison, and potentially, calibration.

2 Overview of the process

Initial trials using digital scanning (including Boardman, 2010) showed that to produce a consistent set of images employing different operators using different equipment, controls and constraints must be applied to the image capture process. An important part of the process is then managing the operator as well as the digital hardware. This is achieved using a regulated and standardised procedure using bespoke software that leads the user through a series of questions and instructions offering defaults and guidance to ensure that image quality is maintained and that appropriate meta-data are gathered.

The ergonomics of the operation then become important to ensure that a high-quality image archive covering decades of cards is constructed at a practicable rate. For instance, by working through a set of cards in chronological order the next date can be calculated and card type predicted by the software, the operator then only has to intervene in case of anomalies, e.g. procedural errors where the wrong type of card for the time of year had been used by the recording station. These are simple measures that save a little time per card, but when multiplied by thousands of cards, make the task more tractable.

It was the intention from the outset of this work that any archive of images must be suitable for repeated reanalysis to explore different signal detection and transfer function algorithms rather than incorporate analysis into the scanning stage. Therefore the method produces rectified and registered copies of each card image to simplify geometrical calculations during analysis, i.e. so that analysis to extract solar data can use straightforward Cartesian coordinate geometry. In this case rectified means transforming the curved card images into a rectangular form and registered.

The process of adding a card image to the archive is divided into four stages as illustrated in Fig. 2.

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3 Image capture

Our initial experiments showed that consumer-grade scanning equipment can capture images with geometric distortion levels far below significance to card analysis and trials suggested that an image resolution of 200 dpi is sufficient to capture any significant charring of the card. The consistency in image colour representation is more of a problem, hence colour calibration of the scanner is a fundamental part of the archive building process.

3.1 Scanner colour calibration

Building a self-consistent long-term card image archive will require many thousands of scans. The sensors in consumer-grade image scanners alter with time. Consequently it is important to calibrate the scanner at regular intervals. The calibration process used is adopted from the field of commercial digital imagery. A standardised colour test card or “colour target” is scanned and the image compared with a digital reference copy of that particular target provided by the colour target manufacturer. Colour management software (CMS) is then used to compare the captured and digital reference images which produces a calibration profile that quantifies deficiencies in the scanner’s colour representation. The calibration profile conforms to the International Color Consortium (ICC) standard. This type of procedure is widely understood and does not require detailed description here, see <http://www.jiscdigitalmedia.ac.uk/> for more information on the management of digital imagery. We used the open source Argyll Color Management System (CMS); the CMS’s website (<http://www.argyllcms.com/>) describes the procedure to be used in detail. From the user’s point-of-view all that is required is to scan the “colour target” when prompted to by our software. The reference image we used is a standard IT8.7/2 target which is processed by the CMS to produce an ICC profile at regular intervals. The optimum frequency of calibration is difficult to determine precisely, we followed empirical evidence and calibrated every 1000 scans. The resulting calibration profile data are embedded in each subsequent image scan.

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The image data itself are not modified at this point as the ICC profile is recognised by many image processing tools and can therefore be applied at the point of use.

3.2 Image type and resolution

In the Campbell-Stokes recorder the solar radiation is focused onto the cards which creates a char or burn trace that can produce a range of effects from a discolouring of the surface to perforation completely through the card (see Fig. 1). The presence of burn can be related to the time of day of the occurrence of bright sunshine, and the width of the burn gives an indication of the strength of the direct downwelling short-wave radiation at that moment. The cards have three different patterns, one each for the summer (12 April to 2 September inclusive in the Northern Hemisphere), winter (from 15 October to the last day of February inclusive) and the intervening equinoctial periods. The dimensions of the card are standardised although detailed documentation of the current standard is difficult to obtain; the most recent design description available to the authors is Bilham (1932). The basic design of the instrument has changed little in the intervening years although the dimensions of the sphere and therefore the frame and cards have altered slightly. Our method does not require knowledge of these exact dimensions as the image manipulation uses an empirical method based solely on the scanned image. The optical geometry of the instrument means that both the summer and winter cards are portions of the same annulus, the summer cards being longer to accommodate the greater number of daylight hours. Here “longer” indicates the dimension in the direction recording time and width orthogonal to the time direction. The equinoctial cards are straight with a trapezoidal shape and are wider than the curved cards as the rate of change of solar zenith, and hence lateral position of the burn track, is greater around the equinoxes than the solstices.

The purpose of the method is to build a reusable and easily analysed archive. Consequently a standard image format, 24-bit RGB TIF (Tagged Image Format) is used, i.e. three 8-bit colour channels ([R]ed, [G]reen and [B]lue), with the EXIF (EXchangeable Image Format) extension to the image used to carry the meta-data. The meta-data

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



captured are site name, site latitude and longitude, card pattern type, card trimming, the equation of time (see Sect. 6) and a quality code (see Table 1). The quality codes are subjective, but give a basic method of screening poor cards at the point in the process when every card will be examined by eye.

5 Cards of the UK Met. Office pattern have a blue-green face with hour markers and other information left unprinted; this shows as the card's natural off-white colour. On used cards, the burned traces are for the most part black, occasionally with some grey ash. This means that in standard RGB images the majority of the solar insolation related data can be found in the green and blue channels. A bright red sheet fixed to
10 the scanner to serve as an image background means that pixels with high red, and low blue and green channel values can be considered not part of the card, simplifying the detection of the card within the image. A caveat to this simplification is that the card frequently burns through in which case the red background appears within the card area. This problem is minor and is dealt with in later description of the method.

15 3.3 The operator's task

The objective of this work is to automate much of the card scanning process, i.e. to simplify the operator's task and reduce the scope for operator error whilst still making the construction of a long archive practical. Later in our process the portion of the image that represents the card must be located, so to simplify the location step the
20 operator is required to place the card on the scanner platen in a particular orientation. The positioning need not be precise which avoids compromising the speed of manual card handling and an aide-mémoire is attached to the scanner lid to guide the operator. In our case the curved cards are placed with the longest edge towards the top left of the resulting image and the straight cards roughly vertical in the image with the longest
25 edge to the left of the final image.

The operator should work through a series of cards in chronological order. Our experience suggests that observers already archive the cards in this manner. The date of the first card in the sequence must be input at the start along with other information

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



regarding the Campbell-Stokes recorder site. As has already been mentioned, different patterns of card are used at different times of year, therefore the date and hence shape of each subsequent card can be predicted and offered as a default input. The operator can override the predicted card shape in cases where the original meteorological observer used the incorrect pattern of card.

After a scan of the card is taken the operator is shown the raw scanned image and given the opportunity to accept, or reject and repeat a scan. If the scan is accepted the operator is then prompted to make a subjective judgement about the quality of the card from the example categories given in Table 1 as cards can be damaged in use or even defaced. This evaluation is necessary as meteorological observers sometimes write on the card face and cards with very long burns close to the card edge can tear. Acceptable images are saved using an automatically generated filename time stamp. If the card shows no evidence of burn the scanning stage can be skipped for speed, but the fact the card is blank is logged so as not to skew later time series analysis. All of the meta-data regarding the card, including the quality code and description, are embedded in the saved image's EXIF data fields to permit automatic filtering later in the processing and analysis.

4 Image manipulation

The first step in extracting the sunshine card data from an image is to use the ICC profile embedded in the scan to produce a colour corrected image. All pieces of digital image production equipment inherently influence the way the colour content of an image is perceived and interpreted, and the ICC profile mechanism is intended to control this. Therefore the colour correction process also requires a target profile to correct to. There are a number of different profiles available for different output types or "colorimetric intent". The image output of this work is only for numerical analysis so the particular output profile chosen is not important as long as it is used consistently throughout the process and does not require extreme corrections that may

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



clip the image's dynamic range. The choice of profile will affect the optimum values of the thresholds used in detecting card features, but these thresholds are empirically determined and their absolute values are not important, again as long as they are used consistently throughout the card archive. This work used the profile in file sRGB_v4_ICC_preference_displayclass.icc profile available from <http://www.color.org/> as it intended for RGB colourspace used in later analysis. In our system the conversion is performed using the open source ImageMagick toolset <http://www.imagemagick.org>.

In previous methods (Boardman, 2010) the identification of the card within the image has required manual intervention thus slowing the process of archive building; our method automates this stage. In the following sections the image described should be thought of as an A4 size page in portrait orientation with the cards longest edge to the left of the page.

4.1 Image location

With cards correctly placed, the edge of the card can be found to the left of the image by reading across each row of the card starting from the left-hand edge and searching for a transition from the bright red background to colours associated with the card, i.e. white (markers) or blue-green (background). If the correct card has been used for the time of year any burn will not reach the card edge. The thickness of the card does produce a small edge-shadow and the card edge itself does not appear cleanly cut at 200 dpi resolution, so the position of pixels representing the edge is smoothed using a moving average filter. The position of the edge and hence the ends of the card in the image along with knowledge of the card patterns provide sufficient information to locate the rest of the pixels representing the card.

4.2 Card area identification

The next step in the method is to identify the image area containing the card which is dependent upon the shape of that card. The method diverges at this point to treat

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



curved and straight cards separately. The curved summer and winter cards are the more difficult to process so the rest of the this description covers these types; equinoctial cards can use a subset of the method. The size of and shape of card type is known and standardised, so could be used as a mask to select the image area containing the card. However, standard meteorological observation practice requires that the ends of the cards be trimmed to prevent obscuration at certain latitudes. In addition, the exposure of the cards to the elements in the Campbell-Stokes recorder mean that used cards may be distorted and not conform to a standardised mask so the method is designed to extract the actual card image in a consistent manner.

The detected left-hand card edge should closely approximate a circular arc, so we recover the radius of the arc using the following procedure (see Fig. 3). The Figure shows a series of chords constructed on the card's lower edge which corresponds to the left-hand edge described in the method. Simple geometry shows that a straight line that passes through the middle of a chord and is orthogonal to that chord will pass through the centre of the circle that the arc is part of. The equation of a straight line for a chord can be readily determined from two points selected from the list of pixel positions of the card edge already obtained. Chords of at least 300 pixels in length are used because short chords will amplify the effects of any fine-scale deviations in the card edge. The equations of a straight line of the chords can be transformed into equations of radial lines by rotating the gradient through 90° and calculating a new y -intercept based on the coordinates of the middle of the chord (Eqs. 1 and 2),

$$y = mx + c \quad (1)$$

$$n = \tan \left(\text{atan}(m) - \left(\frac{\pi}{2} \right) \right), \quad (2)$$

where x , y are the coordinates of a point on a straight line, c is the y -axis intercept and m and n are the gradients of the original straight line and a straight line orthogonal to it, respectively.

The centre of the card arc is then found by calculating where pairs of these radial lines intercept. Figure 3 shows the construction of a small number of these chords and

Semi-automatic CS analysis

A. M. Horseman et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

radial lines for clarity; in the operational method, a much larger number of chords and radii is used to improve the accuracy of the location of the arc centre. To further reduce the effects of defects and distortions in the detected card edge the coordinates of the intercepts are obtained for all permutations of pairs of radial lines, and the mean of these x and y coordinates taken as the centre of the card arc. For the same reason, the radius in pixels of the outer card edge is not predetermined and is obtained by calculating the average distance between all of the card edge pixels and the calculated centre.

Inspection of a selection of the used cards showed that the width of the card is relatively unaffected by card alterations or distortions so this can be converted into distance in pixel space and the radius in pixels of the inner card edge found. The portion of the original image that contains the card now falls within an annulus whose inner and outer radii have been obtained.

This stage of the process for an equinoctial card is much simpler. The left-hand card edge is found in the same manner as for curved cards and is used as a baseline for the direct extraction of a rectangular area sufficiently large to enclose the whole card.

5 Image rectification and registration

5.1 Midday marker location

The registration and rectification process requires that the midday marker of the card is placed at the middle of the long edge of a rectified and registered output image (see Fig. 2). The next step is therefore to find the midday marker by first locating the ends of the cards. This is achieved by searching for background colour pixels along a notional arc of radius halfway between that of the inner and outer edges. The search is started from positions known to be beyond the card ends and works towards the position of the card. This search locates the approximate position of the card ends, but the card may have been trimmed by hand. Inspection of sample cards, including

**Semi-automatic CS
analysis**

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



those left untrimmed, shows that the midday marker does not always fall exactly in the geometric middle of a card. Consequently the detection of the ends of the card does not provide enough information to locate the midday marker. To overcome this uncertainty a longitudinal (parallel to the longer card edges) search for the white pixels of the midday marker line is performed around the middle of the card area. The search area is longitudinally constrained to avoid mis-identifying other hour markers and laterally constrained to exclude the area of potential burn which can be estimated using the card date from the image meta-data. For instance, as Fig. 1 shows, the burn occurs in the lower portion of the card in the middle of the period between 12 April to 2 September when summer pattern cards are used. Towards the ends of this period the burn will occur in the upper portion of the card.

5.2 Card image extraction

At this point sufficient information has been diagnosed from the full image to define the region to be extracted. The radii of the inner and outer arcs define the top and bottom card edges of the rectified output area and the midday marker sets the middle of the image. The dimensions of the output image for the curved card shapes are fixed for each card pattern to ensure all the potentially trimmed cards will be extracted and to simplify future analysis. The dimensions of this area are derived from the size of unmodified cards. The method ensures that the midday marker falls in the middle column of the rectangular output image regardless of the way the card has been cut. The tapered ends of the cards means that rectification to a rectangular output of fixed size may need some pixels that would fall outside of the scanned input image. These areas would not contain the card and are filled simply with 100% red pixels for the analysis stage.

The rectification and registration process is then performed as shown in Fig. 4. Each row of the rectangular output image corresponds to a circular arc with a radius that falls between that of the inner and outer edges found earlier. These arcs share the same centre that was also found earlier in the process and are arranged so that the

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



middy marker will be located in the middle of the output image. The radii of successive extraction arcs are incremented in 0.127 mm steps (corresponding to 200 dpi) to create an output image that has the same resolution of the original scan. The columns of the output image are also spaced at 0.127 mm to create an output with a 1 : 1 aspect ratio in scale. The transformation of a row of pixels selected from a series of arcs with increasing radius into a corresponding series of straight rows with constant pixel spacing means that the outer arcs will be undersampled compared to the inner ones, i.e. the along-arc spacing of the pixels selected for the output image will increase with the arc radius.

The location of the pixels to use is simplified by calculating the required position in polar coordinates using the radii values discovered above. The angular (along arc) spacing is derived from the angle at the centre of a sector defined by two radial lines with the radius of the inner card edge and a curved edge 0.127 mm long (200 dpi). The calculation of the coordinates of the pixels to select is done using floating point arithmetic for precision, but of course the image pixel coordinates use whole numbers, so the coordinates are truncated to integer when extracting the pixels. A refinement of the method would be to derive a pixel value interpolated from the four nearest neighbours of the calculated position. Registration is achieved by using a radial line that passes through both the centre of the card arc and the midday marker located earlier. This line will bisect each of the arcs shown in Fig. 4. Equal numbers of pixels are then selected from each side of the bisection line to produce rectangular images 2150 × 244 for winter and 3000 × 244 for summer cards. Figure 5 shows the effectiveness of the rectification and registration process.

Equinoctial cards do not require the rectification process and are never trimmed, so the midday marker and ends of the card can be easily detected, producing images that are typically 2170 pixels along the longest side. As has been previously described, the width (shortest side) is fixed at 308 pixels to accommodate the wider equinoctial card pattern. All rectified and registered images have the midday marker in the middle of the longest side and have a temporal scaling of 150 px h^{-1} .

6 Equation of time

An objective of the semi-automatic analysis process is to be able to convert the burn on the Campbell-Stokes recorder cards into a time series of solar insolation strength with a temporal resolution of the order of minutes. The standard meteorological use of the Campbell-Stokes recorder is to measure the duration of bright sunshine within a day. This only requires the temporal scale to be self-consistent and need not be synchronised to any time standard. If the Campbell-Stokes record is to be compared with time series of atmospheric parameters from other solar instruments that use universal time coordinated (UTC) the card's temporal scale must be standardised. Meteorological standard practice is to level the instrument and align it to face due south which in turn means that the midday marker on the card represents 12:00 in local apparent time (LAT) or true solar time. The levelling means that a burn track will be orthogonal to the hour markers which means that they can be used as a time reference. The clock time at which the burn actually passes through the midday marker varies due to precession and nutation of the earth's motion and can be as much as 17 min before or after LAT. Correction of these variations uses the equation of time (see Müller, 1995, for a detailed explanation and calculation) and yields a uniform time termed Local Mean Time (LMT). LMT has a fixed departure from Greenwich Mean Time or UTC solely due to the longitude of the meteorological station (this has already obtained for the card image meta-data). To correct for a station's longitude, four minutes must be added to the recorded time for every degree west of Greenwich and equally four minutes subtracted for every degree east of the prime meridian.

The processing program calculates the value for the equation of time for each card when it is scanned and embeds this information in the image meta-data. The equation used to calculate the equation of time requires just the date of the card and is taken from the Astronomical Almanac for 2012, which states a precision of 3.5 s for years between 1950 and 2050. The value can then be applied by later analysis if UTC is required.

AMTD

5, 8729–8757, 2012

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



7 Comparison with pyrheliometers

The aim of the method to this point is to transform the scans of Campbell-Stokes recorder cards into a self-consistent archive of rectified and registered images and meta-data in a form that can be readily analysed. The rectified and registered images are easier to interpret and analyse because the regular grid is simpler to process. The rectified and registered image also shows the tracks of the burns do not conform to perfectly circular arcs. This is most clear in a close inspection of the summer cards (see Fig. 5) which shows that the burn track deviates towards the lower edge of the card at both the ends of the day. This evidence suggest that the deviation is not due to misalignment of the card in the instrument and is most likely due in part to the continual change in solar zenith and in part to the increased effects of atmospheric refraction at low elevation angles.

The purpose of the automation and future analysis is to provide a record of solar insolation data similar to that available from pyrheliometers, but from locations and times beyond the existing solarimeter network. The development and optimisation of the analysis techniques are the next stage of the work, but the results of a simple thresholding approach show promise and are worth describing here.

Wood and Harrison (2011) showed that it is reasonable to assume that the amount of card burned at any point is related to the strength of the direct solar insolation focused on the card at that time. This is supported by Fig. 6 which compares the direct solar insolation from a pyrheliometer co-located with the Campbell-Stokes recorder at Lerwick (Fishwick, 2007). The Lerwick site was chosen, in part, because it has a number of co-located solarimeters that form part of the baseline surface radiation network (BSRN) (see <http://www.bsrn.awi.de/>). The solar data used here comes from a Kipp & Zonen CH1 pyrheliometer measuring direct insolation at normal incidence using a sun tracker. Figure 6 shows data from the pyrheliometer and the Campbell-Stokes recorder on a common timebase. The Campbell-Stokes recorder data are a metric derived by applying simple thresholds to the rectified and registered image for the appropriate day.

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



In the figure the pyrhelimeter data are measured in W m^{-2} whereas the Campbell-Stokes recorder data are simply the count of pixels in each column of the image that pass a particular threshold. Two thresholds are used, one to capture dark charred areas and the other to record pixels where the card has burned through. Although no attempt is made here to derive a scaling factor to translate these pixel counts into W m^{-2} , it is readily apparent from Fig. 6 that the patterns of the Campbell-Stokes recorder and pyrhelimeter signals show considerable similarities in both time and signal strength. The World Meteorological Organisation suggests that solar insolation must exceed a nominal threshold of 120 W m^{-2} for the card to start charring (WMO, 2008) and the comparison in Fig. 6 bears this out. Hence it should be borne in mind that the day chosen for this example was only a moderately bright spring day; on a clear day at this time of year the pyrhelimeter can register insolation intensity over 800 W m^{-2} for periods several hours. In general the data from the Campbell-Stokes recorder shows a systematic lag with respect to the pyrhelimeter data of approximately 3–4 min. This may be because the card takes a small amount of time to reach charring temperature and also to extinguish, but is more likely to be due to a slight misalignment of the instrument with due-south.

Future enhancements

The current pixel thresholding is sufficient to show a correlation between burn amount and the level of solar insolation, but needs to be more sophisticated as the burn habit goes through three phases that are evident in the resulting burn colours. The weakest burn is a discolouring as the card chars through brown to black, the next level is where the card is consumed leaving a light coloured ash. The ash is fragile and is usually lost, but in certain circumstances the ash can remain and is difficult to distinguish from the unburned card by colour alone. However, in these cases the light coloured ash is surrounded by a border of black char, so a more sophisticated thresholding system could correctly count these ash coloured pixels as burned.

**Semi-automatic CS
analysis**

A. M. Horseman et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

The Lerwick Meteorological Station is operated 24 h per day, consequently the cards in the Campbell-Stokes recorder are changed during the hours of darkness. It is more common for the cards to be changed at 09:00 (UTC) which means that one card will record sunshine from 09:00 a.m. one day to 09:00 a.m. the following day. In periods of fine weather this is often visible as a “step” in an apparently continuous burn track as the solar zenith varies from day-to-day. An enhanced analysis process can use the image’s UTC corrected time-base to split the burn data at the “step” point and associate it with the correct day.

8 Conclusions

Building the archive

Using the method we described here we have built an archive of high-quality Campbell-Stokes recorder card images. Our Lerwick archive covers the periods 2000–2006 and 1978–1986 and includes every card that shows evidence of burn; an archive that consists of over 3000 images. By refining the basic process of capturing an image in the manner described a practised operator could scan all the usable cards from a whole year in less than one working day. This still implies that capturing an archive of a century of cards would require approximately 100 working days, but by constraining the data gathering process the procedure could be performed relatively quickly using piece-workers or citizen scientists.

In this work we have shown that it is possible to use readily available technology to mine the archives of a simple, reliable and widely used meteorological instrument to provide a proxy record of solar insolation strength. This is a step towards building an archive of solar insolation data at a resolution of the order of minutes that extends back to end of the 19th century. The fine-scale information lends itself to long-term statistical analysis of cloud frequency.

**Semi-automatic CS
analysis**

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Acknowledgements. We gratefully acknowledge Patrick Fishwick at the Lerwick Meteorological Station, and Glyn Hughes and Lynne Chambers at the Met. Office Archive, Edinburgh and Exeter for the loan of their Campbell-Stokes recorder cards and Helen Clish and Liz Fawcett at Lancaster University Library for the safe storage of the same. We also thank Chataly Sarkar for testing the prototype of the software, and Thom Brade for researching literature describing the physics of the Campbell-Stokes recorder. Tom Richardson gratefully acknowledges Research Placement Studentship funding from the UK NERC. The images showing the Campbell-Stokes recorder cards contain public sector information licensed under the Open Government Licence v1.0.

References

- Bentley, E.: Society news – seagulls and sunshine recorders, *Weather*, 66, p. 312, doi:10.1002/wea.716, 2011. 8731
- Bilham, E. G.: The Campbell-Stokes sunshine recorder, Tech. rep., Air Ministry Meteorological Office, London, 1932. 8736
- Boardman, A. T.: Extraction of direct solar irradiance from Campbell-Stokes sunshine cards for the determination of historical atmospheric turbidity, MSc thesis, Lancaster Environment Centre, Lancaster University, Bailrigg, Lancaster, LA1 4YQ, 2010. 8733, 8734, 8739
- Fishwick, P.: Basic measurements of radiation at station Lerwick (2004–01), Met. Office, Exeter, UK, doi:10.1594/PANGAEA.670819, 2007. 8745
- Gilgen, H., Roesch, A., Wild, M., and Ohmura, A.: Decadal changes in shortwave irradiance at the surface in the period from 1960 to 2000 estimated from Global Energy Balance Archive Data, *J. Geophys. Res.*, 114, D00D08, doi:10.1029/2008JD011383, 2009. 8731
- Helmes, L. and Jaenicke, R.: Experimental verification of the determination of atmospheric turbidity from sunshine recorders, *J. Clim. Appl. Meteorol.*, 23, 1350–1353, 1984. 8732
- Helmes, L. and Jaenicke, R.: Atmospheric turbidity determined from sunshine records, *J. Aerosol Sci.*, 3, 261–263, 1986. 8732
- Horseman, A. M., MacKenzie, A. R., and Timmis, R.: Using bright sunshine at low-elevation angles to compile an historical record of the effect of aerosol on incoming solar radiation, *Atmos. Environ.*, 42, 7600, doi:10.1016/j.atmosenv.2008.06.033, 2008. 8732, 8733

**Semi-automatic CS
analysis**

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Jaenicke, R. and Kasten, F.: Estimation of atmospheric turbidity from the burned traces of the Campbell-Stokes sunshine recorder, *Appl. Optics*, 17, 2617–2621, 1978. 8732
- Maurer, J. and Dorno, C.: On the progress and geographical distribution of the atmospheric-optical disturbance of 1912–13, *Mon. Weather Rev.*, 42, 214–216, 1914. 8732
- 5 Müller, M.: Equation of time – problem in astronomy, *Acta Phys. Pol. A*, 88, S49–S67, 1995. 8744
- Painter, H.: The performance of a Campbell-Stokes sunshine recorder compared with a simultaneous record of the normal incidence of irradiation, *Meteorol. Mag.*, 110, 102–109, 1981. 8732
- 10 Pinker, R. T., Zhang, B., and Dutton, E. G.: Do satellites detect trends in surface solar radiation?, *Science*, 308, 850–854, doi:10.1126/science.1103159, 2005. 8731
- Ruckstuhl, C. and Norris, J. R.: How do aerosol histories affect solar “dimming” and “brightening” over Europe?: IPCC-AR4 models versus observations, *J. Geophys. Res.*, 114, D00D04, doi:10.1029/2008JD011066, 2009. 8731
- 15 Ruckstuhl, C., Philipona, R., Behrens, K., Collaud Coen, M., Dürr, B., Heimo, A., Mätzler, C., Nyeki, S., Ohmura, A., Vuilleumier, L., Weller, M., Wehrl, C., and Zelenka, A.: Aerosol and cloud effects on solar brightening and the recent rapid warming, *Geophys. Res. Lett.*, 35, L12708, doi:10.1029/2008GL034228, 2008. 8731
- Stanhill, G.: Global dimming: a new aspect of climate change, *Weather*, 60, 11–14, doi:10.1256/wea.210.03, 2005. 8730
- 20 Stanhill, G. and Cohen, S.: Global dimming: a review of the evidence for a widespread and significant reduction in global radiation with discussion of its probable causes and possible agricultural consequences, *Agr. Forest Meteorol.*, 107, 255, doi:10.1016/S0168-1923(00)00241-0, 2001. 8730
- 25 Wild, M.: From dimming to brightening: decadal changes in solar radiation at Earth’s surface, *Science*, 308, 847–850, doi:10.1126/science.1103215, 2005. 8731
- Wild, M.: Global dimming and brightening: a review, *J. Geophys. Res.*, 114, D00D16, doi:10.1029/2008JD011470, 2009. 8730, 8731
- Wild, M.: Enlightening global dimming and brightening, *B. Am. Meteorol. Soc.*, 93, 27–37, doi:10.1175/BAMS-D-11-00074.1, 2012. 8730
- 30 Wild, M., Trussel, B., Ohmura, A., Long, C. N., König-Langlo, G., Dutton, E. G., and Tsvetkov, A.: Global dimming and brightening: an update beyond 2000, *J. Geophys. Res.*, 114, D00D13, doi:10.1029/2008JD011382, 2009. 8730

WMO: Guide to Meteorological Instruments and Methods of Observation, 7th Edn., World Meteorological Organisation, Secretariat of the World Meteorological Organization, Geneva, Switzerland, 2008. 8746

5 Wood, C. R. and Harrison, R. G.: Scorch marks from the sky, *Weather*, 66, 39–41, doi:10.1002/wea.657, 2011. 8733, 8745

Xia, X.: A closer looking at dimming and brightening in China during 1961–2005, *Ann. Geophys.*, 28, 1121–1132, doi:10.5194/angeo-28-1121-2010, 2010. 8731

AMTD

5, 8729–8757, 2012

Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Semi-automatic CS analysis

A. M. Horseman et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 1. Quality categories that the operator can use to describe Campbell-Stokes recorder card.

Code	Description
A	Strong burn with some spreading
B	Clear burn
C	Faint burn
D	Defaced – strong burn with some spreading
E	Defaced – clear burn
F	Defaced – faint burn
G	Card physically damaged

**Semi-automatic CS
analysis**

A. M. Horseman et al.


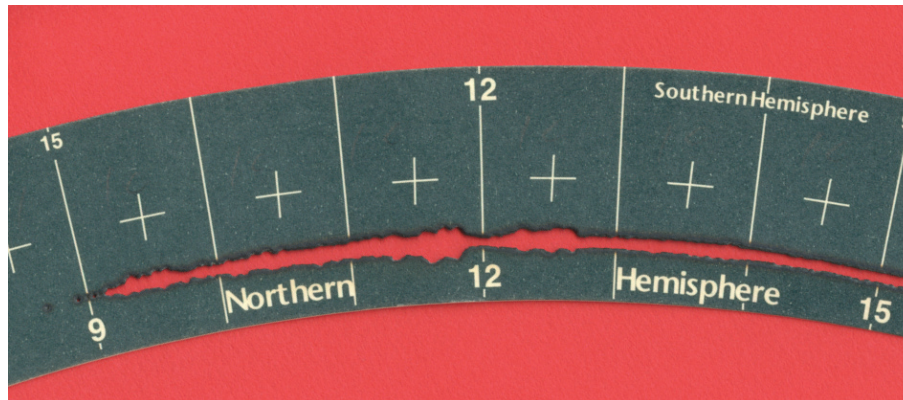



Fig. 1. Excerpt from a scan image of a sunshine recorder card that illustrates how the amount of card burn can vary in width (across track). The maximum width of burn in this image exceeds 5 mm. This card is from Lerwick for 3 June 2006.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)


(1)

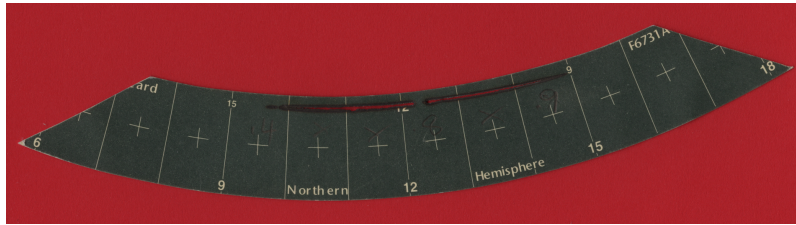

(2)

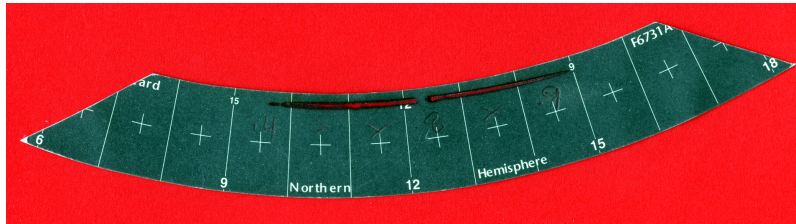

(3)

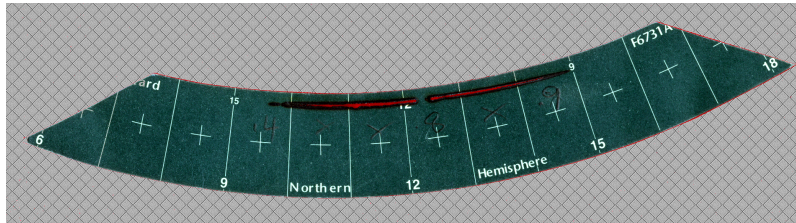

(4)



Fig. 2. Schematic illustration of the image capture method. The steps are executed in numerical order and are: **(1)** capture a quality image – the operator enters meta-data at this point, **(2)** apply a colour correction using the embedded calibration profile, **(3)** identify the card within the image, and **(4)** extract and rectify the card image.

**Semi-automatic CS
analysis**

A. M. Horseman et al.

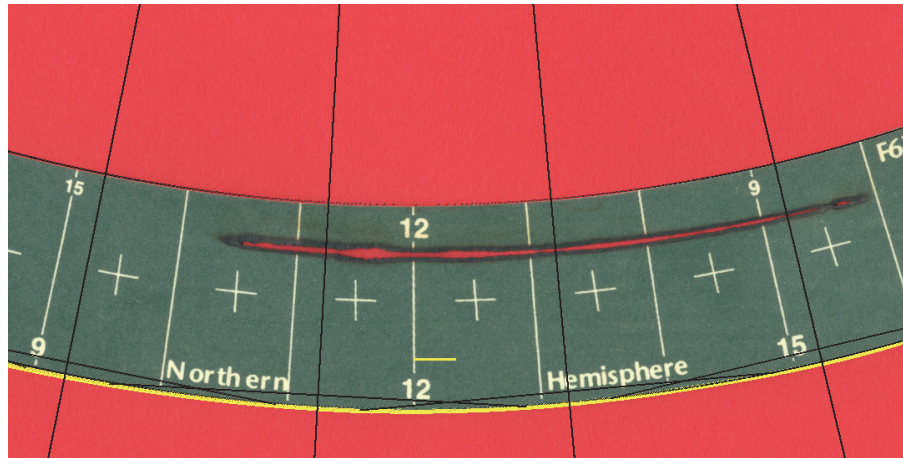


Fig. 3. Excerpt from a scan image showing how the components of the card geometry are recovered. The curved yellow line to the bottom of the card shows the detected and smoothed edge. The short yellow line in the centre shows the path of the search for the midday marker, the position of this search is deliberately performed on a portion of the card that is clear of the burn path. The straight black lines show the construction of the chords and orthogonal radial lines used to detect the centre of the card arc. The search and construction lines in this image were added to the original card image by the semi-automatic processing program operating in a mode implemented specifically to aid refinement of the extraction process. This card is from Lancaster University's Hazelrigg Field Station for 21 January 2011.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Semi-automatic CS
analysis

A. M. Horseman et al.

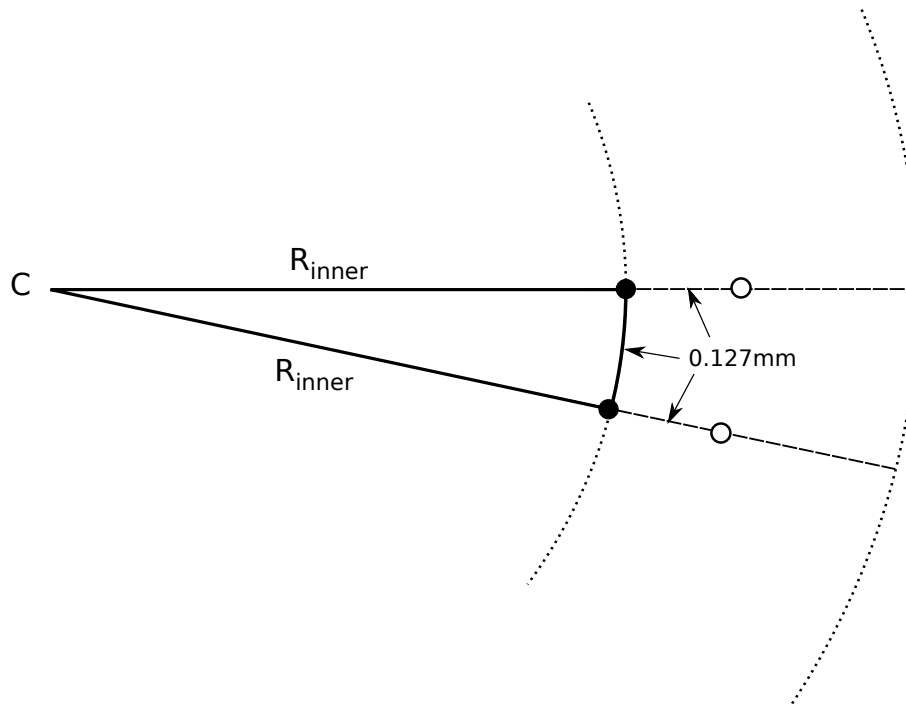


Fig. 4. Diagram showing the method of extracting pixels from an image of curved Campbell-Stokes recorder card that are required for the production of a rectified output image. The filled circles represent pixels that will form the bottom row of the rectangular output image. The empty circles represent pixels for the second from bottom row. C denotes the centre of the circular arc that is the inner edge of the card image (R_{inner} is radius of this arc). The pitch of the selected pixels is 0.127 mm along the inner edge so that selecting other pixels on the radial lines shown will also be spaced at 0.127 mm to maintain 200 dpi pitch in the output image. The proportions of the card geometry in this diagram have been distorted to fit the page.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Semi-automatic CS
analysis

A. M. Horseman et al.

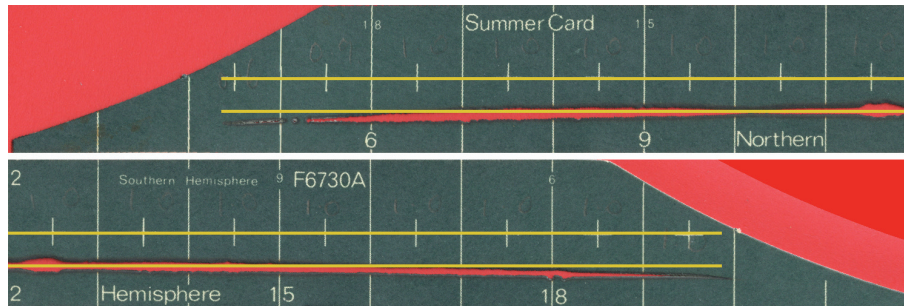


Fig. 5. Illustration of the rectification and registration method using a card from 17 July 2003. The straight yellow lines in the figure are parallel with the longer image edge. One line passes through the “+” markers on the card which are on the centre-line of the card. The other line is placed to show the deviation from linearity of the burn track described in the text. The image has been split to better fit the page.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Semi-automatic CS
analysis

A. M. Horseman et al.

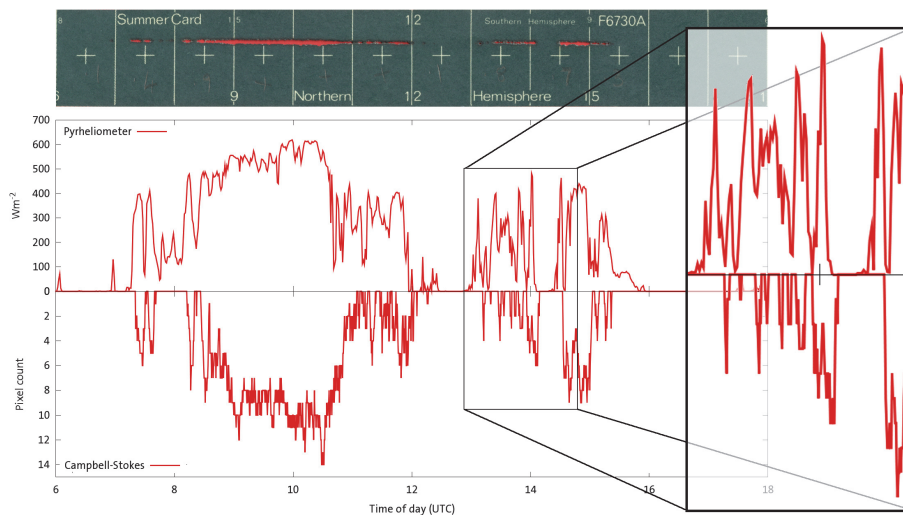


Fig. 6. Comparison between the solar data extracted from a rectified and registered Campbell-Stokes recorder card and that from the co-located pyrliometer at Lerwick. These data are for 21 April 2003. The card image has been cropped and scaled to match the time scale used for the data panels. There is a clear correlation between the data from the two sources in both time and amount despite this being only a moderately sunny day.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

