

The RAMNI airborne lidar for cloud and aerosol research

F. Cairo¹, G. Di Donfrancesco², L. Di Liberto¹, and M. Viterbini¹

¹Istituto di Scienze dell'Atmosfera e del Clima, Consiglio Nazionale delle Ricerche, Roma, Italy

²Ente Nazionale per le Nuove tecnologie, l'Energia e l'Ambiente, Roma, Italy

Abstract. We describe an airborne lidar for the characterization of atmospheric aerosol. The system has been set up in response to the need to monitor extended regions where the air traffic may be posed at risk by the presence of potentially harmful volcanic ash, and to study the characteristics of volcanic emissions both near the source region and when transported over large distances. The lidar provides backscatter and linear depolarization profiles at 532 nm, from which aerosol and cloud properties can be derived. The paper presents the characteristics and capabilities of the lidar system and gives examples of its airborne deployment. Observations from three flights, aimed at assessing the system capabilities in unperturbed atmospheric conditions, and at characterizing the emissions near a volcanic ash source, the Mt. Etna, and transported far away from the source, are presented and discussed.

1 Introduction

The lidar technique has high potentials for assessing the particulate burden of the atmosphere, since is currently the only remote sensing system that allows the direct determination of the vertical profiles of optical properties of micron-sized aerosols, and particles in thin clouds. Due to new powerful laser sources and improved electronics, profiles of the optical properties of the atmosphere can be achieved with high spatial and temporal resolution, typically of the order of metres, and of seconds. Such high resolution allows both to monitor the temporal evolution of the stratification and dynamics of aerosols in the atmosphere above a ground-based station, and to sample extended regions, when the instrument is mounted on moving platforms such as vans, ships or aircraft (Lilley et al., 2004). Airborne lidars have been used since

the early eighties (Moerl et al., 1981; Browell et al., 1990; Renger et al., 1997; Flamant et al., 2000; McGill et al., 2002) and now reliable, robust, transportable systems are widely used throughout the world, deployed in remote sites in harsh conditions, on board of both large (Stachlewska et al., 2010) or ultralight (Chazette et al., 2007) aircraft. The capability of airborne lidar to measure the atmospheric particulate in real time over extended regions, has demonstrated its great usefulness in response to the recent emergency, induced by the Eyjafjalla volcano eruption between April and May 2010 (Petersen, 2010). Then, the volcanic plume originated from the eruption, dwelled over Europe for several weeks, hampering the civil air traffic and perturbing the economic, political and cultural activities of the continent. Consequently, several airborne lidar usually devoted to atmospheric research were deployed to perform measurements of aerosols and volcanic ashes (Schumann et al., 2011; Marengo et al., 2011). That effort of the scientific community toward monitoring and quantifying the presence of ash, had the twofold goal both to study the evolution and fate of the volcanic plume (Bukowiecki et al., 2011; Ansmann et al., 2011; Wiegner et al., 2011), and to provide input to decision makers that had to face such civil contingency.

Lidar can easily detect the presence of volcanic ash, identified by using polarization diversity and/or multi-wavelength backscatter systems (Wiegner et al., 2011). The amount of ash can then be assessed under some assumption on particle size spectrum, refractive index and density (Ansmann et al., 2010; Gasteiger et al., 2011). Such information, provided in real time, allowed to validate the reports and forecasts of the volcanic ash cloud transport, issued by the Volcanic Ash Advisory Centres, and to inform the national Civil Aviation Authorities that had to issue warnings for the flight safety over extended areas, possibly affected by ash presence.

Triggered by the need to provide adequate coverage to the national territory, in May 2010 the Italian civil aviation authority asked our Institution to set up an airborne lidar ca-

70 pable to detect and quantify the presence of particulate and
ashes in the atmosphere. A lidar (RAMNI - Radar ottico
Aviotrasportato per il Monitoraggio delle No-flight zones sopra
Italia - Airborne Optical radar for monitoring No-Flight
75 Zones over Italy) has then been certified to fly, installed and
tested on an Alenia C-27J Spartan, a medium-sized transport
aircraft of the Italian Air Force. Such system is now opera-
125 tive and obeys the twofold role of providing the atmospheric
science community with a research instrument tested for air-
borne operations, and to deliver operatively real-time esti-
80 mates of the volcanic ash burden in the atmosphere, in case
of civil contingencies. The present work describes the char-
acteristics of the RAMNI system and the data analysis pro-
cedure, and illustrates some of its observations. Results from
130 flights aimed at testing the capabilities of the system and at
85 detecting the presence of ashes emitted from Mt. Etna, and
from Grimsvotn volcanoes are here presented and discussed.

2 Instrument description

The RAMNI lidar that has been installed on the C-27J, be-
70 longs to the instrumental equipment usually present in the ex-
perimental facility of San Pietro Capofiume (11.6° E, 44.7°
N), maintained by the Institute of Atmospheric Sciences and
Climate of the Italian National Research Council. It was de-
140 signed and implemented in the framework of a collaboration
between ISAC-CNR, the Ente Nazionale per le Nuove tec-
95 nologie, l'Energia e l'Ambiente (ENEA) and Embedded De-
vices s.r.l (now IsoComp, www.isocomp.it), an Italian SME.
145 Systems sharing some common feature with the one hereby
described have been used in remote sites in Africa (Cava-
lieri et al., 2011, 2010) and Spitzberger (Di Liberto et al.,
100 in press). The system, designed for unattended outdoor use
and whose total weight is 30 kg, is contained in a 30x40x50 cm
150 aluminum box, electronically shielded and thermally insu-
lated with polyurethane. A quartz window allows the trans-
mission of the laser pulse toward the atmosphere, and the
105 collection of the backscattered signal. The temperature in
the aluminium box is controlled by four cooler-heater Peltier
155 cells, 20W each, which maintain the temperature within the
laser operating conditions (10° C - 30° C). The system power
consumption is less than 240W (10A at 24V).

2.1 Transmitter

The laser source (Bright Solutions, Wedge) is an air cooled,
110 diode pumped Nd-YAG, with second-harmonic generation
and active Q switching. The laser pulse duration is 1 ns and
the emission is on two wavelengths, with energies of 350μJ /
165 pulse at 532 nm (green) and 800μJ / pulse at 1064 nm (near
infrared). The pulse repetition rate is 1 kHz. From factory
specifications, the laser beam divergence is 3 mrad and is
further reduced by a factor of 7 by a beam expander. The
170 half divergence *sdiv* of the laser has been measured by fol-

lowing in an open field the horizontally the diverging beam
cross section, for a distance of 350 meters. The beam cross
section resulted to be elliptical, and its divergence was differ-
ent along the two main axes. The measured minimum value
of the two half divergences was 0.2 mrad. This leads to a de-
crease of the energy density $S(r)$ across the beam section with
the distance r from the source, that decreases more rapidly
than

$$S(r) = \frac{E}{r^2 \cdot sdiv} \quad (1)$$

where E is the pulse energy. This equation allowed us to
define the minimum safety distance beyond which the laser
beam is considered eye safe. Eye safety is a major concern
for both nadir or zenith pointing airborne lidars, and is fur-
ther discussed and detailed in Appendix A. The laser beam
is sent into the atmosphere by means of a steerable dielectric
mirror, placed before the beam expander. The mirror posi-
tioner allows fine alignments of the beam with respect to the
telescope field of view (FOV).

2.2 Receiver

The optical receiver is a Newtonian telescope with a diameter
of 20 cm, $f/1.5$, with a FOV of 0.75 mrad, regulated by a pin-
hole of 200 μm placed in the telescope focal plane, acting as
field stop. Under this geometry, the overlap of the laser beam
with the telescope FOV begins at 40 m from the instrument
and is completed at 600 m.

A gray photochromic glass is placed in the telescope fo-
cal plane. The glass darkens on exposure to ultraviolet (UV)
radiation, and gradually returns clear when UV is removed,
on a timescale of some minutes. The system efficiency then
decrease by a factor of 4, under conditions of strong sky
background light, i.e. when used in daylight, while max-
imum sensitivity is achieved during nighttime; this allows
to moderate the effects of saturation and non linearity on
the light detectors under strong light exposure. The photo-
chromic glass response to fast background light changes
- as those that may occur when white clouds cross the tele-
scope FOV - is considered slow enough to deem the glass
attenuation constant over the time a single lidar profile is av-
eraged. After the telescope focal plane the light is collimated
by a 2 cm diameter, $f/1.5$ achromatic lens. Two low-pass
dichroic cubes act to split the radiation into different path
according to its wavelength. Narrow band interference fil-
ters with 2 nm bandwidth (Semrock) are placed on each of
the different paths to separate the backscatter at 532 nm, at
608 nm - the Raman scattering from Nitrogen - and 1064
nm. These filters have high transmission (≥ 90 %) and a
negligible temperature dependence. A cube polarizer is used
to further divide the radiation at 532 nm in the components
parallel and perpendicular to the plane of polarization of the
emitted light. The radiation at 608 and 532 nm is directed on
miniature photomultiplier modules (Hamamatsu 5783P and

6780-20 respectively) with very low thermal noise (less than 10 counts / s at 25°C). The 1064 nm radiation is focused, by a steerable small parabolic mirror, into an Avalanche Photo Diode (APD) C30954E (EGG) with 0.8 mm photo sensitive area diameter. The polarization voltage for the APD is set manually to a suitable value by a custom electronic board. This electronics allows to keep the APD gain fixed, by automatically varying the polarization voltage and hooking it to possible APD temperature changes, in accordance with the APD gain vs temperature curve.

2.3 Data acquisition

The signal from the photodetectors is amplified with a gain of 11 and a bandwidth of 250 MHz. As usual in photomultiplier detection, two cases arises: if the photon arrival rate is such that the electrical impulses, originated by the single photon detection process, pile up to produce a continuous current waveform, the signal is measured in *current mode*; if otherwise the photon arrival rate is low enough to allow to discriminate the single photon electrical impulses, the signal is measured in *photoncounting mode*. In our case, the signal is simultaneously recorded both in current and in photoncounting mode, and the two acquisitions are then suitably merged when the data are processed, as detailed hereafter. The electronic acquisition card (Embedded Devices, APC-80250DSP) is based on FPGA technology and uses a fast digital signal processor unit (DSP) for both modes. In current mode, the photomultiplier signal is filtered through a 15 MHz low pass to avoid aliasing effects, and then digitized into an 8 bits waveform, at an adjustable sampling rate. The duration of the single sample can be set to the values of 12.5, 25, 50 or 100 ns, and the waveform is reconstructed for a total of 1024 samples. The number of samples is fixed - the first 24 collected before the laser shot and used for measuring background light. This renders a spatial resolution spanning from 1.875 m to 15 m. Accordingly, the total sampled waveform duration corresponds to spatial range that can vary from 1.875 to 15 km.

In photoncounting mode the impulses originating from photon detection are counted when they reach an adjustable threshold level, that allows to reject spurious low noise. For each photon detection, TTL pulses are formed and counted in 1024 consecutive time bins, whose length may span from 25 to 1000 ns in 25 ns increments, rendering a spatial resolution, along the lidar profile, that can be set from 3.75 m to 150 m. Since the first 24 are collected before the laser shot and used for measuring background light, the overall profile range can vary from 3.75 to 150 km.

The acquisition card provides the sum of the signals, integrated over N laser shots. Thus, profiles are produced as averages over times that can range from 1 s (i.e. a minimum of 1000 laser shots, whereas the frequency of laser pulses is 1 kHz) to possibly several tens of hours, and the averaging time can be adjusted by means of the control soft-

ware. A good compromise between good signal to noise ratio and a sufficient temporal resolution is generally obtained by setting the time average between 5 and 60 s. Averaged profiles are stored in the memory board of the system (500 MB, expandible to several GB), which can accumulate tens of thousands of them. An external computer is used to access the system, and a dedicated software package allows to modify the settings of the acquisition card (average profile duration, its vertical extension and resolution, frequency and power of the laser pulse, photoncounting threshold level and so on) via USB or TCP/IP connection. The system automatically starts operating and storing data as it gets turned on, and stops when it is turned off, or whenever an appropriate command is sent from an external computer, as when it is necessary to stop the data logging to download the data or to provide real-time data visualization for alignment purpose. Data are stored as ASCII files. Each file reports information on the system settings, housekeeping data (temperatures in some critical parts, voltage levels, ambient pressure) and the raw data as series of photocounts per bin, and averaged current waveforms in digit units. A real time visualization of the measurements is possible on an external computer by means of a suitable software package, for system checking or for alignment. A synopsis of the system specifications is reported in Table 1. The photoncounting mode, preferable in the acquisition of atmospheric returns from distant ranges due to better signal to noise ratio and absence of spurious electronic biases, tends to get saturated in bright daylight, for the acquisition of atmospheric returns from regions close to the instrument. In these conditions, use of the current mode is mandatory. A vertical region of overlap between current and photoncounting mode acquisitions exists, and allows merging the two to reconstruct the whole backscattering profile from a few tens of meters from the instrument to the maximum altitude of the sounding. The region where the two acquisition modes coexist and are both accurate and sensitive, is placed generally between 2 km and the top of the current mode profile, which can be at 3.75 km or higher. In this region, the photoncounting mode has still a good linearity and current mode is sensitive enough.

2.4 Electromagnetic and mechanical compatibility

The system was tested at the Laboratory for Electromagnetic Fields ENEA Casaccia, in order to characterize the emissions radiated and conducted, to check the compatibility of its use on an airplane. The tests were conducted in more sessions in the period from June to July and November 2010. At the end of the test series, it has been certified (Test Report ENEA EMFLab04/2010 EMFLab and 05/2010) that the lidar system emits conducted and radiated noise levels below the limits prescribed by the relevant legislation. Therefore, it meet the requirements of MIL-STD 461E CE102 and RE102 for the tests.

3 Data processing

The system is able to measure the atmospheric return backscattered elastically at 1064 nm, at 532 nm in parallel and perpendicular polarization, and the nitrogen Raman scattered signal at 608 nm, although this latter is available only at night due to the low value of its scattering cross section. Unfortunately, for the measurements acquired during the flights presented hereafter, the 1064 nm data were plagued by a spurious noise that hampered their use in a quantitative way. We will present and quantitatively discuss here only the data acquired with the polarization diversity 532 nm channels.

The data processing is not automated but done by an operator after the end of each measurement session, with an originally implemented software code. Quality checked data can be delivered after one hour from the measurement. The preliminary step in the data processing procedure is the correction for dead time effects on the photoncounting mode profiles. According to Donovan et al. (1993), let S_0 the true photoncounting rate, and S_v the photoncounting rate observed by our device, the two are linked by;

$$S_v = S_0 \cdot \exp(-S_0 \cdot \tau) \quad (2)$$

where the dead time τ can be estimated from the maximum observed photoncounting rate as $\tau = \frac{1}{R_v^{max} \cdot e}$ and in our case is 6 ns. Eq. (2) allows the retrieval of the true photoncounting rate, and this extends some hundreds of metres down the limit where the photoncounting profile can be considered accurate. The part of the photoncounting profile further down, generally below 1 km in daylight, or even further down at night-time, where the correction would exceeds 50%, is considered not reliable.

The current mode profile is corrected for the partial overlap between the laser beam and the FOV in the near range, so that the signal in the near range is reconstructed using the procedure described in Biavati et al. (2011). The correction is considered reliable if it does not exceed 75% of the reconstructed signal. In this way, an atmospheric profile is retrieved down to 100-200 m from the instrument. The current and photoncounting profiles are then superimposed and merged together in a region where both acquisition modes are considered sensitive and accurate. This region may vary according to the background light level and to the amount and distribution of aerosol. Generally, we privilege the photoncounting acquisition, as it is known to be superior to the current one in terms of stability, detection efficiency, and signal to noise ratio (Tull, 1968) and is less affected by nonlinearities arising from the extensive dynamical range of the atmospheric backscatter signal (Cairo et al., 1996). Therefore the current acquisition is used only when the photoncounting starts showing saturation effects, i.e. when the photoncounting rate exceeds 10 MHz. Henceforth, for the polarized channel, current mode is used generally below 2-4 km in daylight, and below 1-2 km during nighttime. The merging delivers

a single atmospheric profile for each polarization, with data below the merging region acquired in current mode, and data above that in photoncounting mode. Figure 1 displays the atmospheric elastic, polarization preserving, backscatter signal acquired on a clear night with 300 s integration time. The figure reports the atmospheric return as photoncounting rates per single laser shot, for the photoncounting mode acquisition, and in Analog to Digital Converter digit units, ranging from 0 to 255, for the current mode acquisition. The photoncounting mode acquisition is presented before (black line) and after (blue line) the application of the dead time correction, the current mode acquisition is displayed before (red line) and after (purple line) the application of the partial overlap correction. Also displayed are the altitude regions where the overlapping photoncounting and current signals are merged. The inelastic Nitrogen Raman signal, acquired with 1500s integration time (green solid line), is also displayed. The Raman signal is acquired in photoncounting mode only.

3.1 Uncertainty analysis

We discuss the uncertainty to be attributed to the retrieval of the physical quantities of interest, namely the aerosol backscattering coefficient and depolarization, following the well established literature on the lidar error analysis (Russell et al., 1979), which we will briefly summarize. We will use the result hereby discussed to calculate the uncertainty on our measurements, and from these considerations we will estimate the minimum aerosol signal detectable with sufficient accuracy, when presenting the measurement from one of the flights, in paragraph 3.1.

3.1.1 Aerosol backscatter coefficient

Let $N(r)$ be the number of photons generated by the process of backscatter at a distance r from the system and detected by our lidar system, in case of photoncounting detection, or a current directly proportional to them in case of current detection; let E the energy of the laser pulse, C a parameter that describes the overall efficiency of the system, $\beta(r)$ and $\alpha(r)$ respectively the backscatter coefficient and atmospheric extinction. We start from the well known lidar equation:

$$\begin{aligned} N(r) &= \frac{E \cdot C \cdot \beta(r)}{r^2} \cdot \exp(-2 \cdot \int_0^r \alpha(r) dr) = \\ &= \frac{E \cdot C \cdot \beta(r)}{r^2} \cdot T(r) \end{aligned} \quad (3)$$

Where the term $T(r)$ expresses the atmospheric transmission from the lidar to the scattering region at distance r and back, and it is understood that in the case of elastic scattering, extinction and backscatter coefficients can be divided into a contribution due to air molecules and aerosol:

$$\beta(r) = \beta_m(r) + \beta_a(r) \quad (4)$$

$$\alpha(r) = \alpha_m(r) + \alpha_a(r) \quad (5)$$

A quantity commonly used in lidar research is the total Backscatter Ratio R

$$R(r) = \frac{\beta(r)}{\beta_m(r)} \quad (6)$$

defined so that $R = 1$ if there are no aerosols, and $R \geq 1$ otherwise. This is rewritten in terms of measured quantities as:

$$R(r) = \frac{N(r) \cdot r^2}{E \cdot C \cdot \beta_m(r) \cdot T(r)} \quad (7)$$

The system parameters E and C are eliminated by a calibration procedure that assumes as known the value $R_0 = R(r_0)$ at a given calibration altitude r_0 . Then:

$$R(r) = \frac{R_0 \cdot N(r) \cdot r^2 \cdot \beta_m(r_0) \cdot T(r_0)}{N(r_0) \cdot r_0^2 \cdot \beta_m(r) \cdot T(r)} \quad (8)$$

and once $R(r)$ is retrieved from the measurements, we finally get to the quantity of physical interest, the aerosol volume backscatter coefficient:

$$\beta_a(r) = (R(r) - 1) \cdot \beta_m(r) \quad (9)$$

Introducing the dimensionless parameters:

$$n(r) = \frac{N(r)}{N(r_0)} \quad x = \left(\frac{r}{r_0}\right)^2 \quad q = \frac{T(r_0)}{T(r)} \quad (10)$$

posing $\beta_m(r_0) = \beta_m^0$, and using (8), eq. (9) takes the form:

$$\beta_a(r) = n(r) \cdot x \cdot q \cdot \beta_m^0 \cdot R_0 - \beta_m(r) \quad (11)$$

After rearranging the usual error propagation formula and neglecting covariances between the measured quantities, and the uncertainty on the altitude x , we get to:

$$\left(\frac{\delta\beta_a}{\beta_a}\right)^2 = \left(\frac{\beta_m \cdot R}{\beta_a}\right)^2 \cdot \left[\left(\frac{\delta n}{n}\right)^2 + \left(\frac{\delta q}{q}\right)^2 + \left(\frac{\delta\beta_m^0}{\beta_m^0}\right)^2 + \left(\frac{\delta R_0}{R_0}\right)^2 + \frac{1}{R^2} \cdot \left(\frac{\delta\beta_m}{\beta_m}\right)^2\right] \quad (12)$$

Showing how the errors in the aerosol backscatter coefficient retrieval come from the signal measured, the estimation of transmission and density, and on the assumed value for the backscatter ratio at the calibration altitude.

We now discuss and quantify the individual contributions to be applied to our system:

$\left(\frac{\delta n}{n}\right)$ is the uncertainty on the measured signal: it has a fixed contribution due to the statistics of photons arriving from the calibration altitude r_0 , which we often place around 6-7 km, and a contribution varying along the profile.

We detail the discussion for the two different modes of detection:

If the signal is detected in photocounting mode, then n is proportional to the sum of photoncounts arrived and detected during each serie of consecutive time bins. The Poissonian statistics of photon arrival gives the standard deviation as the square root of the number of photoncounts. Each laser shot causes a burst of backscattered photons, and averaging N of such bursts is a common way to increase the counting statistics, thus improving the signal to noise ratio by a factor \sqrt{N} . In our case, typical averaging times range from 5 to 60s, so that, given our laser pulse repetition rate, N may range from 5000 to 60000. As detailed before, photocounting is performed over a serie of 1024 consecutive time bins of adjustable width. In the measurements presented hereafter, the width of such bins was set to 200 ns (and consequently the vertical resolution of our profile to 30 m, and its extent to 30 km). If bkg is the sky background photon count and p is the overall photon count, the relative uncertainty on the lidar signal $n = p - b$ will be $\frac{\delta n}{n} = \frac{\delta p}{n} + \frac{\delta bkg}{n}$. Even in daylight, for our system, the sky background photoncounting rate is some 10^6 photoncount s^{-1} and is negligible throughout a large part of the tropospheric return.

In current mode the waveform is digitized with an 8-bits Analog to Digital Converter (ADC), and recorded. The digital resolution error, on the single sample, is equal to its least significant bit (LSB). On an average of N samples, as the LSB is dithered by noise from electronics and from inherent atmospheric variability, the averaged waveform resolution is increased by a factor \sqrt{N} corresponding to an increment of $\frac{\log_2 N}{2}$ bits. In our case, for $N = 5000$, the averaged waveform has an equivalent LSB of 14 bits; for $N = 60000$ the equivalent LSB is 16 bits. As above, if bkg is the current caused by the sky background, or by any other electronic bias, and p the overall current, $n = p - bkg$ and the relative uncertainty on the lidar signal will be $\frac{\delta n}{n} = \frac{\delta p}{n} + \frac{\delta bkg}{n}$. Practically, the digital uncertainty is usually much smaller than the one arising from the determination of bkg , computed as the average current level of the waveform in the 24 samples preceding the laser shot. Such current level is 'noisy', due to electronics as well as inherent signal variability, so that the standard deviation STD_{bkg} of the sky background level is usually greater than the digital resolution error, in every condition. Such standard deviation, taken as the uncertainty on the sky background signal, can be though to affect equally every other portion of the current waveform, and so we put $\delta p = \delta bkg = STD_{bkg}$.

$\frac{\delta q}{q}$ is the error on the transmission due to both molecular and aerosol extinction. The molecular extinction can be evaluated from Rayleigh theory once the air density profile is obtained from measurements or from a suitable atmospheric model, while in absence of an independent measurement, β_a can be calculated from (11) only if *a priori* assumptions are made on the relation between aerosol extinction and

backscatter coefficients (the so-called *lidar ratio*). In such assumptions lie the largest source of unaccuracy in lidar retrievals. We followed the standard Klett approach (Klett, 1981) and choosed to fix the lidar ratio to piecewise constant values in regions where clouds or aerosols are present. Such regions are automatically identified by iteratively inspecting the values of backscatter ratio, depolarization ratio and altitude during the data processing, and recursively adjusting the lidar ratio accordingly. As instance, when thin liquid or ice clouds are identified in a given altitude range, the lidar ratio there is set to values known from literature (Chen et al., 2002; O'Connor et al., 2004). The lidar ratio for aerosol may easily range from 30-50 sr⁻¹ in the case of dust (Mattis et al., 2002; Immler et al., 2003) to 80 sr⁻¹ for biomass burning aerosol (Wandinger et al., 2002), and reported values for volcanic ashes are in the range 45-60 (Ansmann et al., 2010; Gross et al., 2011). Although our data process allow to constrain the aerosol lidar ratio value when additional Aerosol Optical Depth measurements from sunphotometers are available (as in the San Pietro Capofiume station) (Marenco et al., 1997), or to provide an altitude dependent aerosol lidar ratio when the nitrogen Raman signal (Ansmann et al., 1990) is available during nighttime, these opportunities were not attainable during the flight tests. Hence a constant aerosol lidar ratio was set to 50 sr⁻¹ everywhere, except when cirrus (30 sr⁻¹) or thin water clouds (19 sr⁻¹) were identified. To give an estimation of the uncertainty induced by such choice, following the literature (Russell et al., 1979; Bockmann et al., 2004) we write:

$$\left(\frac{\delta q}{q}\right)^2 = 4 \cdot (\delta\tau_a^2 + \delta\tau_m^2) \cong 4 \cdot ((0.5 \cdot \tau_a)^2 + (0.1 \cdot \tau_m)^2) \quad (13)$$

where $\tau_{a,m}$ indicate the optical depths due to particulates and molecules, respectively.

$\frac{\delta\beta_m^0}{\beta_m^0}$ and $\frac{\delta\beta_a}{\beta_a}$ both reflect uncertainties on the molecular density, derived from other independent measurements or a suitable atmospheric model. In our case we put both of them equal to 0.01.

$\frac{\delta R_0}{R_0}$ is the uncertainty on the $R(r_0)$ calibration value used in the retrieval; in our case, it is often possible to reach in a measurement session the upper part of the troposphere where the molecular scattering dominates. A conservative estimation is to put the uncertainty on R_0 at 0.02.

3.1.2 Volume and aerosol depolarization

Depolarization measurements allow discrimination of various kind of aerosol and clouds (Sassen, 1991; di Sarra et al., 2001; Iwasaka et al., 2003; Wiegner et al., 2009). The volume linear depolarization ratio δ is defined as the ratio of the aerosol and molecular backscatter coefficients as:

$$\delta(r) = \frac{\beta_m^{cross}(r) + \beta_a^{cross}(r)}{\beta_m^{par}(r) + \beta_a^{par}(r)} \quad (14)$$

where the superscript *par* and *cross* refer to backscattering with polarization parallel and perpendicular to the polarization of the emitted light. It can be directly expressed in terms of the ratio of the cross to the parallel-polarized lidar return signals, once the atmospheric return is split according to its polarization diversity and separately detected:

$$\delta(r) = K \cdot \frac{n^{cross}(r)}{n^{par}(r)} \quad (15)$$

In (15) it is apparent that, apart from the coefficient K , a calibration constant accounting for the difference in the responses of the two channels, only the measured signals contribute to its random error. However, an incorrect determination of K leads to significant systematic errors severely affecting the accuracy of the measurements. This coefficient can be directly measured by a variety of procedures (Freudenthaler et al., 2009; Alvarez et al., 2006) that exploit a controlled splitting of the backscattered light into its parallel and cross polarized components, to be fed into the receiving channels. In the data presented hereafter, a different depolarization calibration approach has been used, the so called *0° calibration*. In this approach, K is chosen in order for the depolarization to obtain the theoretical value to be expected for the atmospheric backscattering from a region where the aerosol presence can be considered negligible, and the observed depolarization is assumed to come from molecules alone (Young, 1980). In our case, this theoretical value was set to 0.014 (Behrendt et al., 2002). To determine K , a mean atmospheric profile with reduced SNR was created by averaging the measurements for several minutes, and an atmospheric region, namely the *Rayleigh range*, where particulate scattering could be considered negligible was determined around 8 km. This procedure offer itself to criticism, as even a small amount of depolarizing aerosol in the Rayleigh range leads to an uncorrected bias, inducing a severe underestimation of the aerosol depolarization throughout the profile. An absolute determination of the K coefficient of our system was performed after the flights, by illuminating the lidar telescope, covered with a thick slab of Teflon, with a collimated beam from a high power quartz lamp. The diffuse transmission in the forward direction, resulting completely unpolarized, allowed an absolute determination of the channel gain ratio. The agreement of the absolute determination of the K coefficient with the value retrieved with the Rayleigh range approach confirmed the correctness of our previous assumptions. Another important source of systematic errors in depolarization measurements comes from the incomplete separation of parallel and cross polarized lidar returns, which leads to a mixing or a 'cross talk' between receiving channels, again leading to underestimate the depolarization of aerosols. The cross talk can be taken into account and different methods have been envisaged to properly assess it (Biele et al., 2000; Reichardt et al., 2003); in our case we estimated the cross talk following the approach outlined in

565 Snels et al. (2009) and the volume depolarization profiles are 615
corrected accordingly (Cairo et al., 1999) for a cross talk of
2.5 % between channels. This level of incomplete splitting in
polarization is in good accordance with what directly tested
570 used in our system. 620

A second depolarization parameter, the particle depolarization (Cairo et al., 1999), is an intensive quantity widely used to classify aerosols. It can be retrieved by separately assessing the aerosol backscatter coefficient from cross and parallel backscattering, and then ratioing the two. The value 625
of its uncertainty strongly depends on the amount of depolarizing aerosol present. We will discuss its uncertainties when presenting the measurement from one of our flights.

4 Performances during flight 630

580 The lidar system has been deployed in four flight tests on a
C27-J Spartan of the Italian Aeronautica Militare, all of them
in daylight conditions. The system was placed in the aircraft, 635
pointing to the zenith through an open hatch on the ceiling of
the fuselage. In the first flight the system was not operative,
585 and was subjected to intense mechanical stresses to verify
the solidity of installation and to control the maintenance of
the optical alignment after the flight. In the subsequent sec- 640
tions, data from the flights when the system was operative
are presented and discussed.

590 4.1 December 9, 2010 645

The system was equipped with an ancillary computer dedicated to store the data acquired from the avionics sensors of the C27-J (geo-reference, time, aircraft altitude, atmospheric dynamical and thermodynamical parameters, acquired at 1 Hz) that were then used to interpret the lidar data. The parameters of the acquisition were set at 15 m vertical resolution for the current mode and 30 m vertical resolution for the photoncounting mode, the profiles extending respectively for 15 km and 30 km. The flashlamp laser power was set to 90% of its maximum value. The integration time for each 655
profile was set to 5s. The aircraft took off from the Aeronautica Militare military base of Pratica di Mare (40.66° N, 12.48° E, 89 m a.s.l.) and headed south to fly over the CNR-IMAA CIAO atmospheric observatory of Potenza (40.60° N, 15.72° E, 760 m a.s.l.) (Madonna et al., 2011) to obtain 660
simultaneous measurements with a ground based reference system of proven accuracy (Mona et al., 2009). Unfortunately, low cloudiness above the station did not allow to operate the ground based system. However, RAMNI collected data throughout the flight, that was performed at a constant 665
altitude of 2150 m. The flight altitude was dictated by the fact that the aircraft flew unpressurized. The data obtained allowed us to assess the system performances, even in absence of a ground based comparison. Here, only data from

the 532 nm channels will be discussed, since the 1064 nm channel was affected by a noise that prevented a quantitative determination of the backscattering at this wavelength. The source of this noise was not found in the timeframe of the project. However, the 1064 nm data, for this as well as the other flights, qualitatively confirmed the 532 nm observations.

Figure 2 shows the color coded profiles of the total backscattering coefficient (aerosol + molecular) and figure 3 shows the volume depolarization, measured during the flight. Each profile represents an average over 60 s. Noticeable is the presence of scattered clouds at 4 km and 6 km altitude (the black areas where data are outside the color scale), some of them optically so thick to inhibit the signal detection beyond them (at 57000 s, 57800 s, 58200 s, 58600 s). The low value of the depolarization suggests a liquid or mixed phase for them. Other high-altitude ice clouds, discernible from the high values of depolarization associated to them, are present around 10 km. The data collected during this flight, which we take as representative of a nearly aerosol free atmosphere, have been used to evaluate the sensitivity of the system when flying in daylight conditions, the most burdensome, by using the results of the uncertainty analysis reported in paragraph 3. The uncertainty to be attributed to the measurements of the volume backscattering coefficient and depolarization is shown in the upper panel of figure 4, (black line for depolarization, red line for backscattering), function of the distance from the aircraft. While the backscattering can be measured with reasonable sensitivity throughout the range, errors on depolarization measurements exceed 100% already a few kms from the system, forcing us to much longer integration times for calibration.

The lower panel of Figure 4 shows the threshold value of $\beta_a(r)$ for an accurate determination. That is, considering the aerosol distributed uniformly along the vertical from the lidar to the vertical range r , the value that would be affected by a 100 % uncertainty at r , given the characteristics and performances of the lidar system, the random measurement error, the uncertainties on aerosol extinction and on the determination of air density and calibration values. This aerosol threshold quantity depends on the distance from the lidar, and on the measurement integration time. It would also depend on the flight altitude, that we held fixed in our sensitivity and accuracy analysis, at the aircraft flight level (2150 m).

The two solid curves display such threshold value for different integration times (black one for 60 s integration time, red one for 60 s integration time). Considering an aircraft speed of about 400 km/h, those integration times allow horizontal resolutions of respectively 0.5 km and 3 km along the line of flight. Also reported for comparison are the values of the molecular backscatter coefficient (dashed line), computed from temperature and pressure measured by an atmospheric sounding at Pratica di Mare. As instance, at 8000 m from the aircraft, for an integration time of 5 s, the 100 % uncertainty on the aerosol backscatter coefficient is reached for

a value of $0.5 \cdot 10^{-3} \text{ km}^{-1} \text{ sr}^{-1}$, i.e. for a total backscatter ratio of 2 at 10 km altitude (provided the aircraft flying altitude is 2150 m); for an integration time of 60 s, the same uncertainty is obtained for an aerosol backscatter coefficient of approximately $0.05 \cdot 10^{-3} \text{ km}^{-1} \text{ sr}^{-1}$, i.e. for a total backscatter ratio of 1.1 at 10 km altitude.

It should be emphasized that this threshold aerosol value is higher than the minimum detectable aerosol signal. In fact in our error analysis, the conservative and relatively large value of the uncertainty induced by the arbitrary choice of the aerosol extinction plays a big role. Moreover, the uncertainty it causes on the determination of the aerosol coefficient at range r , depends on the vertical aerosol distribution from the lidar to r . In our computation, we posed ourselves in the unfavourable - and probably unlikely - condition of an aerosol uniformly distributed throughout that range.

4.2 January 14, 2011

The third flight aimed at monitoring the volcanic plume originated from a brief eruptive episode of the Etna volcano (37.73° N , 15.00° E , 3329 m a.s.l.). The Etna started on 12 January a strombolian activity with explosive outbursts of pasty lava ejected a few tens or hundreds of meters into the air, the activity becoming stronger during the night. On the 14, there was no activity responsible for lava emissions as in the previous day, and during our flight the volcano had already finished erupting since a few hours and only a plume persisted from the mouth of the volcano, pushed south-southwestward by the prevailing winds. Figure 5 shows the Aerosol Optical Depth (right panel) and Angstrom coefficient (left panel) as measured by MODIS-Terra at 12.10 UT on the 14. The circle highlights the region where the plume originated from the volcano was sought for and detected during the flight. The volcanic plume is hardly discernible in the Optical Depth image, a little more so in the Angstrom coefficient image where a zone of reduced values can be noticed, spreading from the south-western part of the coast of Sicily, toward the Strait of Sicily, advected by the wind that blew almost perpendicular to the coastline.

The C27J took off from Pratica di Mare in the early afternoon and headed southward, making a transept parallel to the southwest Sicilian coastline flying over the Strait of Sicily, at an altitude of about 1000 m, a few tens of kilometers from the land. The aircraft passed below the plume originating from the volcano which was situated at an altitude of about 2-3000 m. The plume was detected approximately 150 km downwind from the source, and was visible. The plane flew at a minimum distance of about 1000 m from the base of the plume, that was considered to be a safe distance. Figure 6 and 7 show the color-coded time series of profiles of total backscatter coefficient and depolarization - this latter extending only up to 4 km of altitude, because of high sky background - measured during the flight. Each profile represents an average over 60 s. The data clearly shows the presence

of a layered structure of particulates that extends between 2 and 3.5 km, visible between 55000-56000s. The origin of this structure was easily traced back to emissions from Etna, by inspecting the analysis of high altitude winds. The lack of any depolarization in the backscattered light suggests that the particles were essentially liquid, probably sulfate particles condensed from water vapor and minor gases emitted from Etna, with no detectable presence of ash particles. Lidar observations for a similar event, performed in 2002 from the lidar station in Potenza, also reported the dominant presence of submicron sulfate particles (Villani et al., 2006). A zoom on the volcanic plume is reported in figure 8, where the aerosol backscatter ratio is presented. There, clearly discernible is the presence of low level aerosol extending to 1000-1500 m, likely influenced by the transport off the coast, the noticeable presence of free tropospheric aerosols up to 5-6 km, the elongated structure of the plume, with backscatter ratio as high as 4 in its higher portion, and a region of very clean air, apparent as a white spot at 1-2 km.

On its way back along the south-east coast of the island, the plane flew close to Mount Etna and the pilot took pictures of the plume originating from its mouth, as displayed in figure 9.

4.3 May 28, 2011

The flight was motivated by the forecast of the VAAC MetOffice announcing the presence of volcanic aerosol over the Po valley, above 11 km altitude and with concentrations ranging between 200 and 2000 $\mu\text{g m}^{-3}$, as a result of the transport of the plume originated from the ongoing eruption of the Icelandic volcano Grimsvotn (63.98° N , 19.70° W , 1725 m a.s.l.). The presence of the ash cloud was forecasted to occur between 6:00 UTC and 12:00 UTC. The C27J took-off from Pratica di Mare at 08.03 LT (06.03 UTC). The aircraft followed a route toward the western end of the Po Valley, at an altitude of 1800 m, which was considered safe for flight, and began taking measurements at 7.29 UTC, after an eastward turn, following the course of the river Po until it reached the Adriatic coast. There, it climbed to 3200 m at 08.30 UTC, and turned south-southeast continuing the flight along the Adriatic coastline. The measurements continued until the aircraft reached Ancona, then were shut off. The aircraft then came back to Pratica di Mare where it landed after about 4 flight hours.

The altitude of the supposed ash presence, and the order of magnitude of the aerosol backscatter coefficients to be expected, ranging from 2 to 20 $10^{-3} \text{ km}^{-1} \text{ sr}^{-1}$, producing a lower limit for the Aerosol Backscatter Ratio of 5 at 12 km, posed this mission within the limit of our detection capabilities. Figure 10 and 11 report the color-coded profiles of the total backscattering coefficient and volume depolarization. The data collected show the presence of layers of tropospheric aerosol from the flight level up to about 7 km, with values ranging from 0.1 to 0.3 $10^{-3} \text{ km}^{-1} \text{ sr}^{-1}$.

These layers show a maximum volume depolarization of 2-3 % at around 6-7 km, which decreases downward. Above this layered structure, the aerosol is significantly reduced. An average particulate depolarization of 40-50% throughout the layer could be inferred. The uncertainty on the particulate depolarization is severely affected by the extremely low value of the aerosol backscattering, hence in our case the error to attribute to this parameter exceeds 100 %. The inferred value would be consistent with what expected for mineral dust, but a 5-days backtrajectory analysis show no sign of origin from dust source regions, hence do not support such attribution. In any case, the measurement uncertainty due to the paucity of aerosol do not allow a reliable classification.

Above 9 km, no presence of aerosols is detected, with backscatter coefficient values within or above the $0.2 \cdot 10^{-3} \text{ km}^{-1} \text{ sr}^{-1}$ lower limit indicated by the VAAC forecast. This lack of aerosol presence received an indirect confirmation by lidar data from a CALIPSO satellite overpass (not shown), that crossed our aircraft trajectory at 12.36 UTC, and reported no aerosol presence.

5 Conclusions

An airborne lidar was prepared and tested as a tool for monitoring the presence and estimate the mass density of particulate in the atmosphere. Three test flight have been performed, under conditions of high sky brightness. In one case, a volcanic plume originated from Etna volcano was detected, and presence of ash was excluded. In a different case, the system was able to exclude the presence of ash that were forecasted at concentrations considered hazardous to air traffic. The system has thus been tested under a variety of conditions and delivered informations useful for managing civil contingencies, and for research on volcanic emissions. An improvement of the system performances is foreseen, in order to exploit the 1064 nm elastic channel, that may provide additional informations on particle mean sizes. However, while the availability of airborne lidars as the one here presented, and the effort to improve the accuracy of its aerosol parameter retrieval is undoubtedly worth of, any improvement will probably never result - alone - in a totally unambiguous classification of the aerosol, and a quantitative assessment of the aerosol mass concentration through extinction-to-mass or backscatter-to-mass coefficients. The depolarizing properties of volcanic clouds - and its mass-to backscatter ratio - depend on the particular volcano, on the particular eruption, on the age of the ash cloud, on the thermo dynamical conditions encountered along its trajectory and so on and on, the microphysics of volcanic clouds being largely unknown, and there is still a relatively poor database of in-situ and remote sensing measurements and comparisons to support the results of lidar inversions. The unequivocal attribution of the type of particles observed and a reliable estimate of their mass concentration will have to be based on ancillary information from trans-

port models, and from the synergic use of other remote sensing (Gasteiger et al., 2011; Ansmann et al., 2010) and in situ measurements (Flentje et al., 2010).

Appendix A

Eye safety concerns

The value of the Maximum Permissible Exposure (*MPE*) for a pulsed laser radiation depends on various parameters such as the emitted wavelength, the pulse repetition frequency (*F*), the duration of single pulse (*t*), the total duration of the pulse train (*T*), and the total exposure time (T_{max}). There are three separate criteria to be fulfilled, namely:

1. The *MPE/pulse* is limited by its value for each single pulse (single pulse limit).
2. The *MPE/pulse* is limited by its value for all exposure times between *T* and T_{max} , divided by the number of pulses *N* during this time period (average power limit).
3. The *MPE/pulse* is limited by its value for a single pulse, multiplied by $N^{-1/4}$ where *N* the number of pulses that occur over time T_{max} (repetitive pulse limit).

and the enforced MPE is the lowest among those identified by these criteria.

Let $T_{max} = 0.25 \text{ s}$ be the time to close the eyes dazzled by a casual exposure to visible laser radiation (blink effect time). For a repetition frequency of 1 kHz, this physiological response time of the human eye to dazzling light gives $N = 250$. In Table 2, the MPE limits in the enforced legislation are reported. If the emission takes place simultaneously on more wavelengths, the MPE is additive.

In Table 3 the maximum allowable values for our system are reported. The most compelling criterion appears to be the third. Using (1), the safety condition for the eyes (eye safety) is verified for $r \geq 1500 \text{ m}$.

Acknowledgements. The authors express their sincere thanks to Dr. Gerardo De Canio, Dr. Alessandro Zambotti and the staff of the Laboratory of Qualification of Materials, Components and Systems of ENEA for the great willingness to collaborate in the project; to the Department of Earth and Environment of the National Research Council for financial support; to Dr. Gelsomina Pappalardo and the staff at CNR-IMAA for their availability to validate the system and for useful discussions on the interpretation of the data, and finally, to the Italian Aeronautica Militare, and in particular the Reparto Sperimentale Velo, for uninterrupted support, contribution and great professionalism displayed in bringing to a successful end the system deployment in a short time.

References

- Alvarez, J. M., Vaughan, M. A., Hostetler, C. A., Hunt, W. H., Winker, D. M.: Calibration technique for polarization-sensitive lidars. *J. Atmos. Ocean. Technol.* 23, 683699, 2006.

- Ansmann, A., Riebesell, M., Weitkamp, C. : Measurement of atmospheric aerosol extinction profiles with a Raman lidar, *Opt. Lett.* 15, 746-748, 1990
- 880 Ansmann, A., Tesche, M., Groß, S., Freudenthaler, Seifert, V. P., Hiebsch, A., Schmidt, J., Wandinger, U., Mattis, I., Müller, D., Wiegner M. : The 16 April 2010 major volcanic ash plume over central Europe: EARLINET lidar and AERONET photometer observations at Leipzig and Munich, Germany, *Geophys. Res. Lett.*, 37, L13810, doi:10.1029/2010GL043809, 2010.
- 885 Ansmann, A., M. Tesche M., Seifert, P., Groß, S., Freudenthaler, V., Apituley, A., Wilson, K. M., Serikov, I., Linné H., Heinold, B., Hiebsch, A., Schnell, F., Schmidt J., Mattis, I., Wandinger, U., Wiegner, M. : Ash and fine-mode particle mass profiles from EARLINET-AERONET observations over central Europe after the eruptions of the Eyjafjallajökull volcano in 2010, *J. Geophys. Res.*, 116, D00U02, doi:10.1029/2010JD015567, 2011.
- Behrendt, A., Nakamura, T. : Calculation of the calibration constant of polarization lidar and its dependency on atmospheric temperature. *Optics Exp.* 10, 805817, 2002
- 895 Biavati, G, Di Donfrancesco, G., Cairo, F., and Feist, D. G. : Correction scheme for close-range lidar returns, *Appl. Opt.* 50, 5872-5882, 2011.
- Biele, J., Beyerle, G. and Baumgarten G. : Polarization lidar: corrections of instrumental effects. *Optics Exp.*, 7, 427435, 2000.
- 900 Böckmann, C., Wandinger, U. , Ansmann A., Bösenberg J., Amiridis, V., Boselli, A., Delaval, A., De Tomasi, F., Frioud, M., Grigorov, I. V., Hagard, A., Horvat, M., Iarlori, M., Komguem, L., Kreipl, S., Glarchevêque, G., Matthias, V., Papayannis, A., Pappalardo, G., Rocadenbosch, F., Rodrigues, J. A., Schneider, J., Shcherbakov, V., Wiegner, M. : Aerosol Lidar Intercomparison in the Framework of the EARLINET Project. 2. Aerosol Backscatter Algorithms, *Appl. Opt.* 43, 977-989, 2004.
- Browell, E. V., Butler, C. V., Ismail, S., Robinette, P. A., Carter, A. F., Higdon, N. S., Toon, O. B., Schoeberl, M. R., Tuck, A. F. : Airborne lidar observations in the wintertime arctic stratosphere-Polar stratospheric Clouds, *Geophys. Res. Lett.*, 17, 385-388, 10.1029/GL017i004p00385, 1990.
- 915 Bukowiecki, N., Zieger, P., Weingartner, E., Jurányi, Z., Gysel, M., Neining, B., Schneider, B., Hueglin, C., Ulrich, A., Wichser, A., Henne, S., Brunner, D., Kaegi, R., Schwikowski, M., Tobler, L., Wienhold, F. G., Engel, I., Buchmann, B., Peter, T., Baltensperger, U. : Ground-based and airborne in-situ measurements of the Eyjafjallajökull volcanic aerosol plume in Switzerland in spring 2010, *Atmos. Chem. Phys.*, 11, 10011-10030, doi:10.5194/acp-11-10011-2011, 2011.
- 920 Cairo, F., Congeduti, F., Poli, M., Centurion, S., Di Donfrancesco, G. : A survey of signal-induced noise in photomultiplier detection of wide dynamics luminous signals, *Rev. Sci. Instr.*, 67, 3274-3280, DOI:10.1063/1.1147408, 1996.
- 925 Cairo, F., Di Donfrancesco, G., Adriani, A., Pulvirenti, L., Fierli, F. : Comparison of Various Linear Depolarization Parameters Measured by Lidar, *Appl. Opt.* 38, 4425-4432, 1999.
- Cavaliere, O., Di Donfrancesco, G., Cairo F., Fierli F., Snels M., Viterbini M., Cardillo F., Chatenet B., Formenti P., Marticorena, B., Rajot, J. L. : The AMMA MULID network for aerosol characterization in West Africa, *Int. J. Remote Sens.*, 32, 5485-5504, DOI:10.1080/01431161.2010.502156, 2011.
- 930 Cavaliere O., Cairo F., Fierli F., Di Donfrancesco, G., Snels M., Viterbini M., Cardillo F., Chatenet B., Formenti P., Marticorena, B., Rajot, J. L. : Variability of aerosol vertical distribution in the Sahel, *Atmos. Chem. Phys.*, 10, 12005-12023, 2010
- Chazette, P., Sanak J., Dulac, F.: New Approach for Aerosol Profiling with a Lidar Onboard an Ultralight Aircraft : Application to the African Monsoon Multidisciplinary Analysis, *Environ. Sci. Technol.*, 41, 83358341, DOI: 10.1021/es070343y, 2007.
- Chen, W. N., Chiang, C. W., Nee, J. B.: The lidar ratio and depolarization ratio for cirrus clouds, *Appl. Opt.*, 41, 64706497, 2002.
- Di Liberto L., Angelini F., Pietroni I., Cairo F., Di Donfrancesco G., Viola A., Argentini S., Fierli F., Gobbi G., Maturilli M., Neuber R., Snels M. : Estimate of the Arctic planetary boundary layer height by a micro Lidar : a case study, *Ad. Met.*, in press.
- di Sarra, A., Di Iorio T., Cacciani M., Fiocco G., Fua D. : Saharan dust profiles measured by lidar from Lampedusa, *J. Geophys. Res.*, 106, 10,335-10,347, 2001
- Donovan, D. P., Whiteway, J. A., Carswell, A. I. : Correction for nonlinear photon-counting effects in lidar systems, *Appl. Opt.* 32, 6742-6753, 1993.
- Flamant, C., Pelon, J., Chazette, P., Trouillet, V., Quinn, P., Frouin, R., Bruneau, D., Leon, J.-F., Bates, T., Johnson, J., Livingstone, T. : Airborne lidar measurements of aerosol spatial distribution and optical properties over the Atlantic Ocean during a European pollution outbreak of ACE-2, *Tellus*, 52B, 662677, 2000.
- Flentje, H., Claude, H., Elste, T., Gilge, S., Köhler, U., Plass-Dülmer, C., Steinbrecht, W., Thomas, W., Werner, A., Fricke, W. : The Eyjafjallajökull eruption in April 2010 detection of volcanic plume using in-situ measurements, ozone sondes and lidar-ceilometer profiles, *Atmos. Chem. Phys.*, 10, 1008510092, doi:10.5194/acp-10-10085-2010, 2010.
- Freudenthaler, V., Esselborn, M., Wiegner, M., Heese, B., Tesche, M., Ansmann, A., Müller, D., Althausen, D., Wirth, M., Fix, A., Ehret, G., Knippertz, P., Toledano, C., Gasteiger, J., Garhammer, M., and Seefeldner, M.: Depolarization ratio profiling at several wavelengths in pure Saharan dust during SAMUM 2006. *Tellus*, 61B, 165179, 2009.
- Gasteiger, J., Gross, S., Freudenthaler, V., Wiegner, M. : Volcanic ash from Iceland over Munich: mass concentration retrieved from ground-based remote sensing measurements, *Atmos. Chem. Phys.*, 11, 2209-2223, doi:10.5194/acp-11-2209-2011, 2011.
- Gross, S., Freudenthaler, V., Wiegner, M., Gasteiger, J., Geiss, A., Schnell, F. : Dual-wavelength linear depolarization ratio of volcanic aerosols: lidar measurements of the Eyjafjallajökull plume over Maisach, Germany, *Atmos. Environ.* 48, 85-96, 2011.
- 980 Immler, F., Schrems, O. : Vertical profiles, optical and microphysical properties of Saharan dust layers determined by a ship-borne lidar, *Atmos. Chem. Phys.*, 3, 1353-1364, 2003.
- Iwasaka, Y., Shibata, T., Nagatani, T., Shi, G.-Y., Kim, Y. S., Matsuki A., Trochkin D., Zhang D., Yamada M., Nagatani M., Nakata H., Shen Z., Li G., Chen B., Kawahira and K. : Large depolarization ratio of free tropospheric aerosols over the Taklamakan desert revealed by lidar measurements: possible diffusion and transport of dust particles. *J. Geophys. Res.* 108, doi:10.1029/2002JD003267, 2003.
- Klett, J. D. : Stable analytical inversion solution for processing lidar returns, *Appl. Opt.* 20, 211-220, 1981.
- Lilley, M., Lovejoy, S., Strawbridge, K., Schertzer, D. : 23/9 dimensional anisotropic scaling of passive admixtures using lidar data of aerosols, *Phys. Rev. E* 70, DOI: 10.1103/70, 0363071-7,

- 2004.
- 995 Madonna, F., Amodeo, A., Boselli, A., Cornacchia, C., Cuomo, V.,¹⁰⁵⁵
D'Amico, G., Giunta, A., Mona, L., Pappalardo, G. : CIAO: the
CNR-IMAA advanced observatory for atmospheric research, *Atmos. Meas. Tech.*, 4, 1191-1208, doi:10.5194/amt-4-1191-2011,
1000 2011.
- Mattis, I., Ansmann, A., Muller, D., Wandinger, U., Althausen, D.,¹⁰⁶⁰
: Dual wavelength Raman lidar observations of the extinction-to
backscatter ratio of Saharan dust, *Geophys. Res. Lett.*, 29, 1306,
doi: 10.1029/2002GL014721, 2002.
- 1005 Marengo, F., Santacesaria, S., Bais A., F., Balis, D., di Sarra, A.,
Papayannis, A., Zerefos, C. : Optical properties of tropospheric¹⁰⁶⁵
aerosols determined by lidar and spectrophotometric measure-
ments (Photochemical Activity and Solar Ultraviolet Radiation
campaign), *Appl. Opt.* 36, 6875-6886 1997.
- 1010 Marengo, F., Johnson, B., Turnbull, K. Newman, S. Haywood, J.,
Webster, H., Ricketts, H. : Airborne lidar observations of the¹⁰⁷⁰
2010 Eyjafjallajökull volcanic ash plume, *J. Geophys. Res.* 116,
10.1029/2011JD016396, 2011.
- McGill, M.J., Hlavka D.L., Hart W.D., Spinhirne J.D., Scott V.S.,
1015 Schmid B. : The Cloud Physics Lidar: Instrument descrip-
tion and initial measurement results, *Appl. Opt.*, 41, 3725-3734,¹⁰⁷⁵
2002.
- Moerl, P., Reinhardt, M. E., Renger, W., Schellhase, R. : The use
of the airborne lidar ALEX-F for aerosol tracing in the lower
1020 troposphere, *Contr. Atmos. Phys.*, 45, 403410, 1981.
- Mona, L., Pappalardo, G., Amodeo, A., D'Amico, G., Madonna,¹⁰⁸⁰
F., Boselli, A., Giunta, A., Russo, F., and Cuomo, V.: One year
of CNR-IMAA multi-wavelength Raman lidar measurements in
coincidence with CALIPSO overpasses: Level 1 products com-
1025 parison, *Atmos. Chem. Phys.*, 9, 72137228, doi:10.5194/acp-9-
7213-2009, 2009.¹⁰⁸⁵
- O' Connor, E. J., Illingworth, A. J., Hogan, R. J.: A technique for
autocalibration of cloud lidar. *J. Atmos. Oc. Tech.*, 21,777786,
2004.
- 1030 Petersen, G. N.: A short meteorological overview of the Eyjafjal-
lajökull eruption 14 April-23 May 2010, *Weather*, 65, 203-207,¹⁰⁹⁰
2010.
- Reichardt, J., Baumgart, R., McGee, T. J. : Three signal method for
accurate measurements of depolarization ratio with lidar. *Appl.*
1035 *Opt.* 42, 49094913, 2003.
- Renger, W., Kiemle, C., Schreiber, H. G., Wirth, M., Morl,¹⁰⁹⁵
: Correlative measurements in support of LITE using the air-
borne backscatter lidar ALEX, in: *Advances in Atmospheric Re-
mote Sensing with Lidar*, edited by: Ansmann, A., Neuber, R.,
1040 Rairoux, P., and Wandinger, U., Springer-Verlag, Berlin, 165168,
1997.
- Russell, P. B., Swissler, T. J., McCormick, M. P. : Methodology
for error analysis and simulation of lidar aerosol measurements,
Appl. Opt. 18, 3783-3797, 1979.
- 1045 Sassen, K. : The polarization lidar technique for cloud research:
a review and current assessment, *Bull. Am. Meteorol. Soc.*,
72,1848-1866, 1991.
- Schumann, U., Weinzierl, B., Reitebuch, O., Schlager, H., Minikin,
A., Forster, C., Baumann, R., Sailer, T., Graf, K., Mannstein,
1050 H., Voigt, C., Rahm, S., Simmet, R., Scheibe, M., Lichtenstern,
M., Stock, P., Rüba, H., Schäuble, D., Tafferner, A., Rautenhaus,
M., Gerz, T., Ziereis, H., Krautstrunk, M., Mallaun, C., Gayet,
J.-F., Lieke, K., Kandler, K., Ebert, M., Weinbruch, S., Stohl,
A., Gasteiger, J., Gross, S., Freudenthaler, V., Wiegner, M., Ans-
mann, A., Tesche, M., Olafsson, H., and Sturm, K. : Airborne ob-
servations of the Eyjafjalla volcano ash cloud over Europe during
air space closure in April and May 2010, *Atmos. Chem. Phys.*,
11, 2245-2279, doi:10.5194/acp-11-2245-2011, 2011.
- Snels M., Cairo F., Colao F., Di Donfrancesco G. : Calibration
method for depolarization lidar measurements, *Int. J. Remote
Sens.*,30, 5725-5736, DOI: 10.1080/01431160902729572, 2009.
- Stachlewska, I. S., Neuber, R., Lampert, A., Ritter, C., Wehrle, G. :
AMALi the Airborne Mobile Aerosol Lidar for Arctic research,
Atmos. Chem. Phys., 10, 29472963, 2010.
- Tull, R. G. : A comparison of Photon counting and Current Mea-
suring techniques in Spectrometry of Faint Sources, *Appl. Opt.*
7, 2023-2029, 1968.
- Villani, M. G., Mona L., Maurizi A., Pappalardo G., Tiesi A.,
Pandolfi M., DiSodoro M., Cuomo V., Tampieri F. : Trans-
port of volcanic aerosol in the troposphere: The case study
of the 2002 Etna plume, *J. Geophys. Res.*, 111, D21102,
doi:10.1029/2006JD007126, 2006.
- Wandinger, U., Muller, D., Bockmann, C., Althausen, D., Matthias,
V., Bosenberg, J., Weiss, V., Fiebig, M., Wendisch, M., Stolhl,
A., Ansmann, A. : Optical and microphysical characterization
of biomass-burning and industrial-pollution aerosols from multi
wavelength lidar and aircraft measurements, *J. Geophys. Res.*,
107, 8125, doi: 10.1029/2000JD000202, 2002.
- Weinzierl, B, Sauer, D., Esselborn, M., Petzold, A., Veire, A., Rose,
M., Mund, S., Wirth, M., Ansmann, A., Tesche, M., Gross, S.,
Freudenthaler, V : Microphysical and optical properties of dust
and tropical biomass burning aerosol layers in the Cape Verde re-
gion - an overview of the airborne in situ and lidar measurements
during SAMUM-2, *Tellus B*,63, 589-618, doi:10.1111/j.1600-
0889.2011.00566.x, 2011.
- Wiegner, M., Gasteiger J., Kandler, K., Weinzierl, B., Rasp, K., Es-
selborn, M., Freudenthaler V., Heese, B., Toledano, C., Tesche,
M., Althausen, D.: Numerical simulations of optical properties
of Saharian dust aerosols with emphasis on lidar applications,
Tellus B, 61, 180-194, 2009.
- Wiegner, M., Gasteiger J., Groß, F., Schnell F.: Characterization of
the Eyjafjallajökull ash-plume: Potential of lidar remote sensing.
J. Phys. Chem. Earth, doi:10.1016/j.pce.2011.01.006, in press.
- Young, A. T. : Revised depolarization corrections for atmospheric
extinction, *Appl. Opt.*, 19, 3247-3248, 1980.

Table 1. Synopsis of the system specifications

Technical specifications of the RAMNI system	
Detected Wavelengths	1064, 608 and 532 nm (two polarizations)
Laser Type	Nd-YAG (1064 and 532 nm)
Pulse duration	1 ns
Laser repetition rate	up to -1 kHz
Laser output energy	0.8 mJ at 1064 nm; 0.35 mJ at 532 nm
Telescope diameter	20 cm
Telescope type	F/1.5 Newtonian
Telescope field of view	0.7 mrad
Beam divergence	0.4 mrad, full angle <i>·7expanded</i>
Filter Bandwidth	2 nm
Vertical Resolution	From 7.5 to 150 in photoncounting mode From 1.875 to 15 m in current mode
Vertical range	1024 <i>·VerticalResolution</i>
Time resolution	down to 1s

Table 2. Values of the MPE for direct eye exposure to laser radiation, according to Sicherheitstechnischen Festlegungen und Anlagen fr Lasergerate, VDE 1998 Beuth-Verlag, ISSN 0178-224X (Stachlewska et al., 2010).

	Criterion 1	Criterion 2	Criterion 3
Emission duration	$10^{-9} - 10^{-7} s$	$10^{-9} - 10^{-7} s$	$10^{-3} - 10s$
Wavelength 315-400 nm	$5.6 \cdot t^{0.25} \cdot 10^3 Jm^{-2}$	$5.6 \cdot t^{0.25} \cdot 10^3 Jm^{-2}$	-
Wavelength 400-550 nm	$5 \cdot 10^{-3} Jm^{-2}$	$18 \cdot t^{0.75} Jm^{-2}$	$N^{-0.25} \cdot 5 \cdot 10^{-3} Jm^{-2}$
Wavelength 1050-1150 nm	$5 \cdot 10^{-2} Jm^{-2}$	$90 \cdot t^{0.75} Jm^{-2}$	$N^{-0.25} \cdot 5 \cdot 10^{-2} Jm^{-2}$

Table 3. Maximum permissible exposure for our system

	532 nm	1064 nm	tot
MPE ₁	$5 \cdot 10^{-3} Jm^{-2}$	$50 \cdot 10^{-3} Jm^{-2}$	$55 \cdot 10^{-3} Jm^{-2}$
MPE ₂	$6.4 \cdot 10^{-3} Jm^{-2}$	$31.8 \cdot 10^{-3} Jm^{-2}$	$38.2 \cdot 10^{-3} Jm^{-2}$
MPE ₃	$1.25 \cdot 10^{-3} Jm^{-2}$	$12.5 \cdot 10^{-3} Jm^{-2}$	$13.75 \cdot 10^{-3} Jm^{-2}$

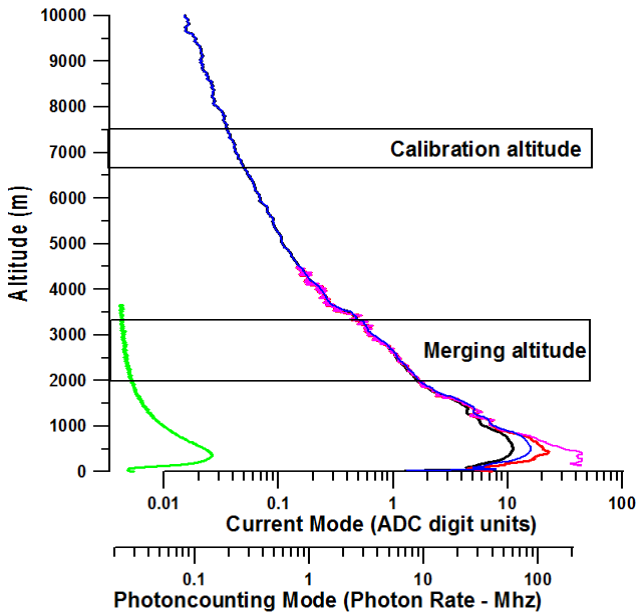


Fig. 1. Atmospheric elastic (300 s average) and Raman (1500 s average) backscatter return. Photon counting acquisition for the elastic backscattering, before (black) and after (blue) dead time correction. Current acquisition for the elastic backscattering, before (red) and after (purple) partial overlap correction. The green solid line reports the Raman backscattering acquired in photoncounting mode. The data were acquired on 7 Dec at 20:20, and represent (photon-counting) or are proportional to (current) the photon flux induced by a single laser shot.

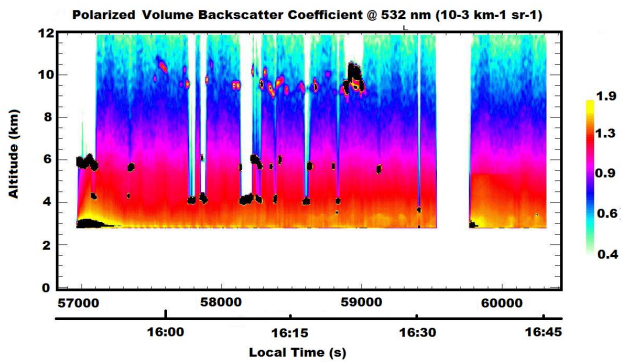


Fig. 2. Time vs altitude curtain of total (aerosol + molecular) backscatter coefficient, for the flight on 9 December 2010.

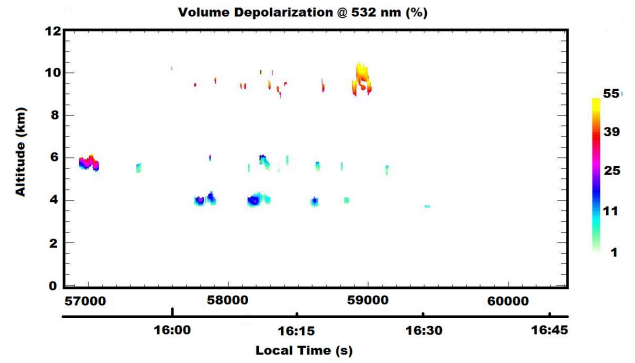


Fig. 3. Time vs altitude curtain of total depolarization ratio, for the flight on 9 December 2010

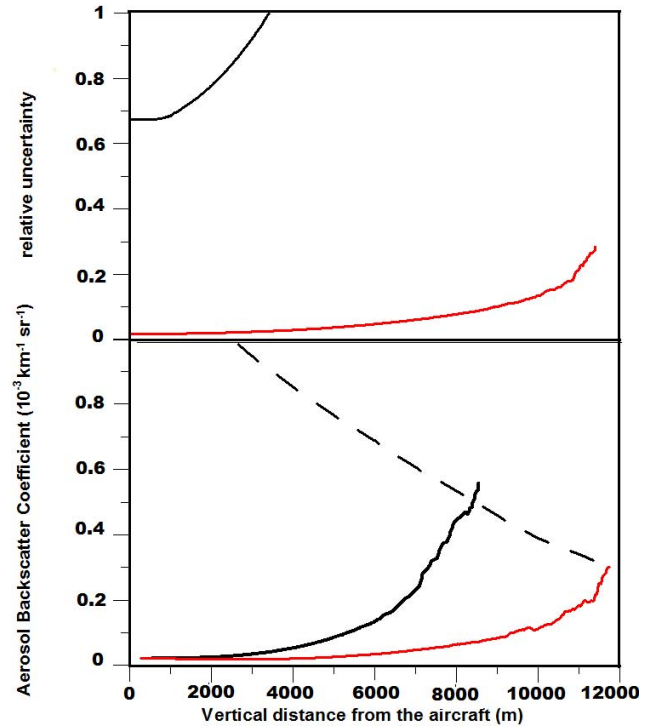


Fig. 4. Top panel: Relative uncertainty for Volume Backscatter Coefficient (red line) and Volume Depolarization (black line). Bottom panel: Curves of threshold Aerosol Backscatter coefficient, defined as the one giving 100 % uncertainty, function of the distance from the aircraft (black solid line for 5 s integration time, red solid line for 60 s integration time). The dotted line represent the molecular backscatter coefficient values, and is reported for comparison. These curves were computed from the data from the first flight of RAMNI, when the aircraft was flying at 2150 m altitude.

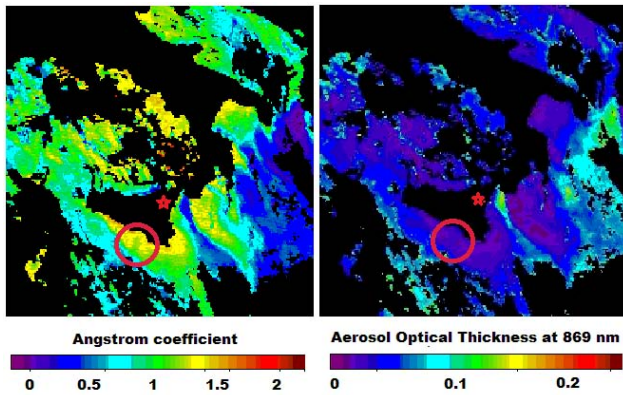


Fig. 5. Color coded Aerosol Optical Thickness (right panel) and (531-869 nm) Angstrom coefficient (left panel) by MODIS Terra, on 14 December 2010 at 12:10 UT. The circles highlight where an enhancement of AOD and a variation of the Angstrom coefficient with respect to its background values can be discerned, originated by the volcanic plume from Etna. The star show the position of the volcano.

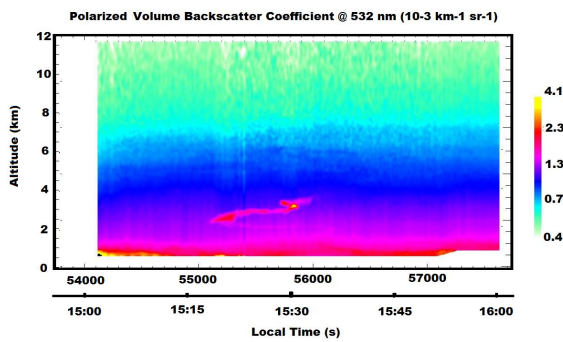


Fig. 6. Time vs altitude curtain of Parallel Volume Backscattering coefficient, for the flight on 14 January 2011

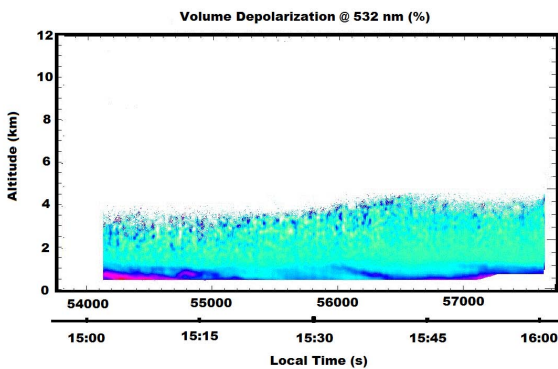


Fig. 7. Time vs altitude curtain of total depolarization ratio, for the flight on 14 January 2011

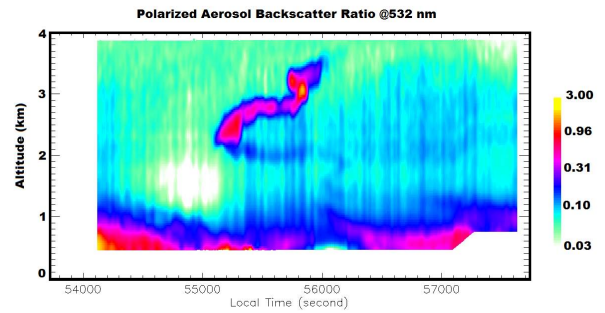


Fig. 8. Time vs altitude curtain of the Aerosol Backscattering coefficient, for the flight on 14 January 2011



Fig. 9. A picture of Mount Etna taken on 14 January 2010 from onboard the C27J- Spartan aircraft (courtesy T. Col. F. Palazzi).

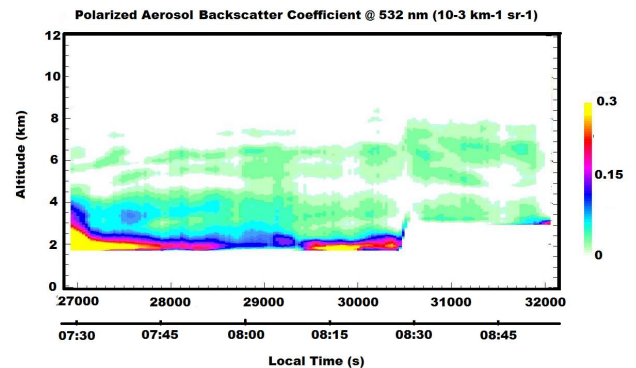


Fig. 10. Time vs altitude curtain of Aerosol Backscattering coefficient, for the flight on 28 May 2011

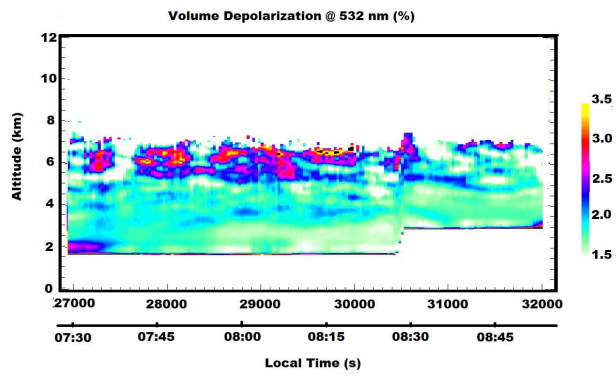


Fig. 11. Time vs altitude curtain of total depolarization ratio, for the flight on 28 May 2011