

This discussion paper is/has been under review for the journal Atmospheric Measurement Techniques (AMT). Please refer to the corresponding final paper in AMT if available.

An improved method for retrieving nighttime aerosol optical thickness from the VIIRS Day/Night Band

T. M. McHardy¹, J. Zhang¹, J. S. Reid², S. D. Miller³, E. J. Hyer², and R. E. Kuehn⁴

¹Department of Atmospheric Sciences, University of North Dakota, Grand Forks, ND, USA

²Marine Meteorology Division, Naval Research Laboratory, Monterey, CA, USA

³Cooperative Institute for Research in the Atmosphere, Colorado State University, Fort Collins, CO, USA

⁴Cooperative Institute for Meteorological Satellite Studies, University of Wisconsin-Madison, Madison, WI, USA

Received: 17 April 2015 – Accepted: 27 April 2015 – Published: 20 May 2015

Correspondence to: J. Zhang (jzhang@atmos.und.edu)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Using Visible/Infrared Imaging Radiometer Suite (VIIRS) Day/Night Band (DNB) data, a method, dubbed the “variance method”, is developed for retrieving nighttime aerosol optical thickness (τ) values through the examination of the dispersion of radiance values above an artificial light source. Based on the improvement of a previous algorithm, this updated method derives a semi-quantitative indicator of nighttime τ using artificial light sources. Nighttime τ retrievals from the newly developed method are inter-compared with an interpolated value from late afternoon and early morning ground observations from four AEROSOL ROBOTIC NETWORK (AERONET) sites as well as column-integrated τ from one High Spectral Resolution Lidar (HSRL) site at Huntsville, AL during the NASA Studies of Emissions and Atmospheric Composition, Clouds and Climate Coupling by Regional Surveys (SEAC⁴RS) campaign, providing full diel coverage. Sensitivity studies are performed to examine the effects of lunar illumination on VIIRS τ retrievals made via the variance method, revealing that lunar contamination may have a smaller impact than previously thought, however the small sample size of this study limits the conclusiveness thus far. VIIRS τ retrievals yield a coefficient of determination (r^2) of 0.60 and a root-mean-squared-error (RMSE) of 0.18 when compared against straddling daytime-averaged AERONET τ values. Preliminary results suggest that artificial light sources can be used for estimating regional and global nighttime aerosol distributions in the future.

1 Introduction

Recently, observationally based nighttime aerosol studies have drawn increasing attention from the research community (e.g. Zhang et al., 2008a; Berkoff et al., 2011; Lee et al., 2012; Campbell et al., 2012; Johnson et al., 2013). Berkoff et al. (2011) and Barreto et al. (2013) present surface-based methods to estimate nighttime aerosol optical properties through measuring the attenuated moonlight using a modified ver-

AMTD

8, 5147–5178, 2015

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



sion of sun-photometers. Based on Berkoff et al. (2011), the NASA AErosol RObotic NETwork (AERONET, Holben et al., 1998) team is developing an operational nighttime aerosol retrieval capability (B. Holben, personal communication, 2015). While mineral dust can be detected and in part quantified from space by infrared means (e.g., Miller, 2003; Hansell et al., 2007; Lee et al., 2012), the recently launched Visible Infrared Imaging Radiometer Suite (VIIRS) instrument, equipped with a calibrated Day/Night Band (DNB), opens a new door for enabling shortwave nighttime aerosol retrievals from space-borne observations (e.g. Johnson et al., 2013).

The previously mentioned studies are motivated by an acutely felt need for nighttime aerosol observations. In particular, studies have shown notable improvements in aerosol forecasting through the assimilation of satellite aerosol products, mostly from daytime observations (e.g. Zhang et al., 2008b, 2011, 2014; Yumimoto et al., 2008; Uno et al., 2008; Benedetti et al., 2009; Schutgens et al., 2010; Sekiyama et al., 2010). To capture the diurnal cycle, the aerosol modeling community requires nighttime satellite aerosol data having broad spatial coverage and high temporal resolution to further advance aerosol, visibility, and air quality forecasts (e.g. Zhang et al., 2011, 2014). Johnson et al. (2013) were the first to outline a method for retrieving nighttime aerosol optical depth (τ) from the VIIRS DNB. In Johnson et al. (2013), the difference between VIIRS DNB radiances from an artificial light source and a dark background area adjacent to the light source over a cloud free sky are used to derive nighttime τ .

The algorithm used in the nighttime aerosol retrieval method of Johnson et al. (2013) is challenging to apply on a global scale for several reasons. First, near identical VIIRS pixels from different nights are needed from a selected artificial light source and the corresponding nearby background. To implement such a method operationally over a large study domain is difficult, as VIIRS DNB viewing geometries vary from day to day. This makes it difficult to select the same group of pixels daily. Second, the inherent variation within an artificial light source, especially for a large city comprised of hundreds of VIIRS pixels, is not considered. Thus, larger retrieval errors may be expected from complex artificial light sources. Third, the contribution from diffused artificial lights

needs to be computed, requiring a priori knowledge about aerosol types and aerosol absorbing properties.

In this study, modification to the Johnson et al. (2013) algorithm is proposed which considers the reduction of radiance contrast of VIIRS DNB pixels within a given nighttime artificial light source as a proxy for aerosol optical depth. This new method overcomes some of the issues encountered by Johnson et al. (2013) and is easier to implement on a global scale. The outline of this paper is as follows: Sects. 2, 3, and 4 describe the data used in this study, highlight the newly developed approach, and explore the sensitivity of radiance dispersion within a given light source to various parameters, respectively. Section 5 shows the inter-comparisons of the retrieved nighttime τ from the VIIRS DNB with AERONET and High Spectral Resolution Lidar (HSRL) observations. Considerations of uncertainty are included in Sect. 6 and Sect. 7 summarizes the salient findings of this research.

2 Datasets

This study combines VIIRS DNB satellite observations with ground-based sun photometers from four sites in the AERONET network and an HSRL instrument in Huntsville, AL deployed for the NASA Studies of Emissions and Atmospheric Composition, Clouds and Climate Coupling by Regional Surveys (SEAC⁴RS) campaign. Table 1 lists the locations, study periods, and instrumentation at Alta Floresta, Cape Verde, and Grand Forks (the three sites used in Johnson et al., 2013) as well as a fourth site in Huntsville, AL that is new to this study. Level 1.5 AERONET data were chosen in Johnson et al. (2013) as Level 2.0 data were not available for all desired sites during their respective study periods. We choose to use Level 2.0 AERONET data as it is now available and have included updated comparisons using data from Johnson et al. (2013) to maintain consistency between the two studies.

The nighttime AERONET τ values are estimated by taking the mean of the daytime AERONET retrievals straddling the VIIRS nighttime overpass (the daytime AERONET

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



τ values from the evening before the time of the VIIRS overpass and the morning after the time of the VIIRS overpass, as long as both AERONET retrievals are within 24 h of each other). If, for any reason, there is no available nighttime AERONET τ estimation, the corresponding VIIRS overpass is not included in this study.

Cloud-Aerosol Lidar with Orthogonal Polarization (CALIOP) nighttime τ data are not used as a validation tool in this study due to a lack of collocated CALIOP and VIIRS data pairs over the selected artificial light sources. Also, Omar et al. (2013) found significant AOD biases and differences in cloud clearing between CALIOP and AERONET. CALIOP will have a better signal-to-noise ratio for nighttime observations vs. daytime, but Campbell et al. (2012) found that CALIOP AOD had similar errors during both day and night. Even with a perfect CALIOP AOD, the small spatial coverage combined with the long repeat cycle eliminates CALIOP from the list of potential validation tools for this study.

Still, validating VIIRS nighttime τ retrievals with daytime AERONET data is not ideal, as the diurnal variation of τ is not considered. Thus, nighttime Wisconsin HSRL τ retrievals from Huntsville, Alabama (from 26 June–26 October, 2013) are used as an independent validation dataset. Different from CALIOP, HSRL measures both molecular and aerosol backscattering, and thus can be used to derive the ratio of extinction to backscatter (lidar ratio), which can be further used to yield a more reliable τ retrieval (Hair et al., 2008). Besides HSRL measurements, AERONET data are also available for the study period within close proximity to Huntsville, Alabama (UAHuntsville station, 34° N, 86° W). Thus, both Level 2.0 AERONET and HSRL data from Huntsville, Alabama (from June–October, 2013) are used in the validation efforts.

The HSRL data are processed as a ten-minute average at 30 m vertical resolution (i.e., each τ value is the 10 min average of extinction integrated from the surface up to a given altitude, every 30 m from the surface). Because of noise at higher altitudes, rather than simply taking the column-integrated τ value at the highest altitude, HSRL total column τ was estimated by taking the average of all column-integrated τ retrievals between altitudes of 10 and 15 km. HSRL profiles are visually inspected for the pres-

ence of clouds, and VIIRS overpasses that occurred on nights with no available HSRL data are not used.

Because the Wisconsin HSRL operates at a wavelength of 0.532 μm , both AERONET observed and VIIRS retrieved τ values are interpolated to 0.532 μm ($\tau_{0.532}$) using the Angstrom exponent relationship after solving for α :

$$\alpha = -\frac{\log\left(\frac{\tau_{\lambda_1}}{\tau_{\lambda_2}}\right)}{\log\left(\frac{\lambda_1}{\lambda_2}\right)} \quad (1)$$

Where α is the Angstrom exponent. λ_1 and λ_2 are 0.5 and 0.87 μm , respectively. τ_{λ_1} and τ_{λ_2} are the straddling daytime-averaged AERONET τ values at the respective wavelengths. In order to obtain $\tau_{0.532}$, Eq. (1) is rearranged such that

$$\tau_{\lambda} = \tau_{\lambda_0} \left(\frac{\lambda}{\lambda_0}\right)^{-\alpha} \quad (2)$$

Where, in this case, λ is 0.532 μm , λ_0 is 0.675 and 0.7 μm (the center of the DNB wavelength range) for AERONET and VIIRS retrievals, respectively, and τ_{λ_0} is the originally retrieved τ at those wavelengths.

The three sites (Alta Floresta, Cape Verde, and Grand Forks) from Johnson et al. (2013) were originally chosen to represent smoke, dust and, urban cases, respectively. It is important to note that they also vary in spatial extent (6–150 pixels). The Huntsville test site covers a significantly larger area (500 pixels) than the other three sites, allowing for detailed testing of the impact of city size to τ retrievals. Basic information about the four sites examined in this study is found in Table 1.

The VIIRS/DNB Sensor Data Record-SDR (SVDNB) and VIIRS/DNB SDR Geolocation Content Summary (GDNBO) data are used for providing radiance and geolocation values, respectively. The VIIRS Cloud Cover/Layers Height Data Content Summary (VCCLO) data are used for cloud-clearing of the selected VIIRS pixels. In addition to

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the calibrated pixel-level top-of-atmosphere radiance values, the VIIRS DNB data products include metadata on satellite and lunar geometry, specifically, satellite, solar, and lunar zenith angles, lunar illumination fraction, and quality assurance flags.

3 Methodology

- 5 Following Johnson et al. (2013), the satellite observed radiance is composed of three major components, as illustrated in Eq. (3).

$$I_{\text{sat}} = I_s e^{-\tau/\mu} + D + I_p \quad (3)$$

Here, τ is the total optical thickness, μ is the cosine of the satellite zenith angle, D is the additional diffuse radiance, I_p is the path radiance (including aerosol layer reflected moon light), and I_s is the surface upward radiance for an artificial light source. The first term from the right hand side of Eq. (3) represents the VIIRS observed surface radiance through direct attenuation. The second and the third terms from the right hand side of Eq. (3) show the diffuse and path radiances, respectively (Johnson et al., 2013). As mentioned in Johnson et al. (2013), I_s can be defined as:

$$I_s = \frac{r_s (\mu_0 F_0 e^{-\tau/\mu_0} + \mu_0 F_0 T(\mu_0)) + \pi I_a}{\pi(1 - r_s \bar{r})} \quad (4)$$

Where F_0 is the moon light at the Top of Atmosphere (TOA), μ_0 is the cosine of the lunar zenith angle, r_s is the surface reflectance and \bar{r} is the reflectance from the aerosol layer. $T(\mu_0)$ is the diffuse transmittance and I_a is the emission from the artificial light source. The first two terms from the numerator represent reflected direct and diffuse downward moonlight, respectively. Here we assume that emissions from artificial light sources (I_a) are stable throughout the respective study periods. Also, because pixels comprising a given city are within close proximity, we assume that total optical

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



a product of parallax effect, which was corrected with the release of terrain corrected geolocation data (released in early 2014). The difference between terrain-corrected and non-terrain-corrected geolocation data was determined to be sub-pixel in magnitude for Grand Forks. Therefore, the lack of terrain-corrected geolocation for the study periods in this study is not expected to introduce additional error.

As this study intends to examine the radiance contrast between pixels within a given artificial light source, a way to quantify the pixel-to-pixel differences (i.e., statistical dispersion) of radiance values within this light source is needed. A sensitivity study comparing optical thickness values calculated using different measures of statistical dispersion (not shown) determined that simple standard deviation (SD) produces the best results when compared against AERONET optical thickness values, therefore the Δ operator in Eqs. (5) and (6) is the “the SD of ...”.

The method described above, dubbed the “variance method”, is based on radiance values within a given artificial light source; therefore, it is necessary to determine which pixels comprise an artificial light source (“city pixels”). With potential automation in mind, it was decided that city pixels should be determined algorithmically. As suggested from Johnson et al. (2013), any pixel with a radiance value greater than 1.5 times the mean radiance of a given section of the VIIRS DNB granule enclosing the target city, and a radiance value greater than $0.25 \times 10^{-8} \text{ W cm}^{-2} \text{ sr}^{-1}$ is considered a city pixel. Figure 1 shows an example of artificial light detected using this method for Huntsville, Alabama. Because atmospheric conditions, and therefore VIIRS retrieved radiance values, change on a nightly basis, the number of city pixels for a given city may also change from night to night. In order to remain consistent, n brightest city pixels are used to compute the SD of radiance values for each nighttime VIIRS overpass within the study period of a given city, where n is the minimum number of algorithmically determined city pixels among overpasses that passed VIIRS cloud screening and visual inspection for each city. VIIRS cloud screening is performed by removing any pixels that were flagged as containing cloud at any level in the previously mentioned VCCLO product. Any VIIRS granule of an artificial light source that contains a cloudy

pixel in the vicinity of the artificial light source ($\sim 0.2^\circ$ latitude/longitude) is not used in this analysis.

The only values required to calculate τ from Eq. (6) over an artificial light source from a single VIIRS nighttime overpass are ΔI_{sat} and ΔI_{a} – the SD of radiance values of city pixels from that overpass and the stable (aerosol-, cloud-, and moon-free) SD of radiance values of the city pixels, respectively. The former is straightforward; the latter, however, presents multiple challenges. First and foremost, a nighttime atmosphere totally free of aerosols and lunar illumination is very unlikely, so error is inherent. Due to the lengths of the VIIRS data record and study periods used for this demonstration, the number of VIIRS overpasses that occur on even nearly aerosol-, cloud-, and moon-free nights within the study periods is extremely limited. It was therefore decided to take ΔI_{a} for each city as the mean of the two greatest SD of city pixel radiance values within the study period. The rationale behind this is that, in theory, the night with the lowest aerosol loading and least lunar illumination should have the most variance among city pixels. This is not always the case; however, the ΔI_{a} terms for all locations are taken on nights with τ values below 0.1 (according to the straddling daytime-averaged AERONET τ). A database of VIIRS retrieved radiance values for artificial light sources worldwide is currently being constructed to improve the robustness of this parameter.

Lastly, different from Johnson et al. (2013), only pixels with an artificial light source are needed. It is assumed that the diffuse radiance is spatially and temporally invariant within a given light source, and the derivative is zero. Thus, the newly proposed approach avoids the need for a priori knowledge of aerosol microphysical properties, making it more suitable for a larger scale analysis.

4 Sensitivity studies

The contrast of satellite retrieved radiances within an artificial light source (ΔI_{sat}) is used as the basic information content for the study. It is therefore necessary to examine the impacts of viewing angles and lunar illumination on ΔI_{sat} . For example; for

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



a given aerosol loading, do we expect a change in ΔI_{sat} for a moonless night vs. a night with significant moonlight? Figure 2 shows the variance of VIIRS retrieved radiance values of artificial light source pixels plotted against lunar fraction (from the VIIRS GDNBO product). There is a plausible relationship between variance and lunar fraction for the Alta Floresta, Grand Forks, and Cape Verde sites, but the Huntsville site displays no such relationship. A variance correction using a linear model was attempted for the three locations showing a potential relationship, however this correction produced results that are worse than those without the correction, and thus is not used hereafter.

It is anticipated that lunar illumination would introduce a change in ΔI_{sat} . To test this assumption, the ΔI_{sat} values over the Huntsville site are computed for nights with and without lunar illumination that have similar nighttime HSRL τ values. Thus, if the lunar illumination affects ΔI_{sat} under a similar aerosol loading scenario, a relationship between ΔI_{sat} and lunar fraction should be observed. An examination of the difference in the variance of VIIRS retrieved radiance values between nights with lunar illumination and nights without lunar illumination is shown in Fig. 3. Each data point consists of a pair (one light, one dark) of retrievals with similar HSRL total-column τ (within 0.008 of each other). Also, to minimize the effects of aerosol loading on the derived relationship, only data pairs that have HSRL τ values less than 0.25 (and greater than 0.16, the lowest HSRL τ among retrieval nights) are chosen. The y axis displays the relative difference in variance for each pair – this is a proxy for the contribution of lunar illumination to the VIIRS τ retrieval. The x axis is the difference in lunar fraction for each pair. Values of relative contribution range from approximately -0.12 (meaning the light night had lower variance) to approximately 0.42. While the sample size is small, this Figure displays no clear relationship between lunar fraction and VIIRS radiance dispersion.

To further test the effects of lunar illumination on the VIIRS retrievals, all retrievals were separated into two groups – those made during which the moon was present and those made without the presence of the moon. Retrievals made in the presence of the moon were determined as all nights having a lunar fraction greater than 15 % and having a lunar zenith angle below 89° . Table 2 shows the root-mean-squared-error (RMSE)

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of the VIIRS retrieved τ values against straddling daytime-averaged AERONET τ values separated by the presence of the moon, as well as data counts for each subset separated by location. Retrievals were not divided further (such as in Fig. 5) in order to keep the sample size in each subsection sufficiently large and to prevent locational bias. The RMSE for retrievals made on nights with significant lunar illumination is nearly 0.1 lower than for nights without significant lunar illumination. With this small sample size, lunar illumination cannot be ruled out as a source of retrieval error; however, our tests find no evidence for degraded retrieval performance under moonlit conditions.

Similar to Johnson et al. (2013), the relationship in between ΔI_{sat} and viewing geometry is studied. Figure 4 shows ΔI_{sat} as a function of satellite zenith angle for Huntsville, Alta Floresta, Grand Forks, and Cape Verde, respectively. Similar to what is reported by Johnson et al. (2013), no viewing angle dependence is found for ΔI_{sat} for Alta Floresta and Cape Verde. Huntsville also does not display a dependence on viewing geometry. Again, as in the previously mentioned study, a significant positive relationship does exist between ΔI_{sat} and the satellite zenith angle for Grand Forks. The reason for this relationship, as suggested from Johnson et al. (2013), is still not known and is left to future research once a larger analysis sample is available.

5 Results

As the first step, the VIIRS DNB nocturnally retrieved τ values at $0.7 \mu\text{m}$ ($\tau_{0.7}$) derived based on Eq. (6) are inter-compared with the straddling daytime-averaged AERONET τ at $0.675 \mu\text{m}$ ($\tau_{0.675}$) values. Figure 5a shows VIIRS retrieved $\tau_{0.7}$ values plotted against the corresponding straddling daytime-averaged AERONET $\tau_{0.675}$ for Huntsville (square), Alta Floresta (circle), and Grand Forks (“x”). Cape Verde (Fig. 5b, asterisk) is isolated, as it is comprised of significantly fewer pixels than the other locations. It is suspected that the cause of the poor performance of the VIIRS τ retrievals over Cape Verde is due to the inherent weakness in calculating statistical variance with such a small sample size. This issue is further explored in Sect. 6. The coefficient of

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



determination (r^2) of the VIIRS retrieved nighttime $\tau_{0.7}$ for all locations and straddling daytime-averaged AERONET $\tau_{0.675}$ is 0.60, with a RMSE of 0.18. The r^2 values for Huntsville, Alta Floresta, Grand Forks, and Cape Verde are 0.63, 0.72, 0.38, and 0.43, with RMSEs of 0.04, 0.13, 0.06, and 0.40, respectively. It is noted that because ΔI_a (the “stable” upwelling radiance from the artificial light source) for each city is taken from the average of two nights within the study period as explained above, there is one VIIRS τ retrieval for each location that is at or below 0, which is not physically possible, and one VIIRS τ retrieval slightly above 0. These retrievals were not removed for the calculations of r^2 , RMSE, or best-fit lines, and do negatively impact the results.

One of the main purposes of this study is a comparison between the “variance method” developed here and the method presented in Johnson et al. (2013, hereafter “background method”). Table 3 shows the r^2 , RMSE, and best-fit slope of nighttime $\tau_{0.7}$ retrievals made using the variance method (Table 3a) and nighttime $\tau_{0.7}$ retrievals made using the background method (Table 3b, Johnson et al., 2013) compared against the corresponding straddling daytime-averaged AERONET $\tau_{0.675}$ values. Huntsville data is not included in Table 3b, as it is not reported in Johnson et al. (2013). For Alta Floresta (moderate aerosol loading, moderate size), the variance method performs better than the background method across the board. For Grand Forks (low aerosol loading, large size), the methods perform comparably. We suspect the poor performance of both methods over Grand Forks is due to the very low aerosol loading and relatively high error inherent in these methods. For Cape Verde (high aerosol loading, very small size), the background method performs significantly better than the variance method. Based on these results, it is hypothesized that the background method performs better for smaller or more isolated artificial light sources and the variance method performs better for larger artificial light sources. This hypothesis will be furthered investigated once a large scale analysis has been performed.

We have further evaluated the variance method with the use of HSRL data over Huntsville. Figure 6a shows VIIRS retrieved $\tau_{0.7}$ values interpolated to $0.532 \mu\text{m}$ ($\tau_{0.532}$), plotted against the corresponding time-averaged HSRL retrieved total-column

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



values are computed for the identified relatively aerosol free nights using the baseline defined number of brightest artificial light pixels. Then, a SD of ΔI_{sat} values ($\Delta\Delta I_{\text{sat}}$) is computed. $\Delta\Delta I_{\text{sat}}$ represents the relative stability of ΔI_{sat} values used in the VIIRS τ retrievals. Next, we repeat the process by incrementally reducing the number of artificial light pixels used in the analysis. For example, we reduce the number of pixels used for a Huntsville retrieval to 400 (as opposed to the original 509 pixels used) by taking the 400 brightest pixels out of the original 509 pixels. ΔI_{sat} is then computed for each night in Table 4 with the 400 brightest pixels treated as the artificial light source. The result of the exercise is shown in Fig. 8. In Fig. 8, the x axis is the number of brightest artificial light pixels used in computing $\Delta\Delta I_{\text{sat}}$ normalized by the number of pixels used in the actual retrieval for each respective location (see Table 4). The y axis is $\Delta\Delta I_{\text{sat}}$ normalized by the $\Delta\Delta I_{\text{sat}}$ from the baseline cases. It is clear from Fig. 8 that the normalized $\Delta\Delta I_{\text{sat}}$ increases as the number of pixels used in the retrieval decreases. This increased variability translates into a less reliable retrieval. It is hypothesized that this is because simple SD as a quantification of statistical dispersion is more robust as the sample size increases. Therefore, it is suggested that only medium to large cities (on the order of 10 s of VIIRS pixels in spatial coverage at least) are used for nighttime retrievals via the method outlined in this study; however, an exact size has yet to be determined and is a topic left for future studies.

6 Uncertainties and limitations

Similar to Johnson et al. (2013), by taking the total derivative of Eq. (6), we have

$$d\tau = \mu \left(\frac{dC}{C} + \frac{d\Delta I_a}{\Delta I_a} - \frac{d\Delta I_{\text{sat}}}{\Delta I_{\text{sat}}} \right) \quad (7)$$

Thus, the uncertainty in the estimated VIIRS τ is a combined relative uncertainty from the correcting factor C (only applied to Grand Forks), as well as relative errors in the SD of satellite radiance and surface outgoing radiance within an artificial light source,

weighted by cosine of viewing angle. For example, a 10% uncertainty in the derived ΔI_s could introduce an error in VIIRS τ of 0.05 at the viewing angle of 60° ($\mu = 0.5$), and at nadir, the retrieved error increases to 0.1.

Still, there are major issues that need to be explored that could potentially limit implementation of the research presented in this paper. For example, ΔI_a , which is the surface artificial light source emission, is assumed to be invariant through the study period. However, ΔI_a may indeed, and almost certainly does, change with time and viewing geometry (see, e.g. <http://www.nasa.gov/content/goddard/satellite-sees-holiday-lights-brighten-cities/>). Thus, to fully investigate this problem, a careful analysis of the spatial and temporal variations of artificial light sources is needed. Other currently unresolved factors related to the artificial light sources that may introduce uncertainty include an unexpected increase in the artificial light emissions (e.g., a large scale fire event). In this study, city pixels are determined algorithmically using purely radiance values, which means that the exact same locations on the earth were not necessarily chosen for each retrieval. While there may be a way to implement official boundaries into determining which pixels are “city pixels”, cities often do not simply end at boundaries. These sources of uncertainty are in addition to previously mentioned relationships due to lunar and satellite variables.

Cloud contamination is likely to be another major source of uncertainty. With only limited visible and infrared channels, nighttime cloud, and especially thin cirrus cloud, detections may be problematic. Since this is a case study, all VIIRS granules are visually inspected. However, to fully automate the process, additional cloud screening checks will most likely be needed, which will require the use of other VIIRS channels or data from other sensors.

7 Conclusions

This paper presents a new method for using radiance values observed by the Visible/Infrared Imaging Radiometer Suite (VIIRS) Day/Night Band (DNB) over artificial

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



light sources to estimate nighttime aerosol optical thickness (τ). This method is based on theoretical radiative transfer equations for the retrieval of optical thickness using contrast reduction of radiances from artificial light sources within a close proximity. This study seeks to improve upon the shortcomings inherent in the method presented by Johnson et al. (2013), such as the difficulty of implementing said method over a large area in a timely manner. This study suggests:

1. Improvement agreements vis-à-vis Johnson et al. (2013) are found between VIIRS DNB nighttime τ and nighttime τ values estimated from AEROSOL ROBOTIC NETWORK (AERONET) and High Spectral Resolution Lidar (HSRL) measurements. This indicates that the variance method can be used as a way of estimating nighttime aerosol properties.
2. A reasonable agreement is also found between nighttime HSRL τ values and nighttime AERONET τ values that are approximated based on daytime AERONET data. Thus, daytime AERONET τ observations can be used semi-quantitatively as validation for nighttime τ retrievals when other options are not present.
3. The proposed algorithm has its limitations. Expected uncertainties originating from lunar illumination, viewing geometry, and city characteristics. Various tests described in this study did not show any systematic impact of lunar illumination on the retrieval, but the small sample size prevents drawing strong conclusions from this. Also, to implement the algorithm in a regional or global analysis, an automated cloud screening scheme is needed to take the place of the manual cloud screening performed in this study.
4. While it is expected that lunar illumination has an effect on the retrievals presented in this study, the magnitude of contribution to retrieved τ values from lunar contamination is unclear. For example, data from the largest artificial light source (Huntsville), which has coincident nighttime HSRL measurements, display no relationships between lunar fraction and VIIRS retrieved τ values, relative error, or variance of radiance values.

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Lastly, an operational nighttime aerosol product from a passive remote sensing method is still non-existent. The Cloud-Aerosol Lidar with Orthogonal Polarization (CALIOP) does provide nighttime aerosol measurements, but the coverage of the non-scanning CALIOP observations is very limited (a single track roughly 70 m across). This limits the use of CALIOP data in aerosol modeling and forecasts. This study presents a novel technique for deriving nighttime aerosol properties from the VIIRS that, despite important limitations, shows skill in comparison with ground based measurements. The methods described here will lead to future improvements in developing a reliable nighttime aerosol product for the aerosol modeling community.

Acknowledgements. This research was funded by the Office of Naval Research Code 322 and the NASA project NNX14AJ13G. We thank the AERONET Team, especially those members in Grand Forks, Espargos, Huntsville, and Alta Floresta, for their work.

References

- Barreto, A., Cuevas, E., Damiri, B., Guirado, C., Berkoff, T., Berjón, A. J., Hernández, Y., Almansa, F., and Gil, M.: A new method for nocturnal aerosol measurements with a lunar photometer prototype, *Atmos. Meas. Tech.*, 6, 585–598, doi:10.5194/amt-6-585-2013, 2013.
- Benedetti, A., Morcrette, J.-J., Boucher, O., Dethof, A., Engelen, R. J., Fisher, M., Flentje, H., Huneeus, N., Jones, L., Kaiser, J. W., Kinne, S., Mangold, A., Razingerg, M., Simmons, A. J., and Suttie, M.: Aerosol analysis and forecast in the European Centre for Medium-Range Weather Forecasts Integrated Forecast System: 2. Data assimilation, *J. Geophys. Res.*, 114, D13205, doi:10.1029/2008JD011115, 2009.
- Berkoff, T. A., Sorokin, M., Stone, T., Eck, T. F., Raymond Hoff, R., Welton, E., and Holben, B.: Nocturnal aerosol optical depth measurements with a small-aperture automated photometer using the moon as a light source, *J. Atmos. Ocean. Tech.*, 28, 1297–1306, 2011.
- Campbell, J. R., Tackett, J. L., Reid, J. S., Zhang, J., Curtis, C. A., Hyer, E. J., Sessions, W. R., Westphal, D. L., Prospero, J. M., Welton, E. J., Omar, A. H., Vaughan, M. A., and Winker, D. M.: Evaluating nighttime CALIOP 0.532 μm aerosol optical depth and extinction coefficient retrievals, *Atmos. Meas. Tech.*, 5, 2143–2160, doi:10.5194/amt-5-2143-2012, 2012.

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Hair, J. W., Hostetler, C. A., Cook, A. L., Harper, D. B., Ferrare, R. A., Mack, T. L., Welch, W., Izquierdo, L. R., and Hovis, F. E.: Airborne High Spectral Resolution Lidar for profiling aerosol optical properties, *Appl. Optics*, 47, 6734–6752, doi:10.1364/AO.47.006734, 2008.
- Hansell, R. A., Ou, S. C., Liou, K. N., Roskovensky, J. K., Tsay, S. C., Hsu, C., and Ji, Q.: Simultaneous detection/separation of mineral dust and cirrus clouds using MODIS thermal infrared window data, *Geophys. Res. Lett.*, 34, L11808, doi:10.1029/2007GL029388, 2007.
- Holben, B. N., Eck, T. F., Slutsker, I., Tanré, D., Buis, J. P., Setzer, A., Vermote, E., Reagan, J. A., Kaufman, Y. J., Nakajima, T., Lavenu, F., Jankowiak, I., and Smirnov, A.: AERONET – a federated instrument network and data archive for aerosol characterization, *Remote Sens. Environ.*, 66, 1–16, 1998.
- Johnson, R. S., Zhang, J., Hyer, E. J., Miller, S. D., and Reid, J. S.: Preliminary investigations toward nighttime aerosol optical depth retrievals from the VIIRS Day/Night Band, *Atmos. Meas. Tech.*, 6, 1245–1255, doi:10.5194/amt-6-1245-2013, 2013.
- Lee, S.-S. and Sohn, B. J.: Nighttime AOT retrieval for Asian dusts from MODIS IR measurements: an artificial neural network approach, *J. Meteorol. Soc. Jpn.*, 90, 163–177, doi:10.2151/jmsj.2012-201, 2012.
- Miller, S. D.: A consolidated technique for enhancing desert dust storms with MODIS, *Geophys. Res. Lett.*, 30, 2071, doi:10.1029/2003GL018279, 2003.
- Omar, A. H., Winker, D. M., Tackett, J. L., Giles, D. M., Kar, J., Liu, Z., Vaughan, M. A., Powell, K. A., and Trepte, C. R.: CALIOP and AERONET aerosol optical depth comparisons: one size fits none, *J. Geophys. Res.-Atmos.*, 118, 4748–4766, doi:10.1002/jgrd.50330, 2013.
- Schutgens, N. A. J., Miyoshi, T., Takemura, T., and Nakajima, T.: Applying an ensemble Kalman filter to the assimilation of AERONET observations in a global aerosol transport model, *Atmos. Chem. Phys.*, 10, 2561–2576, doi:10.5194/acp-10-2561-2010, 2010.
- Sekiyama, T. T., Tanaka, T. Y., Shimizu, A., and Miyoshi, T.: Data assimilation of CALIPSO aerosol observations, *Atmos. Chem. Phys.*, 10, 39–49, doi:10.5194/acp-10-39-2010, 2010.
- Uno, I., Yumimoto, K., Shimizu, A., Hara, Y., Sugimoto, N., Wang, Z., Liu, Z., and Winker, D. M.: 3D structure of Asian dust transport revealed by CALIPSO lidar and a 4DVAR dust model, *Geophys. Res. Lett.*, 35, L06803, doi:10.1029/2007GL032329, 2008.
- Yumimoto, K., Uno, I., Sugimoto, N., Shimizu, A., Liu, Z., and Winker, D. M.: Adjoint inversion modeling of Asian dust emission using lidar observations, *Atmos. Chem. Phys.*, 8, 2869–2884, doi:10.5194/acp-8-2869-2008, 2008.

Zhang, J., Reid, J. S., Westphal, D. L., Baker, N. L., and Hyer, E. J.: A system for operational aerosol optical depth data assimilation over global oceans, *J. Geophys. Res.*, 113, D10208, doi:10.1029/2007JD009065, 2008a.

5 Zhang, J., Reid, J. S., Miller, S. D., and Turk, F. J.: Strategy for studying nocturnal aerosol optical depth using artificial lights, *Int. J. Remote Sens.*, 29, 4599–4613, doi:10.1080/01431160802020528, 2008b.

10 Zhang, J., Campbell, J. R., Reid, J. S., Westphal, D. L., Baker, N. L., Campbell, W. F., and Hyer, E. J.: Evaluating the impact of assimilating CALIOP-derived aerosol extinction profiles on a global mass transport model, *Geophys. Res. Lett.*, 38, L14801, doi:10.1029/2011GL047737, 2011.

Zhang, J., Reid, J. S., Campbell, J. R., Hyer, E. J., and Westphal, D. L.: Evaluating the impact of multi-sensor data assimilation on a global aerosol particle transport model, *J. Geophys. Res.-Atmos.*, 119, 4674–4689, doi:10.1002/2013JD020975, 2014.

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Table 1. Basic information for each of the test sites, including site name, AERONET and HSRL site latitude/longitude locations, and date range of the respective study periods. The “Size of the city” column indicates the number of pixels used in the calculations.

Cities	AERONET site	HSRL site	Study period	Number of retrievals	Size of the city
Alta Floresta	9.9° S, 56.1° W	N/A	Aug–Sep 2012	18	50
Cape Verde	16.7° N, 22.9° W	N/A	Aug–Nov 2012	10	6
Grand Forks	47.9° N, 97.3° W	N/A	Jun–Aug 2012	17	117
Huntsville	34.7° N, 86.6° W	34.7° N, 86.6° W	Jun–Oct 2013	20	509

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)

[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 2. RMSE of VIIRS retrieved nighttime τ against straddling daytime-averaged AERONET τ for retrievals occurring on nights with (top) and without (bottom) the moon present. Nights with lunar presence are determined as those having a lunar fraction greater than 15% and having a lunar zenith angle less than 89° . The number of retrievals in each category separated by location is also shown.

	Huntsville	Alta Floresta	Grand Forks	Cape Verde	Total	RMSE
Moon present	11	13	8	5	37	0.13
No moon	9	5	9	5	28	0.22

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Table 3. Coefficient of determination, root-mean-squared error (RMSE), and best-fit slope of VIIRS estimated nighttime τ compared against estimated nighttime Level 2.0 AERONET τ at the three original locations for the new method presented in this study (top, Table 3a) and the method presented in Johnson et al. (2013, bottom, Table 3b). Average AERONET τ for each location is provided for context.

Table 3a				
Location	r^2	RMSE	Slope	Mean AOT
Alta Floresta	0.72	0.13	0.96	0.23
Grand Forks	0.38	0.06	0.61	0.10
Cape Verde	0.43	0.40	0.92	0.32
Huntsville	0.63	0.04	0.88	0.14
Table 3b				
Location	r^2	RMSE	Slope	Mean AOT
Alta Floresta	0.60	0.16	1.07	0.23
Grand Forks	0.33	0.05	0.51	0.10
Cape Verde	0.86	0.13	0.81	0.32
Huntsville	N/A	N/A	N/A	N/A

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



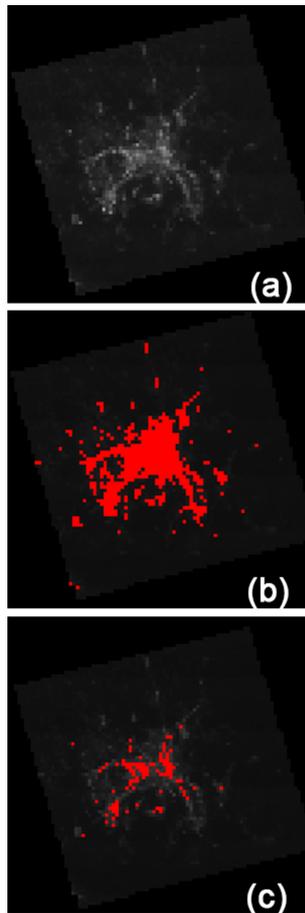


Figure 1. (a) A Raw VIIRS DNB image of Huntsville from the night of 26 June 2013. (b) The same image from (a) with algorithmically-determined city pixels in red. (c) The same as in (b), except only the 100 brightest city pixels are in red.

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

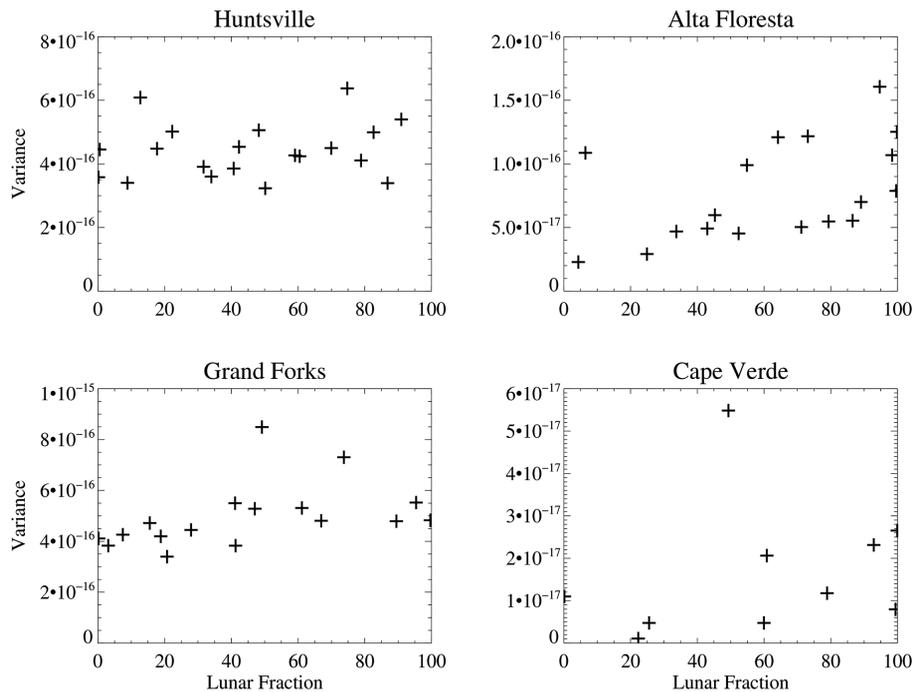


Figure 2. Variance of VIIRS retrieved radiance values vs. average lunar fraction for each night an τ retrieval was made, separated by location.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

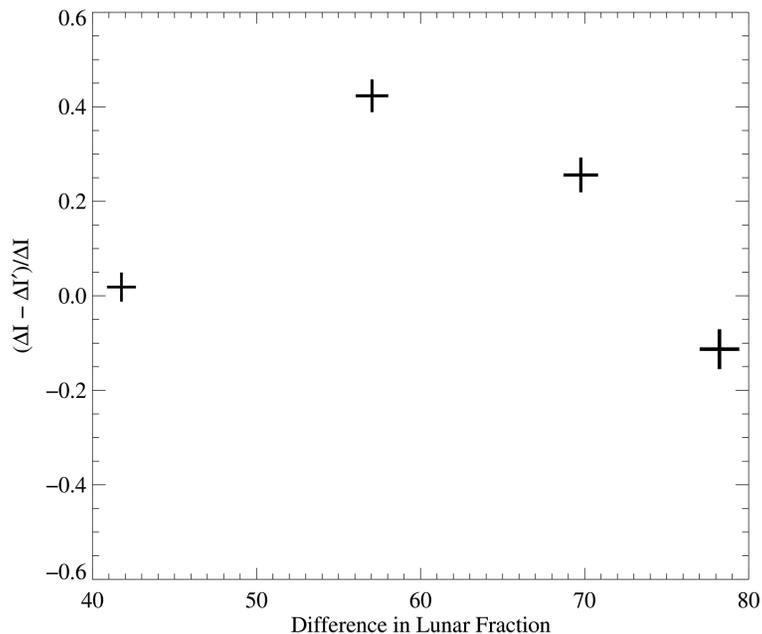


Figure 3. The relative difference in radiance variance for nights with lunar contamination (ΔI on the y axis label) and without lunar contamination ($\Delta I'$). Each point consists of a pair (one light, one dark) of retrievals with similar (within 0.008) τ . The x axis indicates the difference in lunar fraction between the paired retrievals. The symbol sizes represent the magnitude of HSRL τ values, which range from 0.15 to 0.25.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

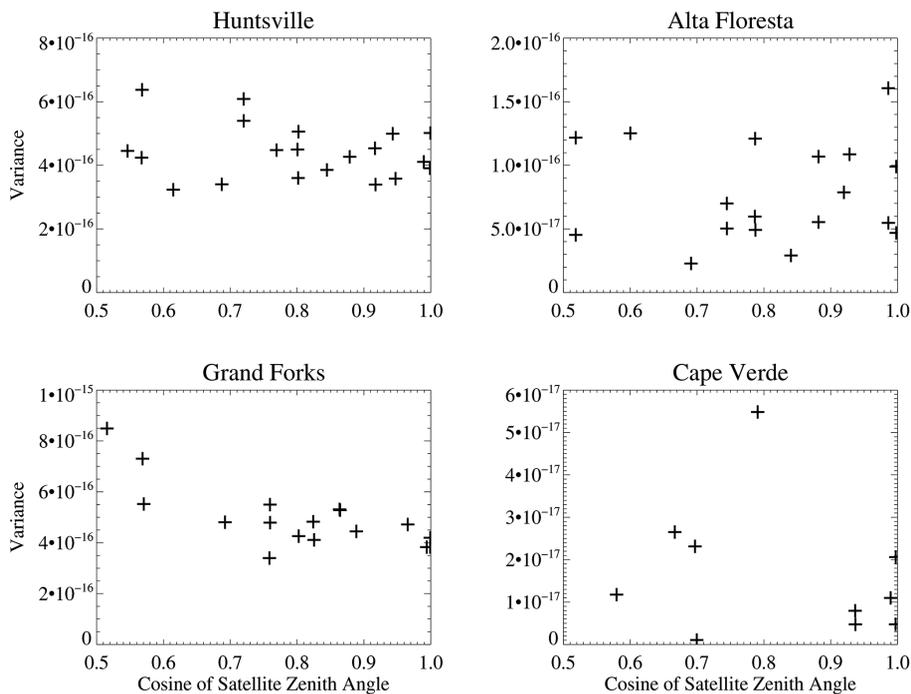


Figure 4. Variance of VIIRS retrieved radiance values vs. the cosine of the average satellite zenith angle for each night that a retrieval is made, separated by location.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

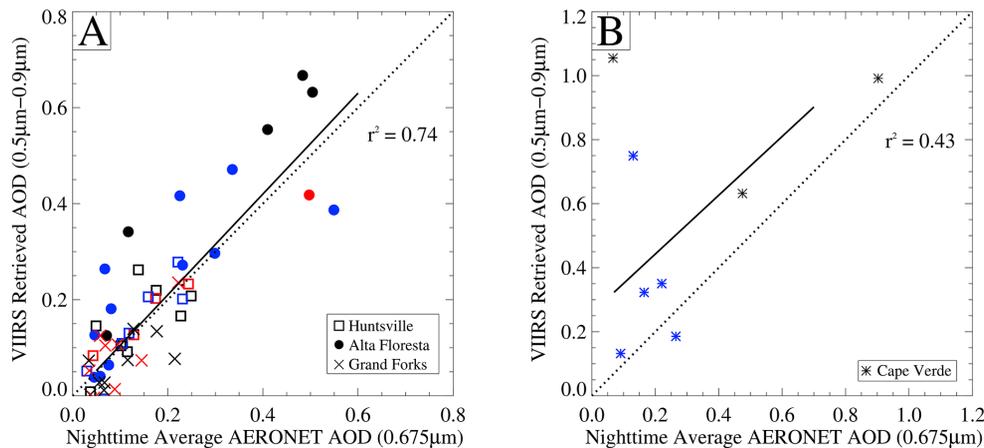


Figure 5. VIIRS retrieved τ as a function of straddling daytime-averaged AERONET τ for Huntsville (left, **a**, square), Alta Floresta (left, **a**, circle), Grand Forks (left, **a**, “x”), and Cape Verde (right, **b**, asterisk). One-to-one (dotted) and best-fit (solid) lines are also shown. Cape Verde is isolated due to its relative small size (6 pixels). Retrievals made on nights with a lunar fraction less than 15% or with a lunar zenith angle greater than 89° (below the horizon) are shown in black. Retrievals made on nights with a lunar fraction greater than 15% but less than 50% and a lunar zenith angle less than 89° are shown in red. Retrievals made on nights with a lunar fraction greater than 50% and a lunar zenith angle less than 89° are shown in blue.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

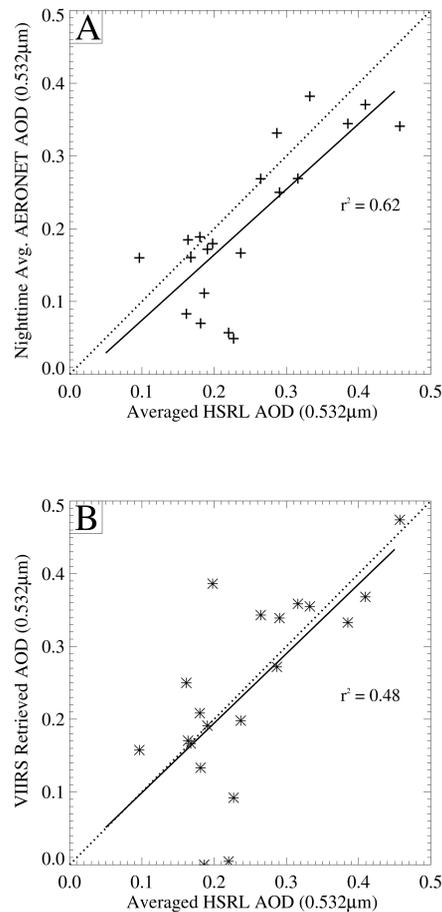


Figure 6. Straddling daytime-averaged AERONET τ (top, **a**) and VIIRS retrieved τ (bottom, **b**) as a function of Wisconsin HSRL retrieved total-column τ for Huntsville, Alabama. One-to-one (dotted) and best-fit (solid) lines are also shown.

Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

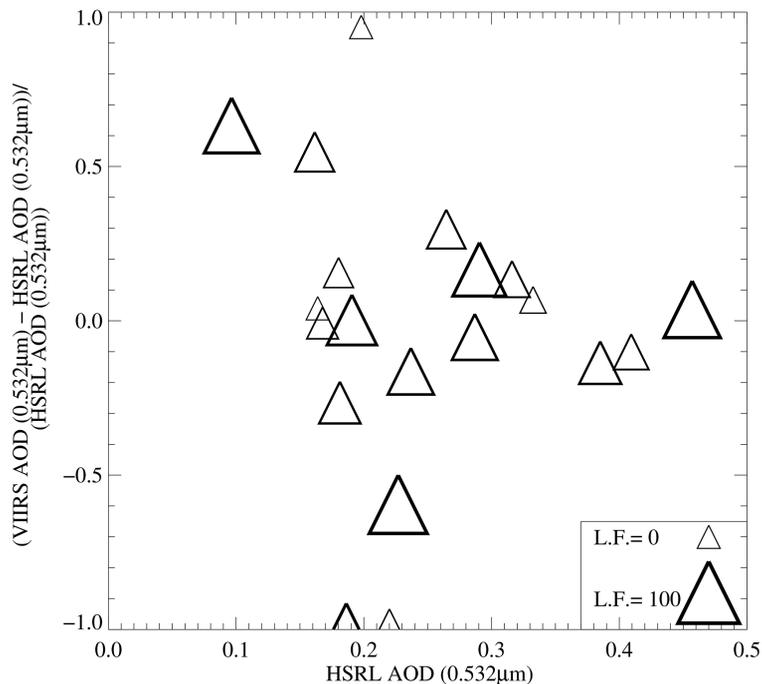


Figure 7. Relative error of each VIIRS τ retrieval (interpolated to $0.532\ \mu\text{m}$) with respect to HSRL retrieved total-column τ , plotted as a function of the HSRL retrieval. The Lunar Fraction (on a scale of 0–100) is indicated by plot symbol size, as shown by the key in the bottom right corner.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Nighttime aerosol retrieval from VIIRS

T. M. McHardy et al.

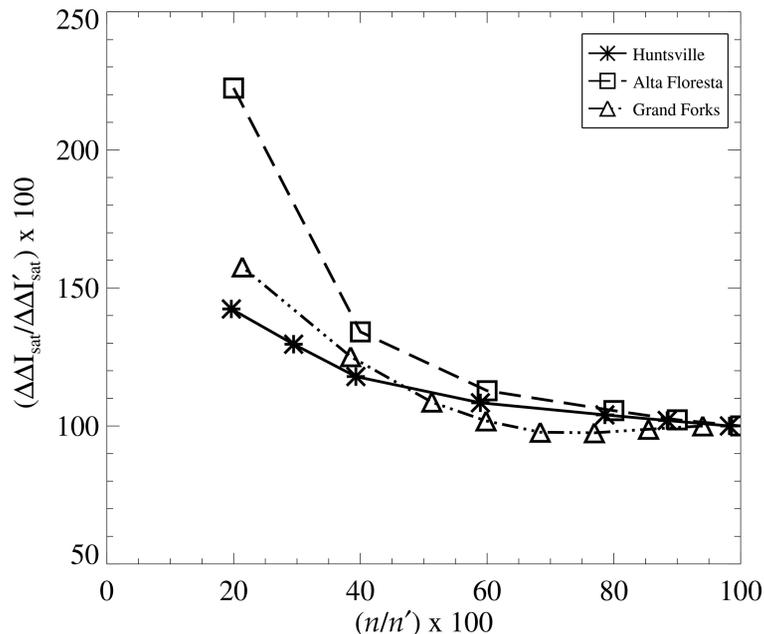


Figure 8. The normalized SD of ΔI_{sat} values ($\Delta\Delta I_{\text{sat}}$) as a function of the normalized number of brightest artificial city light pixels (n) for selected nights that are relatively aerosol free (HSRL and/or AERONET $\tau < 0.2$) for Huntsville, Alta Floresta, and Grand Forks. For a given location and for a given number of brightest artificial city light pixels taken from among the baseline case pixels, the SD of ΔI_{sat} values are first computed using data from selected relative aerosol free nights. Both n and $\Delta\Delta I_{\text{sat}}$ value are then normalized based on the values used in the actual retrievals (n' , $\Delta\Delta I'_{\text{sat}}$) as shown in Figs. 6 and 7 (details are listed in Table 4) for a comparison among different locations.