

Dear Editor,

Please find attached a point-by-point response to the reviews and a marked-up manuscript version with all relevant changes made in the manuscript.

Best regards,

Michael Roesch

Referee #1,

We thank you for your thoughtful comments and thorough reading of the paper. We have made the suggested changes and added data and references where requested. A point by point response follows.

Major comments:

1. The generator can generate aerosol with total concentrations up to ~150 cm⁻³ if 0.5 g ATD sample is added into the generator. For aerosol research, monodisperse particles are typically required. Therefore, if the aerosol flow exiting the generator is passed through a DMA to produce monodisperse aerosol, the resulted aerosol concentration might be very low. This may largely limit the applicability of this generator.

We agree that monodisperse particles are essential for size resolved measurements and calibrations. In this study our focus was particle generation for applications with low material or particle requirements. However, based on this comment we have performed a particle number calculation as a function of mineral dust load to estimate the total number concentration for larger dust loads than 0.5g in the generator. Using the equation derived from the fitted curve to our measurements ($y = 8.414 * \exp(x/0.18081) - 4.75126$) for this batch of ATD, a dust load of 0.75g will ideally generate ~528 cm⁻³, a dust load of 1g ~2118 cm⁻³ and 1.25g already 8456 cm⁻³. Introducing these concentrations into a DMA, and assuming 10% of the introduced particles are selected as monodisperse aerosol particles, output concentrations of ~53 cm⁻³ – 845 cm⁻³ are achievable with the final output concentration of monodisperse particles dependent on several other factors e.g. particle size, shape etc. (Wiedensohler et al. 2012).

In the manuscript we added the following text per this comment:

(Page 5, line 14-24): added

“A curve fitted to the data provides a particle number concentration (PNC) as a function of the mass load (ML) for this ATD sample:

$$PNC = 8.414 * \exp\left(\frac{ML}{0.18081}\right) - 4.75126 \quad (\text{Eq. 1})$$

Eq. 1 can be used to estimate the generated particle number concentration. For a sample mass of 0.75 g, ~525 cm⁻³; 1 g ~2120 cm⁻³ will ideally be generated. The exponential form of Eq. 1 should not be used to multi-gram quantities; it is used here to demonstrate that particle size selection instruments e.g. a differential mobility analyzer (DMA), could be used in combination with PRIZE and higher mass loadings. While the purpose of this work is to demonstrate the

applicability of PRIZE for the aerosolization of small sample sizes, some researchers may use it for dispersion followed by separation. Assuming $\sim 10\%$ of the introduced particles are selected as monodisperse aerosol particles, output concentrations of $\sim 15 \text{ cm}^{-3}$ - 210 cm^{-3} are achievable. The final output concentration of monodisperse particles will depend on several factors, including the sample material mode size, the particle size selected, the shape factor, etc. (Wiedensohler et al., 2012).”

(Page 6, line 8): added

“Furthermore, we demonstrate with calculations that mass loadings larger than 0.5 g could be used in combination with differential mobility separation for production of size-selected aerosols.”

Also applicable to this point is that an increase in the amount of particles produced would increase a size-selected fraction. To address this we performed experiments with other PRIZE configurations, including a stainless steel insert. For this we introduced a stainless steel tube (25.4mm in diameter, 20mm in height and 2mm wall thickness) inside the elutriator to prevent the direct contact of the bronze beads to the wall to improve generation and minimize direct particle contact to the 3D printed material. This feature reduced the particle number concentration generated from the wall material down to $\sim 0 \text{ particles cm}^{-3}$ (in comparison to $\sim 1.5 \text{ particles cm}^{-3}$ without the stainless steel insert).

We have also added the following text and modified Figures 4e and 5e per this comment:


(Page 3, line 5): added

“We investigate configurations both with and without a stainless steel insert forming the walls of the elutriator.”


(Page 4, line 29): added

“The particle concentration at this stage could be reduced to $\sim 0.1 \text{ cm}^{-3}$ with insertion of a stainless steel tube into the elutriator (Fig. 4e, Fig. 5e). This prevented direct contact of the bronze beads with the generator wall and indicates that some abrasion of the printed surface can take place.”

(Figure 4e):

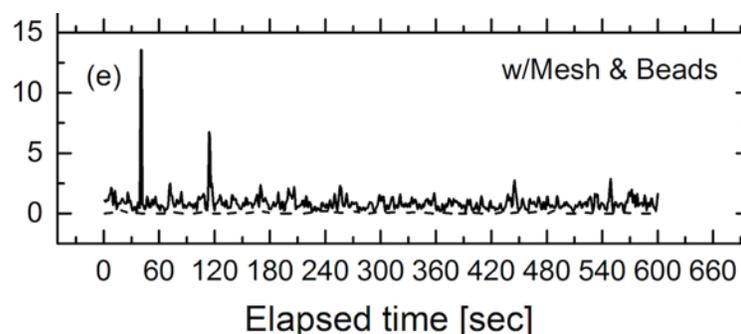

(Figure 5e):

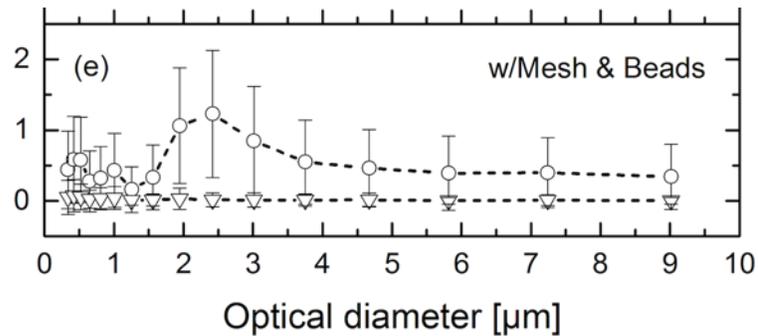

Minor comments:

1. (Page 1, line 20-23): In addition to Garimella et al. (2014), there are a number of studies showing that wet generation could change the physicochemical properties of mineral dust particles, including Sullivan et al. (2010) and Kumar et al. (2011). This issue has also been discussed by a recent review paper (Tang et al., 2016).

We thank the reviewer and included the additional suggested literature on wet generation of mineral dust particles. We also thank the referee for the additional literature references in the review; we also added them to the correct position in the manuscript.

now (Page 1, line 21-24):

“Sullivan et al. (2010), Kumar et al. (2011), Garimella et al. (2014) and Tang et al. (2016) demonstrated that such aqueous processing alters the surface composition, physiochemical properties and hygroscopicity of the particles even after condensed phase water is completely removed.”

2. (Page 2, line 11-14): I do not agree with the statement “These techniques require multiple instruments and supervision of the generation setup”. As pointed out in the same paragraph, those generators are actually very simple and only require a flask and a shaker. I believe the major drawback is that particle number concentration typically shows fast and large variation (e.g., Tang et al., 2015).

We agree. The statement “These techniques require multiple instruments and supervision of the generation setup.” in the manuscript on page 2, line 13 was deleted.

3. Figures 4-5: Could authors briefly explain in figure captions what each stages are actually doing? This will help readers better understand these two figures.

We included a more detailed description of the different stages in both figure captions.

(Figure 4):

“Figure 4: Time-series measurements of particle number concentrations: (a) CPC with filter; (b) freshly printed generator; (c) through the generator after wet sanding; (d) through the generator after wet sanding and installing the porous screen; (e) fully assembled generator including porous screen and bronze beads atop as bed material, without (solid line) and with a stainless steel insert (dashed line).”

(Figure 5):

“Figure 5: Average particle size distributions: (a) OPS with filter; (b) freshly printed generator; (c) through the generator after wet sanding; (d) through the generator after wet sanding and installing the porous screen; (e) fully assembled generator including porous screen and bronze beads atop as bed material, without (circles) and with a stainless steel insert (triangles).”

Technical comments:

“I suggest authors should carefully check the entire manuscript as there are quite a lot of places where typos and grammatical issues occur. Below I only provide a few examples:”

We thank the referee and have now performed a thorough check of grammar and typos. Please find below the corrections that have been made to the manuscript. All changes that have been made in addition to the comments can be seen in the trackable version of the manuscript.

1. “Page 1, line 8: should it be “due to either rarity or expense”?”

(Page 1, line 8): changed to
“due to either rarity or expense“

2. “Page 1, line 20: change “require they first be made...” to “require them first to be made...”?”

now (Page 1, line 21): changed to
“require them first to be made..“

3. “Page 1, line 26: change “needed or for...” to “needed for...”?”

now (Page 1, line 28): changed to
“is needed, or for a short period of time.“

4. “Page 2, line 25: delete “But” or change it to “However”?”

now (Page 2, line 29): deleted
“But“

5. “Page 3, line 17: the last sentence in this paragraph is grammatically incorrect “

now (Page 3, line 21): sentence was changed to
“The PRIZE generator used in this study was printed with 100 micrometer resolution with no significant performance changes observed across this resolution range.“

6. “Page 5, line 8: The first sentence is awkward. We do not perform time-series. What we can perform is measurement.”

now (Page 4, line 21): changed sentence to
“Before generator assembly, measurements with the CPC and OPS coupled to a filter (IDN-4G, Parker) were performed.“

7. “Page 5, line 24: change “as function” to “as a function”.”

now (Page 5, line 10): changed to
“as a function”

8. “Page 6, line 6: should the more professional terminology be “cloud condensation nucleation and ice nucleation potential”?”

(Page 6, line 6): changed the sentence to

“Due to the preservation of the original chemical composition of the aerosolized particles, which is a major advantage of dry particle generation, investigations of cloud condensation and ice nucleation potential can be made without aqueous processing artifacts.”

Referee #2,

We thank you for your thoughtful comments and thorough reading of the paper. We have made the suggested changes and added data and references where requested. A point by point response follows.

Major comments:

1. The characterization performance results are convincing, however, and this is optional if authors could also present some research application results.

Since submission of this “proof of concept” of the printed fluidized bed generator we have now put it into operational use to generate mineral dust particles in our lab. Specifically, we are studying the effects of mineral dust particles on the output of different solar cells.

Towards this point we have added the following text and a figure (Fig. 8) of the generated particle number size distribution:

(Page 1, line 14):

“Additional tests with collected soil dust samples are also presented.”

(Page 4, line 16-19):

“In addition, PRIZE was used to disperse an arid soil sample collected in Saudi Arabia. Data for each experiment and the soil dust dispersion are presented in the subsequent sections.”

(Page 5, line 26-29):


“A final experiment was conducted to demonstrate the use of PRIZE for dispersion of collected soil dust samples. Fig. 8 provides a size distribution of particles dispersed from an arid soil sample collected in Dhahrat Laban (west of Riyadh, Saudi Arabia).”

(Page 6, line 5):

“We demonstrate the use of PRIZE for collected samples of soil dust and note its use with mass spectrometry or transmission electron microscopy. ”

(Page 16, line 1):

Figure 8:

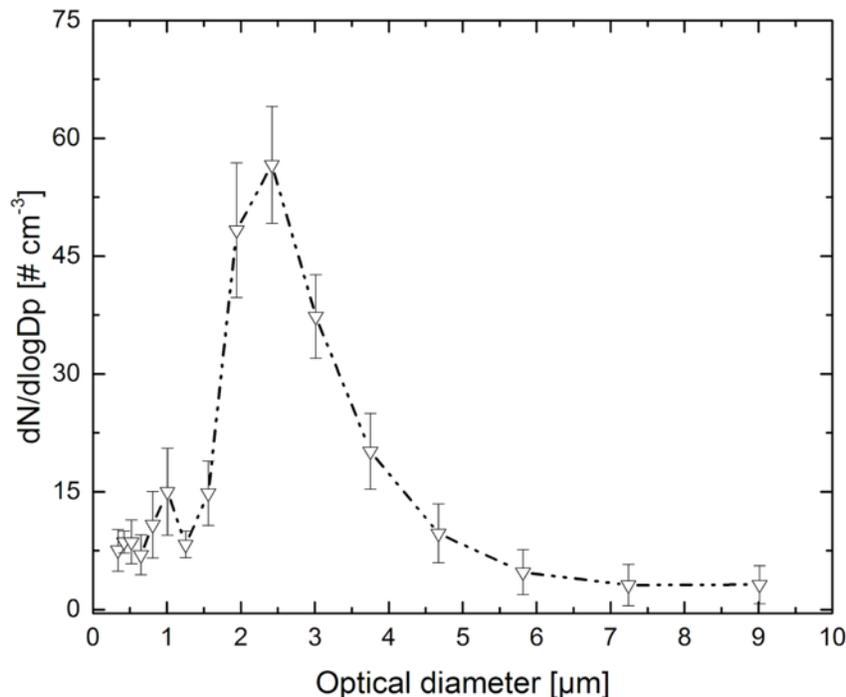

2. It is not clear ‘what are the limitations of the existing aerosol generators.’

The presented particle generator is a low-cost addition to already existing dry particle generation instruments. To expand on this we added the following statement to the manuscript.

(Page 5, line 31):

“This study describes the design, manufacture and proof-of-concept experiments of the 3D printed fluidized bed generator PRIZE, which is a compact, simple and low-cost addition to existing dry particle generation instruments.”

3. It is mentioned that (page 2 line13) the existing flask design requires multiple instruments and supervision of the setup. This is incorrect.

We agree. The statement on page 2, line 13 was deleted.

4. Further, they say FBAG and SSPD involves mechanical moving parts and larger weight. It is not clear how having multiple moving parts and weight (< 50lbs) impedes the research ability of the instrument to generate the dry powder.

We agree that the weight of an instrument has no influence on the ability to generate particles from dry powder. However, a lower weight of the instrument would further enable its use in e.g. remote field applications. To clarify this we added the following statement to the manuscript.

(Page 2, line 20):

“In comparison to existing dispersion devices, the PRIZE generator does not contain moving parts, features smaller dimensions and mass, and has a lower cost, requiring only access to 3D printing. This allows for multiple PRIZE generators to be used with different samples, thereby reducing the time and possible artifacts associated with cleaning procedures on a single generator.”

Dry particle generation with a 3D printed fluidized bed generator

Michael Roesch¹, Carolin Roesch¹, and Daniel J. Czicz^{1,2}

¹Department of Earth, Atmospheric & Planetary Sciences, Massachusetts Institute of Technology, Cambridge, 02139, USA

²Department of Civil Environmental Engineering, Massachusetts Institute of Technology, Cambridge, 02139, USA

5 *Correspondence to:* Michael Roesch (roesch@mit.edu)

Abstract. Here we describe the design and testing of [PRIZE \(PRinted fluidIZed bed gEnerator\)](#), a compact fluidized bed aerosol generator manufactured using stereolithography (SLA) printing. Dispersing small quantities of powdered materials – due [to either rarity or expense](#) - is challenging due to a lack of small, low-cost dry aerosol generators. With this as motivation, we designed and built a generator that uses a mineral dust or other dry powder sample mixed with bronze beads that sit atop a porous screen. A particle free airflow is introduced, dispersing the sample as airborne particles. [Total particle number concentrations](#) and size distributions were measured during different stages of the assembling process to show that the SLA 3D printed generator did not generate particles until the mineral dust sample was introduced. Time-series measurements with Arizona Test Dust (ATD) showed stable total particle number concentrations of 10 – 150 cm⁻³, depending on the sample mass, from the sub- to super-micrometer size range. [Additional tests with collected soil dust samples are also presented.](#) PRIZE is simple to assemble, easy to clean, inexpensive and deployable for laboratory and field studies that require dry particle generation.

1 Introduction

Investigating dry powder samples, such as mineral and soil dust and volcanic ash, is essential to understand their atmospheric influence, especially on clouds (Boucher et al., 2013). Inexpensive commercial nebulizers have often been used to aerosolize these types of samples but require [them first to](#) be made into a water slurry. [Sullivan et al. \(2010\), Kumar et al. \(2011\), Garimella et al. \(2014\) and Tang et al. \(2016\)](#) demonstrated that such aqueous processing alters the surface composition, [physiochemical properties](#) and hygroscopicity of the particles even after condensed phase water is completely removed. [Samples therefore often](#) need to be [dispersed by](#) particle generators that do not change [these](#) characteristics. Different types of generators, such as rotating brush generators (Czicz et al., 2013, Hiranuma et al., 2015), fluidized bed generators (FBG) (Tobo et al., 2012, Hartmann et al., 2016) and shakers (Garimella et al., 2014) have been used for dry dispersion depending on the amount of material and the experimental setup. In some applications only a small [number of particles is needed](#), or for a short [period of time](#). These include [some filter sampling](#) (Dryer et al., 2014), [electrodynamic and other](#) particle trapping (Hesse et al., 2002) and single particle mass spectrometry (Murphy, 2006). Moreover, the sample to

Michael 27.4.17 14:28

Deleted: a

Michael 27.4.17 14:28

Deleted: named PRIZE (PRinted fluidIZed bed gEnerator)

Michael 27.4.17 14:28

Deleted: to

Michael 27.4.17 16:48

Deleted: P

Michael 27.4.17 16:48

Deleted:

Michael 27.4.17 14:28

Deleted: concentration

Michael 28.4.17 13:07

Deleted: y

Michael 27.4.17 14:28

Deleted: These samples

Michael 27.4.17 14:28

Deleted: prepared with suitable

Michael 27.4.17 14:28

Deleted: their

Michael 27.4.17 14:28

Deleted: amount

Michael 27.4.17 14:28

Deleted: aerosol

Michael 27.4.17 14:28

Deleted: are

Michael 27.4.17 14:28

Deleted: time

be aerosolized might be limited, due to rarity or expense, necessitating a generation system capable of working with gram-level quantities. These uses motivate a small, low-cost and easy to set up dry particle generator.

Fluidized bed aerosol generators (FBGs) have been used in several studies to disperse dry samples as sub- to super-micrometer size range aerosol particles (Guichard, 1976; Moreno et al., 1976; Boucher and Lua, 1982; Wang et al., 1998;

5 Gauthier et al., 1999; Niedermeier et al., 2010; Clemente et al., 2013) ~~with commercially available version such as the TSI Fluidized Bed Aerosol Generator (FBAG, Model 3400A, TSI Inc.) or the small-scale powder disperser (SSPD, Model 3343, TSI Inc.).~~ Some issues with dispersion have become apparent from the use of these instruments. Sub-10 micrometer diameter particles, are difficult to disperse due to cohesive forces (Geldart, 1973); the dispersibility of a dust sample increases with increasing particle size (Hinds, 1999). While a broad size range of the material being dispersed typically enables better aerosolization it may also lead to particle segregation in the bed (Lind et al., 2010). Another issue faced by FBGs is that the material to be dispersed is often charged due to triboelectrification. This is caused by friction between the generator walls, the beads and the particles themselves (Mehrani et al., 2007). Using conductive wall material or ionization through radioactive neutralizers ~~can decrease~~ this effect (Boucher and Lua, 1982; Forsyth et al., 1998). An alternative means of particle production is agitation of dry materials (Sullivan et al., 2009). Examples include flasks in combination with ultrasonic ~~baths~~ or mechanical shakers. ~~In both cases, mechanical or other agitation devices need to be combined with sample containers and flow hardware for aerosolization of samples.~~

The objective of this study was to produce a small, ~~low-cost~~ 3D printed FBG able to disperse small quantities of dry micrometer-sized samples without artifact particles from either the generator or bed. In comparison to ~~existing dispersion devices~~, the PRIZE generator does not contain moving parts, features smaller dimensions ~~and mass, and has a lower cost, requiring only access to 3D printing.~~ This allows for multiple PRIZE generators to be used with different samples, thereby ~~reducing the time and possible artifacts associated with cleaning procedures on a single generator.~~

2 Methods

2.1 Design

25 PRIZE consists of two main parts, the generator body (Fig. 1) and exchangeable lids with customizable outlet configurations (Fig. 2). The instrument, except the porous screen and the bronze beads comprising the bed, was designed using a computer aided design (CAD) program (Solidworks 2015, Dassault Systems). The PRIZE generator follows similar designs by Marple et al., 1978. ~~In~~ contrast to the aforementioned generator or the commercially available FBAG and SSPD, PRIZE does not contain any moving parts or a supply chain to feed fresh dry powder into the bed. This feature was chosen to keep the set up simple and reproducible.

30 At the bottom of the generator there is a 6.35 mm (0.25 inch) tube inlet ~~to introduce the~~ particle free carrier gas. The inlet was designed to fit common tube connectors. Downstream of the inlet, an internal cone with 7 radially equidistant arms

- Michael 27.4.17 14:28
Deleted: and are
- Michael 27.4.17 14:28
Deleted: e.g.
- Michael 27.4.17 14:28
Deleted: Small
- Michael 27.4.17 14:28
Deleted: , sub-10 micrometers,
- Michael 27.4.17 14:28
Deleted: decreases
- Michael 27.4.17 14:28
Deleted: -
- Michael 27.4.17 14:28
Deleted: bath
- Michael 27.4.17 14:28
Deleted: disperse e.g. calcite powder as described by Sullivan et al., 2009. These techniques require multiple instruments
- Michael 27.4.17 14:28
Deleted: supervision
- Michael 27.4.17 14:28
Deleted: the generation setup.
- Michael 27.4.17 14:28
Deleted: , which will enable groups to use a comparable aerosol generation method.
- Michael 27.4.17 14:28
Deleted: the FBAG or the small-scale powder disperser (SSPD, Model 3433, TSI Inc.)
- Michael 27.4.17 14:28
Deleted: any mechanical
- Michael 27.4.17 14:28
Deleted: , weight, much
- Michael 27.4.17 14:28
Deleted: acquisition costs and maintenance.
- Michael 27.4.17 14:28
Deleted: But, in
- Michael 27.4.17 14:28
Deleted: for introduction of a

support a 25.4 mm diameter porous screen. This screen supports the bed and sample while also allowing a homogeneous flow pattern through the bed. The porous screen is made from stainless steel (TWP Inc., CA) with a mesh size of 80 micrometers. This prevents fall through of the 100 micrometer diameter bronze beads that form the bed. Above the porous screen is a 35 mm long and 25.4 mm diameter elutriator tube; the bronze bead bed is located inside the elutriator. The elutriator tube is topped with a lid with a 6.35 mm (0.25 inch) outlet. We investigate configurations both with and without a stainless steel insert forming the walls of the elutriator. To prevent leakage, lids are equipped with inner side O-rings. Based on the number of instruments connected to the generator, lids designed with single or multiple 6.35 mm outlets can be installed (a single outlet lid is shown in Fig. 2). Mounts for a rotameter and a 3 mm LED to illuminate the bed were designed at the left side of the generator body. Mounting holes at the bottom were designed to secure the generator to a surface during operation. The overall dimensions of PRIZE are 70 mm × 60 mm × 98 mm (width, depth, height). All designed parts are saved as style files (.stl) to be readable by the 3D printer software.

2.2 Manufacturing

The generated construction files were uploaded to the 3D printer software (PreForm, Formlabs Inc.). In the program, the parts were oriented on the virtual build platform and scaffolding with 0.5 mm contact points were generated for support during the printing process. The oriented and supported parts were then positioned on the virtual build platform and uploaded to the 3D SLA printer (Form 2, Formlabs Inc.). Clear photopolymer resin (FLGPCL02, Formlabs Inc.) was used as the printing material. This allowed for observation of the particle generation. At the start of the print process the resin was automatically heated to 31°C and kept at this temperature until the print was finished. The liquid resin is cured through photo polymerization by a 405 nm violet laser. The resolution of the printed layers can be adjusted to 25, 50 or 100 micrometer. Using the highest resolution, of 25 micrometer, printing lasted ~19 hours while using the lowest resolution only ~7 hours were required. The PRIZE generator used in this study was printed with 100 micrometer resolution with no significant performance changes observed across this resolution range.

The printed parts were removed from the build platform and agitated in isopropyl alcohol (IPA) for ~20 minutes to remove uncured resin. Snips were used to remove the support structure from the printed parts. Residual supports marks were removed by wet sanding in a two-step process: first coarse sanding with grit size 800 and a second fine sanding with grit size 2000. To increase the strength of the printed parts, the manufacturer recommends a 60 minute post-curing with a 405 nm light source (it should be noted this curing time also depends on the size and the wall thickness of the printed part). The printed generator parts were post-cured overnight (~8 hours) in a custom-built UV box. Inside are 300 surface-mount device (SMD) light-emitting diodes (LEDs) emitting at 405 nm, with a total intensity of 934.8 cd. After post-curing, the parts were polished using a Dremel with a soft felt bob.

2.3 Experimental setup

Michael 27.4.17 14:28

Deleted: outlets

Michael 27.4.17 14:28

Deleted: ; this

Michael 27.4.17 14:28

Deleted: production when PRIZE was lit by the mounted LED.

Michael 27.4.17 14:28

Deleted: printing

Michael 27.4.17 14:28

Deleted: throughout

Michael 27.4.17 14:28

Deleted: process

Michael 27.4.17 14:28

Deleted: was

Michael 27.4.17 14:28

Deleted: results considered here

A schematic of the experimental setup with the relevant flow rates used in this study is shown in Fig. 3. Dry filtered nitrogen was used as the carrier gas. The flow was controlled by a rotameter (MR3A, Omega Engineering). Flow tests with only the 100 micrometer bronze beads (ACuPowder International LLC) showed that 4.0 l min^{-1} was sufficient to create a “boiling” motion in the fluidized bed (i.e., the threshold where the gas did not only pass through the pore space of the beads without moving them), visible through the clear resin wall of the elutriator. All measurements in this study were therefore performed at 4.0 l min^{-1} . At the outlet of the generator the flow was split into three pathways. The first was connected to a condensation particle counter to measure particle number concentrations in the size range from 0.007 to 2.0 micrometer (CPC, BMI Inc.), the second to an optical particle sizer to determine particle number size distributions in the size range from 0.3 to 10 micrometer (OPS Model 3330, TSI Inc.) and the third to a filter open to lab for excess air.

3. Results

Three types of experiments were conducted to demonstrate the performance of PRIZE. First, control experiments at different assembly stages to verify minimal particle generation by the generator itself. Second, a mineral dust sample was added to the generator and a time-series measurement was performed. Third, a sensitivity study was performed on the effect of generated particle number concentration as function of mineral dust mass added to the generator. In addition, PRIZE was used to disperse an arid soil sample collected in Saudi Arabia. Data for each experiment and the soil dust dispersion are presented in the subsequent sections.

3.1 Control experiments

Before generator assembly, measurements with the CPC and OPS coupled to a filter (IDN-4G, Parker) were performed. No particles were detected, providing a zero background for the experiments (Fig. 4a, Fig. 5a). Connecting the generator to the CPC and OPS after printing also showed no particles, indicating that PRIZE was not generating particles at this stage (Fig. 4b, Fig. 5b). Particles were observed by the CPC post-sanding and are likely residuals of the sanding process; we suggest a thorough cleaning (e.g. via immersion sonication) to eliminate these although they were observed to asymptote to zero after 450 seconds (Fig. 4c, Fig. 5c). Because no particles were observed in the OPS, we assume their diameter was smaller than 0.3 micrometer (i.e. below the detection limit of the OPS). Installing the porous screen did not cause significant particle generation. Introduction of the bronze beads resulted in an OPS maximum particle concentration of $\sim 1.5 \text{ cm}^{-3}$ with a mode at $\sim 2.5 \text{ micrometer}$ in diameter; a similar particle concentration was detected at the CPC. The particle concentration at this stage could be reduced to $\sim 0.1 \text{ cm}^{-3}$ with insertion of a stainless steel tube into the elutriator (Fig. 4e, Fig. 5e). This prevented direct contact of the bronze beads with the generator wall and indicates that some abrasion of the printed surface can take place.

3.2. Mineral dust experiments

- Michael 27.4.17 14:28
Deleted:)
- Michael 27.4.17 15:02
Deleted:
- Michael 27.4.17 14:28
Deleted: with equal tubing length.
- Michael 27.4.17 15:14
Deleted: perform
- Michael 27.4.17 15:15
Deleted: performance
- Michael 27.4.17 14:28
Deleted: For the first control experiment,
- Michael 27.4.17 14:28
Deleted: were run for 600 seconds with an upstream
- Michael 27.4.17 14:28
Deleted: at their inlet to verify
- Michael 27.4.17 14:28
Deleted: counts were recorded
- Michael 27.4.17 14:28
Deleted: The
- Michael 27.4.17 14:28
Deleted: were then connected to the generator as shown in Figure 3. Measurements at different stages
- Michael 27.4.17 14:28
Deleted: assembling
- Michael 27.4.17 14:28
Deleted: of the generator
- Michael 27.4.17 14:28
Deleted: performed to verify minimal parti... [1]
- Michael 27.4.17 14:28
Deleted: 60 cm^{-3} were detected in the CPC ... [2]
- Michael 27.4.17 14:28
Deleted: by
- Michael 27.4.17 14:28
Moved (insertion) [1]
- Michael 27.4.17 14:28
Deleted: ; afterwards no particles were dete... [3]
- Michael 27.4.17 14:28
Deleted: result in further
- Michael 27.4.17 14:28
Deleted: (i.e., only four single CPC counts... [4]
- Michael 27.4.17 14:28
Deleted: into the generator. The averaged s... [5]
- Michael 27.4.17 14:28
Deleted: micrometers diameter. Similar pa... [6]

Arizona Test Dust (ATD, Powder Technology Inc. MN) was used as the sample material in this study. The nominal size of particles ranged from 0-3 micrometer and 0.2 g ATD were initially added to the generator. A measurement time of 1200 seconds was split into two 600 second segments, to determine the particle concentration as a function of time. The first 600 seconds showed a decrease after startup, a brief drop in concentration, and then an upward asymptote to ~25 cm⁻³ at the CPC (Fig. 6a). The size distribution in the OPS remained more or less constant with a final maximum particle concentration of ~25 cm⁻³ centered at 0.3 micrometer diameter (Fig. 6b). Although this is the lowest size bin of the OPS, the similarity in CPC and OPS concentrations indicate most generated particles fall within, and towards the low end of, the OPS size range. The second 600 seconds showed a stable particle concentration from 25–30 cm⁻³ in the CPC (Fig. 6c). The shape of the size distribution did not change over time, showing the maximum particle concentration remained at ~0.3 micrometer (Fig. 6d). A sensitivity study of the number concentration of generated particles as a function of ATD mass added to the generator was also performed. ATD was added stepwise from 0.1 to 0.5 g to the clean PRIZE instrument with measurements made after an initial 600 second “warm-up” period, the stabilization time indicated in the initial experiment. This procedure was repeated at each mass loading. The resulting particle number concentrations showed an exponential growth with increasing mass load in the fluidized bed from 10 – 150 cm⁻³ (Fig. 7). A curve fitted to the data provides a particle number concentration (PNC) as a function of the mass load (ML) for this ATD sample:

$$PNC = 8.414 * \exp\left(\frac{ML}{0.18081}\right) - 4.75126 \quad (\text{Eq. 1})$$

Eq. 1 can be used to estimate the generated particle number concentration. For a sample mass of 0.75 g, ~525 cm⁻³; 1 g ~2120 cm⁻³ will ideally be generated. The exponential form of Eq. 1 should not be used to multi-gram quantities; it is used here to demonstrate that particle size selection instruments e.g. a differential mobility analyzer (DMA), could be used in combination with PRIZE and higher mass loadings. While the purpose of this work is to demonstrate the applicability of PRIZE for the aerosolization of small sample sizes, some researchers may use it for dispersion followed by separation. Assuming ~10% of the introduced particles are selected as monodisperse aerosol particles, output concentrations of ~15 cm⁻³ - 210 cm⁻³ are achievable. The final output concentration of monodisperse particles will depend on several factors, including the sample material mode size, the particle size selected, the shape factor, etc. (Wiedensohler et al., 2012).

A final experiment was conducted to demonstrate the use of PRIZE for dispersion of collected soil dust samples. Fig. 8 provides a size distribution of particles dispersed from an arid soil sample collected in Dhahrat Laban (west of Riyadh, Saudi Arabia).

4. Conclusions

This study describes the design, manufacture and proof-of-concept experiments of the 3D printed, fluidized bed generator PRIZE, which is a compact, simple and low-cost addition to existing dry particle generation instruments. The generator is capable of dispersing aerosol particles from dry material without itself generating significant particles (<5% by number at 0.2 g of ATD without a stainless steel insert, negligible with). Using SLA technology makes this a low-cost instrument when

Michael 27.4.17 14:45
Deleted: .

Michael 27.4.17 14:45
Deleted: as

Michael 27.4.17 14:28
Deleted: (Fig. 4 and Fig. 5)

Michael 27.4.17 14:28
Deleted: measurements

Michael 27.4.17 14:28
Deleted: In the OPS, the

Michael 27.4.17 14:28
Deleted: then

Michael 27.4.17 14:28
Deleted: and it was run for

Michael 27.4.17 14:28
Deleted: seconds

Michael 27.4.17 14:28
Deleted: .

Michael 27.4.17 14:28
Moved up [1]: Because no particles were observed in the OPS, we assume their diameter was smaller than 0.3 micrometer (i.e., below the detection limit of the OPS).

Michael 27.4.17 14:28
Deleted: Installing the porous screen into the generator likewise did not cause significant particle generation. Introduction of the bronze beads resulted in an OPS maximum concentration of ~1.5 cm⁻³ with a mode at ~2.5 micrometers diameter; a similar particle concentration was detected at the CPC... [8]

Michael 27.4.17 14:28
Deleted: a

Michael 27.4.17 16:17
Deleted: FBG called PRIZE. The described

Michael 27.4.17 14:28
Deleted: (~

compared to commercially available FBGs. Furthermore, the generator is compact and easy to set up, as it requires only particle-free pressurized gas, and gram-quantity samples. It is therefore ideal for use in minimally appointed laboratory and field conditions.

We demonstrate the use of PRIZE for collected samples of soil dust, and note its use with mass spectrometry or transmission electron microscopy. Due to the preservation of the original chemical composition of the aerosolized particles, which is a major advantage of dry particle generation, investigations of cloud condensation and ice nucleation potential can be made without aqueous processing artifacts. Furthermore, we demonstrate with calculations that mass loadings larger than 0.5 g could be used in combination with differential mobility separation for production of size-selected aerosols.

The .stl files for PRIZE are available up on request.

Conflict of interest

The authors have no conflicts of interest in the published material.

Acknowledgements

We acknowledge funding from the Center for Complex Engineering Systems at the King Abdulaziz City for Science and Technology, NSF (AGS-1461347), DOE (DE-SC0014487), and NASA (NNX13AO15G).

References

Ardon-Dryer, K., Levin, Z.: Ground-based measurements of immersion freezing in the eastern Mediterranean, *Atmos. Chem. Phys.*, 14(10), 5217–5231, 2014.

Boucher, O., Randall, D., Artaxo, P., Bretherton, C., Feingold, G., Forster, P., Kerminen, V.-M., Kondo, Y., Liao, H., Lohmann, U., Rasch, P., Satheesh, S., Sherwood, S., Stevens, B., and Zhang, X.: Clouds and Aerosols. In: *Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, chapter 7. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, 2013.

Boucher, R. F. and Lua, A. C.: A stable, high-concentration, dry aerosol generator, *J. Aerosol Sci.*, 13(6), 499–511, 1982.


Clemente, A., Balas, F., Pilar Lobera, M., Irusta, S., Santamaria, J.: Fluidized Bed Generation of Stable Silica Nanoparticle Aerosols, *Aerosol Sci. Tech.*, 47(8), 867–874, 2013.

- Michael 27.4.17 14:28
Deleted: . Requiring
- Michael 27.4.17 14:28
Deleted: , it is
- Michael 27.4.17 14:28
Deleted: where dry particle dispersal is required.
- Michael 27.4.17 14:28
Deleted: The PRIZE FBG can be used in future studies for investigating
- Michael 27.4.17 14:28
Deleted: chemical composition
- Michael 27.4.17 14:28
Deleted: different dust species, e.g.
- Michael 27.4.17 14:28
Deleted: , fly ash or other mineral dust,
- Michael 27.4.17 14:28
Deleted:
- Michael 27.4.17 14:28
Deleted: the aerosolized particles can be investigated with regards to their water droplet
- Michael 27.4.17 14:28
Deleted: nucleating
- Michael 27.4.17 14:28
Deleted: .
- Michael 27.4.17 14:28
Deleted: declare that they
- Michael 27.4.17 14:28
Deleted: conflict
- Michael 27.4.17 14:28
Deleted: the Massachusetts Institute of Technology,
- Michael 27.4.17 14:28
Deleted:) for funding.
- Michael 27.4.17 14:28
Deleted: .

- Cziczo, D. J., Garimella, S., Raddatz, M., Hoehler, K., Schnaiter, M., Saathoff, H., Moehler, O., Abbatt, J. P. D., and Ladino, L. A.: Ice nucleation by surrogates of Martian mineral dust: What can we learn about Mars without leaving Earth?, *J. Geophys. Res. Planets*, 118, 1945–1954, 2013.
- 5 Forsyth, B., Liu, B. Y. H., Romay, F. J.: Particle charge distribution measurement for commonly generated laboratory aerosols, *Aerosol Sci. Tech.*, 28(6), 489–501, 1998.
- Garimella, S., Huang, Y.-W., Seewald, J. S., and Cziczo, D. J.: Cloud condensation nucleus activity comparison of dry- and wet-generated mineral dust aerosol: the significance of soluble material, *Atmos. Chem. Phys.*, 14, 6003–6019, 2014.
- 10 Gauthier, D., Zerguerras, S., Flamant, G.: Influence of the particle size distribution of powders on the velocities of minimum and complete fluidization, *Chem. Eng. J.*, 74, 181–196, 1999.
- Geldart, D.: Types of gas fluidization, *Powder Technol.*, 7, 285–292, 1973.
- 15 Guichard, J. C. in: B. Liu (Ed.): *Aerosol Generation Using Fluidized Beds, Fine Particles: Aerosol Generation, Measurement, Sampling, and Analysis*, Academic Press, New York, 1976.
- Hesse, E., Ulanowski, Z., Kaye, P. H.: Stability characteristics of cylindrical fibres in an electrodynamic balance designed for single particle investigation, *J. Aerosol Sci.*, 33(1), 149–163, 2002.
- 20 Hinds, W. C.: *Aerosol Technology: Properties, Behavior, and Measurement of Airborne Particles*, 2nd ed., Wiley Interscience, New York, 1999.
- 25 Hiranuma, N., Moehler, O., Yamashita, K., Tajiri, T., Saito, A., Kiselev, A., Hoffmann, N., Hoose, C., Jantsch, E., Koop, T., Murakami, M.: Ice nucleation by cellulose and its potential contribution to ice formation in clouds, *Nat. Geosci.*, 8(4), 273–277, 2015.
- 30 [Kumar, P., Sokolik, I. N., and Nenes, A.: Cloud condensation nuclei activity and droplet activation kinetics of wet processed regional dust samples and minerals, *Atmos. Chem. Phys.*, 11, 8661-8676, 2011.](#)
- Lind, T., Danner, S., Guentay, S.: Monodisperse fine aerosol generation using fluidized bed, *Powder Technol.*, 199, 232–237, 2010.

- Marple, V. A., Liu, B. Y. H. and Rubow, K. L.: A dust generator for laboratory use, *Am. Ind. Hyg. Assoc. J.*, 39, 26-32, 1978
- Mehrani, P., Bi, H. T., Grace, J. R.: Bench-scale tests to determine mechanisms of charge generation due to particle-particle and particle-wall contact in binary systems of fine and coarse particles, *Powder Technol.*, 173, 73–81, 2007.
- Moreno, F., Blann, D. in: B. Liu (Ed.): Large Flow Rate Redispersion Aerosol Generator, *Fine Particles: Aerosol Generation, Measurement, Sampling, and Analysis*, Academic Press, New York, 1976.
- 10 Murphy, D. M.: The design of single particle laser mass spectrometers, *Mass. Spectrom. Rev.*, 26, 150–165, 2006.
- Niedermeier, D., Hartmann, S., Shaw, R. A., Covert, D., Mentel, T. F., Schneider, J., Poulain, L., Reitz, P., Spindler, C., Clauss, T., Kiselev, A., Hallbauer, E., Wex, H., Mildenberger, K., and Stratmann, F.: Heterogeneous freezing of droplets with immersed mineral dust particles - measurements and parameterization, *Atmos. Chem. Phys.*, 10(8), 3601–3614, 2010.
- 15 Sullivan, R. C., Moore, M. J. K., Petters, M. D., Kreidenweis, S. M., [Qafoku, O., Laskin, A., Roberts, G. C., and Prather, K. A.: Impact of Particle Generation Method on the Apparent Hygroscopicity of Insoluble Mineral Particles, *Aerosol Sci. Technol.*, 44, 830-846, 2010.](#)
- 20 Sullivan, R. C., Moore, M. J. K., Petters, M. D., Kreidenweis, S. M., Roberts, G. C., and Prather, K. A.: Timescale for hygroscopic conversion of calcite mineral particles through heterogeneous reaction with nitric acid, *Phys. Chem. Chem. Phys.*, 11, 7826-7837, 2009
- 25 [Tang, M. J., Cziczo, D. J., and Grassian, V. H.: Interactions of Water with Mineral Dust Aerosol: Water Adsorption, Hygroscopicity, Cloud Condensation and Ice Nucleation. *Chem. Rev.*, 116, 4205–4259, 2016.](#)
- Tobo, Y., DeMott, P. J., Raddatz, M., Niedermeier, D., Hartmann, S., Kreidenweis, S. M., Stratmann, F., and Wex, H.: Impacts of chemical reactivity on ice nucleation of kaolinite particles: A case study of levoglucosan and sulfuric acid, *Geophys. Res. Lett.*, 39, 2012.
- 30 Wang, Z., Kwak, M., Li, H.: Fluidization of fine particles, *Chem. Eng. Sci.*, 53, 377–395, 1998.
- 35 [Wiedensohler, A., Birmili, W., Nowak, A., Sonntag, A., Weinhold, K., Merkel, M., Wehner, B., Tuch, T., Pfeifer, S., Fiebig, M., Fjaraa, A. M., Asmi, E., Sellegri, K., Depuy, R., Venzac, H., Villani, P., Laj, P., Aalto, P., Ogren, J. A., Swietlicki, E., Williams, P., Roldin, P., Quincey, P., Hüglin, C., Fierz-Schmidhauser, R., Gysel, M., Weingartner, E., Riccobono, F., Santos, S., Gruning, C., Faloon, K., Beddows, D., Harrison, R. M., Monahan, C., Jennings, S. G., O'Dowd, C. D., Marinoni,](#)

[A., Horn, H. G., Keck, L., Jiang, J., Scheckman, J., McMurry, P. H., Deng, Z., Zhao, C. S., Moerman, M., Henzing, B., de Leeuw, G., Loschau, G., Bastian, S.: Mobility particle size spectrometers: harmonization of technical standards and data structure to facilitate high quality long-term observations of atmospheric particle number size distributions, Atmos. Meas. Tech., 5, 657-685, 2012.](#)

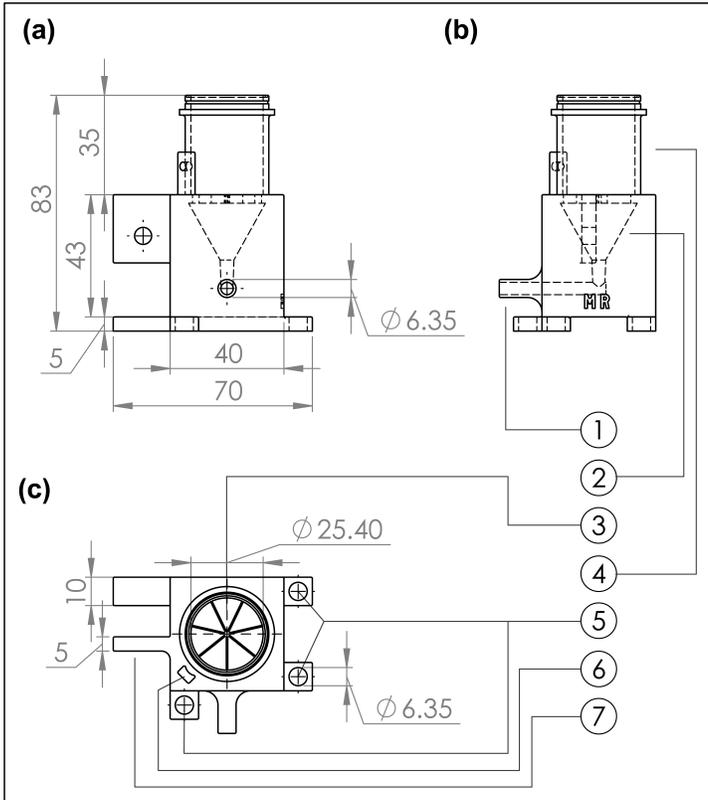

5 | Figure 1: Dimensioned drawings of PRIZE: (a) rear view; (b) side view; (c) top view. All dimensions are in millimeters. The generator body consists of 7 components; (1) inlet, (2) internal cone, (3) radial grid with openings, (4) elutriator tube, (5) mounting holes, (6) LED mount, and (7) rotameter (or other flow meter) mount.

Michael 27.4.17 14:28

Deleted: the

Michael 27.4.17 14:28

Deleted: body


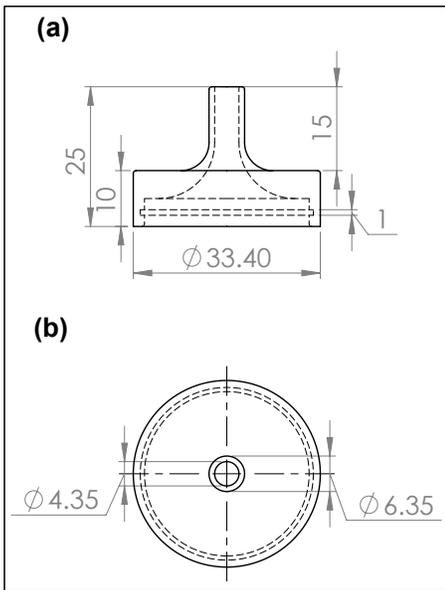


Figure 2: Dimensioned drawing of a single port outlet lid: (a) side view; (b) top view. All dimensions are in millimeters.

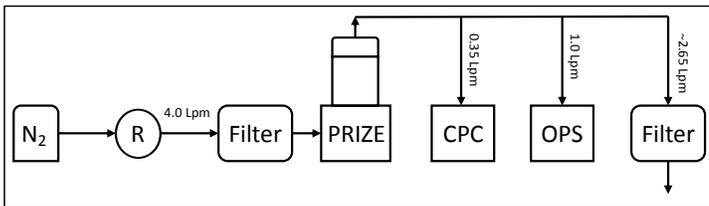

5 Figure 3: Schematic of the experimental setup used in this study. A filtered dry nitrogen flow was controlled by a rotameter (R) upstream of PRIZE. Downstream, the flow was split into three parts to a CPC, an OPS, and excess flow discarded through a filter.

Michael 27.4.17 14:28
Deleted: equal length pathways

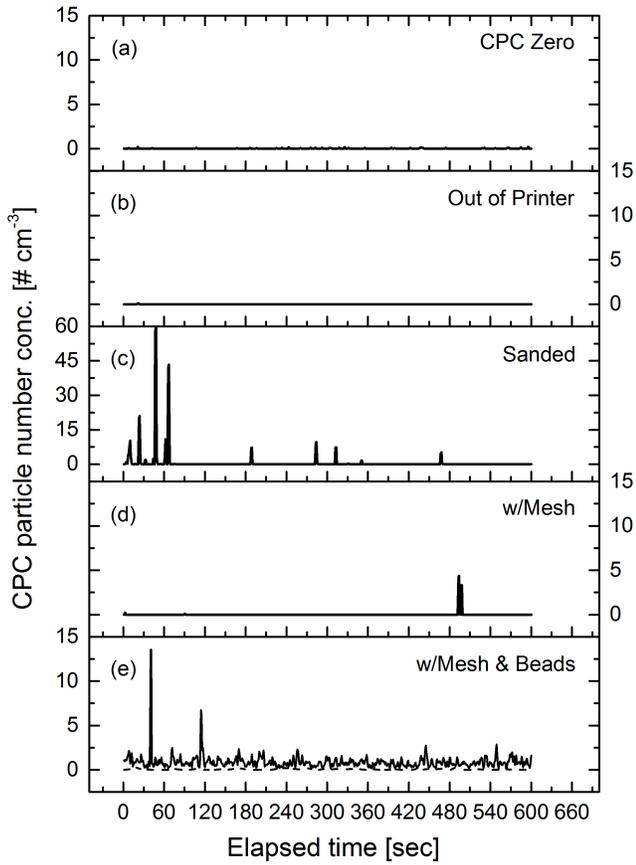


Figure 4: Time-series measurements of particle number concentrations: (a) CPC with filter; (b) freshly printed generator; (c) through the generator after wet sanding; (d) through the generator after wet sanding and installing the porous screen; (e) fully assembled generator including porous screen and bronze beads atop as bed material, without (solid line) and with a stainless steel insert (dashed line).

Michael 27.4.17 14:28

Deleted:

Michael 27.4.17 14:28

Deleted: filter measurement; (b-e) at different assembling stages of the PRIZE generator.

E

5

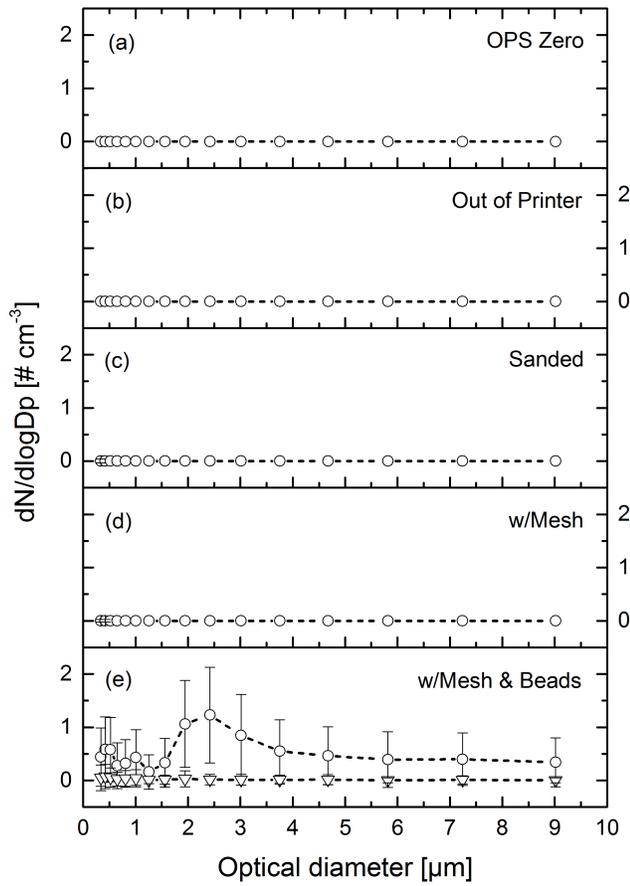


Figure 5: Average particle size distributions: (a) OPS with filter; (b) freshly printed generator; (c) through the generator after wet sanding; (d) through the generator after wet sanding and installing the porous screen; (e) fully assembled generator including porous screen and bronze beads atop as bed material, without (circles) and with a stainless steel insert (triangles).

Michael 27.4.17 14:28

Deleted:
Michael 27.4.17 14:28
Deleted: Averaged...verage particle nur... [10]

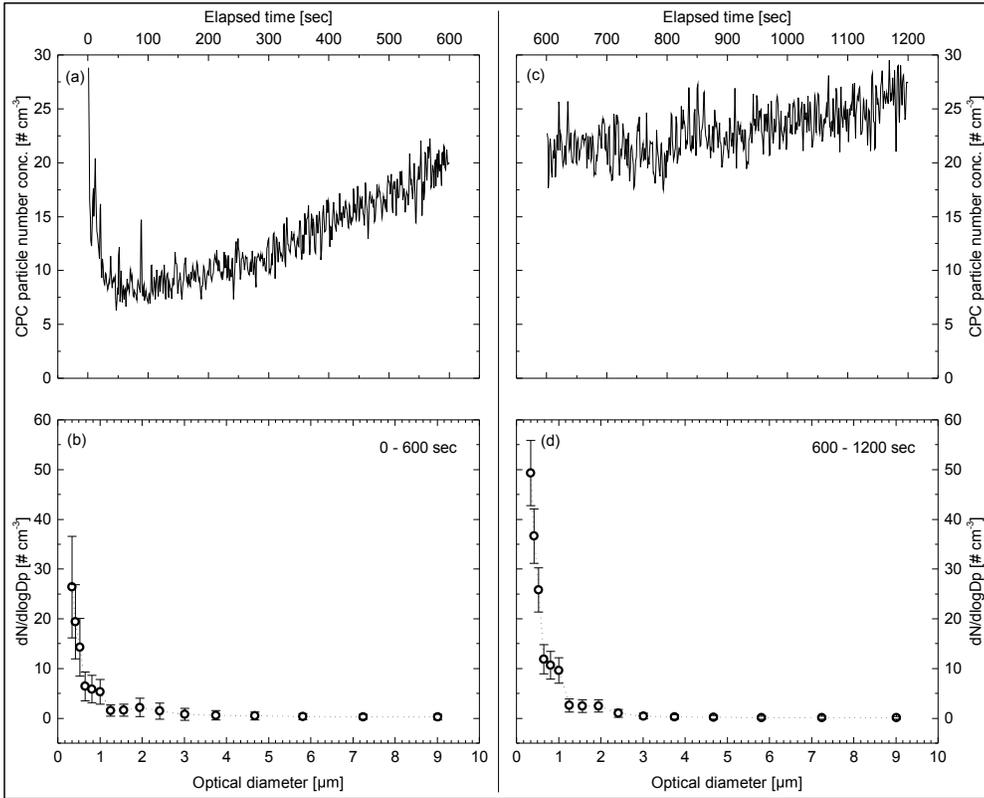


Figure 6: Arizona Test Dust measurements: (a) particle number concentration for the first 600 seconds; (b) corresponding particle size distribution; (c) particle number concentration for the second 600 seconds; (d) corresponding particle size distribution.

- Michael 27.4.17 14:28
Deleted: averaged
- Michael 27.4.17 14:28
Deleted: number
- Michael 27.4.17 14:28
Deleted: averaged
- Michael 27.4.17 14:28
Deleted: number

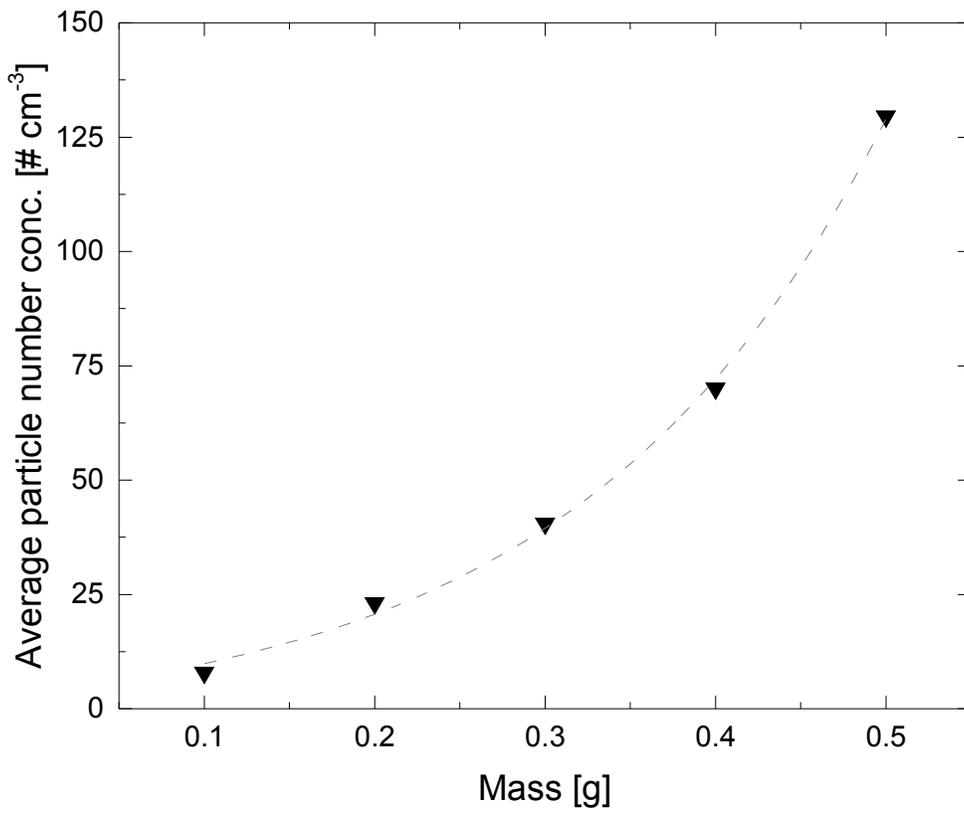


Figure 7: Particle number concentration generated as a function of Arizona Test Dust mass in the fluidized bed (triangles) with a fitted exponential curve (dashed line).

Michael 27.4.17 14:28
Deleted: Average particle

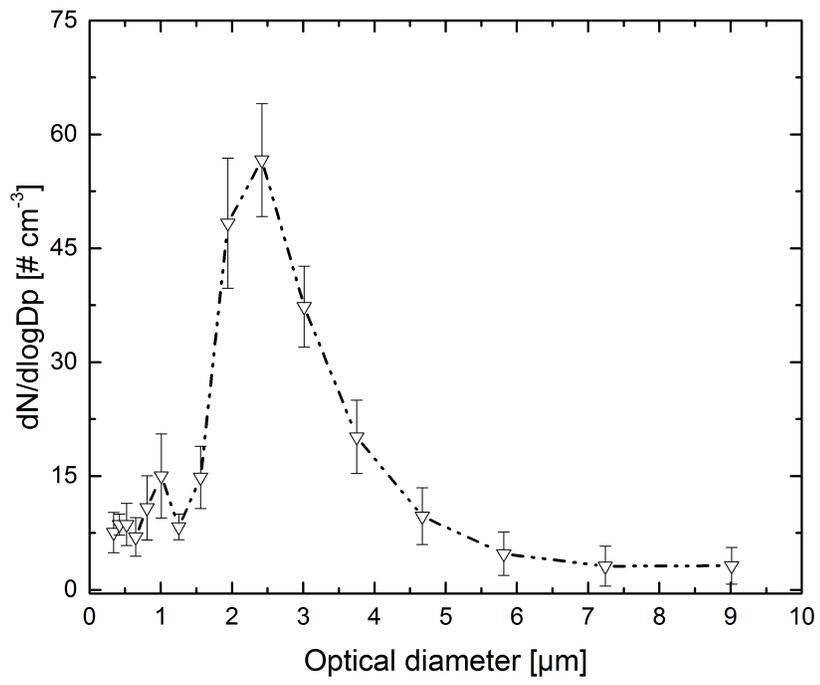


Figure 8: Average particle size distribution with corresponding standard deviations as a function of optical particle diameter. Particles were generated from a Saudi Arabian arid soil dust sample.

5

10

Table 1: PRIZE assembly stages, the action taken and the particle detection results at the CPC and OPS. Corresponding particle number concentration time-series measurements and size distributions are provided in Figures 4 and 5, respectively.

Stage	Action	CPC	OPS
Out of printer	Freshly printed test	No	No
Sanded	Wet sanded with 800 & 2000 grit	Yes	No
w/Mesh	Screen installed	Yes	No
w/Mesh&Beads	Bed material added	Yes	Yes
		(4e)	(5e)

- Michael 27.4.17 14:28
Deleted: Assembly
- Michael 27.4.17 14:28
Deleted: of the PRIZE generator
- Michael 27.4.17 14:28
Deleted: which was
- Michael 27.4.17 14:28
Deleted: averaged particle
- Michael 27.4.17 14:28
Deleted: can be found
- Michael 27.4.17 14:28
Deleted: Raw print tested
- Michael 27.4.17 14:28
Deleted: Raw print wet
- Michael 27.4.17 14:28
Deleted: Porous screen was
- Michael 27.4.17 14:28
Deleted: into the sanded generator
- Michael 27.4.17 14:28
Deleted: &
- Michael 27.4.17 14:28
Deleted: Bronze beads were
- Michael 27.4.17 14:28
Deleted: to the bed