

Improved optical flow velocity analysis in SO₂ camera images of volcanic plumes - Implications for emission-rate retrievals investigated at Mt. Etna, Italy and Guallatiri, Chile

Jonas Gliß^{1,2,3}, Kerstin Stebel¹, Arve Kylling¹, and Aasmund Sudbø³

¹Norwegian Institute for Air Research, Kjeller, Norway

²Department of Physics, University of Oslo (UiO), Oslo, Norway

³Department of Technology Systems, University of Oslo (UiO), Kjeller, Norway

Correspondence to: Jonas Gliß (jg@nilu.no)

Abstract. Accurate gas velocity measurements in emission plumes are highly desirable for various atmospheric remote sensing applications. The imaging technique of UV SO₂ cameras is commonly used for monitoring of SO₂ emissions from volcanoes and anthropogenic sources (e.g. power plants, ships). The camera systems capture the emission plumes at high spatial and temporal resolution. This allows to retrieve the gas velocities in the plume directly from the images. The latter can be measured at a pixel level using optical flow (OF) algorithms. This is particularly advantageous under turbulent plume conditions. However, OF algorithms intrinsically rely on contrast in the images and often fail to detect motion in low-contrast image areas. We present a new method to identify ill-constrained OF motion-vectors and replace them using the local average velocity vector. The latter is derived based on histograms of the retrieved OF motion-fields. The new method is applied to two example datasets recorded at Mt. Etna (Italy) and Guallatiri (Chile). We show that in many cases, the uncorrected OF yields significantly underestimated SO₂ emission-rates. We further show, that our proposed correction can account for this and that it significantly improves the reliability of optical flow based gas velocity retrievals.

In the case of Mt. Etna, the SO₂ emissions of the north-east crater are investigated. The corrected SO₂ emission-rates range between 4.8 – 10.7 kg/s (average: 7.1 ± 1.3 kg/s) and are in good agreement with previously reported values. For the Guallatiri data, the emissions of the central crater and a fumarolic field are investigated. The retrieved SO₂ emission-rates are between 0.5 – 2.9 kg/s (average: 1.3 ± 0.5 kg/s) and provide the first report of SO₂ emissions from this remotely located and inaccessible volcano.

1 Introduction

Studying and monitoring of gas emissions is highly desirable since the emitted gases can have substantial environmental impacts. This includes both natural and anthropogenic sources such as volcanoes, industrial areas, power plants, urban emissions or wildfires. The measurements can help to better assess regional and global impacts of the emissions, for instance, related to air-quality standards and pollution monitoring or climate impacts (e.g. Schwartz, 1994, Robock, 2000, IPCC, 2013). Sulfur dioxide (SO₂), in particular, is a toxic gas emitted both by anthropogenic and natural sources (e.g. power plants, ships, volca-

noes). The pollutant has various impacts, both of socio-environmental and economic nature (e.g. human health, agriculture) and on the climate (e.g. being a precursor of stratospheric sulfur aerosols, Wigley, 1989). Furthermore, SO_2 is an important monitoring parameter related to volcanic risk assessment (e.g. Fischer et al., 1994, Caltabiano et al., 1994).

- 5 Passive remote sensing techniques are commonly used for monitoring of gas emissions from localised emitters (or point sources). The instruments are based on the principle of light absorption and typically measure path integrated concentrations (column densities, CDs) of the gases. Instrumentation can be ground, airborne and satellite based and can cover wavelengths ranging from the near ultraviolet (UV) up to thermal long-wave infrared (LWIR), either using solar or thermal radiation as light source. Note that the term “point-source” is not clearly defined and may, in some cases, refer to scales of several kilometres
- 10 (e.g. a whole city in case of space based observations), and in other cases, to only a few metres (e.g. a power-plant chimney for ground based near-source measurements).

Gas emission-rates (or fluxes) of the sources are typically retrieved along a plume transect ℓ by integrating the product of the measured CDs with the local gas velocities in the plume. The latter may be estimated using meteorological weather data (e.g. Frins et al., 2011) or using correlation techniques (e.g. Williams-Jones et al., 2006, Johansson et al., 2009) in case the

15 measurements are performed at a moderate sampling rate (e.g. spectroscopic instrumentation such as COSPEC or scanning DOAS instruments, e.g. Moffat and Millan, 1971, Platt and Stutz, 2008) and at sufficient source distance.

A more recent measurement technique is based on camera systems which are equipped with wavelength selective filters (e.g. McElhoe and Conner, 1986, Mori and Burton, 2006, Prata and Bernardo, 2014, Kuhn et al., 2014, Dekemper et al.,

20 2016). The imaging devices can be used to create instantaneous CD maps of the measured species (e.g. SO_2 , NO_2) at high spatial resolution and at sampling rates potentially down into the sub-Hz regime (dependent on the optical setup and lighting conditions). This allows to study high frequency variations in the emission signals or to investigate individual sources separately (e.g. Tamburello et al., 2013, D’Aleo et al., 2016). As a result, the cameras are often pointed at source-vicinity, where the plumes can show turbulent behaviour, mostly a result of aerodynamic effects and buoyancy. The resulting velocity fields often deviate

25 significantly from the meteorological background wind field. Luckily, the high resolution of the imaging systems allows us to account for these spatial and temporal fluctuations by directly measuring the projected 2D velocity fields using optical flow (OF) algorithms (e.g. Krueger et al., 2013, Bjornsson et al., 2013, Peters et al., 2015, Lopez et al., 2015, Stebel et al., 2015, Kern et al., 2015).

OF algorithms can detect motion at the pixel-level by tracking distinct image features in consecutive frames. In the following,

30 the basic principles of the OF computation are briefly introduced, as well as different optimisation strategies (see e.g. Jähne, 1997, Fleet and Weiss, 2006, Fortun et al., 2015 for a comprehensive introduction into the topic). OF algorithms are based on the assumption that a certain image quantity, such as the brightness I or the local phase ϕ , is conserved between consecutive frames. Then, a continuity equation of the form

$$\partial_t g + \mathbf{f} \nabla_{ij} g = 0 \tag{1}$$

can be used to describe the apparent motion of brightness (or phase) patterns between two frames. Here, $\mathbf{f} = [u, v]^T$ denotes the flow vector in the detector coordinate system i, j . g is the conserved quantity (e.g. I, ϕ), $\nabla_{ij} = [\partial_i, \partial_j]^T$ and ∂_t denote the spatial and temporal differentiation operators. Eq. 1 is typically referred to as the optical flow constraint (OFC) equation and can be solved numerically per image-pixel, for example, using a least-squares or a total least-squares optimisation scheme. The

5 OFC states an ill-posed problem, as it seeks to find the two velocity components u and v from a single constraint (i.e. I or ϕ , cf. Eq. 1). This is commonly referred to as the *aperture problem* and is typically accounted for by introducing further constraints that impose spatial coherency to the flow field. These can be subdivided into *local* and *global* constraints, or a combination of both (e.g. Bruhn et al., 2005). *Local* methods (e.g. Lucas and Kanade, 1981) apply the coherency constraint only within a certain neighbourhood around each pixel (the size of this aperture can usually be set by the user). Thus, for pixel-positions that

10 do not contain at least one *trackable* feature within the neighbourhood specified by the aperture size, the algorithm will fail to detect motion. We shall see below, that this can be a fundamental problem for the emission-rate analysis using plume imagery, in case extended homogeneous plume regions coincide with a retrieval transect ℓ . The problem is less pronounced for OF algorithms using *global* constraints (e.g. the algorithm by Horn and Schunck, 1981 which is used in Kern et al., 2015), which can propagate reliable motion vectors over larger image areas. However, note that, dependent on the optimisation strategy, *global*

15 regularisers are often more sensitive to noise (e.g. Barron et al., 1994) and are typically computationally more demanding (e.g. Fleet and Weiss, 2006).

Most of the modern OF algorithms include a multi-scale analysis where the flow-field is retrieved from coarse to fine features, using image pyramids combined with suitable warping techniques (e.g. Anandan, 1989). This can significantly increase the robustness of the results and is of particular relevance in case of large displacements (i.e. several image-pixels, e.g. Beauchemin

20 and Barron, 1995, Fleet and Weiss, 2006).

Optical flow inter-comparison benchmarks (e.g. Baker et al., 2011, Menze and Geiger, 2015) can provide useful information to assess the performance (e.g. accuracy) and applicability (e.g. computational demands, availability of source-code) of different OF algorithms. Particularly important for the emission-rate analysis is the computational efficiency as well as the per-

25 formance within homogeneous image-regions. As discussed above, the latter may be optimised via the incorporated coherency constraints (e.g. by increasing the *local* averaging neighbourhood around each pixel) or by performing a multi-scale analysis. However, this can significantly increase in the required computation times (e.g. Fleet and Weiss, 2006) and may therefore be inapplicable, especially for near-real time analyses.

30 Given these challenges, in many cases the choice of a suitable OF algorithm will be a trade-off between computational efficiency and the performance within homogeneous image-regions. In order to rule out potential failures in the OF retrieval, it is therefore highly desirable to assess the OF performance before calculating the emission-rates. In this paper, we propose a new method, which analyses an OF displacement-vector-field (*DVF*) in order to identify and correct for potentially unphysical OF motion-estimates. The correction is performed in a localised manner, within a specific region-of-interest (ROI) in the

35 images (e.g. in proximity to a plume transect ℓ). It measures the local-average-velocity-vector (LAVV) within the ROI, based

on distinct peaks in histograms computed from the local *DVF*. The strengths of the method are 1) that it is independent of the choice of the OF algorithm and 2) that the additional computational demands are small compared to the OF computation time. The new method is introduced using the Farnebäck optical flow algorithm (Farnebäck, 2003) which showed promising results in Peters et al. (2015) and which is freely available in the OpenCV library (e.g. Bradski, 2000). We use two different volcanic datasets recorded at Mt. Etna, Italy and Guallatiri, Chile to show, that our method can successfully detect and correct for unphysical OF motion estimates during the emission-rate analysis.

The paper is organised as follows: Sect. 2 starts with a short introduction into the technique of UV SO₂ cameras and the required data analysis. Sect. 2.2 provides information about the two datasets (i.e. technical setup, measurement locations), followed by details regarding the image analysis of both datasets (Sect. 2.3). The proposed correction for optical flow based velocity retrievals is introduced in Sect. 2.4. In Sect. 3 the retrieved SO₂ emission-rates for the Etna and Guallatiri datasets are presented and compared to results based on 1. the uncorrected OF *DVF* and 2. assuming a constant global plume velocity using the cross-correlation lag of integrated plume intersections (e.g. McGonigle et al. (2005)). A summary and discussion is given in Sect. 4, followed by our conclusions.

2 Methodology

2.1 UV SO₂ cameras

UV SO₂ cameras measure plume optical densities (ODs) in two wavelength windows of about 10nm width using dichroic filters. The two filters are typically centered around 310 nm (SO₂ “on-band” filter, i.e. sensitive to SO₂ absorption) and, at nearby wavelengths, around 330 nm (SO₂ “off-band” filter). The latter is used for a first order correction of aerosole scattering in the plume (e.g. Kern et al., 2010). An apparent absorbance (AA) of SO₂ can then be calculated based on the ODs measured in both channels:

$$\tau_{AA} = \tau_{on} - \tau_{off} = \ln\left(\frac{I_0}{I}\right)_{on} - \ln\left(\frac{I_0}{I}\right)_{off}. \quad (2)$$

Here, I , I_0 denotes the measured plume and corresponding background intensities, respectively. Note that all quantities in Eq. 2 are a function of the detector pixel position i, j (e.g. $\tau_{AA} \rightarrow \tau_{AA}(i, j)$). The calibration of the measured AA values (i.e. conversion into SO₂ column densities $S_{SO_2}(i, j)$) can be performed using SO₂ calibration cells or using data from a DOAS spectrometer viewing the plume (Lübcke et al., 2013) or a combination of both. The SO₂ emission-rates are typically calculated along a suitable plume cross section (PCS) ℓ in the SO₂-CD images $S_{SO_2}(i, j)$ (e.g. a straight line) by performing a discrete integration of the form:

$$\Phi(\ell) = f^{-1} \sum_{m=1}^M S_{SO_2}(m) \cdot v_{eff}(m) \cdot d_{pl}(m) \cdot \Delta s(m), \quad (3)$$

where m denotes interpolated image coordinates (i, j) along ℓ , f is the camera focal length, d_{pl} is distance between the camera and the plume and $\Delta s(m)$ is the integration step length (for details see Gliß et al., 2017). The effective velocity

$$\mathbf{v}_{\text{eff}}(m) = \langle \bar{\mathbf{v}}(m) \cdot \hat{\mathbf{n}}(m) \rangle \quad (4)$$

is measured relative to the normal $\hat{\mathbf{n}}$ of ℓ (i.e. constant in case of straight retrieval lines) using the corresponding velocity vector $\bar{\mathbf{v}}(m)$. The velocities, if retrieved from the images, represent averages along the line-of sight (LoS) of each pixel (see e.g. Krueger et al., 2013 for a derivation). Since the velocity components in LoS direction cannot be measured from the images, the measured velocities are approximately underestimated by a factor of $\cos(\alpha)$ (α being the angle between plume direction and image plane). However, to first order (and at small angles α), this cancels out since the length of the LoS inside the plume (and thus, the measured SO₂ CDs) increases by approximately the same $\cos(\alpha)$ factor (Mori and Burton, 2006).

10 2.2 Example data

The proposed method to correct for unphysical OF velocity vectors is applied to two volcanic datasets recorded at Mt. Etna (Italy) and Guallatiri volcano (Chile). Both datasets were recorded using a filter-wheel based UV SO₂ camera including a DOAS spectrometer. Details about the technical setup for both datasets are summarised in Table 1.

Table 1. Instrumental setup during both campaigns

		Etna	Guallatiri
Camera	UV Camera	Hamamatsu C8484-16C	Hamamatsu C8484-16C
	On-band filter	Asahi UUX0310	Omega Optical, 310BP10
	Off-band filter	Asahi XBPA330	Omega Optical, 325BP12
	UV lens (focal length)	25 mm	50 mm
DOAS	Spectrometer	Ocean Optics USB 2000+	Avantes AvaSpec-ULS2048x64
	T-stabilisation	No (ambient)	20°
	Telescope	$f = 100 \text{ mm}, f/4$	$f = 100 \text{ mm}, f/4$
	Optical fiber	400 μm	400 μm

2.2.1 Etna data

- 15 Mt. Etna is a stratovolcano situated in the eastern part of the island of Sicily, Italy. We present a short UV camera dataset recorded on 16.09.2015 between 07:06 – 07:22 UTC (see Table 1 for a technical setup of the instruments used for the observations). The data was recorded during a field campaign which took place about 2.5 months prior to a major eruptive event (i.e. in early December 2015, e.g. Smithsonian-Institution, 2013a). The volcano showed quiescent degassing behaviour during all

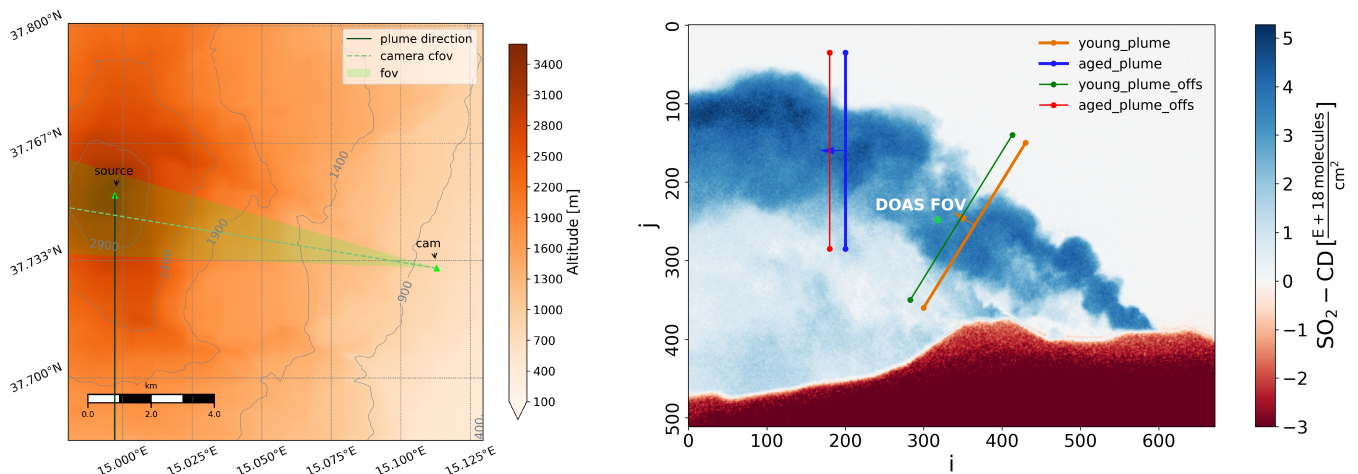


Figure 1. Left: Etna overview map showing position and viewing direction of the camera (*camera cfov*, *fov*) which was located on a roof-top in the town of Milo. Also indicated is the summit area (*source*) and the plume azimuth (*plume direction*). Right: example SO₂-CD image of the Etna plume including two PCS lines (orange / blue) used for emission-rate retrievals and two corresponding offset lines (green, red), that are used for cross-correlation based plume velocity retrievals (cf. Appendix B4). Position and extent of the DOAS-FOV for the camera calibration is indicated by a green spot. Note that the displayed plume image is size reduced by a factor of two (Gauss pyramid level 1).

days of the campaign. The measurements were performed from the roof-top of a building located in the town of Milo, about 10.3 km from the source. An overview map is shown in Fig. 1.

Plume conditions

- 5 During the 15 minutes of data, the meteorological conditions were stable showing a slightly convective plume of the Etna north-east crater (NEC) advected downwind (into the left image half, cf. Fig. 1). The emissions of the other craters are more diffuse and could not be fully captured since they were partly covered by the volcanic flank. Therefore, we kept the focus on the NEC emissions which were investigated along two example PCS lines located at two different positions downwind of the source (orange / blue lines in Fig. 1). A video of the Etna emissions is shown in supplementary video no. 1.

10 2.2.2 Guallatiri data

Guallatiri (18° 25' 00" S, 69° 5' 30" W, 6,071 m a.s.l.) is a stratovolcano located in the Altiplano, northern Chile. The last confirmed eruptive events date back to 1960 (Smithsonian-Institution, 2013b). Due to its remote location little is known about the volcano.

- 15 The presented data are part of a short field campaign between 20 and 22 November 2014. During the three days, the volcano showed quiescent degassing behaviour from the central crater and from a fumarolic field on the SW flank of the volcano. Due to frequent cloud abundances, only a small fraction of the acquired data was suited for the investigation of the SO₂ emissions. A

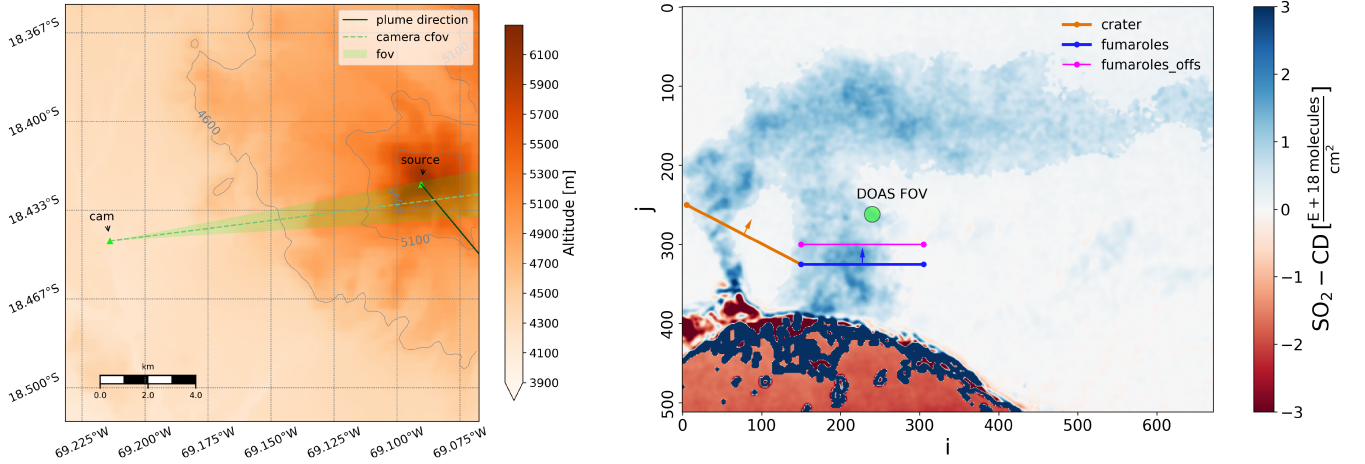


Figure 2. Left: Guallatiri overview map showing position and viewing direction of camera (*camera cfov*, *fov*), summit area (*source*) as well as the plume azimuth (*plume direction*). Right: example SO₂-CD image of the Guallatiri emissions including two PCS lines used to retrieve SO₂ emission-rates from the central crater (orange) and from a fumarolic field (blue) located behind the flank in the viewing direction. An additional line (magenta) is used to estimate gas velocities using a cross-correlation algorithm (relative to blue PCS line, cf. Appendix B4). Position and extent of the DOAS-FOV is indicated by a green spot. Note that the displayed plume image is size reduced by a factor of two (Gauss pyramid level 1).

cloud free time window between 14:48 – 14:59 UTC on 22/11/2014 was chosen (see Table 1 for details about the instrumental setup). An overview map is shown in Fig. 2. The measurements were performed at a distance of 13.3 km away from the source.

Plume conditions

- 5 Compared to Etna, the Guallatiri emissions showed rather turbulent behaviour with strong variations in the local velocities. The central crater plume, in particular, changed its overall direction significantly over time which can be seen in supplementary video no. 2. Emission rates were retrieved along two (connected) PCS lines in the young plume shown in Fig. 2. The lines were chosen such that the emissions from the central crater and the fumarolic field could be investigated separately.

2.3 Data analysis

- 10 The image analysis was performed using the Python software *Pyplis* (Gliß et al., 2017). In a first step, all images were corrected for electronic offset and dark current followed by a first order correction for the signal dilution effect. The latter was applied based on Campion et al., 2015 using suitable volcanic terrain features in the images to retrieve an estimate of the atmospheric scattering extinction coefficients in viewing direction of the camera. The extinction coefficients were used to correct the measured radiances of plume image pixels for the scattering contribution. The latter were identified using an appropriate τ
- 15 threshold applied to on-band OD images.

The sky background intensities (required to for the retrieval of AA images, Eq. 2) were determined using on/off sky reference images (SRI) recorded close in time to the plume image data. The background retrieval was done using the background modelling methods 6 (Etna) and 4 (Guallatiri) of the used analysis software *Pyplis* (Gliß et al., 2017, cf. Table 2 therein). Variations in the sky background intensities and curvature between the plume images and SRI were corrected both in horizontal and vertical direction using suitable gas (and cloud) free sky reference areas in the plume images. All AA images were corrected for cross detector variations in the SO₂ sensitivity using a correction mask calculated from cell calibration data as outlined by Lübecke et al. (2013). The AA images were calibrated using plume SO₂-CDs retrieved from a co-located DOAS instrument (cf. Table 1, see Sect. B1 for details regarding the DOAS retrieval). Position and extent of the DOAS-FOV within the camera images are shown in Figs. 1 (Etna) and 2 (Guallatiri) and were identified using the Pearson correlation method described in Gliß et al. (2017).

The gas velocities in the plume were retrieved both using the Farnebäck OF algorithm and the cross correlation method outlined in McGonigle et al. (2005). Nonphysical OF motion vectors along the emission-rate retrieval lines were identified and corrected for using the proposed OF histogram method, which is described in Sect. 2.4. Note that for the analysis all images were downsampled by a factor of 2 (using a Gaussian pyramid approach).

2.3.1 Etna

The required plume distances for the emission-rate retrieval were derived from the camera location and viewing direction and assuming a meteorological wind direction of $(0 \pm 20)^\circ$ (north-wind, cf. Fig. 1). The latter was estimated based on visual observation. The camera viewing direction was retrieved using the position of the south-east (SE) crater in the images. The signal dilution correction was performed using atmospheric scattering extinction coefficients retrieved 20 minutes prior to the presented observations (i.e. from one on and one off-band image recorded at 06:45 UTC, cf. Fig. 10 in Gliß et al., 2017). During this time the camera was pointed at a lower elevation angle and the images contained more suitable terrain features for the correction. Extinction coefficients of $\epsilon_{\text{on}} = 0.0743 \text{ km}^{-1}$ and $\epsilon_{\text{off}} = 0.0654 \text{ km}^{-1}$ could be retrieved and were used to correct plume image pixels. The latter were identified from on-band OD images using a threshold of $\tau_{\text{on}} = 0.05$. The dilution corrected AA images were calibrated using the DOAS calibration curve shown in Appendix B2. The linear calibration polynomial was retrieved prior to the analysis using camera AA-values that were not corrected for the signal-dilution effect and the corresponding SO₂-CDs measured with the DOAS spectrometer (for details see Appendix B2).

2.3.2 Guallatiri

The plume distances were retrieved per pixel column assuming a meteorological wind direction of $(320 \pm 15)^\circ$. The latter was estimated based on visual observation combined with a MODIS image (see supplementary material) recorded at 15:05 UTC, in which the plume could be identified. The viewing direction of the camera was retrieved based on the geographical location of the summit area in the images.

The dilution correction was performed using scattering extinction coefficients of $\epsilon_{\text{on}} = 0.0855 \pm 0.0012 \text{ km}^{-1}$ and $\epsilon_{\text{off}} = 0.0710 \pm 0.0008 \text{ km}^{-1}$. The latter were retrieved between 14:48 – 14:59 UTC using images from a second UV camera, which was equipped with a $f = 25 \text{ mm}$ lens (i.e. a wider FOV) and hence, contained more suitable topographic features for the retrieval. Plume pixels for the dilution correction were identified from on-band OD images using a threshold of $\tau_{\text{on}} = 0.02$. An example dilution corrected SO_2 -CD image is shown in Fig. 2. The DOAS calibration curve is shown in Appendix B2. Figure 2 shows an example dilution corrected and calibrated SO_2 -CD image.

2.3.3 Radiative transfer effects

Both the Etna and Guallatiri data were recorded at long distances ($> 10 \text{ km}$). Consequently, the applied dilution correction accompanies relatively large uncertainties of statistical nature, which we estimate to $\pm 50\%$, based on Campion et al. (2015). Furthermore, in-plume radiative transfer (e.g. multiple scattering due to aerosols, SO_2 saturation, see e.g. Kern et al., 2013) may have affected the results to a certain degree. However, both plumes showed only little to no condensation. We therefore assess the impact of aerosol multiple scattering negligible. In the case of Etna, SO_2 saturation around 310 nm may induce a small systematic underestimation in the SO_2 emission-rates. This is due to the comparatively large observed SO_2 -CDs of up to $5 \cdot 10^{18} \text{ cm}^{-2}$. The impact of SO_2 saturation is, however likely compensated to a certain degree, since the DOAS SO_2 -CDs (used to calibrate the camera) were retrieved at less affected wavelengths between $\Delta\lambda_0 \approx (315 - 326) \text{ nm}$ (cf. Appendix B1). The same fit-interval is used in Gliß et al. (2015) who performed MAX-DOAS measurements of the Etna plume under comparable conditions. They account for SO_2 saturation by using the weak SO_2 -bands between $\Delta\lambda_1 \approx (350 - 373) \text{ nm}$ (see also Bobrowski et al., 2010) and find relative deviations of about 10% between the two wavelength ranges and for SO_2 -CDs exceeding $5 \cdot 10^{18} \text{ cm}^{-2}$ (i.e. $\frac{\Delta\lambda_0}{\Delta\lambda_1} \approx 0.9$ cf. Fig. A3 in Gliß et al., 2015). We therefore estimate the impact of SO_2 saturation to be below 20% for our data.

2.4 Optical flow histogram analysis

We developed a method to improve optical flow (OF) based gas velocity retrievals needed for the analysis of SO_2 emission-rates (Eq. 3) using UV camera systems. The OF analysis of an image pair yields dense displacement vector fields (*DVF*'s) of the observed gas plumes. In some areas of the image, the *DVF* represents the actual physical motion of gas in the plume, while other image areas may contain unphysical motion vectors (e.g. in low-contrast plume regions, cf. Sect. 1). The proposed method aims to identify all successfully constrained motion vectors and from these, derives an estimate of the average (or predominant) velocity vector in the plume. The latter is then used to replace unphysical motion vectors in the *DVF*. We recommend to perform the analysis in a localised manner, within a specific region-of-interest (ROI) since the velocity fields can show large fluctuations over the entire image (e.g. change in direction or magnitude). Figure 3 shows an example *DVF* (left) retrieved from the Etna plume including an example rectangular ROI (top). Two further images show the corresponding OF displacement orientation angles φ (middle) and flow vector magnitudes $|\mathbf{f}|$ (bottom). Histograms $\mathcal{M}$ (i.e. $\mathcal{M}_\varphi$, $\mathcal{M}_{|\mathbf{f}|}$) of the motion field are plotted in the right panels, respectively, and were calculated considering all image-pixels belonging to the displayed ROI. From the images and histograms, certain characteristics become clear:

1. Image regions containing unphysical motion estimates are characterised by (local) random orientation and short flow vectors (cf. sky background pixels).
2. These unphysical motion vectors manifest as a constant offset in $\mathcal{M}_\varphi$ and as a peak at the lower end of $\mathcal{M}_{|\mathbf{f}|}$.
3. Image regions showing reliable motion estimates, on the other hand, are characterised by (locally) homogeneous orientation φ and magnitudes $|\mathbf{f}|$ exceeding a certain minimum length $|\mathbf{f}|_{\min}$.
4. These successfully constrained motion vectors manifest as distinct peaks in $\mathcal{M}_\varphi$ and $\mathcal{M}_{|\mathbf{f}|}$.
5. The width of these peaks can be considered a measure of the local fluctuations, or the variance, of the velocities (e.g. a very narrow and distinct peak in $\mathcal{M}_\varphi$ would indicate a highly directional movement).

Based on these histogram peaks, the proposed method derives the local *predominant displacement vector* (*PDV*) $\overline{|\mathbf{f}|}$. A detailed mathematical description of the analysis is provided in Appendix A. In the following, the most important steps of the analysis are described.

The retrieval of the *PDV* starts with a peak analysis of $\mathcal{M}_\varphi$ and investigates whether a distinct and unambiguous peak can be identified in the histogram. If this is the case, the expectation value for the local movement direction φ_μ and the angular confidence interval $\mathcal{I}_\varphi$ are retrieved based on the position and the width of the main peak in $\mathcal{M}_\varphi$ (using the 1st and 2nd moments of the distribution). The analysis of $\mathcal{M}_\varphi$ involves a peak-detection routine based on a Multi-Gauss parametrisation. The latter is done to ensure that the retrieved parameters φ_μ and $\mathcal{I}_\varphi$ are not falsified due to potential additional peaks in the distribution (e.g. a cloud passing the scene, e.g. illustrated in Fig. 12). Based on the analysis of $\mathcal{M}_\varphi$, a second histogram $\mathcal{M}_{|\mathbf{f}|}$ is determined, containing the displacement magnitudes $|\mathbf{f}|$ of all vectors matching the angular confidence interval $\mathcal{I}_\varphi$ and exceeding the required minimum magnitude $|\mathbf{f}|_{\min}$. Also here, an expectation value $|\mathbf{f}|_\mu$ and confidence interval $\mathcal{I}_{|\mathbf{f}|}$ are estimated based on the 1st and 2nd moments of the histogram.

The analysis yields four parameters $p_{\text{ROI}} = (\varphi_\mu, \varphi_\sigma, |\mathbf{f}|_\mu, |\mathbf{f}|_\sigma)$ which are used to calculate the predominant displacement vector (*PDV*) within the corresponding ROI:

$$\bar{\mathbf{f}}(\text{ROI}) = [|\mathbf{f}|_\mu \cdot \sin \varphi_\mu, |\mathbf{f}|_\mu \cdot \cos \varphi_\mu]^T. \quad (5)$$

The projected plume velocity vector for the ROI can then be calculated as:

$$\bar{\mathbf{v}}(\text{ROI}) = \bar{\mathbf{f}}(\text{ROI}) \cdot \frac{d_{\text{pl}} \Delta_{\text{pix}}}{f \cdot \Delta t}, \quad (6)$$

where f and Δ_{pix} denote lens focal length and the pixel pitch of the detector, and d_{pl} is the distance between the camera and the plume. Ill-constrained motion vectors in the *DVF* can then be identified with a certain confidence based on $\mathcal{M}_\varphi$ and $\mathcal{M}_{|\mathbf{f}|}$. In this article, the method is demonstrated using the OpenCV (Bradski, 2000) Python implementation of the Farnebäck OF algorithm (Farnebäck, 2003, also used in Peters et al., 2015). It is pointed out, though, that it can be applied to *DVFs* from any motion estimation algorithm.

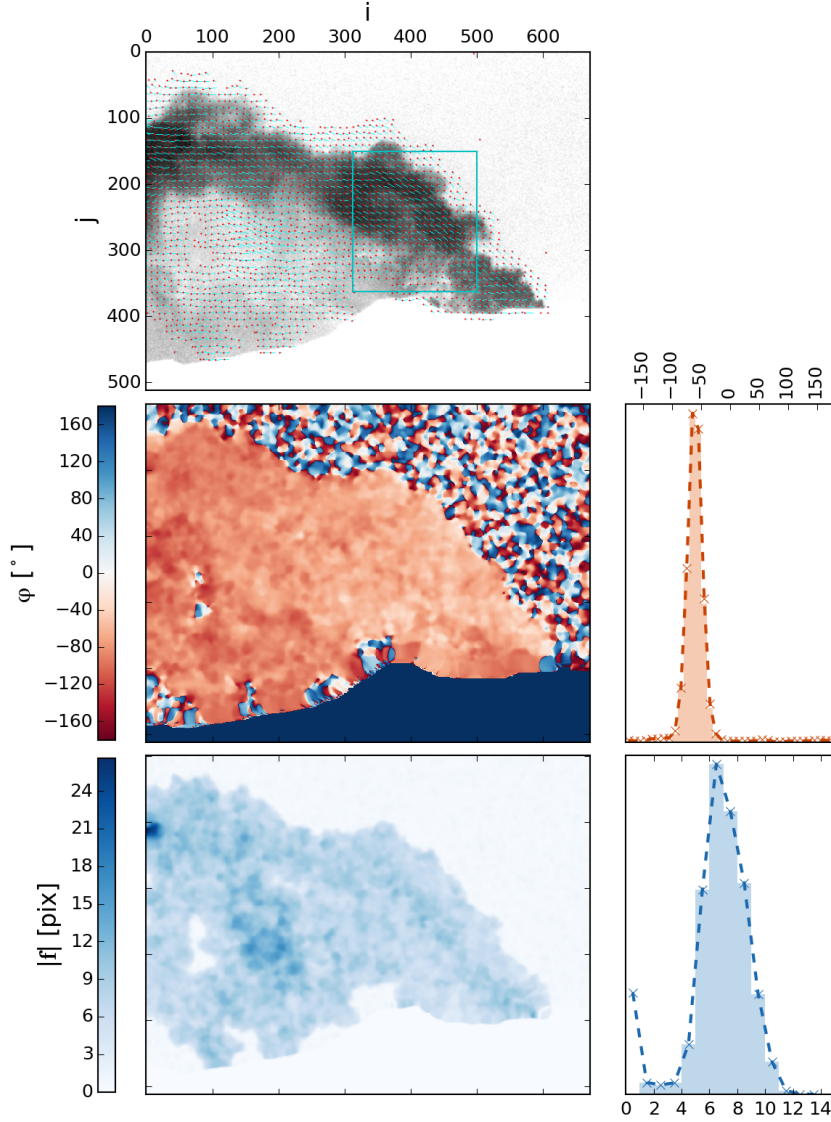


Figure 3. Example output of the Farnebäck optical flow algorithm including a rectangular ROI (top). Two further images show the corresponding orientation angles φ (middle) and magnitudes $|\mathbf{f}|$ (bottom) of the *DVF*. Corresponding histograms $\mathcal{M}_\varphi$ and $\mathcal{M}_{|\mathbf{f}|}$ are plotted on the right, respectively, and include all pixels in the displayed ROI. The histograms are plotted both including (dashed lines) and excluding (red / blue shaded areas) short flow vectors (i.e. $|\mathbf{f}| > |\mathbf{f}|_{\min} = 1.5\text{pix}$). The orientation angles are plotted in an interval $-180^\circ \leq \varphi \leq +180^\circ$ where -90° , $+90^\circ$ correspond to $-i$, $+i$ directions, respectively and 0° to the vertical upwards direction ($-j$). The *DVF* was calculated using two consecutive AA images ($\Delta t = 4.0\text{s}$) of the Etna plume, recorded on 16/09/2015 at 07:14 a.m.

2.4.1 Applicability and uncertainties

The proposed method offers an efficient solution to identify flow vectors containing actual gas movement and separate them from unphysical results in the *DVF*. The method is based on a local statistical analysis of the histograms $\mathcal{M}_\varphi$ and $\mathcal{M}_{|f|}$. A number of quality criteria were defined in order to ensure a reliable retrieval of the local displacement parameters:

- 5 C1: A minimum fraction $r_{\min}$ of all pixels in the considered ROI is required to exceed the minimum magnitude $|f|_{\min}$. The latter can, for instance, be set equal one or can be estimated based on the flow vector magnitudes retrieved in a homogeneous image area (e.g. randomly oriented sky background areas in Fig. 3).
- C2: The same minimum fraction $r_{\min}$ of pixels is required to match the angular expectation range specified by $\mathcal{I}_\varphi$ (at a certain confidence level $n\sigma$, cf. Appendices A and B3).
- 10 C3: If additional peaks are detected in $\mathcal{M}_\varphi$, they are required to stay below a certain significance value $\mathcal{S}$. The latter is measured relative to the main peak based on the integral values (cf. Appendix A3 and Fig. 12).

If any of these constraints cannot be met, the analysis is aborted. The settings used in this study are summarised in Table 2.

- Please note that the method cannot account for any uncertainties intrinsic to the used OF algorithm since these directly
- 15 propagate to the derived histogram parameters. It is therefore recommended, to assess the performance of the used OF algorithm independently and before applying the histogram correction (see e.g. Baker et al., 2011, Menze and Geiger, 2015). The Farnebäck algorithm used in this study showed sufficient performance both in Peters et al. (2015) and in the KITTI benchmark (cf. Menze and Geiger, 2015). The latter find that the algorithm yields correct velocity estimates in about 50 % of all cases (approximately 1σ). Here, “correct” means, that the disparity between a retrieved flow-vector endpoint and its true value does
 - 20 not exceed a threshold of 5 %. We therefore assume that the majority (i.e. $\approx 3\sigma$) of all successfully constrained flow vectors lie within a disparity radius of 15%. Based on this, we assume an intrinsic, conservative uncertainty of 15% for the effective velocities (Eq. 4) retrieved from successfully constrained flow vectors. Note that this is a somewhat arbitrary choice of the intrinsic uncertainty of the Farnebäck algorithm, solely based on the findings of Menze and Geiger (2015). However, we remark again, that it is beyond the scope of this paper to verify the accuracy of the Farnebäck algorithm, which we use to illustrate
 - 25 the performance of our new *post* analysis method. For all ill-constrained motion vectors which are replaced by the *PDV*, we assume a conservative uncertainty based on the width $n\sigma$ of the histogram peaks (cf. Appendices B3 and B5.1).

- Finally, we point out that the proposed histogram correction does not constitute any significant additional computational demands. For our data (i.e. 1344×1024 pix) and on an Intel i7, 2.9 GHz machine, the required computation time for the correction is typically less than 0.1 s. In contrast, the Farnebäck OF algorithm itself typically requires 1.5 s (same specs.) and can be con-
- 30 sidered fast, in comparison with other solutions (e.g. Baker et al. (2011)).

3 Results

The new method was applied to the Etna and Guallatiri datasets introduced in Sect. 2.2. SO_2 emission-rates (Eq. 3) of both sources were retrieved as described in Sect. 2.3 along the corresponding PCS lines (cf. Figs. 1 and 2). In order to assess the performance of the proposed correction we use the following three methods to estimate the gas velocities in the plume:

- 5 1. **glob**: based on cross-correlation analysis at position of PCS line ℓ (i.e. the estimated velocity is applied to all pixels on ℓ and to all images of the time series).
2. **flow_raw**: using raw output from the Farnebäck algorithm (i.e. without correction for erroneous flow vectors).
3. **flow_hybrid**: using reliable optical flow vectors, identify and replace unphysical vectors using the *DVF* from the histogram analysis.

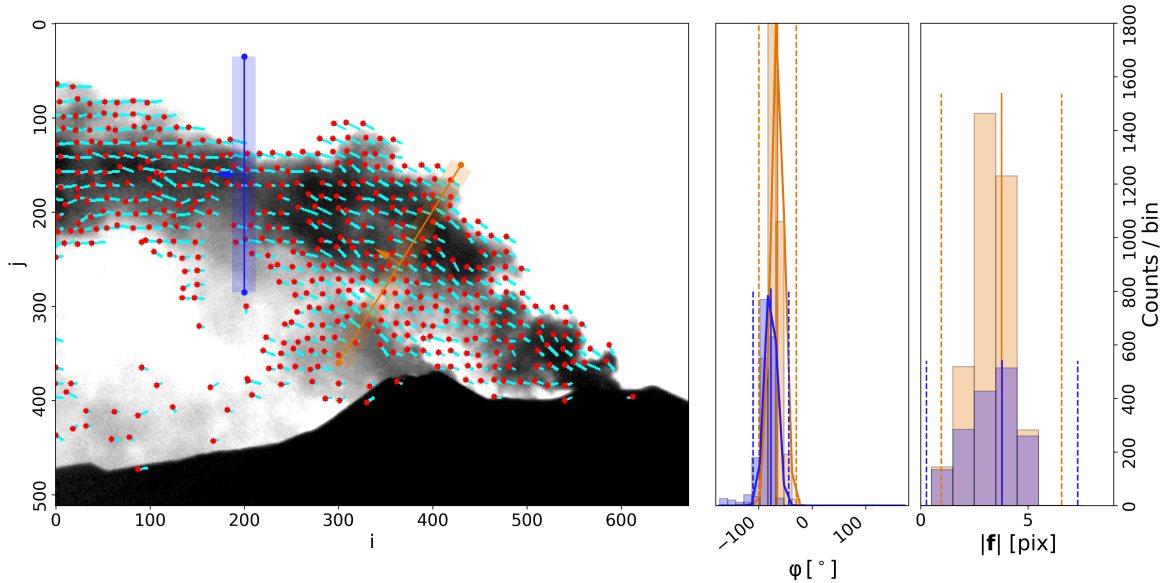


Figure 4. Left: Example flow vector field (blue lines with red dots) of the Farnebäck optical flow algorithm for the Etna plume at 07:13 UTC including the two PCS lines (blue / orange) and the corresponding ROIs used for the histogram analysis (semi-transparent rectangles). Middle, right: histograms of orientation angles $\mathcal{M}_\phi$ and vector magnitudes $\mathcal{M}_{|f|}$ for both lines (bar plot), determined using condition S7 in Appendix A1. The $\mathcal{M}_\phi$ histogram (middle) also includes fit results of the Multi-Gauss peak detection (thick solid lines). The retrieved histogram parameters (ϕ_μ , $|f|_\mu$) and expectation intervals $\mathcal{M}_\phi$, $\mathcal{M}_{|f|}$ are indicated with solid and dashed vertical lines, respectively. From the corrected *DVF*, average effective velocities of $v_{\text{eff}} = (3.9 \pm 0.5) \text{ m/s}$ (orange line) and $v_{\text{eff}} = (4.4 \pm 0.8) \text{ m/s}$ (blue line) were retrieved. Note that in the left image 1) vectors shorter than 1.5 pixels are excluded, 2) the displayed vector lengths were extended by a factor of 3 and 3) only every 15th pixel of the *DVF* is displayed.

Table 2 (in Appendix B3) summarises all relevant settings for the OF based velocity retrievals. Note, that the required minimum magnitude for successfully constrained motion vectors was set per image and ROI using the lower end of $\mathcal{I}_{|f|}$ at 1σ confidence. In order to assess the impact of unphysical motion vectors on the retrieved SO_2 emission-rates, we define the ratio κ :

$$\kappa = \frac{\chi_{\text{pix ok}}}{\chi_{\text{all}}}, \quad (7)$$

- 5 where χ_{all} corresponds to the SO_2 integrated-column-amount (ICA) considering all pixels on ℓ while $\chi_{\text{pix ok}}$ corresponds to the SO_2 ICA considering only pixels showing reliable flow vectors. $\kappa = 1$, for instance, means that all motion vectors on ℓ are considered reliable. The ROIs for the OF histogram analysis were defined for each PCS line individually (based on the position and orientation of the line).

3.1 Etna results

- 10 The OF gas velocities in the plume were calculated from on-band OD (τ_{on}) images, since the OF algorithm showed best performance for the on-band OD images (based on visual inspection before the analysis). Figure 4 shows an example *DVF* of the Etna plume and the corresponding histograms $\mathcal{M}_\varphi$ and $\mathcal{M}_{|f|}$. Along the orange line, the OF algorithm performs considerably well with only 7 % of the velocity vectors found ill-constrained. If not corrected for, these unphysical motion vectors would result in an underestimation of only 1 % in the SO_2 emission-rates. For the blue line, on the contrary, a total of 45 % of the
- 15 pixels on ℓ were found unreliable. Moreover, many of these are located in regions showing large SO_2 -CDs. Hence, the impact is considerably large and, if not corrected for, would induce an underestimation of 33 % in the SO_2 emission-rates.

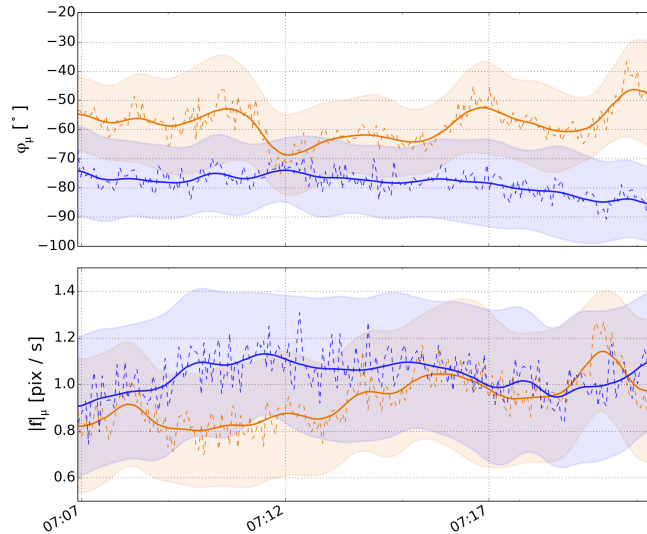


Figure 5. Time series of retrieved *PDV* parameters φ_μ and $|f|_\mu$ (dashed lines) for the two Etna PCS lines (same colours, cf. Fig. 1) and corresponding values after applying interpolation and smoothing (solid lines). The expectation intervals $\mathcal{I}_\varphi$ and $\mathcal{I}_{|f|}$ are plotted as shaded areas.

Prior to the emission-rate analysis, the proposed histogram method was applied to all τ_{on} images in order to retrieve time series of the four correction parameters $p = (\varphi_\mu, \varphi_\sigma, |\mathbf{f}|_\mu, |\mathbf{f}|_\sigma)$. Missing data points (i.e. where the required constraint parameters were not met, cf. Sect. 2.4.1) were interpolated. The results were averaged in time using a combined median filter of width 3 (to remove outliers) and a Gaussian filter ($\sigma = 5$, to remove high frequency variations in the retrieved DVF 's). The results of this pre-analysis are shown in Fig. 5. Due to the stable meteorological conditions the retrieved parameters show only little variation with average values of $\overline{\varphi_\mu} = (-58.3 \pm 5.1)^\circ$ and $|\overline{\mathbf{f}}|_\mu = (0.93 \pm 0.09) \text{ pix/s}$ (orange line) and $\overline{\varphi_\mu} = (-78.5 \pm 3.1)^\circ$ and $|\overline{\mathbf{f}}|_\mu = (1.04 \pm 0.06) \text{ pix/s}$ (blue line).

Figure 6 shows the results of the SO_2 emission-rate analysis for both PCS lines and the three different velocity retrieval methods. Further included are the corresponding effective velocities (average along ℓ , 2nd panel) and the retrieved κ values (Eq. 7). The latter indicates the percentage impact of unphysical OF motion vectors on the SO_2 emission-rates. The plotted uncertainties in the SO_2 emission-rates and the effective velocities (shaded areas) were calculated as described in Appendix B5.

SO_2 emission-rates between $4.9 - 9.7 \text{ kg/s}$ (average: 7.1 kg/s) and $4.8 - 10.7 \text{ kg/s}$ (average: 7.8 kg/s) were retrieved along the orange and blue line, respectively, using the proposed *flow_hybrid* method. The slightly higher values in the aged plume are

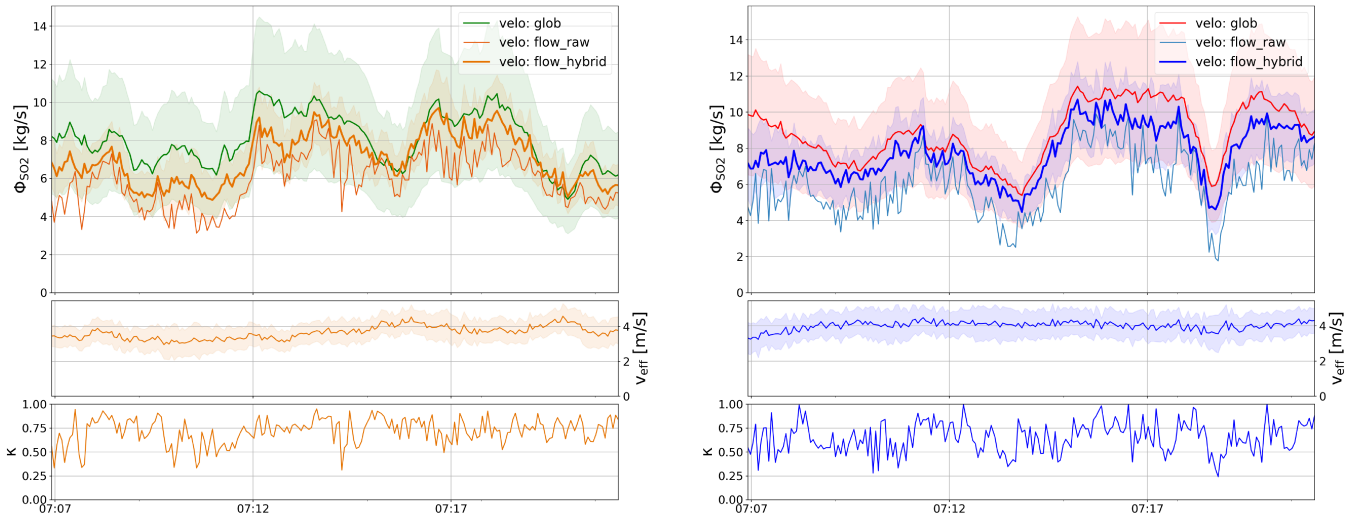


Figure 6. Time series of Etna emission-rates (top panel), showing emissions of the young (left) and the aged (right) plume of the NE crater (orange/blue colours, respectively) using the two PCS lines shown in Fig. 1. Emission rates were retrieved using the three different velocity retrieval methods described above. Uncertainties (shaded areas) are only plotted for the *flow_hybrid* method and the cross-correlation method (“glob”). Further included are time series of effective velocities (Eq. 4, middle panel) and κ values (Eq. 7, bottom) retrieved from the proposed histogram analysis.

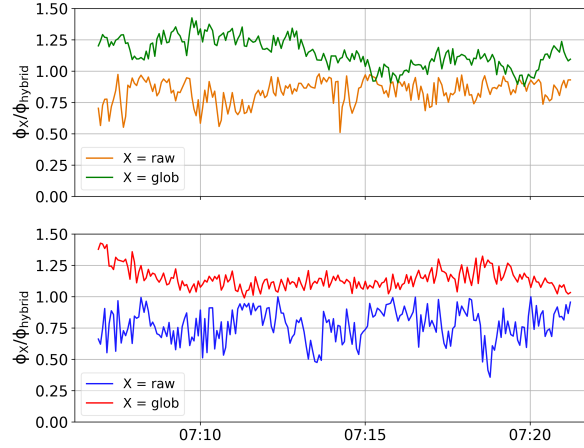


Figure 7. Relative deviations of retrieved SO₂ emission-rates shown in Fig. 6 for the “young_plume” (top) and the “aged_plume” (bottom) PCS lines using the same colour codes as in Fig. 6. The ratios are plotted relative to the results of the proposed *flow_hybrid* method. Results based on the cross-correlation analysis tend to be slightly larger (by about +14%) while the uncorrected OF velocities often yield underestimated SO₂ emission-rates (up to 62%).

likely due to the fact, that this line captures more of the emissions from the other Etna craters (cf. supplementary video no. 1). The corrected OF emission-rates show good agreement with the results using the cross-correlation velocities (*glob* method). The latter, however, tend to be slightly increased by about +14% (cf. Fig. 7). The *flow_raw* method (i.e. uncorrected OF velocities), on the contrary, often yields significantly decreased SO₂ emission-rates, especially in situations where unphysical OF motion vectors coincide with either of the retrieval lines (i.e. low κ value, cf. Fig. 4). The latter show rather strong fluctuations between consecutive frames (i.e. local scatter in the κ values) with an average impact of $\bar{\kappa} = (0.68 \pm 0.15)$. These fluctuations are due to the somewhat random nature of the initial problem. Namely, that the occurrence (and position) of regions containing unphysical motion vectors can change significantly between consecutive frames (cf. Fig. 4). These *unphysical* fluctuations (in the estimated gas velocities) directly propagate to the SO₂ emission-rates (retrieved using the *flow_raw* method) and are thus, not to be misinterpreted with actual (high-frequency) variations in the SO₂ emission-rates.

Relative deviations of the three methods are shown in Fig. 7 (normalised to the results from the proposed *flow_hybrid* method). The cross-correlation based retrievals (*glob*) tend to yield slightly larger SO₂ emission-rates (by +14% on average) while the uncorrected OF (*flow_raw*) often shows underestimated results (by −20% on average). However, we point out again, that these underestimations generally show a rather strong variability. This includes cases showing considerably large underestimations (up to 62%) and other cases, where the OF algorithm appears to perform sufficiently (i.e. $\Delta\Phi = 1$ in Fig. 7).

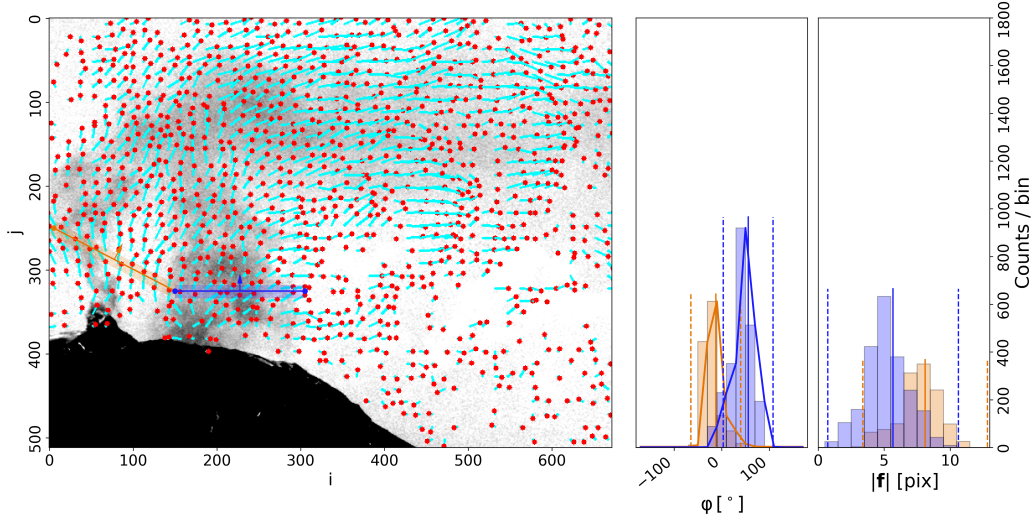


Figure 8. Left: Example output of the Farneback optical flow algorithm for the Guallatiri emissions at 14:48 UTC including the two example PCS lines (blue / orange line) and the corresponding ROIs. Middle and right: Histograms of magnitudes $\mathcal{M}_\varphi$ and orientation angles $\mathcal{M}_{|f|}$ used to retrieve the expectation intervals $\mathcal{I}_\varphi$ and $\mathcal{I}_{|f|}$ and the corresponding PDV in each ROI, respectively (cf. Eq. 5). From the latter, effective velocities of $\mathbf{v}_{\text{eff}} = (3.1 \pm 0.5) \text{ m/s}$ (crater, orange) and $\mathbf{v}_{\text{eff}} = (1.8 \pm 0.6) \text{ m/s}$ (fumaroles, blue) were retrieved. Note that in the left image 1) vectors shorter than 1.5 pixels are excluded, 2) the displayed vector lengths were extended by a factor of 2 and 3) only every 15th pixel of the DVF is displayed.

3.2 Guallatiri results

The OF gas velocities for the Guallatiri data were retrieved using the on-band OD images. An example DVF is shown in Fig. 8. Here, the two sources are clearly separable, showing a convective central crater plume (approx. location at cols. $i \approx 50 - 80$) and the emissions from the fumarolic field located behind the volcanic flank ($i \approx 100 - 300$). Further included are the results of the proposed OF histogram analysis, which was performed relative to the two displayed PCS lines used for the SO_2 emission-rate analysis (cf. Fig. 2).

In this example, the OF algorithm performed considerably well. The uncorrected OF would therefore result in a small underestimation of 6 % (crater) and 3 % (fumaroles) in the SO_2 emission-rates. The different plume characteristics of both sources can be clearly identified based on the displayed histogram distributions. The central crater plume (orange colours) is almost vertically rising ($\varphi = (-12.4 \pm 17.5)^\circ$) and reaches velocity magnitudes of up $|\mathbf{v}|_{\text{max}} = 4.5 \text{ m/s}$. The fumarolic emissions (blue colours) are less convective ($\varphi = (+55.6 \pm 17.4)^\circ$) and show slightly smaller velocities with maximum magnitudes of $|\mathbf{v}|_{\text{max}} = 3.4 \text{ m/s}$.

The time series of the interpolated and smoothed displacement parameters for both PCS lines is shown in Fig. 9. Compared to Etna, the two plumes show considerably more variability both in orientation and in the velocity magnitudes (cf. Figs. 5 and 9). The resulting average values are $\overline{\varphi}_\mu = (12.6 \pm 16.8)^\circ$ and $\overline{|\mathbf{f}|}_\mu = (1.17 \pm 0.33) \text{ pix/s}$ (crater) and $\overline{\varphi}_\mu = (15.9 \pm 13.1)^\circ$

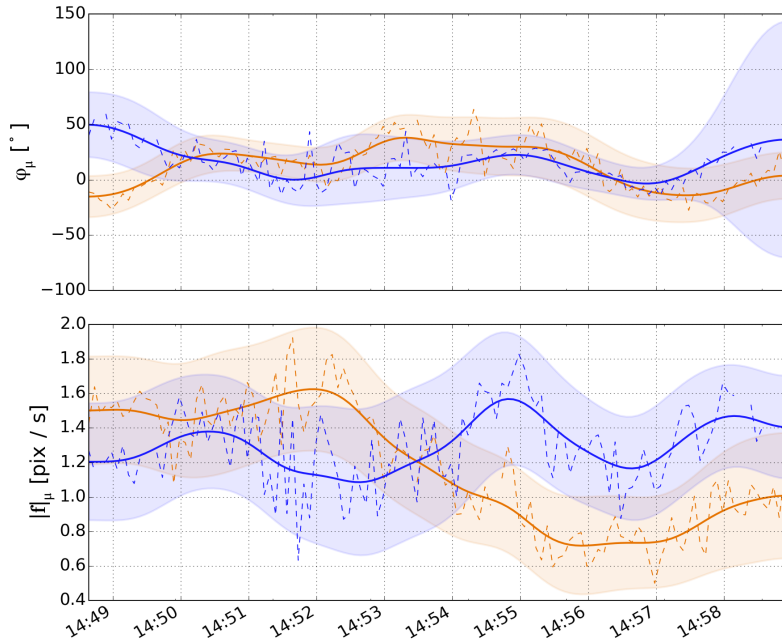


Figure 9. Time series of retrieved *PDV* parameters φ_μ and $|\mathbf{f}|_\mu$ (dashed lines) for the two Guallatiri PCS lines (same colours, cf. Fig. 8) and the corresponding values after applying interpolation and smoothing (solid lines). The expectation intervals $\mathcal{I}_\varphi$ and $\mathcal{I}_{|\mathbf{f}|}$ are plotted as shaded areas.

and $|\overline{\mathbf{f}}|_\mu = (1.30 \pm 0.13) \text{ pix/s}$ (fumaroles). Due to the rather strong temporal variations, the emissions of both sources could not always be successfully separated using the two (fixed) PCS lines. This can be seen in supplementary video no. 2, which shows the evolution of SO_2 emission-rates for both PCS lines.

The results of the emission-rate analysis are shown in Fig. 10, again, including effective velocities and κ values for both PCS lines (cf. Fig. 6). As in the Etna example, the SO_2 emission-rates were calculated using the three different velocity retrieval methods introduced above (i.e. *glob*, *flow_raw*, *flow_hybrid*). In general, similar trends can be observed. The uncorrected OF often causes significant underestimations in the SO_2 emission-rates. It furthermore accompanies rather strong (and unphysical) high-frequency fluctuations which are propagated to the SO_2 emission-rates (see Sect. 3.1 for a discussion). The cross-correlation velocity analysis could only successfully be applied to the emissions from the fumarolic field (cf. Fig. 2 and Sect. B4), since the central crater plume showed too strong fluctuations both in space and time. The corresponding emission-rates of the fumarole emissions (Fig. 10, right, purple colours) show good agreement with the *flow_hybrid* method.

The SO_2 emission-rates, which were calculated based on the proposed *flow_hybrid* method, show only little variation in the central crater emissions with values ranging between $0.1 - 1.5 \text{ kg/s}$ (Fig. 10, left). The corresponding fumarole emissions, however, show rather strong variations with peak emission-rates of 2.5 kg/s (at 14:55 UTC), even exceeding the observed central crater amounts. The sum of both sources yields total SO_2 emission-rates of $\overline{\Phi}_{\text{tot}} = 1.3 \pm 0.5 \text{ kg/s}$ with peak emissions

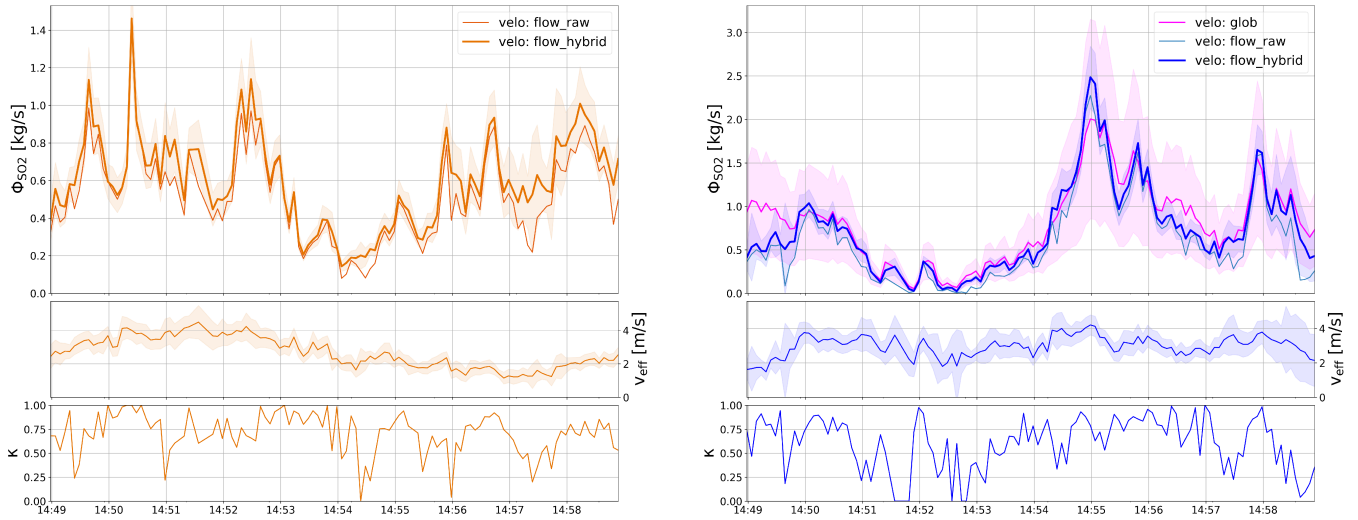


Figure 10. Guallatiri SO_2 emission-rates from the summit crater (left, orange colours) and the fumarolic field (right, blue colours) using the two PCS lines shown in Fig. 2. Uncertainties (shaded areas) are only plotted for the *flow_hybrid* and the *glob* (cross-correlation based velocity) retrieval methods. Further included are the corresponding effective velocities (from the *flow_hybrid* method) and the OF quality factors κ (Eq. 7). The central crater emissions show only little variability ($\Phi \approx 0.6 \text{ kg/s}$) while the fumarolic emissions are characterised by a comparatively strong emission “event” at 14:55 UTC showing peak emissions of 2.5 kg/s .

of up to 2.9 kg/s .

Relative deviations of the retrieved SO_2 emission-rates between the three velocity methods are shown in Fig. 11. As in the case of Etna, the cross-correlation based results (*glob*, fumaroles) tend to be slightly increased (here: $+23\%$) while the uncorrected OF (*flow_raw*) results in an average underestimation of -20% .

5 4 Summary and discussion

4.1 Corrected gas velocities

The proposed histogram correction could be successfully applied to the two example datasets from Mt. Etna and Guallatiri. Especially the rather turbulent Guallatiri case clearly demonstrated the necessity of *localised* gas velocity retrievals (both in the spatial and temporal domain). We showed, that the Farnebäck OF algorithm is (generally) able to resolve the 2D velocity fields in great detail. However, we also showed that unphysical OF motion vectors often induce significant underestimations in the retrieved SO_2 emission-rates. For both datasets, the proposed histogram method was able to account for this issue and resulted in more robust SO_2 emission-rate retrievals (cf. Figs. 7 and 11). The corrected results show good coincidence with SO_2 emission-rates based on the assumption of a global constant velocity (retrieved using a cross-correlation algorithm).

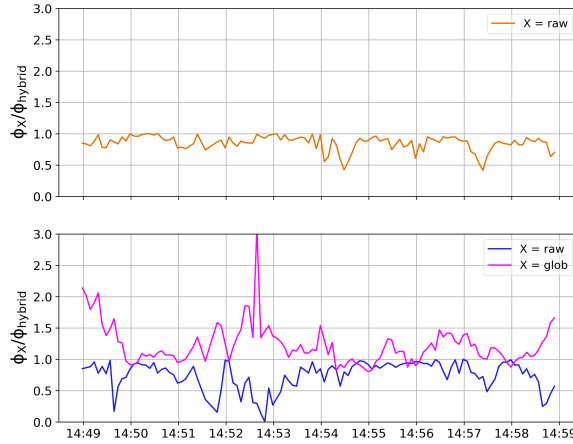


Figure 11. Relative deviations of Guallatiri emission-rates shown in Fig. 10. The deviations are plotted as ratios normalised to the results from the proposed method (*flow_hybrid*), both for the crater (top, no cross-correlation results available) and for the fumarolic emissions (bottom). The average ratios are $1.23 \pm 0.32\%$ (fumaroles, *glob*) and 0.85 ± 0.12 (crater, *flow_raw*) and $0.75 \pm 0.22\%$ (fumaroles, *flow_raw*). Again, the latter show a rather strong variability between the images.

However, the limitations of the cross-correlation method could be clearly demonstrated in the case of the turbulent Guallatiri plume.

4.2 Retrieved SO₂ emission-rates

The retrieved Etna emission rates of $\sim 8\text{kg/s}$ ($\sim 700\text{t/d}$) are at the lower end of typically observed values ($> 1000\text{t/d}$, e.g. Salerno et al., 2009), ranging from a few up to several hundred kg/s, dependent on the activity (e.g. Edner et al., 1994, D'Aleo et al., 2016). The comparatively low values may be partly due to the fact, that mainly the emissions of the NEC were captured, which nonetheless appeared to be the strongest source during the observation period. The presented time series of about 15 min duration is too short to infer any reliable conclusions related to the state of activity. Nonetheless, it may be noted, that the measurements were recorded about two months prior to a major eruptive event, and that indications of decreased pre-eruptive SO₂ emissions have been observed before at Mt. Etna (e.g. Caltabiano et al., 1994). A longer record of Etna's SO₂ emissions (i.e. during the months of Sept. – Dec. 2015) would hence be desirable, in order to evaluate whether these low emission-rates were characteristic for the time period prior to the eruption.

In the case of Guallatiri, these are the first SO₂ emission-rates reported in the literature. This makes the retrieved emission rates of $\sim 1.5\text{kg/s}$ (peak: $\sim 3.0\text{kg/s}$) an important finding of this study. However, also in this case, the presented time series is rather short and hence not suited to infer typical emission characteristics of the volcano. Future investigations are highly de-

sirable in order to infer more detailed information related to the emission characteristics of Guallatiri (e.g. long term averages). Conducting these is obviously more challenging than in the Etna case due to the remote location of the volcano. Space based observations of this considerably weak source may be an option in the future, but appear to be difficult with currently available instrumentation (e.g. Carn et al., 2016).

5

5 Conclusions

In this article, a new method for image based gas velocity measurements in plumes was presented. The success of the method lies in the extraction of quantitative information about gas dynamics inside an emission plume by using the physical information present in a remotely recorded video-image-sequence. The method is based on local gas velocity retrievals using optical flow (OF) algorithms. OF algorithms are a powerful tool for measuring the plume velocities in great detail. However, an intrinsic weakness of such algorithms is that they rely on contrast in the images. Hence, they often yield unphysical motion estimates in low-contrast image regions (e.g. in the center of an extended, homogeneous plume). We showed, that this weakness is unacceptable for applications relying on accurate velocity measures at specific image coordinates (such as the discussed application of camera based SO₂ emission-rate retrievals).

15 The proposed method aims to address this issue based on a local post-analysis of an OF displacement-vector-field (*DVF*). The central idea is to separate reliable from unreliable motion vectors in the *DVF*. This is done based on distinct peaks in histograms of the *DVF*, allowing to derive the local average velocity vector. The latter can then be used as a replacement for unphysical results in the *DVF*. The relevance of the correction was discussed using the example of SO₂ emission-rate retrievals from UV camera data. Specifically, the SO₂ emissions of Mt. Etna (Italy) and Guallatiri (Chile) were investigated using two short example datasets (of about 15 minutes each). The gas velocities were analysed using the Farnebäck OF algorithm. Based on these data we find, that unphysical motion vectors occur rather frequently and hence, often induce significantly underestimated SO₂ emission-rates. We further show, that the correction provides an efficient solution to this problem, resulting in more reliable velocity estimates and hence, in more robust SO₂ emission-rate retrievals. The proposed method therefore provides an important and useful extension for OF based gas velocity retrievals.

25 6 Data and code availability

The analysis of the UV camera data was performed using the software *Pyplis* v0.12.0 (Gliß et al., 2017). The Etna data corresponds to the example dataset of *Pyplis* and can be downloaded from the website. The Guallatiri data, as well as the analysis scripts for both datasets can be provided upon request.

Appendix A: Detailed description of histogram analysis

30 The proposed histogram analysis of local optical flow *DVF*'s includes the following steps.

A1 Retrieval of local displacement parameters

- S1 Extraction of all displacement vectors $\mathbf{f} = [\Delta i, \Delta j]^T$ within specified ROI: $\mathbf{F} = \{\mathbf{f} \mid \mathbf{f} \forall (i, j) \in \text{ROI}\}$, where i, j denotes pixel coordinates in the image. Note that the considered pixels in the ROI may be further restricted, for instance by applying an intensity threshold (e.g. we use a τ_{on} threshold to identify plume pixels).
- 5 S2 Determination of magnitude $|\mathbf{f}| = \sqrt{\Delta i^2 + \Delta j^2}$, and orientation angle $\varphi(\mathbf{f}) = \text{atan2}(\Delta i, \Delta j)$ of all vectors in $\mathbf{F}$.
- S3 Extraction of all vectors in $\mathbf{F}$ exceeding a certain magnitude threshold $|\mathbf{f}|_{\text{min}}$: $\mathbf{F}' = \{\mathbf{f} : \mathbf{f} \in \mathbf{F} \wedge |\mathbf{f}| > |\mathbf{f}|_{\text{min}}\}$.
- S4 Calculation of orientation angle histogram $M_\varphi(\mathbf{F}', \Delta\varphi)$ of vectors in $\mathbf{F}'$ (with the histogram bin-width $\Delta\varphi$).
- S5 Perform multi-peak analysis of M_φ using Multi-Gauss fit (for details see next Sect. A2).
- S6 Use Multi-Gauss fit result to check, whether an unambiguous peak can be identified in M_φ . If this is the case, estimate
 10 the expectation interval $\mathcal{I}_\varphi = [\varphi_\mu - n\varphi_\sigma, \varphi_\mu + n\varphi_\sigma]$ from 1. and 2. moment of M_φ (with n specifying a certain confidence level).
- S7 Extraction of all flow vectors matching angular expectation interval $\mathcal{I}_\varphi$: $\mathbf{F}'' = \{\mathbf{f} : \mathbf{f} \in \mathbf{F}' \wedge \varphi(\mathbf{f}) \in \mathcal{I}_\varphi\}$.
- S8 Calculation of displacement length histogram $M_{|\mathbf{f}|}(\mathbf{F}'', \Delta|\mathbf{f}|)$ from vectors in $\mathbf{F}''$ (with $\Delta|\mathbf{f}|$ being the bin-width in units of pixel displacements).
- 15 S9 Determine average displacement length $|\mathbf{f}|_\mu$ and standard deviation $|\mathbf{f}|_\sigma$ using first and second moment of $M_{|\mathbf{f}|}$.

A2 Multi-Gauss fitting routine

The Multi-Gauss fitting routine is used to detect and parametrise distinct peaks in a given orientation histogram M_φ calculated from a *DVF*. The parametrisation is performed by fitting a number K of superimposed Gaussians of the form

$$f_K(\varphi; p) = \sum_{k=1}^K \mathcal{N}(\varphi; \mathcal{A}_k, \mu_k, \sigma_k) \quad (\text{A1})$$

- 20 to M_φ , with the Normal distribution

$$\mathcal{N}(\varphi; \mathcal{A}, \mu, \sigma) = \mathcal{A} \cdot e^{-\frac{(\varphi - \mu)^2}{2\sigma^2}} \quad (\text{A2})$$

and the corresponding parameter vector $p = (p_1, \dots, p_K) = ((\mathcal{A}_1, \mu_1, \sigma_1), \dots, (\mathcal{A}_K, \mu_K, \sigma_K))$. In order to achieve a physically more reliable result in the optimisation, we recommend to restrict the individual p_k to certain expectation ranges, for instance:

- 25 – Minimum required amplitude: $\mathcal{A}_k > \mathcal{A}_{k,\text{min}}$ (e.g. to avoid fitting all noise peaks)
- Lower threshold for standard deviation: $\sigma_k > \frac{\Delta\varphi}{2\sqrt{2\ln 2}}$ (FWHM must equal or exceed histogram bin resolution)
- Peak position in angular range: $\mu_k \in \{-180, 180\}$

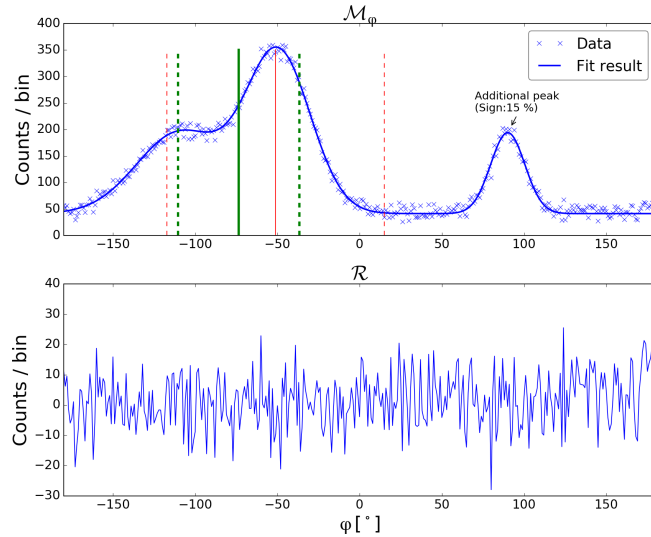


Figure 12. Top: Example fit result (blue line) of a multi-peak analysis applied to synthetic data (blue crosses). Bottom: corresponding fit residual. The dataset consists of three Gaussian Normals including Gaussian noise (with $\sigma_{\text{noise}} = 9$ counts). Two overlapping peaks are located at $\mu = -110$ ($\mathcal{A} = 150$, $\sigma = 25$) and $\mu = -50$ ($\mathcal{A} = 300$, $\sigma = 20$) (forming the predominant peak) and one additional peak at $\mu = 90$ ($\mathcal{A} = 150$, $\sigma = 10$) with a significance of 16%. Expectation parameters (φ_{μ} , φ_{σ}) are indicated with solid and dashed vertical lines, respectively. The latter were retrieved as described in Appendix A3, both including and excluding the additionally detected peak at $\mu = 90$, in red and green colours, respectively.

- Define upper limit for allowed number of superimposed Gaussians: $K \leq K_{\text{max}}$

A routine to perform this fit was written in Python and is implemented in the software package *Pyplis* (class *MultiGaussFit*). The algorithm aims to find the minimum number K of Gaussians required to meet the constraint $\mathcal{C} : \mathcal{R}_{\text{pp}}(i) \leq \mathcal{A}_{k,\text{min}}$, where $\mathcal{R}_{\text{pp}}(i)$ is the peak-to-peak value of the current fit residual $\mathcal{R}(i) = f_K(\varphi, p) - M_{\varphi}$ at iteration step i . If no additional peaks are found in $\mathcal{R}(i)$, the latest optimised parameter vector p is assumed sufficient. Else, p is extended by all additionally detected peaks (in $\mathcal{R}(i)$) and the least-squares fit is re-applied until the optimisation constraint $\mathcal{C}$ is fulfilled, or until a break constraint is met (e.g. maximum iteration reached, or maximum number of allowed Gaussians). An exemplary fit result is shown in Fig. 12.

A3 Retrieval of main peak parameters from Multi-Gauss fit result

The Multi-Gauss parametrisation of $\mathcal{M}_{\varphi}$ allows to identify the most prominent peak in the distribution (which may be a superposition of several Normals) and separate it from potential additional peaks. The latter can have significant impacts on the retrieved statistical parameters φ_{μ} , φ_{σ} (cf. Fig. 12).

Numerically, the retrieval of the main peak parameters from a given fit result vector p is performed as follows:

1. For a given Gaussian p_k in p , find all fitted Gaussians within a specified confidence interval $(n\sigma)_k$ around p_k and calculate the integral value I_k of the local overlap (I_k corresponds to the number of vectors belonging to the main peak).
2. Do step 1. for all detected Gaussians in p , resulting in a vector I_K of length K containing integral values of the local overlaps.
3. Find the main peak position based on the index k^* showing the largest integral value (in I_K)
4. Retrieve main peak parameters by calculating first and second moment of the corresponding local overlap $p_{k^*} : p' = \{p_k : \mu(p_k) \in [\varphi_{\min}, \varphi_{\max}]\}$ with $\varphi_{\min}, \varphi_{\max} = \mu_{k^*} \pm (n\sigma)_{k^*}$ (e.g. the two overlapping peaks at index -74 in Fig. 12).
5. Retrieve mean and standard deviation of p' based on the first and second moment of the resulting main peak distribution $f_{K'}(\varphi; p')$ (cf. Eq. A1), i.e.:

$$\varphi_\mu = \int_{-\pi}^{\pi} \varphi f_{K'}(\varphi; p') d\varphi \quad (\text{A3})$$

$$\varphi_\sigma = \sqrt{\int_{-\pi}^{\pi} (\varphi - \mu_\varphi)^2 f_{K'}(\varphi; p') d\varphi} \quad (\text{A4})$$

resulting in an estimate of the predominant displacement direction in the ROI:

$$\varphi_{\text{glob}}(\text{ROI}) = (\varphi_\mu \pm \varphi_\sigma) \quad (\text{A5})$$

Appendix B: Emission rate analysis supplementary information

15 B1 DOAS SO₂ retrieval

The DOAS spectra from both datasets (Etna, Guallatiri) were analysed using the software DOASIS (Kraus, 2006). All spectra were corrected for electronic offset and dark current and were analysed using a clear sky Fraunhofer reference spectrum (FRS) recorded close in time (to keep potential O₃ interferences at a minimum). In addition, a Ring spectrum, determined from the FRS, was fitted as well as the absorption cross sections (XS) of SO₂ (Hermans et al., 2009) and O₃ (Burrows et al., 1999).

- 20 The latter were convolved with the instrumental line-spread-function (using the measured 334.15 nm mercury line). FRS and Ring were linked to each other and were allowed a slight shift of 0.2 nm and squeeze of 2%. The same shift and squeeze was allowed for the two XS, which were also linked. The retrieval was performed between 314.6 – 326.4 nm. A third order DOAS polynomial was fitted to account for broadband extinction and an additional zero order offset polynomial (fitted in intensity space) was included to account for instrumental effects (e.g. stray light).

25 B2 Camera calibration

Figure 13 shows the DOAS calibration curves retrieved for both datasets. The camera AA values correspond to the pixels covered by the DOAS-FOV shown in Figs. 1 and 2. Prior to the calibration, the camera images and the DOAS data were

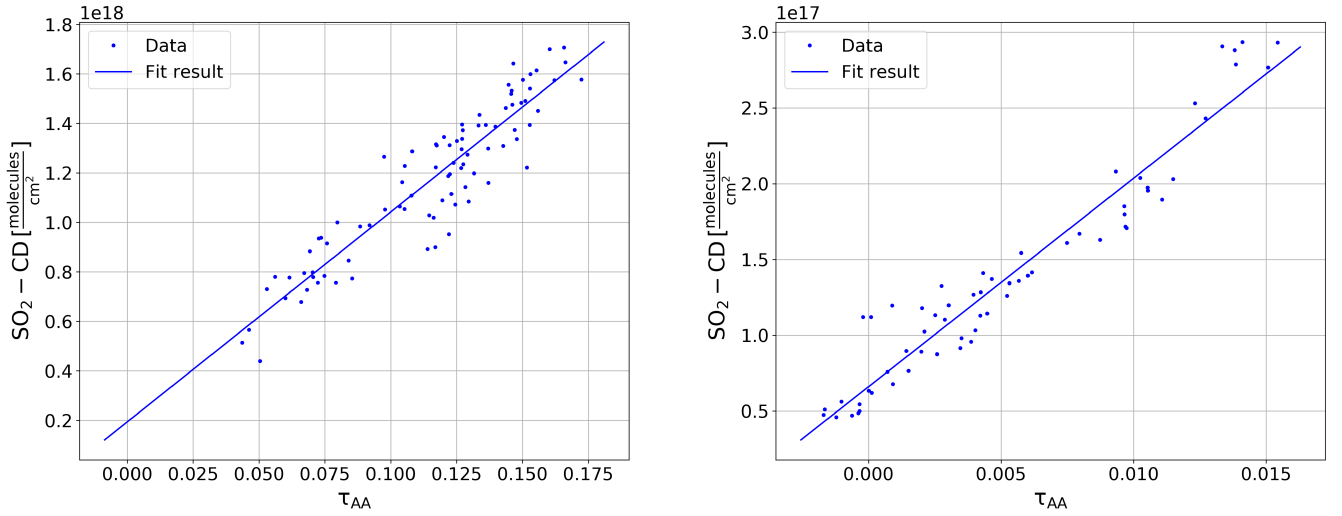


Figure 13. DOAS calibration curves of Etna data (left) and Guallatiri data (right) retrieved from AA images (not dilution corrected) within the image region covered by the DOAS-FOV (cf. Figs. 1 and 2). The corresponding SO_2 -CDs retrieved with the DOAS instrument are plotted on the y-axis. Y-axis offsets were corrected for during the calibration of the AA images.

merged in time. Note that the calibration data displayed in Fig. 13 is not corrected for the signal-dilution effect. In order to calibrate the dilution corrected AA-images, the fitted calibration polynomial was extrapolated into the AA regime of the dilution corrected images. This is based on the assumption that the calibration curve remains linear also at larger optical densities, which is justified by the considerably good plume conditions (low to no condensation) and the low to moderate range of observed SO_2 -CDs (cf. Sect. 2.3.3, see also Kern et al., 2013). Furthermore, this calibration method assumes that the retrieved DOAS SO_2 -CDs exhibit approximately the same amount of signal dilution as the camera imagery. This is justified by the fact, that the DOAS analysis was applied in a wavelength range coinciding with the on/off-band regime of the camera filters (cf. previous Sect. B1).

B3 Settings for optical flow retrieval

All relevant settings for the optical flow based gas velocity retrievals are summarised in Table 2

Table 2. Applied settings for Farneback algorithm (OpenCV implementation) and relevant parameters for the histogram post analysis.

	Parameter	Etna	Gua	Description
Farneback	pyr_scale	0.5	0.5	Multi-scale analysis: downscale factor
	levels	4	4	Multi-scale analysis: pyramid levels
	winsize	20	20	Size of (gaussian) averaging neighbourhood
	iterations	5	5	Number of iterations
	poly_n	5	5	Size of neighbourhood for polynomial expansion
	poly_sigma	1.1	1.1	Standard deviation of smoothing kernel for poly. exp.
Histo analysis	$\Delta\varphi$ [°]	15	20	Bin width of $\mathcal{M}_\varphi$
	$\Delta \mathbf{f} $ [pix]	1	1	Bin width of $\mathcal{M}_{ \mathbf{f} }$
	$ \mathbf{f} _{\min}$ [pix]	1.5	1.5	Required minimum magnitude
	$n\sigma$	3	3	Confidence level for retrieval of $\mathcal{I}_{ \mathbf{f} }$
	$\tau_{\min}$	0.15	0.02	τ threshold for identifying plume pixels
	$r_{\min}$	0.1	0.1	See Sect. 2.4.1
	$\mathcal{S}$	0.2	0.2	See Sect. 2.4.1

B4 Results velocity cross-correlation

B4.1 Etna

- Cross correlation based gas velocities were retrieved for each of the two PCS lines, using two additional lines shifted by 40 pixels in the normal direction (cf. Fig. 1). Velocities of $v_{\text{glob}} = 4.14\text{m/s}$ and $v_{\text{glob}} = 4.55\text{m/s}$ could be retrieved for the young (orange) and aged (blue) plume, respectively. The results of the cross-correlation analysis (ICA time series) are shown in Fig. 14 in Appendix B4.

B4.2 Guallatiri

- Figure 15 shows the result of the velocity cross-correlation analysis using the blue (*fumarole*) PCS retrieval line (cf. Sect. 3.2) resulting in a gas velocity of $v_{\text{glob}} = 3.49\text{m/s}$. The same velocity was assumed for the central crater plume (orange retrieval line in Fig. 2), where the cross-correlation algorithm did not succeed.

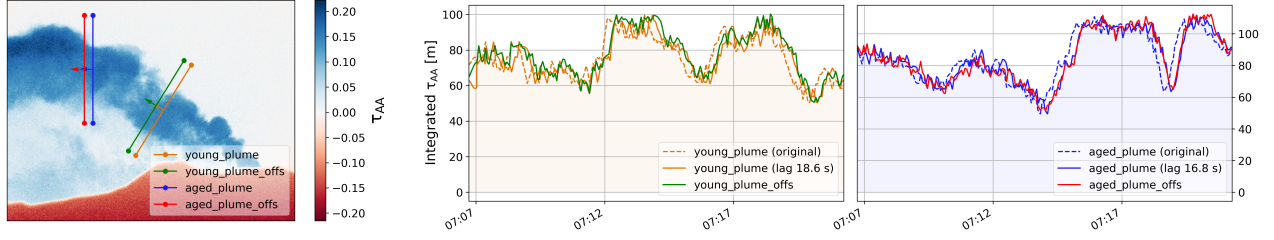


Figure 14. Result of velocity cross-correlation analysis for the Etna data. Left: Example plume AA image including two PCS lines (orange / blue) and corresponding offset lines (green / red) used for the analysis. Middle, right: corresponding time series of the integrated AA values along the two PCS lines (original: dashed, shifted using correlation lag: solid) and along the offset lines (solid) using the same colour scheme.

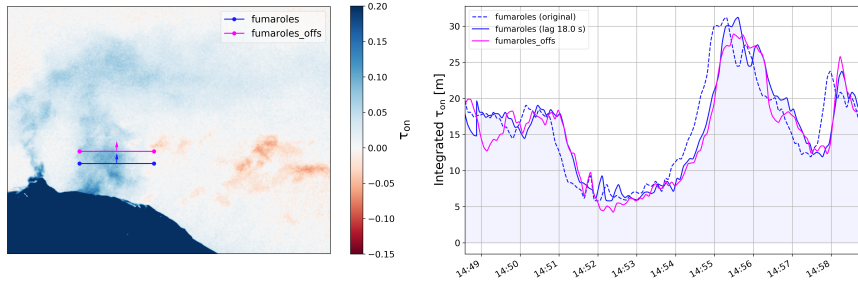


Figure 15. Result of velocity cross-correlation analysis for Guallatiri data. Left: Example plume on-band OD image (τ_{on}) including the PCS (blue) and offset line (magenta) used for the analysis. Right: corresponding time series of integrated on-band ODs (dashed blue / magenta) and further, the shifted PCS signal corresponding to the retrieved correlation lag of 18.0 s (solid blue). Note that here, the velocity analysis was applied using a time series of on-band OD images rather than the τ_{AA} which was used in Fig. 14.

B5 SO₂ emission-rate uncertainties

Uncertainties in the presented emission-rates (shaded areas in Figs. 6 and 10 top) were calculated based on Eq. 3 using Gaussian error propagation. Uncertainties in the plume distance (from uncertainty in plume azimuth and camera viewing direction), in the retrieved SO₂-CDs (from slope error the calibration polynomial) and in the effective gas velocities (Eq. 4) were considered.

- 5 The latter were assumed constant for cross-correlation based velocities using $\Delta v_{glob} = 1.5 \text{ m/s}$. For the optical flow based retrievals, the uncertainties were estimated per image and PCS line as described in Sect. 2.4.1. Note, that uncertainties resulting from potential radiative transfer effects were not included. These are discussed in Sect. 2.3.3.

B5.1 Sensitivity to the chosen histogram analysis settings

- 10 The sensitivity of the retrieved emission-rates (cf. Sect. 3) to the input parameters $|f|_{min}$ and $n\sigma$ of the proposed histogram correction method (cf. Appendix B3) was investigated. These two parameters have the largest impact on the results since they determine, which flow vectors are considered ill-constrained and which ones not. The sensitivity analysis was performed using

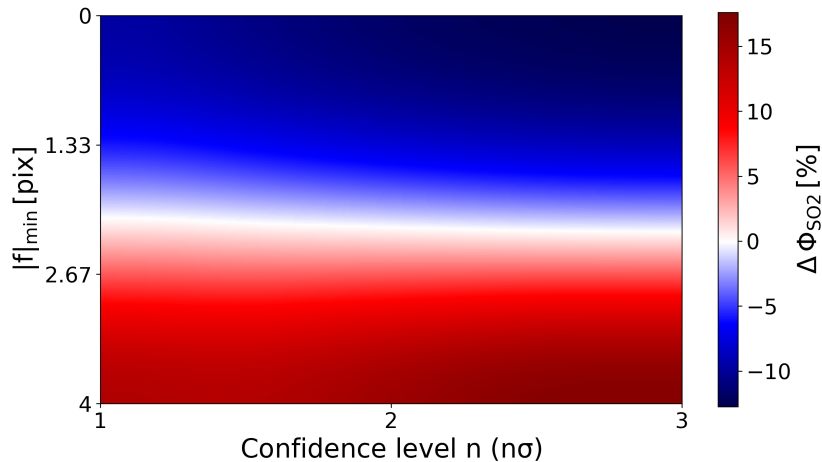


Figure 16. Sensitivity of SO₂ emission-rates as a function of the chosen input settings $|f|_{\min}$ (y-axis) and the confidence level n (x-axis). The investigated value ranges are 0–4 pixels for $|f|_{\min}$ and 1–3 for the n and the deviations are plotted as percentage deviations $\Delta\Phi_{\text{SO}_2}$ from the average SO₂ emission-rate retrieved from this study. The latter amounts to 2.4 kg/s (not dilution corrected, see text). The analysis was performed using the average SO₂ emission-rates retrieved from 30 images of the Etna dataset.

the proposed *flow_hybrid* method applied to 30 images from the Etna dataset that were not corrected for the signal-dilution effect, since the latter is irrelevant for this study (all other analysis settings are the same as described in Sect. 2.3). Figure 16 shows the results of this investigation. The choice of n has a rather small impact on the emission-rates, whereas the choice of $|f|_{\min}$ impacts within a range of approximately $\pm 17\%$. However, considering the more realistic interval of 1–2 for $|f|_{\min}$, the impact is less than 8 %.

Competing interests. The authors declare that they have no conflict of interests.

Acknowledgements. We wish to thank the *Atmosphere and Remote Sensing* group from the Institute of Environmental Physics in Heidelberg, Germany, for support during the Etna field campaign in 2015. We acknowledge the support of F. Prata and H. Murray (Thomas) in planning and conducting the measurements at Guallatiri. Useful discussions with T. Skauli and A. Donath related to the methodology are highly acknowledged. The work of K. Stebel and A. Kylling was partly supported by the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme under grant agreement No 670462 (COMTESSA). J. Gliß acknowledges the Norwegian Institute for Air Research (NILU) and the Graduate Center of the University of Oslo (UNIK) for financial support. Finally, we wish to thank the reviewer C. Kern and one anonymous reviewer as well as J. Joiner as Editor for their very valuable comments and suggestions as well as support during the review phase.

References

- Anandan, P.: A computational framework and an algorithm for the measurement of visual motion, *International Journal of Computer Vision*, 2, 283–310, doi:10.1007/BF00158167, 1989.
- Baker, S., Scharstein, D., Lewis, J. P., Roth, S., Black, M. J., and Szeliski, R.: A Database and Evaluation Methodology for Optical Flow, *International Journal of Computer Vision*, 92, 1–31, doi:10.1007/s11263-010-0390-2, 2011.
- 5 Barron, J. L., Fleet, D. J., and Beauchemin, S. S.: Performance of optical flow techniques, *International Journal of Computer Vision*, 12, 43–77, doi:10.1007/BF01420984, 1994.
- Beauchemin, S. S. and Barron, J. L.: The Computation of Optical Flow, *ACM Comput. Surv.*, 27, 433–466, doi:10.1145/212094.212141, 1995.
- 10 Bjornsson, H., Magnusson, S., Arason, P., and Petersen, G. N.: Velocities in the plume of the 2010 Eyjafjallajökull eruption, *Journal of Geophysical Research: Atmospheres*, 118, 11,698–11,711, doi:10.1002/jgrd.50876, 2013.
- Bobrowski, N., Kern, C., Platt, U., Hörmann, C., and Wagner, T.: Novel SO₂ spectral evaluation scheme using the 360–390 nm wavelength range, *Atmospheric Measurement Techniques*, 3, 879–891, doi:10.5194/amt-3-879-2010, 2010.
- Bradski, G.: The OpenCV Library, *Dr. Dobb's Journal of Software Tools*, 2000.
- 15 Bruhn, A., Weickert, J., and Schnörr, C.: Lucas/Kanade Meets Horn/Schunck: Combining Local and Global Optic Flow Methods, *International Journal of Computer Vision*, 61, 211–231, doi:10.1023/B:VISI.0000045324.43199.43, 2005.
- Burrows, J., Richter, A., Dehn, A., Deters, B., Himmelmann, S., and Orphal, J.: Atmospheric remote-sensing reference data from GOME - 2. Temperature-dependent absorption cross sections of O-3 in the 231-794 nm range, *J. Quant. Spectrosc. Radiat. Transfer*, 61, 509–517, doi:10.1016/S0022-4073(98)00037-5, 1999.
- 20 Caltabiano, T., Romano, R., and Budetta, G.: SO₂ flux measurements at Mount Etna (Sicily), *Journal of Geophysical Research: Atmospheres*, 99, 12 809–12 819, doi:10.1029/94JD00224, 1994.
- Campion, R., Delgado-Granados, H., and Mori, T.: Image-based correction of the light dilution effect for SO₂ camera measurements, *Journal of Volcanology and Geothermal Research*, 300, 48 – 57, doi:10.1016/j.jvolgeores.2015.01.004, 2015.
- Carn, S., Clarisse, L., and Prata, A.: Multi-decadal satellite measurements of global volcanic degassing, *Journal of Volcanology and Geothermal Research*, 311, 99 – 134, doi:10.1016/j.jvolgeores.2016.01.002, 2016.
- 25 D'Aleo, R., Bitetto, M., Delle Donne, D., Tamburello, G., Battaglia, A., Coltelli, M., Patanè, D., Prestifilippo, M., Sciotto, M., and Aiuppa, A.: Spatially resolved SO₂ flux emissions from Mt Etna, *Geophys. Res. Lett.*, 43, 7511–7519, doi:10.1002/2016GL069938, 2016.
- Dekemper, E., Vanhamel, J., Van Opstal, B., and Fussen, D.: The AOTF-based NO₂ camera, *Atmospheric Measurement Techniques*, 9, 6025–6034, doi:10.5194/amt-9-6025-2016, 2016.
- 30 Edner, H., Ragnarson, P., Svanberg, S., Wallinder, E., Ferrara, R., Cioni, R., Raco, B., and Taddeucci, G.: Total fluxes of sulfur dioxide from the Italian volcanoes Etna, Stromboli, and Vulcano measured by differential absorption lidar and passive differential optical absorption spectroscopy, *Journal of Geophysical Research: Atmospheres*, 99, 18 827–18 838, doi:10.1029/94JD01515, 1994.
- Farnebäck, G.: Two-Frame Motion Estimation Based on Polynomial Expansion, pp. 363–370, Springer Berlin Heidelberg, Berlin, Heidelberg, doi:10.1007/3-540-45103-X_50, 2003.
- 35 Fischer, T. P., Morrissey, M. M., Marta Lucia Calvache, V., Diego Gomez, M., Roberto Torres, C., Stix, J., and Williams, S. N.: Correlations between SO₂ flux and long-period seismicity at Galeras volcano, *Nature*, 368, 135–137, doi:10.1038/368135a0, 1994.
- Fleet, D. and Weiss, Y.: Optical Flow Estimation, pp. 237–257, Springer US, Boston, MA, doi:10.1007/0-387-28831-7_15, 2006.

- Fortun, D., Bouthem, P., and Kervrann, C.: Optical flow modeling and computation: A survey, *Computer Vision and Image Understanding*, 134, 1 – 21, doi:10.1016/j.cviu.2015.02.008, image Understanding for Real-world Distributed Video Networks, 2015.
- Frins, E., Ibrahim, O., Casaballe, N., Osorio, M., Arismendi, F., Wagner, T., and Platt, U.: Ground based measurements of SO₂ and NO₂ emissions from the oil refinery "la Teja" in Montevideo city, *Journal of Physics: Conference Series*, 274, 012083, <http://stacks.iop.org/1742-6596/274/i=1/a=012083>, 2011.
- 5 Gliß, J., Bobrowski, N., Vogel, L., Pöhler, D., and Platt, U.: OCIO and BrO observations in the volcanic plume of Mt. Etna – implications on the chemistry of chlorine and bromine species in volcanic plumes, *Atmospheric Chemistry and Physics*, 15, 5659–5681, doi:10.5194/acp-15-5659-2015, 2015.
- 10 Gliß, J., Stebel, K., Kylling, A., Dinger, A., Sihler, H., and Sudbø, A.: Pyplis - A Python Software Toolbox for the Analysis of SO₂ Camera Data, Preprints, doi:10.20944/preprints201710.0085.v1, under review for publication in journal *Geosciences* (MDPI), 2017.
- Hermans, C., Vandaele, A., and Fally, S.: Fourier transform measurements of SO₂ absorption cross sections: I. Temperature dependence in the 24 000–29 000 cm⁻¹ (345–420 nm) region, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 110, 756–765, doi:10.1016/j.jqsrt.2009.01.031, 2009.
- Horn, B. K. and Schunck, B. G.: Determining optical flow, *Artificial Intelligence*, 17, 185 – 203, doi:10.1016/0004-3702(81)90024-2, 1981.
- 15 IPCC: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, doi:10.1017/CBO9781107415324, www.climatechange2013.org, 2013.
- Jähne, B.: Digital Image Processing: Concepts, Algorithms, and Scientific Applications, Springer-Verlag New York, Inc., Secaucus, NJ, USA, 4th edn., <http://www.springer.com/br/book/9783662031742>, 1997.
- 20 Johansson, M., Galle, B., Zhang, Y., Rivera, C., Chen, D., and Wyser, K.: The dual-beam mini-DOAS technique—measurements of volcanic gas emission, plume height and plume speed with a single instrument, *Bulletin of Volcanology*, 71, 747–751, doi:10.1007/s00445-008-0260-8, 2009.
- Kern, C., Kick, F., Lübcke, P., Vogel, L., Wöhrbach, M., and Platt, U.: Theoretical description of functionality, applications, and limitations of SO₂ cameras for the remote sensing of volcanic plumes, *Atmospheric Measurement Techniques*, 3, 733–749, doi:10.5194/amt-3-733-2010, 2010.
- 25 Kern, C., Werner, C., Elias, T., Sutton, A. J., and Lübcke, P.: Applying UV cameras for SO₂ detection to distant or optically thick volcanic plumes, *Journal of Volcanology and Geothermal Research*, 262, 80–89, doi:10.1016/j.jvolgeores.2013.06.009, 2013.
- Kern, C., Sutton, J., Elias, T., Lee, L., Kamibayashi, K., Antolik, L., and Werner, C.: An automated SO₂ camera system for continuous, real-time monitoring of gas emissions from Kilauea Volcano's summit Overlook Crater, *Journal of Volcanology and Geothermal Research*, 300, 81–94, doi:10.1016/j.jvolgeores.2014.12.004, 2015.
- 30 Kraus, S.: DOASIS: A framework design for DOAS, Ph.D. thesis, Ph.D. Thesis, 2006.
- Krueger, A., Stremme, W., Harig, R., and Grutter, M.: Volcanic SO₂ and SiF₄ visualization using 2-D thermal emission spectroscopy - Part 2: Wind propagation and emission rates, *Atmospheric Measurement Techniques*, 6, 47–61, doi:10.5194/amt-6-47-2013, 2013.
- Kuhn, J., Bobrowski, N., Lübcke, P., Vogel, L., and Platt, U.: A Fabry-Perot interferometer-based camera for two-dimensional mapping of SO₂ distributions, *Atmospheric Measurement Techniques*, 7, 3705–3715, doi:10.5194/amt-7-3705-2014, 2014.
- 35 Lopez, T., Thomas, H., Prata, A., Amigo, A., Fee, D., and Moriano, D.: Volcanic plume characteristics determined using an infrared imaging camera, *Journal of Volcanology and Geothermal Research*, 300, 148 – 166, doi:10.1016/j.jvolgeores.2014.12.009, 2015.

- Lübcke, P., Bobrowski, N., Illing, S., Kern, C., Alvarez Nieves, J. M., Vogel, L., Zielcke, J., Delgado Granados, H., and Platt, U.: On the absolute calibration of SO₂ cameras, *Atmospheric Measurement Techniques*, 6, 677–696, doi:10.5194/amt-6-677-2013, 2013.
- Lucas, B. D. and Kanade, T.: An iterative image registration technique with an application to stereo vision, in: *In IJCAI81*, pp. 674–679, 1981.
- 5 McElhoe, H. B. and Conner, W. D.: Remote Measurement of Sulfur Dioxide Emissions Using an Ultraviolet Light Sensitive Video System, *Journal of the Air Pollution Control Association*, 36, 42–47, doi:10.1080/00022470.1986.10466043, 1986.
- McGonigle, A. J. S., Hilton, D. R., Fischer, T. P., and Oppenheimer, C.: Plume velocity determination for volcanic SO₂ flux measurements, *Geophysical Research Letters*, 32, doi:10.1029/2005GL022470, L11302, 2005.
- Menze, M. and Geiger, A.: Object Scene Flow for Autonomous Vehicles, in: *Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 3061–3070, http://www.cv-foundation.org/openaccess/content_cvpr_2015/html/Menze_Object_Scene_Flow_2015_CVPR_paper.html, 2015.
- 10 Moffat, A. J. and Millan, M. M.: The applications of optical correlation techniques to the remote sensing of SO₂ plumes using sky light, *Atmospheric Environment* (1967), 5, 677–690, doi:10.1016/0004-6981(71)90125-9, 1971.
- Mori, T. and Burton, M.: The SO₂ camera: A simple, fast and cheap method for ground-based imaging of SO₂ in volcanic plumes, *Geophysical Research Letters*, 33, doi:10.1029/2006GL027916, 2006.
- 15 Peters, N., Hoffmann, A., Barnie, T., Herzog, M., and Oppenheimer, C.: Use of motion estimation algorithms for improved flux measurements using SO₂ cameras, *Journal of Volcanology and Geothermal Research*, 300, 58–69, doi:10.1016/j.jvolgeores.2014.08.031, 2015.
- Platt, U. and Stutz, J.: *Differential Optical Absorption Spectroscopy: Principles and Application*, Springer, doi:10.1007/978-3-540-75776-4, 2008.
- 20 Prata, A. J. and Bernardo, C.: Retrieval of sulfur dioxide from a ground-based thermal infrared imaging camera, *Atmospheric Measurement Techniques*, 7, 2807–2828, doi:10.5194/amt-7-2807-2014, 2014.
- Robock, A.: Volcanic eruptions and climate, *Reviews of Geophysics*, 38, 191–219, doi:10.1029/1998RG000054, 2000.
- Salerno, G., Burton, M., Oppenheimer, C., Caltabiano, T., Randazzo, D., Bruno, N., and Longo, V.: Three-years of SO₂ flux measurements of Mt. Etna using an automated UV scanner array: Comparison with conventional traverses and uncertainties in flux retrieval, *Journal of Volcanology and Geothermal Research*, 183, 76–83, doi:10.1016/j.jvolgeores.2009.02.013, 2009.
- 25 Schwartz, J.: Air Pollution and Daily Mortality: A Review and Meta Analysis, *Environmental Research*, 64, 36–52, doi:10.1006/enrs.1994.1005, 1994.
- Smithsonian-Institution: Global Volcanism Program, 2013. Etna (211060) in *Volcanoes of the World*, v. 4.5.6., Venzke, E (ed.), Smithsonian Institution, doi:10.5479/si.GVP.VOTW4-2013, 2013a.
- 30 Smithsonian-Institution: Global Volcanism Program, 2013. Guallatiri (355020) in *Volcanoes of the World*, v. 4.5.6., Venzke, E (ed.), Smithsonian Institution, doi:10.5479/si.GVP.VOTW4-2013, 2013b.
- Stebel, K., Amigo, A., Thomas, H., and Prata, A.: First estimates of fumarolic SO₂ fluxes from Putana volcano, Chile, using an ultraviolet imaging camera, *Journal of Volcanology and Geothermal Research*, 300, 112–120, doi:10.1016/j.jvolgeores.2014.12.021, 2015.
- Tamburello, G., Aiuppa, A., McGonigle, A. J. S., Allard, P., Cannata, A., Giudice, G., Kantzas, E. P., and Pering, T. D.: Periodic volcanic degassing behavior: The Mount Etna example, *Geophys. Res. Lett.*, 40, 4818–4822, doi:10.1002/grl.50924, 2013.
- 35 Wigley, T. M. L.: Possible climate change due to SO₂-derived cloud condensation nuclei, *Nature*, 339, 365–367, doi:10.1038/339365a0, 1989.

Williams-Jones, G., Horton, K. A., Elias, T., Garbeil, H., Mougins-Mark, P. J., Sutton, A. J., and Harris, A. J. L.: Accurately measuring volcanic plume velocity with multiple UV spectrometers, *Bulletin of Volcanology*, 68, 328–332, doi:10.1007/s00445-005-0013-x, 2006.