

Xie et al., Sensitivity of airborne radio occultation to tropospheric properties over ocean and land

We thank the editor and the two reviewers for the very insightful and constructive comments. A list of comments with detailed responses are shown below.

Response to the Anonymous Referee #1:

1. The authors mention that Haase et al. 2014 and Murphy et al. 2015 did present results from analysis of RO data obtained during the same campaign. It is not very clear which are the main differences between this manuscript and the two former articles (except the use of the ferry flight instead of the scientific flights). Which are the new aspects tackled in this manuscript not covered in the former two?

Yes, these recent papers, including Haase et al. (2014), Murphy et al. (2015) as well as Wang et al. (2016 and 2017), and the current paper, focused on the ARO measurements from the same PREDICT field campaign.

Haase et al. (2014), Murphy et al. (2015) assessed the capabilities of the ARO observations specifically in the highly variable tropical hurricane environment from a conventional (close-loop tracking) receiver, so the results are limited to the upper part of the troposphere above 7 km, with only a preliminary description of open-loop tracking. Wang et al. (2016 and 2017) expand the error analysis of the tropical measurements to the lower part of the troposphere with the advantages of open-loop tracking (2016) and the phase matching inversion method (2017). These studies used only data from the top antenna because occulting satellite visibility to the side antennas was limited due to frequent turns during the PREDICT research flights.

This paper offers several unique perspectives that are different from the previous three papers. (1) This paper focused on the ARO soundings from the ferry flight, which offers an optimal observing configuration (constant flight speed and altitude) for the side-looking antennas to collect high-quality ARO measurements that were not available during research flights. It evaluates whether on a straight flight, the high gain antennas present a significant advantage when combined with the previous recent advances. (2) In contrast to the studies in the hurricane environment (research flights), it investigates the ARO profile variability due to large scale synoptic variations in atmospheric boundary layer structure over land and ocean in a controlled experiment. (3) The simultaneous recording from two independent antennas allows the evaluation of ARO sounding quality and precision due to random errors, and confirms the high-quality ARO measurement from

the relatively lower gain top antenna. (4) it compares three different retrieval methods, i.e., the full-spectrum-inversion (FSI), phase-matching (PM) and geometric-optics (GO), shedding light on the structural uncertainty of the ARO retrievals.

The “abstract” and the “Introduction” section have been updated to emphasize the unique aspects of this paper.

References:

Haase, J. S., B. J. Murphy, P. Muradyan, F. G. Nievinski, K. M. Larson, J. L. Garrison, and K.-N. Wang: First results from an airborne GPS radio occultation system for atmospheric profiling, *Geophys. Res. Lett.*, 40, 1759–1765, doi:10.1002/2013GL058681, 2014.

Murphy, B., Haase, J. S., Muradyan, P., Garrison, J. L., and Wang, K.-N.: Airborne GPS radio occultation refractivity profiles observed in tropical storm environments, *J. Geophys. Res.*, 120(5), 1690–1709, 2015.

Wang, K.-N., Garrison J. L., Acikoz U., Haase J. S., Murphy B. J., Muradyan P., Lulich T.: Open-loop tracking of rising and setting GPS radio-occultation signals from an airborne platform: Signal model and error analysis. *IEEE Transactions on Geoscience and Remote Sensing*. 54:3967-3984, 2016.

Wang, K.-N., Garrison J. L., Haase J. S., Murphy B. J.: Improvements to the GPS airborne radio occultation in the lower troposphere through implementation of the phase matching (PM) method, *J. Geophys. Res.*, 122(10), 266–10,281. <https://doi.org/10.1002/2017JD026568>, 2017.

2. how the obtained numbers (precisions, biases, ...) compare with the one obtained in Haase et al. 2014, Murphy et al., 2015 and any other paper on ARO analysis?

There are three previous papers analyzing the ARO sounding collected from the research flights during PREDICT campaign, which reflected three stages of advancement in the ARO sounding processing.

Both Haase et al. (2014) and Murphy et al. (2015) focused on the ARO soundings collected from the top antenna with the phase-locked loop tracking during the research flights. The GO retrieval method was used for both papers. *Murphy et al. (2015)* analyzed all ARO soundings collected from the research flight, and presented statistics on retrieval comparisons with model and radiosonde data in the upper and mid-troposphere. For example, the bias compared with ERA-I was -1% and standard deviation from 1.5% at 12 km to 2% at 7 km.

Wang et al. (2017) did a comprehensive evaluation of ARO soundings (59 profiles from research flights) with open-loop (OL) tracking from the top antenna (CH1) with phase-matching retrieval that extends the ARO soundings from the aircraft altitude to near the surface. Significant improvement of ARO sounding quality in the lower troposphere was demonstrated compared to Haase et al. (2014) and Murphy et al. (2015), reducing the bias compared to ERA-I to near 0% from 4 to 12 km, and providing profiles from 2-4 km with a negative bias smaller than -1%. The standard deviation was 2% from 2 to 12 km.

The current paper analyzed the ARO profiles from the ferry flight with open-loop tracking. Both the FSI (this paper) and PM (Wang et al., 2017) retrieval methods show comparable retrieval quality in comparisons with ERA-I. They both show significant improvement in reducing bias in the moist lower troposphere (~1-2% below 4 km) compared to the GO method (3-4% below 4 km) as seen in Figure 9 (c-f) from this paper and Figure 8 from Wang et al. (2017) below.

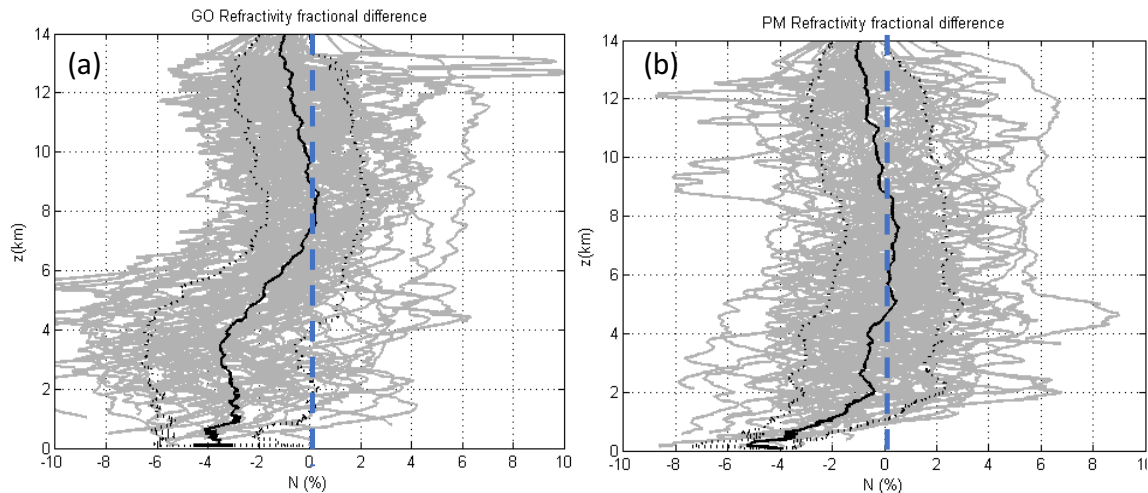


Figure: The fractional difference of the refractivity retrievals (ARO minus ERA-I) for all 59 profiles from the 5 research flights retrieved by (a) GO and (b) PM are shown. For the PM results, the bias with respect to ERA-I, remains less than 1% and the standard deviation is less than 2% over the entire range above 2 km. (Adapted from Figure 8 in Wang et al., 2017)

However, it is interesting to note that in this environment where sharp layer (including the boundary layer) structure in the lower troposphere was much more developed than in the hurricane flights, the tendency for ERA-I to produce a vertically smoother approximation over land (Fig. 6, Fig. 8c,d) resulted in a systematic positive *N*-bias at around 4 km and a negative bias below that on the order of 2-3 %.

3. I understood that these main differences could be either the open-loop vs. close-loop data or the comparison between different analysis (GO/FSI/PM) or the comparison between the different antennas. However, most of the presented work is based on antenna CH1, mostly FSI and only a short section is devoted to the comparison between different methods,

antennas, etc. On the other hand, longer sections are devoted to compare the results with radiosondes and COSMIC data, both data sets not optimal for the comparison (I would simply delete these sections, keep the comparison with ECMWF fields, and give more weight to the most novel aspects of the study).

We deleted the Section 4.3 & Figure 8 that compares the ARO with COSMIC soundings.

However, we kept the section comparing the ARO with the radiosonde data, as the two radiosonde profiles used for the study shows a very different vertical atmospheric structure before and after the frontal passage. The analysis demonstrated that ARO soundings captured the major change of the fine vertical structure at the top and inside the PBL.

Even though it is only a case study, we believe it is important to highlight this sensitivity of the ARO soundings to the fine vertical structure shown in the collocated radiosonde profile.

4. The abstract gives a lot of information about the final precision and biases with respect to the ancillary data sets, while, to my opinion, the novelty of the study lies on the diversity of hardware, low level processing and high level analysis (different antennas, open-loop vs. close-loop, GO/FSI/PM).

We have updated the abstract to emphasize on the unique contribution of the paper, which is described in more detail in the response-to-comment #1.

5. The abstract seem to give two different numbers for RMS precision (0.3% in line 20, 0.2% in line 30)

The two numbers are different. The 0.3% is the RMS difference between ARO and the collocated ERA-I profiles, which could be considered an indicator of the accuracy of ARO measurement, assuming the ERA-I is a good, independent approximation of the true atmosphere. On the other hand, the 0.2% is the ARO refractivity retrieval difference between the top (CH1) and the side (CH2, CH3) antennas, which is a good indicator of the precision of the ARO measurement.

6. page 3, line 17: type PRECICT (PREDICT)

Corrected, thanks.

7. page 4, line 10-15: the way the sentence is written, it seems that the use of 3 antennas was only done during this ferry flight, and not during the science flights of the same campaign. Is this interpretation correct? if so, this should be one of the main focuses of the manuscript, and the analysis, comparisons and conclusions derived from these special (thus unique) settings. If this is not true, then change the sentence to make it clearer.

All three antennas collected ARO measurements during both the research flights and the ferry flight, however, the ARO measurement from side antennas (CH2, CH3) during the research flights produced significantly fewer and degraded quality profiles compared to the top antenna due to aircraft turns. Therefore, only ARO measurements collected from the top antenna were presented in Haase et al. (2014), Murphy et al. (2015) and Wang et al. (2017).

And the reviewer is absolutely correct, one of the major contribution of this paper is to take advantage of the ARO measurements from the high-gain side antenna (CH2, CH3) during the ferry flight to evaluate the ARO soundings collected from the lower gain zenith antenna (CH1).

The manuscript has been modified to clarify the statement as follows:

Page 4, line 6-10,

The ARO signals were simultaneously recorded from two high-gain antennas mounted on both sides of the aircraft fuselage, and one lower gain zenith antenna on the top of the aircraft (Haase et al., 2014, Murphy et al., 2015; Wang et al., 2016). However, the complicated research flight patterns, i.e., sometimes changing flight direction during an occultation, led to degraded signal tracking from the side-looking antennas as the line-of-sight deviated from the maximum in the GPS antenna gain pattern (Murphy et al., 2015; Wang et al., 2016).

Page 4, line 14-17,

"This long flight at nearly constant altitude (~13 km) provided an optimal configuration for simultaneous high-quality ARO measurements from two side-looking antennas and one top antenna. Such independent recordings of occultation events from multiple antennas allows the evaluation of ARO sounding quality and precision."

Page 1 line 31 (Abstract)

"The unique opportunity to make simultaneous independent recordings of occultation events from multiple antennas establishes that high precision ARO measurements can be achieved corresponding to an RMS difference better than 0.2 % in refractivity (or ~0.4 K)."

8. page 5, line 22: the authors do not comment on the potential effects of setting the refractivity at the receiver level as given by ECMWF. How is this affecting the rest of the retrievals?

The impact of any error in the assumed refractivity at the receiver on the ARO retrieval has been evaluated in detail in Xie et al. (2008). The simulation study demonstrated that the random error of refractivity of 0.5% (~ 1 K) at the receiver results in errors up to 0.2% refractivity close to the aircraft altitude, and decreases quickly to 0.05% at 100 m below the receiver height. This error is much smaller than the retrieval errors due to the small

accumulated excess Doppler relative to the random Doppler noise, which produces amplified bending angle errors near (within about 1 km) of the aircraft altitude.

Accounting for refractivity at the receiver location has been implemented in the ARO processing in Murphy et al., 2015 (Fig. 4) and Wang et al., 2017, using the flight level in-situ measurements, and also in Adhikari et al. (2016) and this paper using interpolated ERA-I estimates of refractivity. This produces a closer agreement between the ARO and ERA-I profiles at flight level in the latter two studies, as would be expected.

In this paper, to mitigate the high bending angle errors near the aircraft altitude, the bending angle within the top 1.5 km is replaced with the simulated bending angle profiles obtained from collocated ERA-I profiles. Only refractivity retrievals below ~11.5 km are interpreted. The impact of this assumption decays exponentially below that height (Adhikari et al., 2016).

9. page 6, lines 3-4: which are the effects of correcting the clock errors by pairing with another PRN? how would it change if using another PRN? Is this well-known and done before in RO or ARO? if so, please add references, otherwise comment on possible side effects.

The ARO receiver is tracking the occulting GPS satellite at low elevation and multiple high-elevation GPS satellites simultaneously during an occultation (e.g., Wang et al., 2016). Murphy (unpublished) compared different satellite pairs and found that using the high elevation satellite with the highest SNR produced the best results. It is a standard procedure for space RO, e.g., COSMIC CDAAC, to publish occultations for multiple reference satellites (<http://cdaac-www.cosmic.ucar.edu>).

Reference:

Wang, K.-N., Garrison J. L., Acikoz U., Haase J. S., Murphy B. J., Muradyan P., Lulich T.: Open-loop tracking of rising and setting GPS radio-occultation signals from an airborne platform: Signal model and error analysis. *IEEE Transactions on Geoscience and Remote Sensing*. 54:3967-3984, 2016.

10. page 7, line 6, typo: bracket not close (PM, Wang et al. 2017

Corrected, thanks.

11. page 8, line 6: the authors claim that the retrievals below 11.5 km are independent from the ECMWF (above 11.5 to the receiver level they set the refractivity to ECMWF fields). The fact that at a given range of altitudes they are fixed to the ECMWF seems to me that it affects the rest of the retrievals, so they are not independent of the ECMWF fields. Could the authors comment on this?

We inaccurately described the error mitigation, which has been discussed in detail in response-to-comment #8.

We have removed the following line:

"As a result, the independent refractivity retrievals from ARO measurements extends from surface up to about 11.5 km, which is ~1.5 km below the receiver altitude."

And replaced it with the following sentence:

L28-pp8: *"The dependence on any error in the ERA-I refractivity assigned to the receiver altitude decays exponentially as height decreases."*

12. page 8, lines 14-17: new ERA-5 fields are now available, hourly at 25 km resolution. The interpolation process would be easier.

Yes, the higher temporal and spatial resolution from ERA-5 could lead to a more precise interpolation of the refractivity values at the tangent point locations. However, the limitations of comparing a model point value with the ARO tangent point value derived from a horizontal integral of the atmospheric properties would still remain, and is responsible for larger standard deviation of differences at lower altitudes.

The ERA-5 was not available at the time of submission of the paper nor at the time when the retrievals and most of the analysis was done. Future work may use the ERA-5 fields for comparisons, although we would use the same interpolation process, per se. ECMWF is currently evaluating ERA-5 biases relative to spaceborne RO (Sean Healy, personal communication) so we are not yet planning to use it as a standard.

13. page 10 and afterwards: the RMS difference with respect to ECMWF fields, are they computed up to 11.5 km or up to the receiver level? The comparison should stop at 11.5 km, as above this altitude the solution is set to ECMWF and including this upper segment in the RMS difference would artificially lower the number. Could the authors clarify this point? preferably in the body of the manuscript (not only in the rebuttal letter).

We have updated all the statistics so they are calculated only up to 1.5 km below the aircraft. The aircraft altitude changes slightly during the ferry flight, so the height up to which the statistics are calculated varies from 11.5 to 11.9 km. All the numbers either remain the same or change less than 0.1 %. The numbers have been updated in the manuscript.

14. pages 11 to 14: as mentioned before, I would remove the comparison with COSMIC data (and radiosondes), it is not optimal and does not contribute to the work, adds 'noise' to the study.

We deleted the Section 4.3 & Figure 8 that compares the ARO with COSMIC soundings.

However, we kept the Section 4.2 that compares the ARO with the radiosonde data, as the two radiosonde profiles used for the study shows a very different vertical atmospheric structure before and after the frontal passage. The analysis demonstrated that ARO soundings captured the major change of the fine vertical structure inside the PBL.

Even though it is only a case study, we believe it is important to highlight this sensitivity of the ARO soundings to the fine vertical structure shown in the collocated radiosonde profile.

15. page 15: the authors do not provide details about the antennas, could they present the gain of each of them? either the antenna or a pattern or something that might help understanding why an omnidirectional antenna looking to the zenith achieves ARO of better quality of the dedicated limb oriented ones. Perhaps Table 1 could include the gain of each of the antennas at the observation direction of each ARO event, or the azimuth direction w.r.t. the antenna boresight. Different colors in Figure 10 would also be a useful way to include this information.

We have added one figure (new Figure 1) to illustrate the antenna gain pattern for the high-gain, narrow vertical side-looking (port) antenna (starboard is similar to the port).

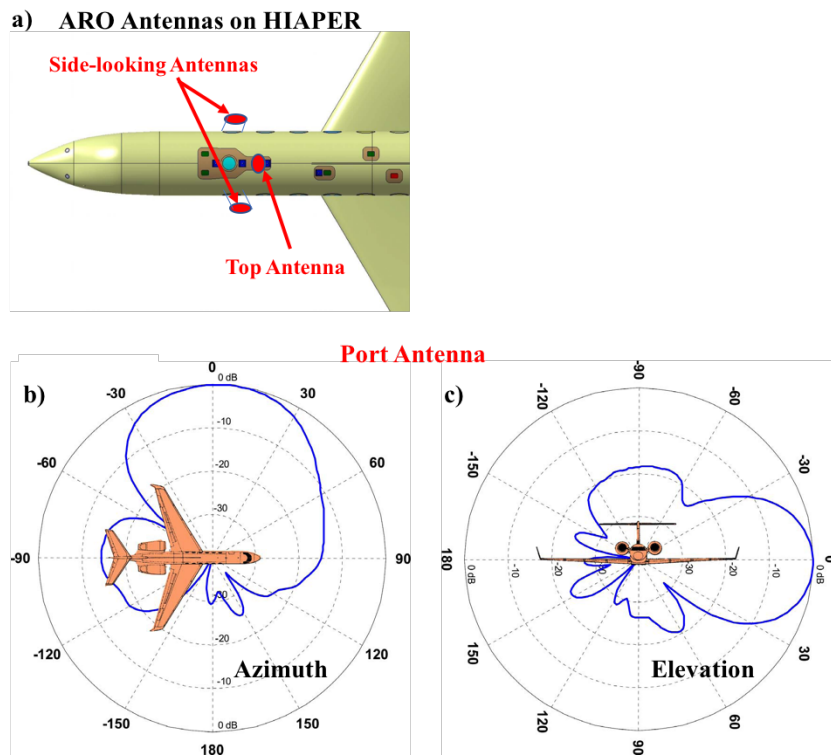


Figure 1. (a) Approximate location of three antennas on HIAPER aircraft, (b, c) the port side-looking antenna (CH2) azimuthal and elevation gain pattern, respectively. For the port antenna, 0° azimuth and elevation are oriented toward the horizon perpendicular

to the flight direction, 90° in azimuth points forward and 90° in elevation points at nadir direction. Note that (b, c) are adapted from Figure 18 in Wang et al., (2016).

Note the ARO signals are focused at about $\pm 5^\circ$ elevation angle, with nearly uniform gain over that range for the port antenna (Fig. 1c). However, the azimuth relative to the boresight varies significantly among occultations. Unlike the omnidirectional top antenna with an isotropic azimuthal gain pattern (not shown), the side-looking antennas have a drop of 10 dB from the boresight to $\pm 40^\circ$ azimuth. Such antenna directivity, and nulls near -60° in the gain pattern, are the most likely explanation for the lower quality results (Fig. 10) for the side-looking antennas than the top antenna, which has the advantage of wide-view capability.

The side-looking antenna is not expected to record occulting GPS at large azimuth angles, especially over -60° (towards the rear of the aircraft). However, several successful recordings with azimuth angle as large as 77.4° (towards the front of the aircraft) were collected. We did not find a clear correlation between the quality of the ARO sounding to the azimuth angle when successful recording is achieved, and therefore did not differentiate ARO profiles by azimuth angle in Fig. 10.

However, as suggested, a new column is added to show the azimuth angle relative to boresight of the lowest tangent point for each ARO event in Table 1. Note the four shaded ARO events that missed the side-looking antenna recording are due to the large azimuth angle away from the antenna boresight.

16. page 17, 3rd paragraph: rather useless comparisons, either remove or shorten, give less weight.

The paragraph has been significantly shortened as follows:

L16-pp17: *"The ARO soundings also agree well with the near-coincident radiosonde above 4 km and capture the heights of sharp layers in the PBL and the variations observed by the radiosondes during the cold frontal passage (Fig. 8)."*

It is interesting to note that in this environment where sharp layer (including the boundary layer) structure in the lower troposphere was much more developed than in the hurricane flights, the tendency for ERA-I to produce a vertically smoother approximation over land (Fig. 6, Fig. 8c,d, Fig. 9c) resulted in a systematic positive bias at around 4 km and a negative bias below that on the order of 2-3%. In addition, the difference in PBL height at the location of the radiosonde and the ARO tangent point can produce large positive and negative differences in refractivity.

17. Summary and conclusions: comparison with Haase et al., 2014 and Murphy et al., 2015 and other ARO experiments. Are these precisions and biases better or worse and why?

As detailed discussed in the response-to-comment #1, the “accuracy” of ARO sounding as compared with the ERA-I reanalysis from this paper is improved relative to the geometric optics inversion method employed on the phase-locked loop data in Haase et al. 2014, and Murphy et al., 2015. The precision and bias of the FSI and PM is comparable to that in Wang et al., 2017. The differences between ERA-I and the ARO profiles are bigger in the lowest troposphere here than in Wang et al., 2017 because of the differences in the precisely retrieved boundary layer height, particularly over land (Fig. 9c), compared to the previous study in the tropical environment.

18. page 18, line 10: it is remarkable that the precision with an omnidirectional antenna looking to the zenith achieves good or better precision than the dedicated side-looking antennas. This should be highlighted here. Also, authors could discuss the potential that this finding might have in the use of commercial flight GPS data for ARO (no need of dedicated side-looking antennas!).

Yes, we agree with the reviewer here. The following sentence is added at the end of the Section 5.

“The surprisingly good quality of ARO measurements from a simple omnidirectional zenith antenna greatly simplifies the implementation of the ARO system and increases the feasibility of developing an operational tropospheric sounding system on-board commercial aircrafts in the future, which could provide a large amount of data for direct assimilation in numerical weather prediction models.”

19. Figures 4, 5, 7, 8, 9 11, captions: which antenna? CH1? please add this information in the caption.

All the ARO profiles from Fig. 5, 6, 8, 9 are from top antenna (CH1). The “CH1” has been added into the caption. CH1 and CH3 were added into the caption of Fig. 10, 11.

20. Figures 4d, 7a, 7b, 8a, 8b: why the bending-impact profile starts at 2 km impact and climbs up to 14 and then down again? I don't understand the segment at low bending angle, with the impact parameter climbing up from 2 to 14 km. Is this well-known and understood?

The impact height is the difference between impact parameter and the radius of the Earth, whereas the impact parameter is the product of refractive index and radius of the curvature at the tangent point (i.e., impact height = $(n \cdot R) - R_e$). The impact parameter is widely used in the radio occultation community as it is the constant quantity for each single ray path connecting the GPS and the RO receiver. The bending angle retrieval is

normally in terms of the impact parameter instead of the geometric height. After the “Abel inversion”, the refractivity is then retrieved at the geometric height (e.g, Kursinski et al., 1997).

With the surface refractivity close to 350 (*N*-units), the impact height near the surface is close to ~2 km. At the aircraft altitude (~13 km), the impact height (~13.5 km) becomes much closer to the geometric height due to the exponential decrease of refractive index of the atmosphere.

Reference:

Kursinski, E. R., G. A. Hajj, J. T. Schofield, R. P. Linfield, and K. R. Hardy (1997), Observing Earth's atmosphere with radio occultation measurements using the Global Positioning System, *J. Geophys. Res.*, 102(D19), 23429–23465, doi:[10.1029/97JD01569](https://doi.org/10.1029/97JD01569).

The segment of increasing bending angle is corresponding to the positive elevation bending angle measurements that is well-known for airborne RO (e.g., Healy et al., 2002, Xie et al., 2008). The bending angle increases as the elevation angle decreases from about +5° to 0° (at the horizon), when RO signals go through thicker atmosphere.

21. Figure 10: perhaps it would help to plot these line with a color code, accounting for either the gain of the antenna at the direction of the ARO event, or the azimuth difference w.r.t. the antenna boresight.

The side-looking antenna is not expected to record occulting GPS at large azimuth angles, especially over -60° (towards the rear of the aircraft). However, several successful recordings with azimuth angle as large as 77.4° (towards the front of the aircraft) were collected. We did not find a clear correlation between the quality of the ARO sounding to the azimuth angle when successful recording is achieved, and therefore did not differentiate ARO profiles by azimuth angle in Fig. 10.

However, as suggested, a new column is added to show the azimuth angle relative to boresight of the lowest tangent point for each ARO event in Table 1. Note the four shaded ARO events that missed the side-looking antenna recording are due to the large azimuth angle away from the antenna boresight.

22. Figure 11: why authors plot the 150 deg azimuth line? is this related to the orientation of the antenna boresight?

The azimuth angle was reference to the flight heading direction. To avoid confusion, we have updated the azimuth angle to be referenced to the antenna boresight direction (i.e., perpendicular to the flight direction in the horizon) in Figure 11 with negative sign indicating towards the rear of the aircraft. The azimuth angles at lower tangent heights are over -60°, where the near null antenna gain (new Fig. 1b) results in low SNR and degraded ARO sounding quality.

Response to the Anonymous Referee #2:

General comments

This is an involved paper, which examines various aspects of an Airborne Radio Occultation mission: the type of data, the nature of the processing, the antenna type and orientation, and the degree to which the results agree with various reference data sources. The resulting profiles compare favourably with those from reanalyses, and are worth publishing.

We thank the reviewer's very positive comments.

Specific comments

1. Why do the bending angle curves turn over at 13 km? Why are there two bending angles for each impact height below that? Please explain (in the text, not to me).

Thanks for the suggestion. We have added the following paragraph into Section 4.1 (ARO retrievals with near-coincident ERA-I profiles) to further discuss the unique aspect of the ARO bending angle measurements.

L13-27, pp11: *"Note the ERA-I bending angle profile is simulated based on the modified forward Abel integration of the refractivity (e.g., Xie et al., 2008). For an ARO receiver located inside the atmosphere, the GNSS signals from both the positive and negative elevation angle (typically $\pm 5^\circ$ reference to the local horizon) are recorded to retrieve the bending angles from the surface up to the receiver altitude. Assuming a spherically symmetric atmosphere, for every negative elevation ray bending angle, there is a corresponding positive elevation bending angle with the same impact parameter. The partial bending angle, i.e., the difference between the negative and positive elevation bending angle, can then be derived and converted to refractivity through a modified inverse Abel transformation (Healy et al., 2002; Lesne et al., 2002; Xie et al., 2008). For illustration purposes in Figure 5, the impact height is used, which is simply the difference between the impact parameter and the local curvature radius of the Earth. Because impact height depends on refractivity, it is typically a value of about 2 km at the surface in the tropics. Note the simulated bending angles from positive elevation angles (e.g., close to $+5^\circ$) are generally very small, because the GNSS signals go through the relatively dry and low density atmosphere above the aircraft altitude. The bending angles increase up to $\sim 0.15^\circ$ (Fig. 5d) at zero elevation (at the local horizon), when the tangent point of the ray is at the aircraft location at ~ 13.5 km altitude (corresponding to the maximum impact height of ~ 14 km, in Fig. 5d). The bending angles continue to increase at lower negative elevation angle as the GPS signals go through the denser and moister atmosphere."*

Technical corrections

1. P8, L26: dimentional \rightarrow dimensional.

Corrected, thanks.

2. P9, L12: On the contrary → In contrast.

Corrected, thanks.

3. All figures OK, except for the strange bending angle business.

Corrected, thanks.

Sensitivity of airborne radio occultation to tropospheric properties over ocean and land

Feiqin Xie¹, Loknath Adhikari¹, Jennifer S. Haase², Brian Murphy^{3,4}, Kuo-Nung Wang⁵, James L. Garrison⁶

¹Department of Physical and Environmental Sciences, Texas A&M University, Corpus Christi, Texas, USA
²Scripps Institution of Oceanography, University of California, San Diego, California, USA
³Department of Earth, Atmospheric, and Planetary Sciences, Purdue University, West Lafayette, Indiana, USA
⁴Now at: Edison State Community College, Piqua, Ohio, USA
⁵Jet Propulsion Laboratory, California Institute of Technology, Pasadena, California, USA
⁶School of Aeronautics and Astronautics, Purdue University, West Lafayette, Indiana, USA

Correspondence to: Feiqin Xie (Feiqin.Xie@tamucc.edu) Submitted to *Atmospheric Measurement Techniques (AMT)*

Abstract. Airborne radio occultation (ARO) measurements collected during a ferry flight at the end of the PRE-Depression Investigation of Cloud-systems in the Tropics (PREDICT) field campaign from the Virgin Islands to Colorado are analyzed. The large contrast in atmospheric conditions along the flight path from the warm and moist Caribbean Sea to the much drier and cooler continental conditions, provides a unique opportunity to address the sensitivity of ARO measurements to the tropospheric temperature and moisture changes. This long flight at nearly constant altitude (~13 km) provided an optimal configuration for simultaneous high-quality ARO measurements from two high-gain side-looking antennas, as well as one relatively lower gain zenith (top) antenna. The omnidirectional top antenna has the advantage of tracking robustly more occulting satellites in all direction as compared to the limited-azimuth tracking of the side-looking antennas. Two well-adapted radio-holographic bending angle retrieval methods, full-spectrum-inversion (FSI), and phase-matching (PM), were compared with the standard geometric-optics (GO) retrieval method. Comparison of the ARO retrievals from the top antenna with the near-coincident ECMWF reanalysis-interim (ERA-I) profiles shows only a small root-mean-square (RMS) refractivity difference of ~0.3 % in the drier upper troposphere from ~5 km to ~11.5 km over both land and ocean. Both the FSI and PM methods improve the ARO retrievals in the moist lower troposphere and reduce the negative bias found in the GO retrieval due to atmospheric multipath. In the lowest layer of the troposphere, the ARO refractivity derived using FSI shows a negative bias of about -2 %. The increase of the refractivity bias occurs below 5 km over the ocean and below 3.5 km over land, corresponding to the approximate altitude of large vertical moisture gradients above the ocean and land surface, respectively. In comparisons to radiosondes, the FSI ARO soundings capture well the height of layers with sharp refractivity gradients but display a negative refractivity bias inside the boundary layer. The unique opportunity to make simultaneous independent recordings of occultation events from multiple antennas establishes that high precision ARO measurements can be achieved corresponding to an RMS difference better than 0.2 % in refractivity (or ~0.4 K). The

Deleted:	analyzed
Deleted:	of
Deleted:	s
Deleted:	inland
Deleted:	~13 km
Deleted:	the
Deleted:	and
Deleted:	demonstrated
Deleted:	robust
Deleted:	intercomparisons of bending angle retrieval techniques over a range of environments that may have different levels of atmospheric multipath propagation interference.
Deleted:	especially
Deleted:	13
Deleted:	th
Deleted:	e
Deleted:	problem
Deleted:	with
Deleted:	Three spaceborne radio occultation profiles within 300 km of the flight track shows a slightly larger RMS refractivity difference of ~2 %.
Deleted:	For the first time,
Deleted:	Analysis analysis of the 12 ARO events that were simultaneously recorded from both the top and side-looking antennas, indicates
Deleted:	of the

surprisingly good quality of recordings from a very simple [zenith](#) antenna ~~increases the feasibility of developing an operational tropospheric sounding system on-board commercial aircrafts in the future, which could provide a large amount of data for direct assimilation in numerical weather prediction models.~~

Deleted: on top of an aircraft

5

1 Introduction

Radio signals from Global Navigation Satellite Systems (GNSS) can be used to sense the atmosphere during a radio occultation (RO) event, when the GNSS signals traverse progressively lower (or higher) atmospheric layers as a moving receiver sets behind (or rises above) the Earth's limb (e.g., Kursinski et al., [1997](#), Rocken et al., 1997). Numerous Low Earth Orbit (LEO) satellites equipped with GNSS RO receivers have been launched since the first Global Positioning System (GPS) RO mission, the GPS/Met in 1995 (Ware et al., 1995). The spaceborne GNSS RO measurements provide high vertical resolution all-weather atmospheric soundings, which complement the conventional passive infrared and microwave sounders with their relatively low vertical resolution and high horizontal resolution, and greatly contribute to global weather forecasting. In 2006, the launch of the six-satellite Constellation Observing System for Meteorology, Ionosphere, and Climate (COSMIC) and the GNSS Receiver for Atmospheric Sounding (GRAS) on-board MetOp began producing about 3000 daily soundings globally (Anthes et al., 2008; Luntama et al., 2008). The RO soundings were operationally assimilated into the numerical weather prediction (NWP) models at many leading weather centers and demonstrated significant impact in the upper troposphere and lower stratosphere (UTLS) (e.g., Healy and Thépaut, 2006; Cucurull and Derber, 2008). The spaceborne RO measurements have advanced knowledge of various physical processes, including the troposphere-stratosphere exchange, gravity waves, hurricane/typhoon evolution, and planetary boundary layer (see Anthes, 2011, and references therein). However, there is relatively limited impact of RO measurements in the lower troposphere, especially on mesoscale phenomena such as severe storm forecasting and small scale processes within tropical storms. The low temporal and spatial sampling rate of spaceborne RO soundings at the regional scale (e.g., only ~1 daily profile over 400 km x 400 km area) typically cannot capture the variation of atmospheric moisture and temperature during the lifetime of mesoscale weather phenomena. In addition, RO refractivity biases seen in the lower troposphere due to uncertainty in signal tracking (e.g., Ao et al., 2003; Beyerle et al., 2006; Ao et al., 2009; Sokolovsky et al., 2010) and the presence of ducting (e.g., Sokolovsky 2003; Xie et al., 2006; Ao et al., 2007; Xie et al., 2010) lead to degraded RO retrievals and reduced impact. The upcoming COSMIC-II mission could double or triple the number of RO soundings but would still offer a limited number of observations over mesoscale and transient weather events.

Deleted: 1995

In contrast, using GNSS receivers on-board an aircraft, dense airborne RO soundings can be collected over the target region during mesoscale and transient weather events. For a receiver within the atmosphere, the Airborne RO (ARO) technique differs from the spaceborne technique (Zuffada et al., 1999; Healy et al., 2002; Xie et al., [2008](#)) in that the raypath

through the neutral atmosphere is not symmetric with respect to the tangent point (the point ~~on a ray~~, closest approach to the Earth ~~center~~). In addition, the nonzero atmospheric refractivity at the receiver cannot be neglected. Therefore, the RO signals from below the local horizon (~~i.e., negative elevation angle~~) must be corrected for the delay due to propagation of the signals from the aircraft altitude to the GNSS satellite above the local horizon (~~i.e., positive elevation angle~~) to retrieve atmospheric properties below the receiver (e.g., Healy et al., 2002). After the precise positions of the GNSS satellite and the receiver are known, the excess phase delay due to the atmospheric refraction can be derived by calculating the difference between the measured phase and the GNSS-receiver line-of-sight (LOS) distance. The ARO signal phase and amplitude can then be inverted to derive the atmospheric bending angle, which can be further converted to refractivity through a modified inverse Abel transformation (Healy et al., 2002; Lesne et al., 2002; Xie et al., 2008).

Early field experiments demonstrated the ARO technique by using a conventional closed-loop-tracking ARO receiver flying at a relative low altitude of ~ 3 km. An exploratory flight system was tested (Yoshihara et al., 2006) but only qualitative conclusions about the performance were drawn. Xie et al. (2008) developed an end-to-end ARO simulation system based on geometric optics to describe in detail the approach, and quantified several key factors affecting the accuracy of the ARO retrievals including the aircraft velocity, in-situ refractivity measurement and the atmospheric horizontal gradient. The GNSS Instrument System for Multistatic and Occultation Sensing (GISMOS) was developed for ARO sounding and reflection measurements (Garrison et al., 2007; Voo et al., 2009). GISMOS was tested in 2008 using the National Science Foundation (NSF) Gulfstream V (GV) research aircraft at flight altitudes of approximately 14 km over the southeastern United States (Lulich et al., 2010; Muradyan, 2009, 2012). Equipped with a dual frequency conventional GPS receiver and inertial measurement unit, GISMOS provides accurate aircraft position and velocity measurements (less than 5 mm/s) which are required for precise ARO retrieval in the lower troposphere (Muradyan et al., 2010). Haase et al. (2014) reported the first results of the ARO measurement and retrievals from the 2010 PRE-Depression Investigation of Cloud-systems in the Tropics (PREDICT) field campaign over the equatorial Atlantic Ocean (Montgomery et al., 2012). Murphy et al. (2015) presented an assessment of the accuracy of ARO bending and refractivity retrievals from the ~~PREDICT~~ field campaign using data from ~~the GISMOS~~ conventional geodetic quality GPS receivers ~~that applied phase-locked loop tracking~~. The implementation of open-loop tracking on the ARO receiver allows high-quality ARO signal tracking deep into the moist lower troposphere where complicated signal dynamics lead to failed signal tracking by the conventional closed-loop tracking receiver (Wang et al., 2016). This multi-path problem caused by the large moisture variation in the lower troposphere leads to significant bias in ARO retrievals based on the geometric-optics (GO) method. With the successful development and implementation of the radio-holographic retrieval algorithms, including the full spectrum inversion (FSI, Adhikari et al., 2016) and the phase matching (PM, Wang et al., 2017), ARO retrieval quality has been significantly improved in the moist lower troposphere.

ARO simulation studies (e.g., Lense et al., 2002; Xie et al., 2008) and previous field observations (Murphy et al., 2015) have demonstrated the large impact of aircraft flight geometry (e.g., altitude, direction) on the ARO sounding density and quality. Due to the much slower motion of the aircraft (~ 0.25 km/sec) compared to ~~LEO~~ satellite (~~~ 7 km/sec~~), it generally

Deleted: of

Deleted:

Deleted: PRECICT

Deleted: installed in GISMOS

Deleted: algorithm

Deleted: e.g.,

Deleted: low-earth-orbit (

Deleted: ,

Deleted: ~ 7 km/sec)

Deleted: s

takes over 20 minutes for an ARO receiver to record the required data from the aircraft cruise altitude (e.g., ~10 km) down to the surface, which is much longer than a typical spaceborne RO event (1-2 minute). In addition, the tangent points during an ARO event also drift much farther (200-300 km) than a spaceborne RO event (generally less than ~100 km). During the research flights from the PREDICT field campaign, the aircraft flew at an average altitude of ~14 km in “lawnmower” or square spiral patterns over the central region of deep convection associated with tropical disturbances (Haase et al., 2014). The ARO signals were simultaneously recorded from two high-gain antennas mounted on both sides of the aircraft fuselage, and one relatively lower gain zenith antenna on the top of the aircraft (Haase et al., 2014; Murphy et al., 2015; Wang et al., 2016). However, the complicated research flight patterns, i.e., sometimes changing flight direction during an occultation, led to degraded signal tracking from the side-looking antennas as the line-of-sight deviated from the maximum in the GPS antenna gain pattern (Murphy et al., 2015; Wang et al., 2016).

This study focuses on the ARO measurements collected during a ferry flight at the end of the PREDICT field campaign from the Virgin Islands to Colorado. The large contrast in atmospheric conditions along the flight path from the warm and moist Caribbean Sea to the much drier and cooler continental conditions provides a unique opportunity to address the sensitivity of ARO measurements to the tropospheric temperature and moisture changes. This long flight at nearly constant altitude (~13 km) provides an optimal configuration for simultaneous high-quality ARO measurements from two side-looking antennas and one top antenna. Such independent recordings of occultation events from multiple antennas allows the evaluation of ARO sounding quality and precision. The quality of the ARO soundings collected from the top antenna are further evaluated by comparing with the near-coincident global reanalysis and radiosonde profiles. In addition, both the well-adapted radio-holographic retrieval methods (FSI and PM) are used and compared with the standard geometric-optics (GO) retrieval method.

The paper is structured as follows: Section 2 describes the GISMOS antenna configuration, and the details of the ARO measurements collected during the ferry flight of the PREDICT campaign. In addition, the independent datasets used to validate the ARO retrievals, including the reanalysis data, and radiosonde soundings are also introduced. Section 3 presents the atmospheric conditions over the study area from reanalysis data. Section 4 evaluates the quality of ARO soundings collected from the top antenna by directly comparing with the reanalysis and radiosonde datasets. The ARO retrieval differences resulting from various ARO retrieval algorithms (GO, FSI and PM) are also presented. The precision of ARO measurements is also quantified through comparisons among the recordings from the three antennas. Finally, the summary and conclusions are presented in Section 5.

2 Data and Methodology

2.1 ARO measurement

Deleted: the
Deleted: sounding
Deleted: the
Formatted: Not Highlight
Deleted: Such
Deleted: frequent
Deleted: altitude and
Deleted: ARO recording
Deleted: a
Deleted: s
Deleted: ARO
Deleted: and profile quality
Deleted: due to
Deleted: signal often moving away
Deleted: To better evaluate the quality of the ARO measurements and avoid the complexity of ARO signal degradation due to the varying aircraft trajectory and signal orientation during the research flights of the PREDICT field campaign, this study focuses on the ARO measurements collected from the ferry flight during the last leg of the campaign. During this ferry flight, the aircraft cruised northwest at nearly constant altitude (~13 km) from the field station at St. Croix in the US Virgin Islands to the UCAR facility at Broomfield, Colorado on October 2, 2010. It provided a better ARO geometry that could lead to higher quality ARO measurements. In addition, the large contrast of atmospheric conditions along the flight path from the warm and moist Caribbean to the much drier and cooler condition inland provides a unique opportunity to address the sensitivity of ARO measurements to the tropospheric temperature and moisture changes. Moreover, during the ferry flight, the ARO signals were simultaneously recorded from two high-gain antennas mounted on both sides of the aircraft fuselage, and one relatively low-gain antenna on the top of the aircraft (Haase et al., 2014; Murphy et al., 2015; Wang et al., 2016). Continuous measurements were made from all 3 antennas during the entire flight. Such a unique dataset offers a great opportunity to evaluate the precision of ARO measurements as well as the impact of signal tracking (e.g., antenna gain, SNR) and different retrieval algorithms on the ARO retrievals.
Formatted: Strikethrough
Formatted: Strikethrough, Highlight
Formatted: Strikethrough
Deleted: details of the
Deleted: other
Deleted: and COSMIC RO
Deleted: quality
Deleted: all three independent
Deleted: between
Deleted: ARO
Deleted: top and side-looking

The NSF/NCAR Gulfstream V (HIAPER) aircraft, with the GNSS Instrument System for Multistatic and Occultation Sensing (GISMOS) onboard, was deployed in August–September 2010 for the Pre-Depression Investigation of Cloud systems in the Tropics (PREDICT) field campaign (Montgomery et al., 2012; Haase et al., 2014; Murphy et al., 2015). A total of seven antennas were mounted on the exterior of aircraft including one on the top and two at each side of the fuselage for occultation measurements as well as two on the bottom of the fuselage for GPS reflection measurements (Garrison et al., 2007). During each flight, GISMOS continuously recorded GPS signals at 5 Hz from geodetic quality dual-frequency Trimble NetRS GPS receivers and simultaneously at 10 MHz using the GNSS Recording System (GRS). In addition to the setting occultation measurements, the GRS doubles the number of ARO soundings by enabling open-loop (OL) tracking technique, which is capable of recording the rising occultation, and allows high-quality signal tracking in the moist lower troposphere (Wang et al., 2016). An Applanix POS/AV™ inertial navigation system was used to achieve velocity precision better than 5mm/s (Muradyan, 2012; Muradyan et al., 2010) as required for airborne retrieval accuracy to be better than 0.5 % in refractivity (Xie et al., 2008).

To evaluate the ARO sounding quality, we focused on the ARO measurements from three antennas, including one omnidirectional avionics antenna mounted on the top of the fuselage (CH1) for precise navigation and high elevation angle satellite data for clock corrections, in addition to occultation measurements, and two high-gain, narrow vertical, and wide azimuthal aperture antennas specially designed for higher sensitivity in tracking low SNR occulting satellites near the horizon, mounted on both the port (right; CH2) and starboard (left; CH3) side of the fuselage (Fig. 1a). In Fig. 1, the azimuth angles are referenced to the antenna boresight direction (i.e., perpendicular to the flight direction in the horizon), with the positive angles measured clockwise (Fig. 1b). Unlike the omnidirectional top antenna with an isotropic azimuthal gain pattern (not shown), the directivity of the side-looking antenna significantly affects the RO signal recording for different observation geometries (Wang et al., 2016). A minimum in the gain pattern exists at -60° azimuth (towards the rear of the aircraft, Fig. 1b). In addition, the fuselage will block the RO signal at greater than $\pm 90^\circ$ azimuth angles. The vertical antenna gain pattern for the side-looking antenna shows relatively uniform gain within $\sim \pm 5^\circ$ from the local horizon (Fig. 1c), where the GNSS occultation signals are tracked. The limited horizontal visibility of occulting GNSS satellites from the side-looking antennas results in few high-quality ARO recordings during the research flights with frequent turns (e.g., Murphy et al., 2015). During the ferry flight, however, the relatively constant flight direction and altitude allow high quality recording from the side-looking antennas.

[Figure 1]

The GRS samples the wide-band GPS signals at 10 MHz on both L1 and L2 frequencies on all three channels. The wide view angle of the top antenna was found to provide sufficiently high SNR recordings of all ARO occulting satellites that were simultaneously recorded by either the port or starboard antenna. Such simultaneous recording between the top (CH1) and side antennas (CH2 or CH3) offers an excellent opportunity to access the precision of the ARO soundings. Note that due

- Deleted: wide-view
- Deleted: that was intended to provide data
- Deleted: plus
- Deleted: horizontal
- Deleted: gain
- Deleted: antennas, with the gain patterns focused on the horizon
- Deleted: extra
- Deleted: Note
- Deleted: el
- Deleted: to the flight direction and negative angle to the backward direction of the airplane
- Deleted: homogenous
- Deleted: horizontal
- Deleted: near perfect circle,
- Deleted: in
- Deleted: y
- Deleted: (near zero)
- Deleted: and the wing
- Deleted: from beyond
- Deleted: Such
- Deleted: when flights
- Deleted: frequently
- Deleted: these

to the inconsistencies in the flight level in situ humidity data (Murphy et al., 2015), we used the ECMWF reanalysis data interpolated to the ARO receiver position to compute the refractivity at the receiver rather than the in situ measurements. The sensitivity of the ARO soundings to the accuracy of the in situ refractivity has been examined in previous studies (e.g., Xie et al., 2008, Murphy et al., 2015) and is significant only at heights in the retrieval close to the aircraft altitude.

2.1.1 Aircraft flight path and ARO soundings

The HIAPER aircraft was deployed for 26 research flights to studying eight storm systems during the PREDICT field campaign. The aircraft typically flown in a lawnmower or square spiral patterns to allow regular sampling of the development region of the targeted storm system. The quality of ARO soundings collected during the research flights has been analyzed in detail (Murphy et al., 2015). However, the frequent direction and altitude changes during the research flight complicated the ARO signal tracking, and led to degraded ARO sounding measurements especially during turns (Murphy et al., 2015; Wang et al., 2016).

After completion of the PREDICT research flights, ARO measurements were then continuously recorded during the return ferry flight from the field station at St. Croix in the US Virgin Islands to the UCAR facility at Broomfield, Colorado on October 2, 2010. During the ferry flight, the aircraft cruised at a steady altitude of approximately 13 km above mean-sea-level (MSL) along a nearly straight flight path, which provided an ideal recording geometry for ARO measurements, especially from the side-looking antennas. Figure 2 shows the aircraft flight path and the tangent points (e.g., local sampling positions) of each recorded occultation. The location of a radiosonde station in Lamont, Oklahoma near the flight track is also marked. Note that each GPS satellite is named for its unique Pseudo Random Noise (PRN) number. Each occultation event is labelled by a pair of PRNs for the occulting GPS satellite and the high-elevation GPS satellite used to correct for the receiver clock errors (e.g., Wang et al., 2016). The ARO tangent point locations were estimated using the geometric-optics ray-tracing method (e.g., Xie et al., 2008) assuming a 1-dimensionally varying atmosphere represented by the Climate Impact on Regional Air Quality (CIRA+Q) refractivity climatological model (Kirchengast et al., 1999). It is worth noting that the ARO measurements sample both the moist conditions over the ocean during the early stage of the flight (15:00–16:40Z) and the relatively dry conditions over land during the final stage of the flight (e.g., 17:00–19:00Z). In the middle stage of the flight, the ARO senses the coastal region over both land and ocean.

[Figure 2]

Altogether, a total of 17 ARO events were recorded during the ~4-hour ferry flight (Table 1). The wide-view zenith antenna (CH1) recorded all 17 ARO events, whereas the port (CH2) and starboard (CH3) high-gain antennas recorded 5 and 8 events, respectively. The four missing ARO recording from both side-looking antennas (shaded in Table 1) are due to the low antenna gain at large azimuth angle (over -60°) from the antenna boresight (Fig. 1b). Here the occultation period begins

Deleted: ... [1]
Deleted: the inconsistency
Deleted: of recording accuracy of
Formatted: Not Highlight
Deleted: were not used in this paper
Deleted:
Deleted: on ARO soundings are only limited to the ARO retrieval close to the aircraft altitude
Deleted: and has been well understood
Deleted: from
Deleted: 2005
Deleted: Therefore, i
Deleted: In this paper, the ECMWF reanalysis data interpolated to the ARO receiver position was used to compute the refractivity at the receiver.
Formatted: Highlight

Deleted: 1

Deleted: The tangent points of three nearby COSMIC RO soundings within 6 h and 300 km of the ARO measurements are shown, labelled with the occulting GPS satellite number (e.g., G23, G29 and G05) along with the location of a radiosonde station in Lamont, Oklahoma used in profile comparisons.
Formatted: Strikethrough
Formatted: Indent: First line: 0.25"
Deleted: 1
Deleted: angle top
Deleted: 6
Deleted: away
Deleted: Table 1 lists all ARO events recorded during the ferry flight.

from tracking the occulting satellite at 5° positive elevation angle above the local horizon until the tangent point descends close to the surface for a setting occultation, and vice versa for a rising occultation. Therefore, the beginning time of each ARO event is defined as when the **tangent point (TP)** is either at positive elevation **angle** of 5° for a setting occultation or near the surface for a rising occultation. Note that the tangent point at zero elevation angle (local horizon) will be at the aircraft altitude. During a setting ARO event, the TPs will gradually descend and move away from the aircraft until the TP touches the surface (Xie et al., 2008), and vice versa for a rising occultation. The TP drift distance measures the distance between the **surface projected** location of the TP at the aircraft altitude (zero elevation angle) and the TP near the surface at MSL. The TP location (latitude and longitude) for each ARO event **close to the surface**, is also shown. With an aircraft cruising at around 13 km, the average ARO sounding takes about 29 minutes with the shortest event **lasting** ~20 min (prn07-28) and the longest event **lasting** ~44 min (prn15-28). Generally, the tangent point drifts away from the aircraft, but will vary in extent with variations in the relative positions and velocities of the occulting GPS satellite and the aircraft. The TP drift distance varies from 181 km (prn08-19) to 589 km (prn06-11) with an average of about 375 km. Interestingly the four longest ARO events (i.e., over 33 min) actually have relatively short TP drift distance of less than 300 km.

[Table 1]

2.1.2 ARO retrieval methods

Similar to the spaceborne RO retrieval, ARO faces the same problems of atmospheric multipath in the **geometric-optics (GO) retrieval method** (Xie et al., 2008; Haase et al., 2014; Murphy et al., 2015). Two radio-holographic retrieval methods have been implemented for ARO measurements to improve the **bending angle retrieval**, including the full-spectrum-inversion (FSI, Adhikari et al., 2016) and the phase-matching method (PM, Wang et al., 2017). A brief description of the three retrieval methods is presented below.

In the GO method, the **RO signals** are considered **to be a series of rays connecting the GPS satellite and the receiver over time**. With the assumption of a **spherically symmetric atmosphere**, each ray has a unique impact parameter, which is the **product of the refractive index and the radial distance of the tangent point from the center of local curvature** (e.g., Kursinski et al., 1997). The bending angle can be uniquely determined from the precise measurements of ARO receiver and GPS satellite positions and the excess Doppler shift of the GPS signal. After removing the Doppler resulting from the movement of GPS transmitter and receiver, the excess Doppler due to the atmosphere is used for retrieving the bending angle and refractivity profiles (e.g., Lesne et al., 2002; Xie et al., 2008). In regions of highly variable refractivity gradients, which often occur in the moist lower troposphere, multiple rays can arrive at the receiver at the same time and **interfere** constructively or destructively, which violates the **single ray assumption in GO**. In that case, the GO method suffers limited vertical resolution and significant refractivity bias. To correctly distinguish these multiple signals, RH retrieval methods are needed.

Deleted: when the TP is near
Deleted: observed during this campaign being
Deleted: about
Deleted: being
Deleted: about
Deleted: .
Deleted: s
Deleted: Because
Deleted: with
Moved (insertion) [1]
Deleted: ,
Deleted: similar
Deleted: on
Deleted: geometric-optics (GO) retrieval of
Moved up [1]: (Xie et al., 2008, Haase et al., 2014, Murphy et al., 2015)
Deleted: . These are
Deleted:
Deleted: GPS
Deleted: GNSS
Deleted: as
Deleted: GNSS
Deleted: with
Deleted: s
Deleted: that describe the geometry of the raypath. With the assumption of a spherically symmetric atmosphere,
Deleted: the
Deleted: as a function of impact parameter
Deleted: along with
Deleted: can be derived and
Deleted: s
Deleted: with different geometry
Deleted: and
Deleted: interfere
Deleted: this
Deleted: of a
Deleted: single ray

The FSI method proposed by Jensen et al. (2003) recognizes the RO signal recording as a summation of radio waves of different frequencies and accounts for their interference. Each wave with a unique frequency corresponds to one single ray path in the GO approach. Multiple frequencies present in the signal at a given time can be unambiguously identified by taking the Fourier transform of the RO signal and using the method of stationary phase. This FSI method has been successfully implemented in spaceborne RO retrievals and has significantly improved both the bending and refractivity retrievals as compared to the GO method. The FSI method was adapted for airborne RO simulation and described in Adhikari et al. (2016). FSI requires a perfectly circular trajectory for both transmitter and receiver. Therefore, a geometric correction to the phase is needed to account for the transformation from the real, non-spherical trajectories to circular trajectories referenced to a local center of curvature. The Fourier transform is then applied separately to both the negative and positive elevation angle segments of the ARO measurements to retrieve the ARO bending angle profile for each segment.

The phase-matching (PM) method (Jensen et al., 2004) is another RH method that also utilizes the method of stationary phase (MSP) to calculate the bending angle profile. Instead of frequency, the PM method uses impact parameter to identify individual subsignals. The impact parameter is forward modelled during occultation period considering the arbitrary receiver and GPS orbit geometry without the need for the correction required by the FSI method. The PM method was first adapted for ARO by Wang et al. (2017).

Once the ARO bending angle is retrieved from each retrieval method, a modified inverse Abel transformation can then be applied to retrieve the ARO refractivity profile (Xie et al., 2008). There is a singularity in the ARO retrievals near zero elevation angle (close to aircraft height) where small errors in ray tangent angle can result in large bending angle errors near the receiver altitude (Xie et al., 2008; Adhikari et al., 2016). These errors could propagate downwards and introduce large refractivity errors at the top of the retrieved refractivity profiles. To mitigate this error, the retrieved bending angles in the top 1.5 km below the receiver altitude are replaced with the simulated bending angle obtained from the collocated ECMWF reanalysis refractivity profile. The dependence on any error in the ERA-I decays exponentially as height decreases. In this paper, the main focus will be on the first results from the analysis of the ARO retrievals using FSI. Comparison among all three retrieval methods will also be presented in Sect. 4.3.

2.2 ECMWF reanalysis and radiosonde data

To evaluate the ARO sounding quality, the high-resolution, 6-hourly European Centre for Medium-Range Weather Forecast (ECMWF) Reanalysis – Interim (ERA-I) data were used. The spatial resolution of the reanalysis data is approximately 80 km (T255 spectral) with uniform grid (0.75° latitude x 0.75° longitude) on 60 vertical levels from the surface up to 0.1 hPa (Dee et al., 2011). The vertical grid levels are unevenly distributed with more levels at lower altitudes.

Deleted: one of the three

Deleted: s

Deleted: , which can be constrained by the in situ refractivity measurement

Deleted: bias

Deleted: in

Deleted:

Deleted: refractivity bias

Deleted: profiles at

Deleted: by

Deleted: profiles

Deleted: As a result, the independent refractivity retrievals from ARO measurements extends from surface up to about 11.5 km, which is ~1.5 km below the receiver altitude.

Deleted: .

Deleted: 4

About half of the model levels (28) are below 10 km, of which 21 levels are below 5 km, and 14 levels are below 2 km. The vertical grid interval increases at higher altitudes, from less than 200 m below 1 km to ~500 m near 5 km.

Given the ERA-I temperature, pressure and mixing ratio data, the corresponding refractivity (N) can be calculated (Smith and Weintraub, 1953; Healy, 2011). The simulated bending angle profile can be calculated through the Abel integral of the refractivity profile (Xie et al., 2008). Both the ERA-I refractivity and bending angle profiles can then be directly compared with the near-coincident ARO soundings. Due to the long tangent point drift (~375 km) (Fig. 1), the ARO sounding senses the atmosphere over a large area, which could cover multiple ERA-I grid cells. Therefore, the ERA-I profile within 3-hours of the ARO sounding is first identified, then the refractivity at each ARO TP location is derived through 3-dimensional bilinear interpolation of the surrounding eight ERA-I grid values. The comparison is expected to produce an estimate of the combined error of the ARO measurement and the effect of horizontal model variations integrated over the entire ray path.

In addition, the Department of Energy (DOE) Atmospheric Radiation Measurement (ARM) program Central Facility (Latitude: 36.62°N, Longitude: 97.48°W, Elevation: 317 m), located near Lamont, in north-central Oklahoma, provides data for validation purposes. The core instrumentation at the Southern Great Plains (SGP) site provides radiosonde soundings four times daily, and continuous measurement of surface temperature, pressure and precipitable water vapor from a microwave radiometer, MWR. For several ARO soundings, two close-by radiosonde soundings were identified, with one at 17:28Z and the other at 23:28Z on October 2, 2010.

3 Atmospheric conditions over the study area

As shown in Table 1, ARO soundings have relatively long duration (~30 min) and large TP drift (~375 km). The horizontal variation of the atmosphere needs to be assessed to better understand the ARO measurements. The ARO soundings can be separated into two categories, ones over land (6 soundings) and the others over ocean, including those over coastal regions (11 soundings), based on their tangent point locations. The ARO soundings in the earlier stage of the flight were taken mostly over the ocean/coastal region (1400–1640Z), and the soundings at the later stage are mostly over land (1700–1900 Z).

Figure 3 shows the ERA-I temperature, moisture and the refractivity field at two pressure levels (850 hPa and 500 hPa), at 18Z on October 2, 2010. The synoptic pattern was dominated by an upper-level trough stretching from central eastern Canada to the Midwestern United States as seen in the 500 hPa height contours (Fig. 3e). A cold front was located over Oklahoma and orienting northwest across the southeastern US all the way to West Virginia. In contrast, high values of moisture extended from low latitudes up to ~25°N over the Caribbean. As a result, very cool and dry conditions were found at the SGP site near the end of the ferry flight, whereas much warmer and more moist conditions were found over the Caribbean (Fig. 3a,b). The slow movement of the cold front into the southern US led to sharp changes in the atmospheric conditions over this region during the 4 h ferry flight. The large spatial variations in temperature and moisture led to

Deleted: ddimensional

Deleted: 2

Deleted: 2e

Deleted:

Deleted: On the contrary

Deleted: 2a

significant inhomogeneity in the refractivity field. Two regions (Fig. 3c,f) were selected to contrast the atmosphere over the warm and moist Caribbean [67–78° W, 18–27° N] with that of the cool and dry land near the Southern Great Plains of the US [89–99° W, 32–40° N]. It is worth noting that the two selected regions do not include the Gulf Coast of Mexico and Florida, which exhibit warm and moist lower troposphere similar to the Caribbean, but rather dry upper troposphere similar to inland region (Fig. 3).

Deleted: 2c

[Figure 3]

Deleted: 2

Deleted: 2

The vertical profiles of the mean moisture and refractivity from ERA-I along with their anomalies and root-mean-square (RMS) difference, over the two selected regions are shown in Figure 4. Over land (89–99° W, 32°–40° N), rather dry atmospheric conditions (mean mixing ratio < 6 g/kg) with low near-surface refractivity (< 300 N-unit) are observed in the northwestern domain (Fig. 4a,c). The planetary boundary layer (PBL) was moist below ~3 km with mixing ratios of less than 1.5 g/kg above this level and a maximum reaching ~6 g/kg near the surface. Most variation in moisture is seen below 3 km with a maximum around 2 km, where the RMS difference is close to 2 g/kg in mixing ratio, resulting in a large variation in refractivity of up to ~1.4 % (Fig. 4a,c). Above 10 km, water vapor content is low (< 0.05 g/kg), and the relatively large variation of refractivity (RMS: ~1 %) indicates the variability in the upper troposphere over land. It should be noted that the sharp decreases in moisture around 3 km and 1 km leads to large refractivity gradients at both altitudes, which can introduce multipath propagation and result in larger differences between the GO and RH refractivity retrievals.

Deleted: 3

Deleted: 3a

Deleted: 5

Deleted: 3a

Over the ocean domain (67–78° W, 18–27° N) extending up to the upper-troposphere, the atmosphere is much moister than over land. The moisture exponentially decreases with altitude from a maximum of ~17 g/kg near the warm ocean surface (with a high surface refractivity of ~380 N-unit). The troposphere near 7 km altitude remains moist with mixing ratio ~1.5 g/kg (Fig. 4b). The highest moisture variability occurs near 5 km, where the maximum RMS difference reaches ~1.5 g/kg in mixing ratio, and ~7 % in refractivity. The refractivity above 10 km shows much less variation over the ocean with a RMS difference (~0.5 %) only half that found over land (~1 %).

Deleted: a

Deleted: more moist

Deleted: atmosphere

Deleted: , extending up to the upper-troposphere, is observed than over the land

Deleted: 3b

Deleted: , where the upper troposphere variability occurs significantly higher in the profile

[Figure 4]

Deleted: 3

4 Evaluation of the ARO retrievals

To evaluate the quality of the ARO measurements, the near-coincident ERA-I reanalysis, and radiosonde soundings were directly compared to the ARO soundings. A quantitative assessment of the ARO retrievals is made through the inter-comparison of three different retrieval methods. Moreover, the precision of ARO measurements is evaluated by comparing the same ARO event from the top and side-looking antennas recorded on two independent channels during the ferry flight.

Deleted: and COSMIC RO

Formatted: Strikethrough

4.1 Comparison of ARO retrievals with near-coincident ERA-I profiles

All 17 ARO measurements recorded from the top antenna (CH1) were processed with the FSI method to retrieve the ARO bending angle profiles, which can be further used for deriving the refractivity profiles. A typical rising ARO event over Alabama, labelled prn15-28 for occulting satellite prn-15 corrected for receiver clock errors by subtracting the residuals from satellite prn-28, is presented in Figure 5, along with the near-coincident ERA-I profile. Note the ERA-I bending angle profile is simulated based on the modified forward Abel integration of the refractivity (Xie et al., 2008). For an ARO receiver located inside the atmosphere, the GNSS signals from both the positive and negative elevation angle (typically $\pm 5^\circ$ reference to the local horizon) are recorded to retrieve the bending angles from the surface up to the receiver altitude. Assuming a spherically symmetric atmosphere, for every negative elevation ray bending angle, there is a corresponding positive elevation bending angle with the same impact parameter. The partial bending angle, i.e., the difference between the negative and positive elevation bending angle, can then be derived and converted to refractivity through a modified inverse Abel transformation (Healy et al., 2002; Lesne et al., 2002; Xie et al., 2008). For illustration purposes in Figure 5, the impact height is used, which is simply the difference between the impact parameter and the local curvature radius of the Earth. Because impact height depends on refractivity, it is typically a value of about 2 km at the surface in the tropics. Note the simulated bending angles from positive elevation angles (e.g., close to $+5^\circ$) are generally very small, because the GNSS signals go through the relatively dry and low density atmosphere above the aircraft altitude. The bending angles increase up to $\sim 0.15^\circ$ (Fig. 5d) at zero elevation (at the local horizon), when the tangent point of the ray is at the aircraft location at ~ 13.5 km altitude (corresponding to the maximum impact height of ~ 14 km, in Fig. 5d). The bending angles continue to increase at lower negative elevation angle as the GPS signals go through the denser and moister atmosphere.

The ERA-I profile shows a weak temperature inversion with a large moisture gradient near 1 km, which leads to a large refractivity gradient and a sharp increase in bending angle around an impact height of 3 km. Both the ARO bending angle and refractivity profiles are highly consistent with the ERA-I profiles with the mean refractivity difference of about $\sim 0.2\%$ (RMS 1%) overall and less than 0.1% (RMS 0.5%) above 3 km. The ARO sounding retrieved from FSI also captures the PBL height well at about 2.5 km. Larger differences are seen in refractivity below that and in the bending angle below ~ 4 km impact height.

The prn15-28 occultation is a rising case, where the ARO receiver tracks the GPS occultation signal from near the surface to the upper atmosphere. For example, the signal to noise ratio (SNR) around UTC 17.1 h is close to the background noise, when the tangent point is near the surface. Note a sharp drop of ARO SNR at 17.17 h to the background noise, and the strong signal re-emerging at ~ 17.12 h in Fig. 5c. The large SNR variation is a strong indication of signal interference due to multipath resulting from the sharp refractivity gradient seen in the ERA-I profiles near 1 km.

[Figure 5]

Deleted:

Deleted:

Deleted: are presented in Figure 45

Deleted: e.g.,

Deleted: With

Deleted: and the

Deleted: can be retrieved

Deleted: With the

Deleted: assumption

Deleted: The bending angle is a function of impact parameter, which is the product of the refractivity index and the radial distance of the tangent point from the center of local curvature.

Deleted: curvature

Deleted: generally

Deleted: as

Deleted: thin

Formatted: Not Highlight

Deleted: The bending angles keep increasing at lower negative elevation as the GNSS signals go through the thicker atmosphere.

Formatted: Font color: Auto

Formatted: Font color: Red

Deleted: 4c

Deleted: 4

After comparing each ARO refractivity profile from the top antenna (CH1) with its near-coincident ERA-I profile, the fractional refractivity differences are shown in Figure 6. Overall, the ARO profiles are highly consistent with the ERA-I above ~5 km with near zero bias of -0.15 % (RMS 0.22 %) in the middle and upper troposphere. In the lower troposphere, however, the ARO refractivity shows a negative bias of about -1.5 % (RMS 1.7 %) below 5 km with a maximum of -3 % near the surface. As large differences in atmospheric conditions are seen between land and ocean (Fig. 4), we further separate the ARO soundings into two categories with one group of ARO soundings over land (i.e., with all TPs over land) and the others over ocean (i.e., with partial or all TPs over ocean) as shown in Fig. 2. The ARO profiles over ocean show a negative refractivity bias below 5 km (Fig. 6), where large moisture variations begin in the ERA-I profiles over the ocean (Fig. 4b,d). Similarly, the ARO profiles over land show the negative refractivity bias below ~3.5 km with a maximum bias near 2 km (Fig. 6), where the maximum moisture and refractivity variations are observed in ERA-I profiles over land (Fig. 4a,c). Overall, the negative ARO refractivity biases in the lower troposphere seem to be related to the moisture variations. Wang et al. (2016) showed that when refractivity is higher than the climatological value used in the Doppler model for the open-loop tracking, low SNR could potentially lead to an unwrapping error in the carrier phase measurements that would produce a preferentially negatively biased refractivity.

[Figure 6]

4.2 ARO retrievals with near-coincident radiosonde measurements

Near the end of the ferry flight, there are two ARO profiles (prn09-28 and prn07-28) near the SGP site at Lamont, Oklahoma (Fig. 2), where radiosonde profiles were launched at 17:28Z and 23:28Z on October 2, 2010 (Fig. 7). The vertical profiles of temperature, relative humidity and the derived refractivity for the two soundings are shown in Fig. 7a,b. The radiosonde around at 17:28Z, or 11:28 PM local time, shows a complicated multiple layer structure. Three distinct layers marked by high relative humidity gradients and weak inversions are seen at around 1.3 km, 1.7 and 2.7 km, where large negative refractivity gradients are also present. On the other hand, the radiosonde in the late afternoon (at 23:28Z, or 5:28 PM) shows a well-defined single layer PBL with a sharp inversion and large relative humidity and refractivity gradient at ~1.9 km. Note that the sharp refractivity gradient exceeds the critical refraction of -157 N-unit/km and leads to a ducting layer across the PBL inversion layer.

The time series of the surface temperature and relative humidity as well as the precipitable water vapor (PWV) from the microwave radiometer shows the high pressure system was moving into the area. The cold front caused significant change around 18Z and strong subsidence and drying afterward, which creating a stronger boundary layer inversion at the radiosonde station in late afternoon (Fig. 7c,d). Near local noon (18:00Z), relatively stable surface temperature but a rapid decrease in PWV are observed. During the one hour time span from 17:30Z to 18:30Z, the PWV decreased by 38 % from 1.6

Deleted: channel 1

Deleted: s

Deleted: 5

Deleted: 13

Deleted: 21

Deleted: 3

Deleted: Table 1

Deleted: 3b

Deleted: 3a

Deleted: 5

Deleted: 1

Deleted: 6

Deleted: 6a

Deleted: a

Deleted: 6c

to 1.0 cm (a decrease of 0.6 cm, or $\sim 6 \text{ kg/m}^2$). The PWV further decreased to $\sim 0.7 \text{ cm}$ at 19:00Z and remained rather constant into the late afternoon (23:00Z, or 5PM local time). Most of the water vapour is found in the boundary layer as seen in Fig. 7a,b. The significant change in the PWV near the radiosonde launch time at 17:28Z but rather small variation at 23:28Z, implies larger temporal variation of the lower tropospheric (or PBL) structure near local noon time (17:28Z) as compared to the late afternoon (23:28Z).

[Figure 7]

The bending angle profiles of the two ARO measurements from prn07-28 (at 18:57Z, Fig. 8a) and prn09-28 (at 18:19Z, Fig. 8b) are presented along with the simulated bending angle profiles from the collocated radiosonde and ERA-I profiles at 17:28Z and 23:28Z, respectively. The refractivity profiles and the difference between the ARO and the radiosonde/ERA-I profiles are also shown in Fig. 8c,d, respectively. The two radiosonde soundings are almost identical in refractivity above $\sim 4 \text{ km}$ (0.7% RMS) but show large differences (up to $\sim 15 \%$ near 2.5 km) inside the boundary layer (Fig. 8d) due to the strong temporal variation of atmospheric conditions resulting from the synoptic forcing and the local diurnal surface heating changes (Fig. 3 and Fig. 7).

The radiosonde at noon (17:28Z) shows three jumps in bending angle at ~ 3 , 4 and 4.5 km impact height and a small increase in bending at $\sim 6 \text{ km}$. On the other hand, the late afternoon sounding (at 23:28Z, or 6:28 PM) shows only one large jump in bending angle at $\sim 3.5 \text{ km}$ impact height (Fig. 8b). It is important to note that even though the two ARO soundings are collected around the same time, the ARO prn09-28 sampled the PBL in northern Oklahoma where the cold air mass associated with the high pressure system was already dominant, whereas the ARO prn07-28 sampled the PBL in southern Oklahoma, when the cold front had just moved in and caused dramatic changes as seen in the in situ measurements at Lamont, Oklahoma (Fig. 7).

The ARO profile (prn07-28) is about 1.5 hours later and 290 km south of the radiosonde (RDS1728Z). It also detects distinctly sharp bending angle near 3 km, 4 km, 4.5 km and 6 km impact height (Fig. 8a). These correspond to the bending angles jumps seen in the radiosonde (RDS1728Z) but with slightly underestimated bending beneath each layer. Despite capturing the height of the individual layers, and showing agreement above 8km ($\sim 0.9 \%$ RMS in refractivity), the ARO and the radiosonde refractivity differences are significant at lower levels, showing RMS difference $\sim 2 \%$ in the height range 4-8 km, and a maximum difference up to -9% at $\sim 2.5 \text{ km}$. In addition, a slightly better agreement between the ARO and the ERA-I profile is seen.

The ARO profile (prn09-28) is a similar distance, about 250 km north of the radiosonde site, but is about 5 hours earlier than the radiosonde (RDS2328Z) observation. However, remarkable consistency between the two in both bending angle and refractivity are shown above 2 km (less than 0.5 % RMS in refractivity), with a large negative bias (up to -10%) in refractivity below $\sim 2 \text{ km}$. This signature in the bending angle profile is typical in the presence of a ducting layer across a sharp inversion layer (Fig. 7b), which could introduce large negative refractivity biases in standard Abel retrieval due to the

Deleted: 6a

Deleted: 6

Deleted: 7a

Deleted: 7b

Deleted: 7c

Deleted: 7d

Deleted: 2

Deleted: 6

Deleted: 6d

Deleted: 6

Deleted: 7a

Deleted: 8

Deleted: 6

non-unique inversion problem (Sokolovskiy 2003; Xie et al., 2006). The ARO sounding shows one large bending angle jump near 3.5 km impact height, corresponding to the sharp refractivity gradient near 2 km that is also observed by the radiosonde. Beneath this height, the ARO bending angle is smaller than the radiosonde bending, which results in a negative refractivity bias below 2 km. Moreover, the ARO profile agrees extremely well with the collocated ERA-I profile, including a much smaller difference inside PBL below 2 km (Fig. 8d). Both the ARO and the collocated ERA-I profile show a smaller refractivity gradient without a ducting layer as observed in the radiosonde profile (RDS2328Z) near 2 km. The better agreement between ERA-I and the ARO measurement implies the likely presence of the horizontal inhomogeneity inside the PBL over the region, where the fine vertical structure observed from the in situ radiosonde might not be representative of a large domain (e.g., 100-200 km horizontally), and could be smoothed out in the ARO observation.

[Figure 8]

4.3 Comparison of ARO profiles derived from different retrieval methods

As described in Section 2.1.2, there are three major ARO retrieval methods, including the geometric-optics and two radio-holographic methods that were used to retrieve the bending angle profiles. The ARO measurements recorded from the top antenna (CH1) are separated once again into land and ocean categories, based on the tangent point locations. Figure 9 shows the mean difference between the ARO profiles from the three methods and the near-coincident ERA-I profiles using ERA-I as the reference. The difference for both the ARO bending angle (Fig. 9a,b) and refractivity (Fig. 9c,d) retrievals over land and ocean are shown separately. Furthermore, the fractional refractivity differences between the GO/PM retrievals and FSI are shown in Fig. 9e,f.

The ARO bending angle profiles from all three retrieval methods display small difference from the near-coincident ERA-I profiles above ~6.5 km over land (Fig. 9a) and above ~8 km over ocean (Fig. 9b) in impact height. Correspondingly, the small RMS fractional refractivity difference is about 0.3 % above ~5 km over both land and ocean (Fig. 9c,d). Below these levels, all three retrieval methods show negative biases increasing at lower altitude. The GO retrieval deviates significantly from the FSI and PM retrievals and shows larger negative biases in bending and refractivity due to the apparent multipath problem resulting from the increasing moisture in the lower troposphere (e.g., Murphy et al., 2015). The higher transition altitude for large GO retrieval bias indicates the multipath problem is worse for GO over ocean (~7 km) than land (~5.5 km) as may be expected from the height dependence of the moisture variability in Fig. 4. All three ARO refractivity (and bending) retrievals reach the maximum biases at around 2.5 km over land and at 4 km over ocean, where the maximum moisture variations are observed in the lower troposphere, respectively (Fig. 4). The RMS refractivity difference between PM and FSI is less than 0.1 % above 5 km and increases slightly at lower levels over land (Fig. 9e). The negative refractivity bias below 5 km is slightly greater for PM retrievals over ocean compared to FSI. However, given the variability and the small number of profiles over ocean analyzed in Figure 9f, this may not be significant.

Deleted: 7d

Deleted: 7

Deleted: ARO retrievals compared to nearby COSMIC RO soundings

... [2]

Formatted: Strikethrough, Highlight

Formatted: Strikethrough

Deleted: channel

Deleted: 2014

Deleted: 3

Deleted: 3

The remaining negative bending angle and refractivity biases in the moist lower troposphere in FSI and PM retrieval (Fig. 9c,d) may be due to low SNR in the lowest levels of the atmosphere. The effects of SNR can be examined by investigating the differences among antennas that are described in the next section.

5 [Figure 9]

4.4 ARO antenna evaluation and measurement precision

10 Out of the 17 ARO events recorded from the top antenna (Table 1), there are 12 ARO events that are simultaneously recorded from one of the two side-looking antennas. The others occurred with a viewing azimuth directly fore or aft of the aircraft. Four were recorded from the port (CH2) and eight from starboard (CH3) antenna (Table 1). The redundant measurements provide a unique opportunity to estimate the precision of the ARO measurements and evaluate the key factors affecting the GPS occultation signal tracking. Note the isotropic top antenna had much better recordings of the high-elevation GPS satellites than the side-looking antenna. For each ARO event, the same high-elevation GPS satellite tracked
15 by the top antenna was used for clock calibration of the occultation measurements from both the top and side-looking antennas. In addition, same processing procedure were applied to the individual channels from side and top antennas for the open loop tracking, filtering, FSI retrieval and Abel inversion, to derive the bending angle and refractivity profiles.

Figure 10 shows the difference between the ARO refractivity retrievals from the side and the top antennas. The individual refractivity difference profiles for each ARO event and the mean difference are shown. Note there is one obvious
20 outlier (prn16-19), which shows a large negative refractivity difference below 3 km reaching -10 % near the surface. Without considering the outlier case, the RMS refractivity difference is less than ~0.1 % above 3 km and 0.2 % overall from the surface up to 1.5 km below the flight level. There is a small positive bias from 0 to 4 km, with a maximum of ~0.5 % near 3 km. The small retrieval difference between the ARO measurements from the top and the side-looking antennas indicates high precision in the raw ARO measurements can be achieved, corresponding to an RMS better than 0.2 % in
25 refractivity (or ~0.4 K).

[Figure 10]

The refractivity retrieval differences between the top and side antennas for each ARO event (Fig. 10), are likely caused
30 by differences in the SNR of the two ARO signals, which results in noise variations in the phase extracted in the open-loop tracking procedure (Wang et al., 2016). Although the side-looking antennas had higher gain in the view direction perpendicular to the aircraft, the line of sight to the GPS satellite was rarely in that direction and often appeared in part of the antenna pattern with lower gain. The antenna directivity limits has lower gain in the fore and aft directions (Fig. 1).
However, the wide-view top antenna generally maintains high SNR until the lowest elevation angle measurements when the

Deleted: The

Deleted: processes

Deleted: ~13

Deleted: forward

tangent point descends into the lower troposphere. It permits observations of GPS satellites at the full 360-degree range of azimuth angles.

Figure 11(a, c) show the outlier case (prn16-19) from Fig. 10 that displays large negative refractivity difference between the side (starboard) antenna (CH3) and the top antenna (CH1). The SNR measured from both antennas are shown in Fig. 11a. In comparison to the top antenna, the side-looking antenna shows generally lower SNR with large variation during the setting occultation. It started tracking prn16 at about -50° azimuth angle relative to the antenna boresight direction (negative sign indicating toward the rear of the aircraft) at 15.75 hrs (UTC), i.e., about 40° from the back of the aircraft. The azimuth angle further increases to over -55° near 15.9 hrs, which led to a significant drop of the SNR close to the noise floor. The SNR thereafter recovered slightly but dropped again to near the noise floor (~ 20 v/v) at around 16.16Z with azimuth angle over -60° , whereas the top antenna maintained relative high SNR above ~ 80 (v/v). Such low SNR (CH3) can result in incorrectly resolved phase unwrapping and introduce a usually negative bias, in the reconstructed signal phase (Fig. 11c), which further leads to a negative bias in the ARO bending and refractivity retrievals (Wang et al., 2016).

On the other hand, a typical normal case (prn01-19) is also shown (Fig. 11b,d). With the occulting GPS satellite near the boresight of the side-looking antenna (e.g., azimuth angle of -48 to -56°), the SNR from the side-looking antenna shows higher SNR than the top antenna. The excess phase difference between the two antennas remains very small during the ARO event and only has some small differences in the lowest troposphere (Fig. 11d), which does not introduce significant differences in the bending angle and refractivity retrievals.

[Figure 11]

5 Summary and Conclusions

The airborne radio occultation technique can offer dense RO soundings over targeted regions during mesoscale and transient weather events, with comparable data quality to the spaceborne RO soundings in the mid to upper troposphere. In this study, the airborne radio occultation measurements from the 4 h long (~ 3600 km) ferry flight from the Virgin Islands to Colorado at the end of the PREDICT field campaign were analyzed, and the quality of the ARO retrievals were evaluated. During the ferry flight, the aircraft was cruising at a steady altitude of approximately 13 km along a nearly straight flight path, which provided the ideal recording geometry for ARO measurements from side-looking antennas. The ARO sampled the warm and moist Caribbean environment to the cool and dry continental environment near the Southern Great Plains of the US. A total of 17 ARO soundings were recorded by the top antenna, among which 12 ARO soundings were simultaneously recorded by the side-looking antennas. The ARO soundings take an average of 29 minutes to sense from 5° above the aircraft local horizon down to the surface with an average TP drifting distance of 375 km. The geometric-optics (GO) method, the full-spectrum-inversion (FSI), and the phase-matching (PM) methods are used to retrieve the ARO

Deleted: s

Deleted: the

Deleted: ~

Deleted: 14

Deleted: the flight heading direction

Deleted: ~

Deleted: 14

Deleted: background

Deleted: background

Deleted: 15

Deleted: can

Deleted: bias,

Deleted: in

Deleted: ~

Deleted: 13

Deleted: -

Deleted: 14

Deleted: relative to flight heading direction

Deleted: analysed

Deleted: of

bending angle profiles, which are then used to derive the refractivity through the modified Abel inversion (Xie et al., 2008). The quality of ARO sounding profiles is assessed in detail by comparison with the near-coincident independent datasets, including the ERA-I reanalysis, and radiosonde soundings.

Comparison of ARO FSI refractivity retrievals with the collocated ERA-I profiles shows near zero refractivity bias of -0.15% (RMS $< 0.22\%$) in the middle and upper troposphere from 5 km up to about 11.5 km (~1.5 km below the aircraft altitude). In the lower troposphere, however, the ARO refractivity shows a negative bias of about -1.5% (RMS 1.7%) below 5 km with a maximum bias near 4 km over ocean and near 2 km over land (Fig. 6), corresponding to the altitude of maximum moisture gradients for ocean and land (Fig. 4), respectively.

The ARO soundings also agree well with the near-coincident radiosonde above 4 km and capture the heights of sharp layers in the PBL and the variations observed by the radiosondes during the cold frontal passage (Fig. 8). The underestimation of the ARO bending angle in the PBL leads to a negative bias in refractivity compared to the radiosonde. However, the smaller difference between ARO and ERA-I profiles indicates that ARO succeeds in representing the refractivity at this larger scale domain.

The ARO retrieval uncertainty due to the bending angle retrieval methods is also evaluated. The ARO profiles from all three retrieval methods display small RMS refractivity difference with less than 0.3% above ~ 5 km over both land and ocean, compared with the near-coincident ERA-I profiles (Fig. 9c,d). Below these levels, all three retrievals show negative biases which increase at lower altitude. The FSI and PM retrieval methods significantly reduce the negative refractivity bias seen in the GO retrieval by addressing the multipath problem. The remaining biases below ~ 4 km warrant further investigation.

Analysis of the 12 ARO events that were simultaneously recorded from the top and side-looking antennas shows that highly consistent ARO measurements are achieved. The overall RMS refractivity difference is less than $\sim 0.1\%$ above 3 km and $\sim 0.2\%$ overall. There is a small positive bias below 4 km with a maximum up to $\sim 0.5\%$ near 3 km. The small retrieval difference in ARO measurements from multiple independent antennas indicates high precision in the raw ARO measurements can be achieved, corresponding to an RMS difference better than 0.2% in refractivity (or ~ 0.4 K). One outlier case shows the limited occultation satellite visibility of the side-looking antenna at large azimuth angle. The low SNR results in unwrapping errors in the carrier phase measurements that produce a negative bias in the ARO bending and refractivity retrievals.

In summary, the ARO measurements by GISMOS from this ferry flight demonstrate its capability of providing relatively dense soundings for targeting synoptic to mesoscale weather systems. The radio-holographic retrieval methods significantly improve the ARO retrieval in the moist lower troposphere where frequent multipath occurs and otherwise causes large negative biases in the GO retrieval. The ARO soundings capture well the height of sharp refractivity gradients in the moist lower troposphere, especially inside the PBL. The remaining negative bias in ARO bending angle and refractivity in the moist lower troposphere is most likely a result of low SNR, that may be best addressed with improved antenna design. The data reveal the presence of sharp moisture gradients and boundary layer ducting phenomena that warrant

Deleted: s, and COSMIC

Deleted: interpolated to the tangent point locations

Deleted: 13

Deleted: 21

Deleted: the

Deleted: at ~ 13 km

Deleted: 5

Deleted: 3

Deleted: Two high-resolution radiosonde soundings from Lamont, Oklahoma, were compared to the nearby ARO measurements. The two radiosonde soundings are 6 hours apart and show almost identical refractivity above ~ 4 km but larger differences (up to $\sim 15\%$ in refractivity) inside the boundary layer due to the strong PBL variations over land (Fig. 7). Although ARO measurements are 290 km from the radiosondes, both

Deleted:

Deleted: profiles

Deleted: re

Deleted:

Deleted: 7

Deleted: The ARO soundings do not compare as well with the closest COSMIC RO soundings from the limited samples. But the comparable RMS refractivity differences between the ARO and nearby COSMIC profiles ($\sim 1.5\text{--}2\%$) with that of the two nearby COSMIC profiles ($\sim 1.5\%$) implies ARO could achieve similar quality sounding as the spaceborne RO.

Formatted: Strikethrough

Deleted: analyzed

Deleted: from the surface up to ~ 13 km

Deleted: between the

Deleted: the top and the side-looking

Deleted: low SNR recorded from

Deleted: unwrapping which

Deleted: introduces

Deleted: the reconstructed signal phase, and further leads to a negative bias in

Deleted: (Wang et al. 2016)

further attention. The surprisingly good quality of ARO measurements from a simple omnidirectional zenith antenna greatly simplifies the implementation of the ARO system and increases the feasibility of developing an operational tropospheric sounding system on-board commercial aircraft in the future, which could provide a large amount of data for direct assimilation in numerical weather prediction models.

Deleted: on top of an aircraft

Deleted: y

Deleted: s

Acknowledgements

Funding for this research was provided by NSF grant AGS-1262041 and NASA grant NNX15AQ17G. Jennifer S. Haase was supported by NSF grant AGS-1015904 and NASA grants NNZ12AQ86G/NNX12AK30G. We also thank Dr. Michael Murphy from the University of California, San Diego for valuable suggestions to improve the manuscript. The in situ surface measurement and radiosonde data were provided by the Department of Energy (DOE) Atmospheric Radiation Measurement (ARM) program. ERA-Interim reanalysis profiles were provided by the European Centre for Medium Range Forecasts (ECMWF).

Deleted: COSMIC GPS RO soundings were obtained freely from the University Corporation for Atmospheric Research (<http://cdac-www.cosmic.ucar.edu/cdac/products.html>).

Formatted: Strikethrough

References

Adhikari, L., Xie, F., and Haase, J. S.: Application of the full spectrum inversion algorithm to simulated airborne GPS radio occultation signals, Atmos. Meas. Tech., 9, 5077-5087, doi:10.5194/amt-9-5077-2016, 2016.

Anthes, R. A., Bernhardt, P. A., Chen, Y., Cucurull, L., Dymond, K. F., Ector, D., Healy, S. B., Ho, S. P., Hunt, D. C., Kuo, Y.-H., Liu, H., Manning, K., McCormick, C., Meehan, T. K., Randel, W. J., Rocken, C., Schreiner, W. S., Sokolovskiy, S. V., Syndergaard, S., Thompson, D. C., Trenberth, K. E., Wee, T. K., Yen, N. L., and Zeng, Z.: The COSMIC/FORMOSAT-3 Mission-Early results, B. Am. Meteorol. Soc., 89, 313-333, 2008.

Anthes, R. A.: Exploring Earth's atmosphere with radio occultation: contributions to weather, climate and space weather, Atmos. Meas. Tech., 4, 1077-1103, doi:10.5194/amt-4-1077-2011, 2011.

Ao, C. O., Meehan, T. K., Hajj, G. A., Mannucci, A. J., and Beyerle, G.: Lower troposphere refractivity bias in GPS occultation retrievals, J. Geophys. Res., 108(D18), 4577, doi:10.1029/2002JD003216, 2003.

Deleted: .

Ao, C. O.: Effect of ducting on radio occultation measurements: An assessment based on high-resolution radiosonde soundings, *Radio Sci.*, 42, RS2008, doi:10.1029/2006RS003485, 2007.

Ao, C. O., Hajj, G. A., Meehan, T. K., Dong, D., Iijima, B. A., Mannucci, A. J., and Kursinski, E. R.: Rising and setting GPS occultations by use of open-loop tracking, *J. Geophys. Res.*, 114, D04101, doi:10.1029/2008JD010483, 2009.

Beyerle, G., Schmidt, T., Wickert, J., Heise, S., Rotacher, M., König-Langlo, G., and Lauritsen, K. B.: Observations and simulations of receiver-induced refractivity biases in GPS radio occultation, *J. Geophys. Res.*, 111, D12101, doi:10.1029/2005JD006673, 2006.

Cucurull, L. and Derber, J. C.: Operational implementation of COSMIC observations into NCEP's Global Data Assimilation System, *Weather Forecast.*, 23, 702–711, 2008.

Dee, D. P. et al.: The ERA-Interim reanalysis: Configuration and performance of the data assimilation system, *Q. J. R. Meteorol. Soc.*, 137(656), 553–597, doi:10.1002/qj.828, 2011.

Garrison, J. L., Walker, M., Haase, J., Lulich, T., Xie, F., Ventre, B. D., Boehme, M. H., Wilmhoff, B., Katzberg S. J.: Development and testing of the GISMOS instrument, *Geoscience and Remote Sensing Symposium, IGARSS 2007, IEEE International*, 5105-5108, 23-28 July 2007, doi: 10.1109/IGARSS.2007.4424010, 2007.

Haase, J. S., ~~Murphy, B. J., Muradyan, P., Nievinski, F. G., Larson, K. M., Garrison, J. L., and Wang K.-N.~~: First results from an airborne GPS radio occultation system for atmospheric profiling, *Geophys. Res. Lett.*, 40, 1759–1765, doi:10.1002/2013GL058681, 2014.

Healy, S. B., Haase, J., and Lesne, O.: Abel transform inversion of radio occultation measurements made with a receiver inside the Earth's atmosphere. *Annales Geophysicae*, 20, 1253-1256, 2002.

Healy, S. and Thépaut, J. N.: Assimilation experiments with CHAMP GPS radio occultation measurements, *Q. J. Roy. Meteorol. Soc.*, 132, 605–623, doi:10.1256/qj.04.182, 2006.

Healy, S. B.: Refractivity coefficients used in the assimilation of GPS radio occultation measurements, *J. Geophys. Res.*, 116, D01106, doi:10.1029/2010JD014013, 2011.

Deleted: .

Deleted: .

Moved down [2]: B. J.

Moved down [4]: K. M.

Moved (insertion) [2]

Moved (insertion) [3]

Moved (insertion) [4]

Deleted:

Deleted: P.

Moved down [3]: F. G.

Moved (insertion) [5]

Moved down [5]: J. L.

Moved down [6]: K.-N.

Moved (insertion) [6]

Deleted: .

Jensen, A. S., Lohmann, M. S., Benzon, H.-H., and Nielsen, A. S.: Full Spectrum Inversion of radio occultation signals, *Radio Science*, ~~38(3)~~, 1040, 2003.

Jensen, A. S., Lohmann, M. S., Nielsen, A. S., and Benzon, H.-H.: Geometrical optics phase matching of radio occultation signals, *Radio Science*, ~~39~~, RS3009, 2004.

Kirchengast, G., Hafner, J., and Poetzi, W.: The CIRA86aQ_UoG model: An extension of the CIRA-86 monthly tables including humidity tables and a Fortran95 global moist air climatology model, IMG/UoG Techn. Rep. for ESA/ESTEC, 8, Eur. Space Agency, Paris, France, 1999.

Kursinski, E. R., Hajj, G. A., Hardy, K. R., Schofield, J. T., and Linfield, R.: Observing Earth's atmosphere with radio occultation measurements. *J. Geophys. Res.*, 102, 23,429-23,465, 1997.

Lesne, O., Haase, J., Kirchengast, G., Ramsauer, J., and Poetzi, W.: Sensitivity Analysis of GNSS radio occultation for airborne sounding of the troposphere, *Phys. and Chem. of the Earth*, 27, 291-299, 2002.

Lulich, T. D., Garrison, J. L., Haase, J. S., Yang, Y. M., Voo, J., Xie, F., Muradyan, P.: Open loop tracking of radio occultation signals from an airborne platform, Proceedings of the 23rd International Technical Meeting of the Satellite Division of the Institute of Navigation, ION GNSS 2010, September 21-24, Portland, OR, 2010.

Luntama, J.-P., Kirchengast, G., Borsche, M., Foelsche, U., Steiner, A., Healy, S., von Engeln, A., O'Clerigh, E., and Marquardt, C.: Prospects of the EPS GRAS mission for operational atmospheric applications, *Bull. Am. Meteorol. Soc.*, 89(12), 1863–1875, 2008.

Montgomery, M. T., Davis, C., Dunkerton, T., Wang, Z., Valden, C., Torn, R., Majumdar, S. J., Zhang, F., Smith, R. K., Bosart, L., Bell, M. M., Haase, J. S., Heymsfield, A., Jensen, J., Campos, T., and Boothe, M. A.: The Pre-Depression Investigation of Cloud systems in the Tropics (PREDICT) experiment: Scientific basis, new analysis tools, and some first results, *Bull. Am. Meteorol. Soc.*, 92(9), 153–172, doi:10.1175/BAMS-D-11-00046.1, 2012.

Murphy, B., Haase, J. S., Muradyan, P., Garrison, J. L., and Wang, K.-N.: Airborne GPS radio occultation refractivity profiles observed in tropical storm environments, *J. Geophys. Res.*, ~~120(5)~~, 1690–1709, 2015.

Muradyan, P.: GPS/INS navigation precision and its effect on airborne radio occultation, MS thesis, 93 pp., Purdue University, West Lafayette, Indiana, U.S.A., 2009.

Deleted: Vol.

Deleted: , No.

Deleted: Vol.

Deleted: vol.

Deleted: , no.

Deleted: pp.

- Muradyan, P.: Profiling the atmosphere with the airborne GPS radio occultation technique using open-loop tracking, PhD thesis, 196pp, Purdue University, West Lafayette, Indiana, 2012.
- 5 Muradyan, P., Haase, J. S., Xie, F., Garrison, J. L., Lulich, T., and Voo, J.: GPS/INS navigation precision and its effect on airborne radio occultation retrieval accuracy, *GPS Solutions*, doi:10.1007/s10291-010-0183-7, 2010.
- Rocken, C., Anthes, R., Exner, M., Hunt, D., Sokolovskiy, S., Ware, R., Gorbunov, M., Schreiner, W., Feng, D., Herman, B., Kuo, Y.-H., and Zou, X.: Analysis and validation of GPS/MET data in the neutral atmosphere, *J. Geophys. Res.*, 102, 29,849–29,866, doi:10.1029/97JD02400, 1997.
- 10 Smith, E. K., and Weintraub, S.: The constants in the equation for atmospheric refractive index at radio frequencies, *Proc. Inst. Radio Engrs.*, 41, 1035-1037, 1953.
- 15 Sokolovskiy, S. V.: Effect of superrefraction on inversions of radio occultation signals in the lower troposphere. *Radio Sci.*, 38, 1058, doi:10.1029/2002RS002728, 2003.
- Sokolovskiy, S., Rocken, C., Schreiner, W., and Hunt, D.: On the uncertainty of radio occultation inversions in the lower troposphere, *J. Geophys. Res.*, 115, D22111, doi:10.1029/2010JD014058, 2010.
- 20 Voo, J. K., Garrison, J. L., Haase, J. S., and Lulich, T. D.: Recent experiments in ocean remote sensing with bistatic radar using global navigation satellite signals, in 2009 IEEE Radar Conference, Pasadena, Calif., edited, p. 5, IEEE, New York, doi:10.1109/RADAR.2009.4977115, 2009.
- 25 Wang, K.-N., Garrison J. L., Acikoz U., Haase J. S., Murphy B. J., Muradyan P., Lulich T.: Open-loop tracking of rising and setting GPS radio-occultation signals from an airborne platform: Signal model and error analysis. *IEEE Transactions on Geoscience and Remote Sensing*. 54:3967-3984, 2016.
- 30 Wang, K.-N., Garrison J. L., Haase J. S., and Murphy B. J.: Improvements to the GPS airborne radio occultation in the lower troposphere through implementation of the phase matching method, *J. Geophys. Res.*, 122, 10,266–10,281, <https://doi.org/10.1002/2017JD026568>, 2017.
- Ware, R., Rocken, C., Solheim, F., Exner, M., Schreiner, W., Anthes, R., Feng, D., Herman, B., Gorbunov, M., Sokolovskiy, S., Hardy, K., Kuo, Y., Zou, X., Trenberth, K., Meehan, T., Melbourne, W., and Businger, S.: GPS sounding of

Deleted: et al.

Deleted: .

Deleted: .

Deleted: [3]

Deleted: technique

Deleted: (PM)

Deleted: under review

Deleted: and

Deleted: Coauthors

the Atmosphere from Low Earth Orbit; Preliminary Results, *Bull. Amer. Meteor. Soc.*, 77, 19-40, doi:10.1175/1520-0447(1996), 1996.

- Xie, F., Syndergaard, S., Kursinski, E. R., and Herman, B. M.: An Approach for Retrieving Marine Boundary Layer Refractivity from GPS Occultation Data in the Presence of Super-refraction, *J. Atmos. Ocean Tech*, 23, 1629-1644, 2006.

Xie, F., Haase, J. S., Syndergaard, S.: Profiling the Atmosphere using the Airborne GPS Radio Occultation Technique: A Sensitivity Study, *IEEE Trans. Geosci. Rem. Sensing*, 46(11), 3424-3435, 2008.

- Xie, F., Wu, D. L., Ao, C. O., Kursinski, E. R., Mannucci, A. and Syndergaard, S.: Super-refraction effects on GPS radio occultation refractivity in marine boundary layers, *Geophys. Res. Lett.*, 37, L11805, doi:10.1029/2010GL043299, 2010.

Yoshihara, T., Fujii, N., Saitoh, S., Sakai, T., Matsunaga, K., Hoshino, K., Tsuda, T., Aoyama, Y. and Danno, S.: Airborne-based downwardlooking GPS occultation experiments, *IEICE Trans.*, J89-B(7), 1233–1241, 2006.

Zuffada, C., Hajj, G. A., Kursinski, E. R.: A novel approach to atmospheric profiling with a mountain-based or airborne receiver, *J. Geophys. Res.*, 104(D20), 24435-24447, 1999.

Table 1: List of all ARO events recorded during the ferry flight on October 2, 2010, with the ARO profiles over land shown in bold, and the ARO recording solely from the top antenna (CH1) being shaded.

prn #	Begin time (UTC hours)	Duration (min)	Channel	Rising/ Setting	Latitude (°N)	Longitude (°W)	TP drift (km)	Azimuth (deg)
prn28-19	14.68	33.6	1	R	19.76	-72.06	263	62.9
prn08-19	14.76	24.0	1, 3	R	23.39	-71.47	181	77.4
prn31-19	14.83	23.4	1	S	18.95	-68.19	287	-74.3
prn01-19	14.94	36.6	1, 3	S	23.42	-69.17	291	-58.1
prn16-19	15.72	35.4	1, 3	S	25.74	-74.59	255	-63.8*
prn17-19	15.31	27.6	1, 2	R	19.26	-75.34	504	19.7
prn06-11	16.12	32.4	1, 3	S	30.50	-77.34	589	-5.3
prn23-11	16.52	25.8	1, 2	S	24.93	-82.35	337	-45.4
prn03-07	16.73	30.0	1, 3	S	32.59	-80.65	497	-23.2
prn15-28	17.08	44.4	1	R	33.45	-86.80	270	84.4
prn13-07	17.24	27.0	1, 2	S	27.95	-88.00	390	-28.5
prn04-28	17.46	29.4	1, 2	R	27.25	-88.56	562	-14.4
prn27-28	17.76	21.6	1	R	35.66	-91.42	328	68.8
prn19-28	17.97	27.6	1, 3	S	37.08	-89.16	441	-26.4
prn24-28	18.10	30.0	1, 3	S	38.85	-91.96	560	-2.2
prn09-28	18.32	21.6	1, 3	R	37.97	-95.61	260	65.9
prn07-28	18.96	19.8	1, 2	S	34.00	-98.08	356	-50.1



Deleted: .

Deleted: ning

Formatted Table

Formatted Table

a) ARO Antennas on HIAPER

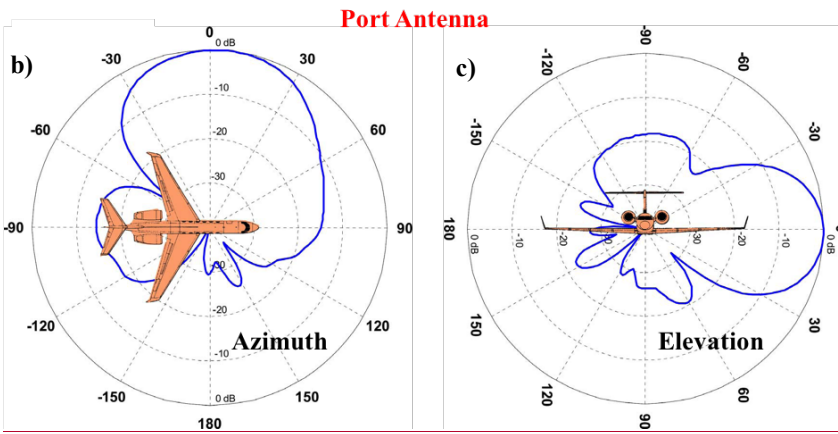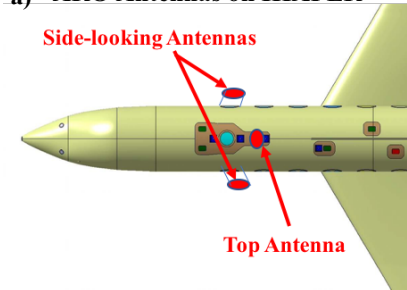

5 Figure 1. (a) Approximate location of three antennas on HIAPER aircraft, (b, c) the port side-looking antenna (CH2) azimuthal and elevation gain pattern, respectively. For the port antenna, 0° azimuth and elevation are oriented toward the horizon perpendicular to the flight direction (antenna boresight), 90° in azimuth points forward and 90° in elevation points at nadir direction. Note that (b, c) are adapted from Figure 18 in Wang et al., (2016).

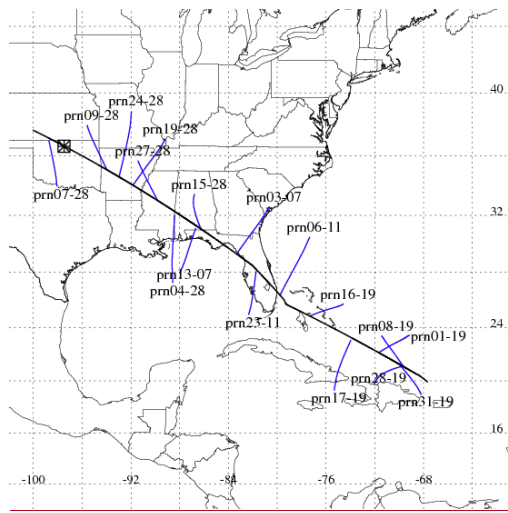


Figure 2. Aircraft flight track (black) from the field station at St. Croix in the US Virgin Islands to the UCAR facility at Broomfield, Colorado on October 2, 2010. The tangent points (blue) and the PRNs of each ARO occultation are shown. The radiosonde station from Lamont, Oklahoma is also marked (star).

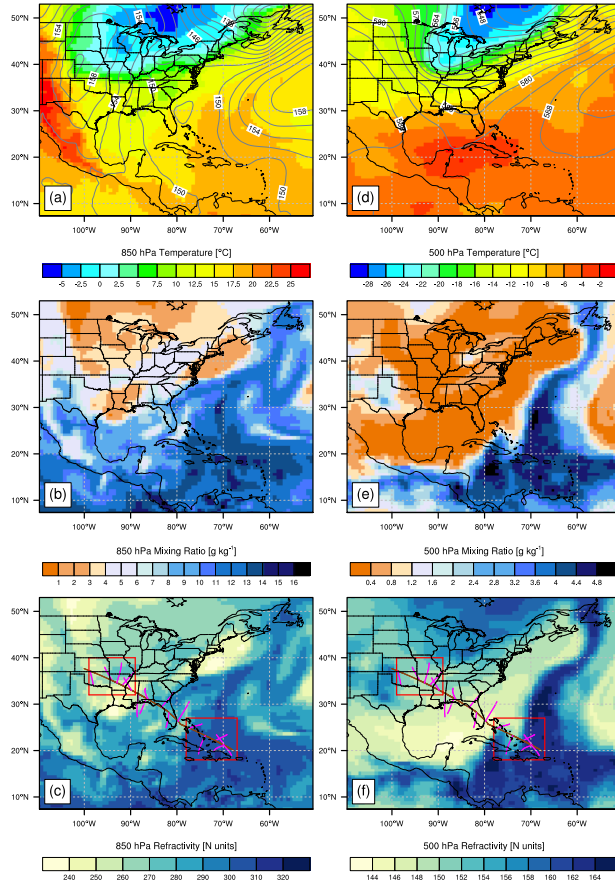


Figure 3: (a, d) ERA-Interim temperature (K) overlaid with the geopotential height contour (dekameters, or tens of meters), (b, e) water vapor mixing ratio (g/kg), and (c, f) the derived refractivity (N-unit) at 850 hPa and 500 hPa, respectively, over the study region at 18Z on October 2, 2010. Also plotted in (c, f) are the flight track (brown), the ARO tangent points (purple) and the two boxes (red) indicating the selected regions with one over land (89–99° W, 32–40° N), and the other over the Caribbean sea (67–78° W, 18–27° N).

Deleted: 2

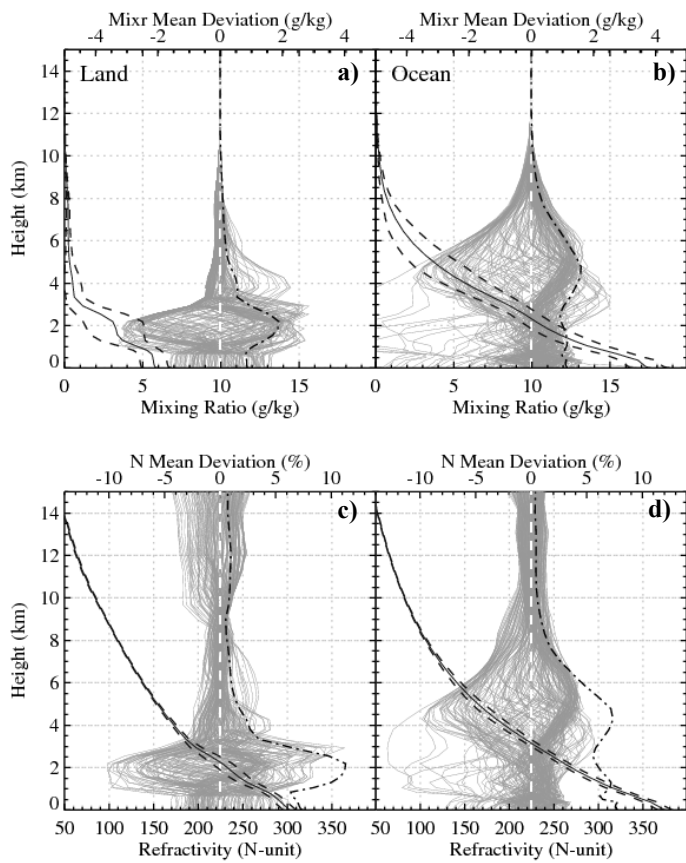


Figure 4: (a) ERA-I mean mixing ratio (solid black) and the mean \pm standard-deviation (dashed) as well as the anomaly profiles (gray) and their respective **RMS** profiles (dash-dotted) over land, and (b) over ocean from the two selected regions indicated in Fig. 2c, at 18Z on October 2, 2010. (c) and (d) show the same but for ERA-I refractivity.

Deleted: 3

Deleted: standard deviation

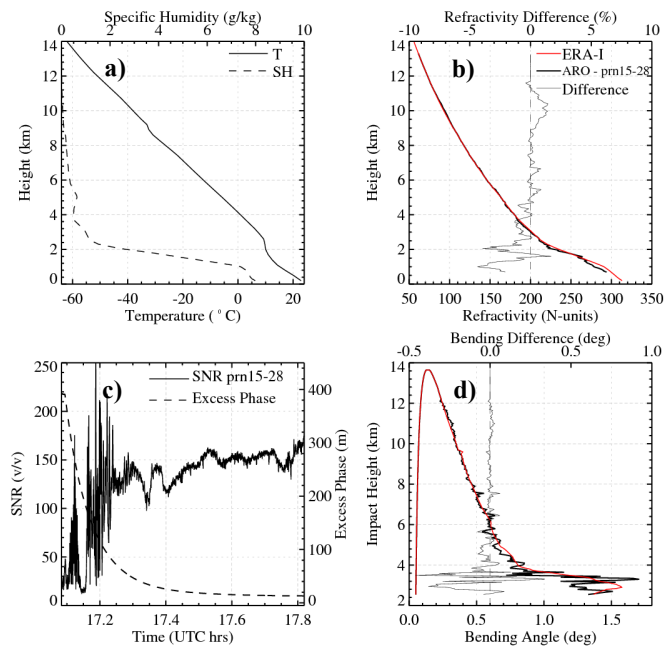


Figure 5: One typical rising ARO sounding (prn15-28) from the top antenna (CH1) with the near-coincident ERA-I profiles, (a) ERA-I temperature and specific humidity profiles; (b) ARO (thick black) and the ERA-I (thick red) refractivity profiles along with their difference (thin black); (c) the SNR and excess phase of the ARO event; and (d) ARO (black) and the simulated ERA-I (red) bending angle profiles and their difference (thin black).

Deleted: 4

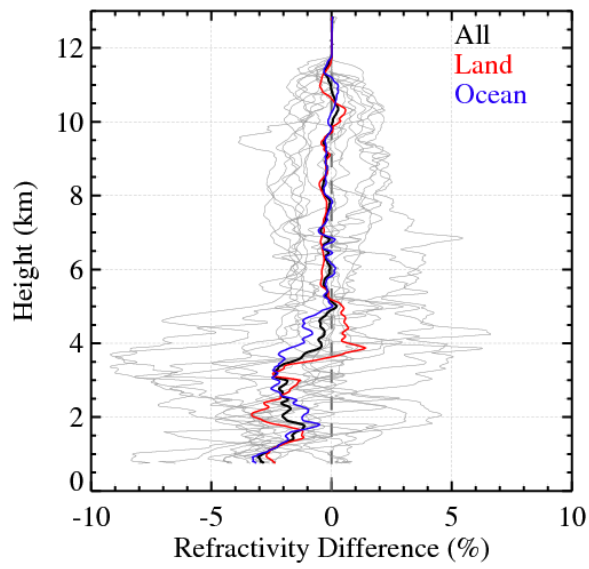


Figure 6: Fractional refractivity difference between the ARO (CHI) FSI retrievals and the near-coincident ERA-I profiles. Each thin gray line represents an individual occultation, and the three thick lines represent the mean difference for all profiles (black), and the profiles over land (red) and over ocean (blue), respectively.

Deleted: 5

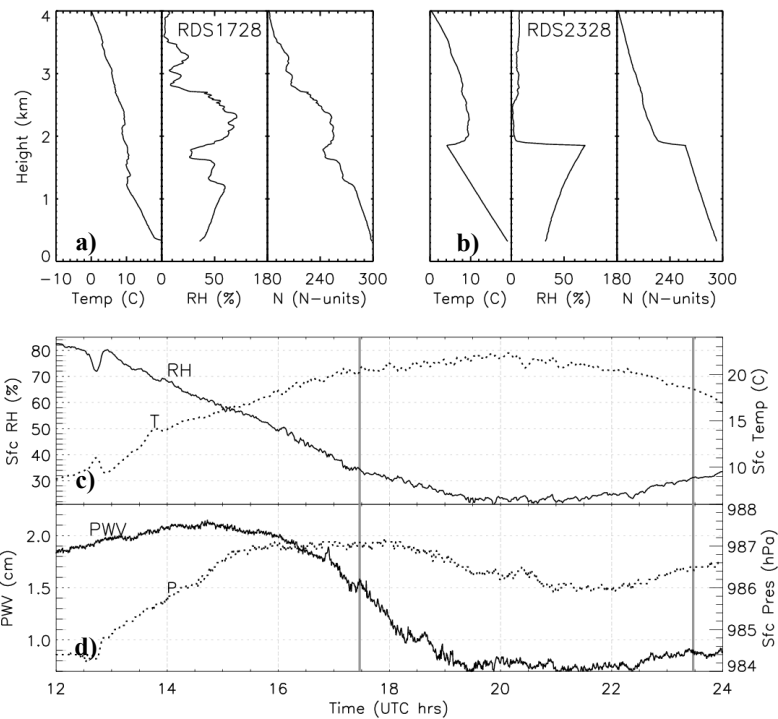


Figure 2: (a, b) Vertical profiles of temperature (Celsius), relative humidity (%) and refractivity (N-unit) for radiosonde profiles at 17:28Z and 23:28Z, respectively; (c) time series of the surface relative humidity and temperature; and (d) surface pressure and precipitable water vapor (PWV) from the microwave radiometer, from the radiosonde station at Lamont, Oklahoma on October 2, 2010. The two vertical gray lines mark the time at 17:28Z and 23:28Z.

Deleted: 6

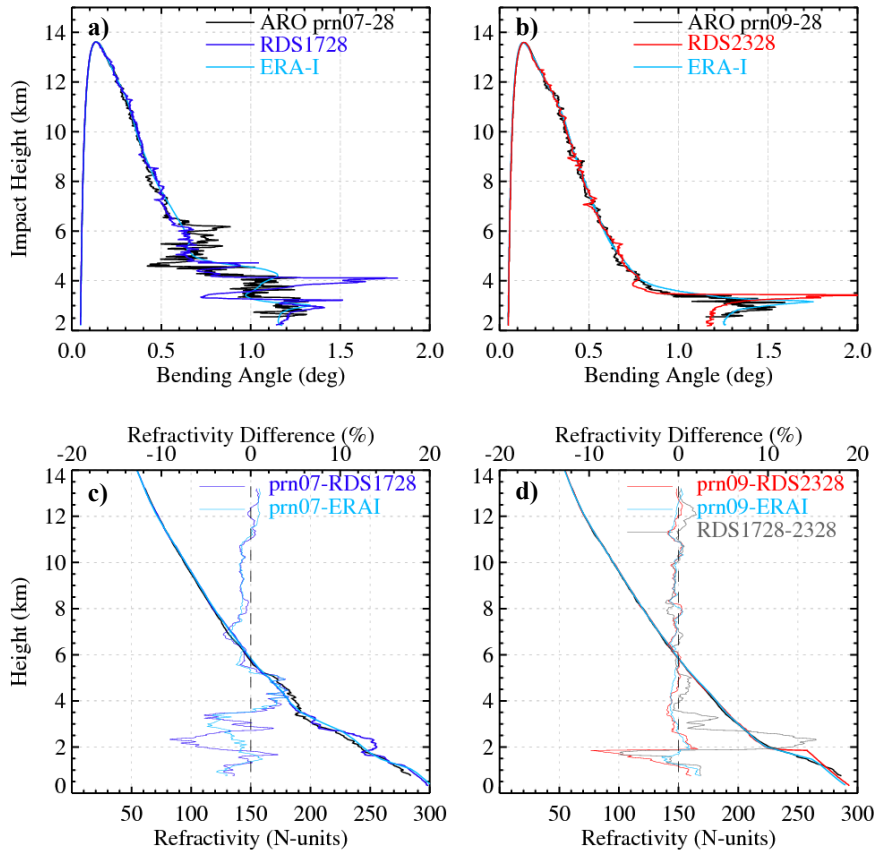


Figure 8: ARO (CH1) bending angle profiles for (a) prn07-28, and (b) prn09-28 along with the simulated bending angle of the near-coincident ERA-I and radiosonde profiles at 17:28Z and 23:28Z on October 2, 2010, respectively. (c, d) The refractivity profiles of ARO, radiosonde, and ERA-I and their difference including the fractional refractivity difference between the two radiosonde in (d).

Deleted: 7

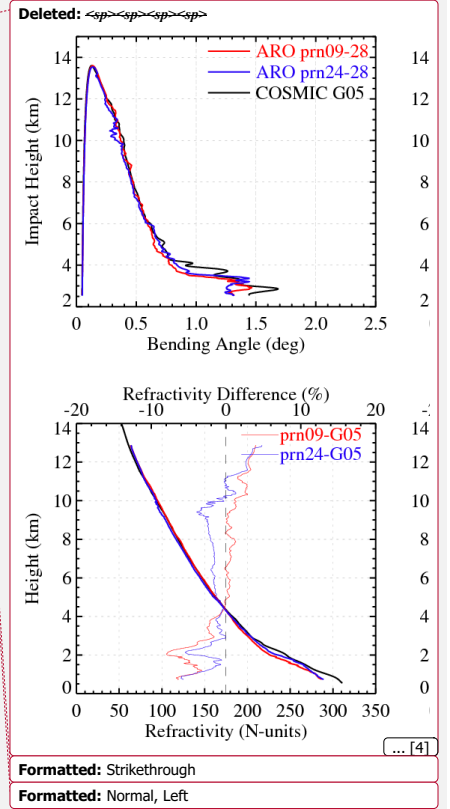
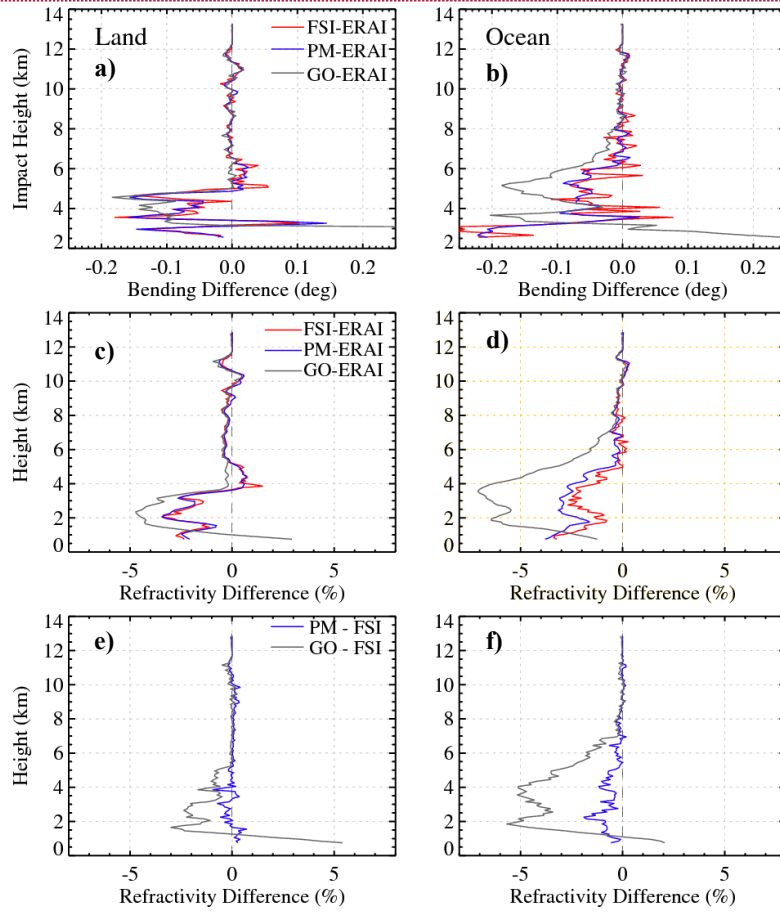


Figure 9: (a, b) The difference between ARO (CHI) bending angle from three retrieval methods (FSI, PM, and GO) and the simulated bending angle of near-coincident ERA-I profiles; (c, d) fractional refractivity difference between ARO retrievals and ERA-I profiles; (e, f) fractional refractivity difference of GO and PM retrievals from the FSI retrieval, over land and ocean, respectively.

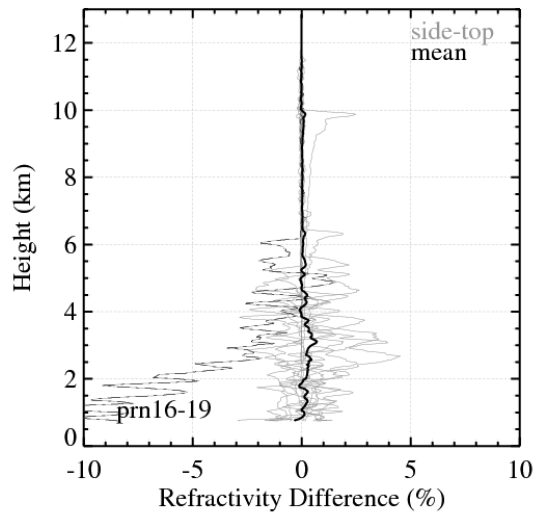
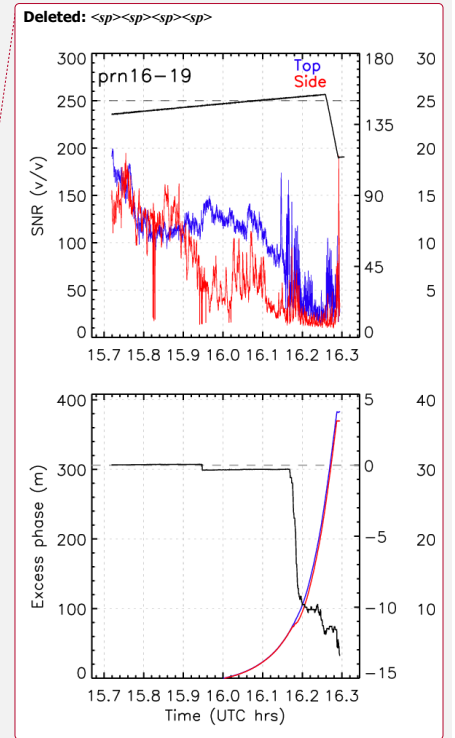


Figure 10: The individual refractivity difference profiles (thin gray) between the ARO retrieval from side-looking antenna (CH2 and CH3) and the top antenna (CH1), which both track the same occulting GPS satellite. Also shown is the mean refractivity difference (thick black) that ignores the outlier case, prn16-19 (dashed) with large negative difference.



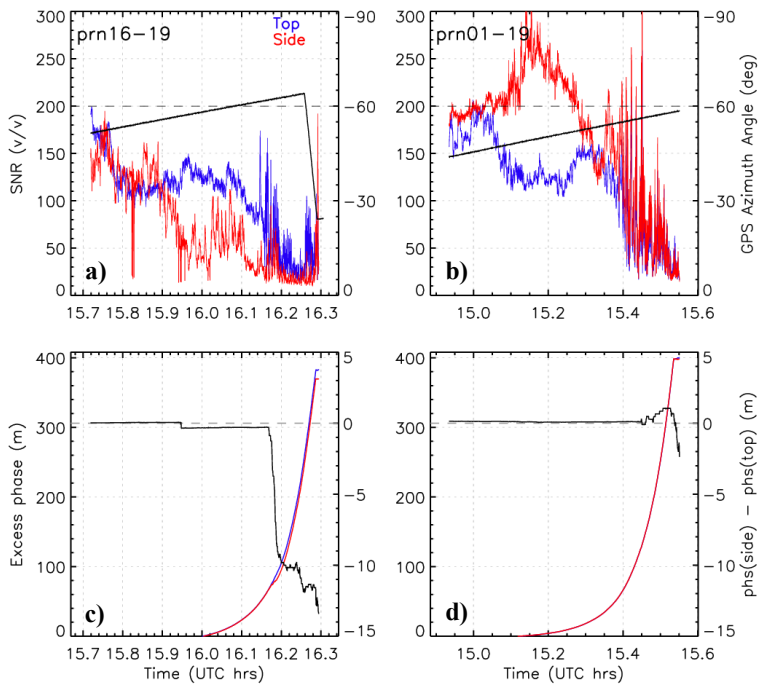


Figure 11: The SNR and the azimuth angle relative to the antenna boresight direction for the occulting satellite (a) prn16 and (b) prn01, recorded from the top (CH1, blue) and the side-looking (CH3, starboard, red) antennas; the two horizontal dashed lines indicate the azimuth angle of -60° ; (c, d) the excess phase for both antennas and their difference (black), and the two dashed lines indicate the zero phase difference.

Deleted: flight heading

Deleted: 150

Deleted: s

Formatted: Tabs: 5.11", Left

Flight level in situ measurements of temperature were made at 50 Hz with a fast response, all weather, de-iced avionics sensor (Rosemount Model 102AL TAT) with 0.5°C accuracy (<http://www.hiaper.ucar.edu/handbook/index.html>). In situ pressure was measured at flight level with 0.1 hPa accuracy. Humidity measurements were made with a vertical cavity surface emitting laser hygrometer and a Buck research model 1011c hygrometer. However, because of

ARO retrievals compared to nearby COSMIC RO soundings

During the ferry flight, three COSMIC RO soundings occurred within 300 km of the ARO soundings and within a 6-hour time window (Fig. 1). Two ARO soundings near 18Z over land (prn 24-28 and prn09-28, see Table 1) are paired with one COSMIC RO sounding (G05) at 14Z. Another two ARO soundings near 15Z over the ocean (prn01-19 and prn 08-19) are paired with two COSMIC soundings (G29 and G23) at 12Z and 17Z, respectively. For direct comparison of COSMIC RO bending angle to the ARO retrieval, the COSMIC bending angle is calculated from the observed COSMIC refractivity profile using the same forward Abel integral (Xie et al., 2008) used for ERA-I and radiosonde profiles (Fig. 8).

Figure 8(a, c) show the bending angle and refractivity comparison between the two ARO profiles and COSMIC profile over land (within 4 h in time and 200 km in space). The COSMIC sounding (G05) is located north of the ARO measurements. Both ARO soundings (prn24-28 & prn09-28) show a sharp bending angle gradient at 3 km impact height. In contrast, the COSMIC sounding (G05) detects two sharp bending angle layers with one at slightly lower than 3 km and another one at 4 km. The two ARO refractivity profiles show a better agreement with the COSMIC profile (G05) above 3 km with RMS refractivity difference of 1.8 % for prn09-28, and 2 % for prn24-28. At the top of the ARO profile at 13 km where the ARO refractivity is constrained by the ERA-I reanalysis, the large difference (4 %) between the ARO and COSMIC (Fig. 4e) indicates that the much cooler upper troposphere observed in the COSMIC sounding location in the north of the ARO sounding could be caused by the synoptic condition difference. The mis-alignment of the bending angle variations in the boundary layer between the ARO and the COSMIC profiles leads to a large negative refractivity difference of 8 % near the surface for both ARO profiles.

Figure 8(b, d) show the two ARO soundings (prn01-19 and prn 08-19) at 15Z (10 AM local time) and the nearby COSMIC profile (G29) over the Caribbean (within 1 h in time and 300 km in space). The other COSMIC profile (G23) occurred about 2.5 hours earlier but over 500 km away from both ARO profile. The two COSMIC soundings agree within less than 1.5 % RMS refractivity difference above 3 km. However, large difference in refractivity are seen at lower levels with a maximum of 8 % near 2.5 km. Overall, the two ARO refractivity profiles show a better agreement with the COSMIC profile (G29) above 3 km with RMS refractivity difference of about 1.6 % for prn01-19, and 1.5 % for prn08-19 (Fig. 8d). Note the two ARO profiles were collected 2 hour later than G29 but 2 hour earlier than G23. A sharp increase in bending angle is observed in COSMIC (G23) at 3.5 km impact height (or around 2 km in height) but not in G29. The large bending angle and sharp refractivity gradients

observed in both the ARO and COSMIC soundings in the lower troposphere can probably be attributed to the fine vertical structure in boundary layer moisture variation. The larger differences in bending angle structure in the mid-troposphere seen in prn01 19 and prn 08 19 over the ocean (Fig. 8d), relative to prn09 28 over land (Fig. 8e), confirms the higher variability in moisture at the mid-troposphere over ocean.

Overall, the comparable RMS refractivity differences between the ARO and nearby COSMIC profiles (~ 1.5 – 2 %) with that of the two nearby COSMIC profiles (~ 1.5 % between G23 and G29) implies ARO could achieve comparable quality sounding as the spaceborne RO. The sensitivity of the ARO sounding to the local moisture and temperature variations along with the high spatial density of soundings offers a great complement to the spaceborne RO soundings for mesoscale and transient weather event studies.

[Figure 8]

Page 21: [3] Deleted

Xie, Feiqin

11/27/17 4:42:00 PM

Wang, K. N.: Signal analysis and radioholographic methods for airborne radio occultations, Doctoral dissertation, Purdue University, Purdue, 149 pp., 2015.

Page 32: [4] Deleted

Xie, Feiqin

11/15/17 12:17:00 AM

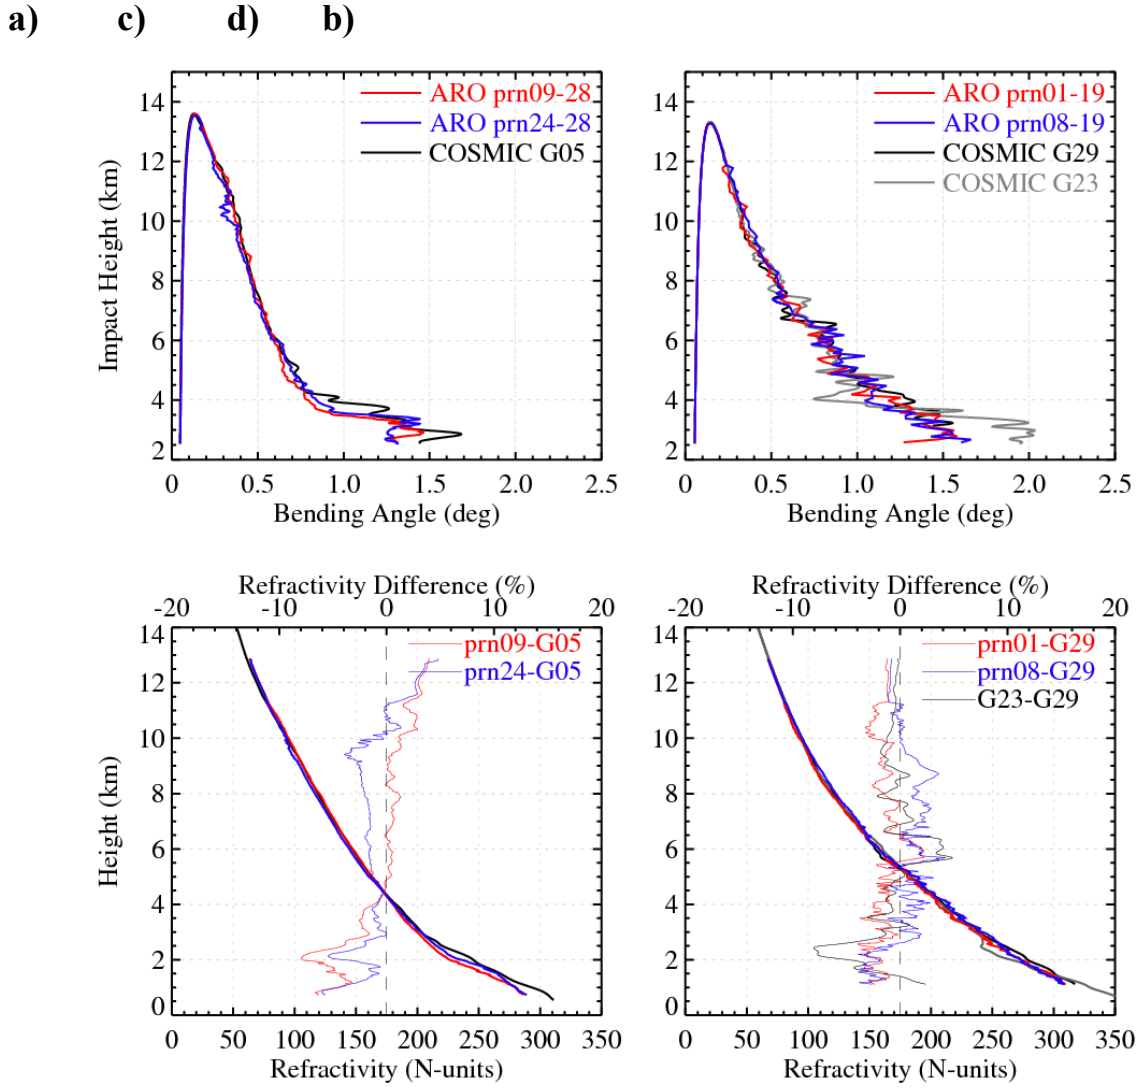


Figure 8: (a) ARO bending angle for two ARO events, prn09-28 and prn24-28 along with the calculated bending of the closest COSMIC RO profile (G05); (b) ARO bending angle for two ARO events, prn01-19 prn08-19, along with the two closest COSMIC RO (G29, G23) profiles. (c, d) ARO and the COSMIC refractivity profiles, and fractional refractivity differences. The fractional refractivity difference between the two COSMIC profiles (G23, G29) is also shown in (d).

