

Answers RC1

We thank the reviewer for the positive general comment on our work. We answered point by point to his comments as shown below:

Page 5, line 5: "Water vapour content in the troposphere affects GNSS signals by lowering their propagation velocities 5 with respect to vacuum." → Please, give a reference.

We added the following reference: Saastamoinen, 1973; Bevis et al., 1992

Page 5, lines 11-14: "Since many years , ... in a routinely way." → Please, provide reference(s).

Bennitt and Jupp, 2012; Guerova et al., 2016 has been added.

Page 5, line 18: How is the ZTD (Zenith Total Delay) defined? Please, explain what ZTD refers to and give reference.

The text has been changed (in red the changes):" **Dry air and water vapour molecules** in the troposphere affects GNSS signals by lowering their propagation velocities with respect to vacuum (**Saastamoinen, 1973; Bevis et al., 1992**). A diminished speed results in a time delay in the signal propagation along the satellite-receiver path, that multiplied by the vacuum speed of light adds an extra-distance to the satellite-receiver geometrical one. It is worth reminding here that the tropospheric delay (the word delay is usually referred to the extra distance and is expressed in meters) due to the **dry air and water vapour molecules**, is just one out of many other systematic errors affecting GNSS observations, which are to be accounted for in order to achieve sub-centimeter accuracy positions. **During GNSS data processing, the contribution of dry air and water vapour to the total delay are separated and estimated in the zenith direction.** This leads to the definition of three delay parameters: ZTD (Zenith Total Delay), ZHD (Zenith Hydrostatic Delay), and ZWD (Zenith Wet Delay), related by the ZTD=ZHD+ZWD (**Bevis et al., 1992; Guenoca et al., 2016**)"

Page 5, line 31: Define the ARPA acronym.

Done

Page 6, lines 3-4: Again, give a definition for Zenith Hydrostatic Delay (ZHD) and the Zenith Wet Delay (ZWD).

See the answer above

Page 6, line 12: The abbreviation PWV is not used/defined anywhere else in the manuscript. Consider changing it to W, which is used for precipitable water vapor throughout the text.

done

Page 8, line 20: Again, define the acronym RMSD.

done

Page 8, line 25: "...within 15 min before and after the sun-sky radiometer measurements..." → Do you mean within 15 minutes around the measurement or 15 minutes before and 15 minutes after the measurement, i.e. within 30 minutes?

The sentence was changed as "The closest W_{GPS} retrievals within **30 minutes**, 15 min before and after the sun-sky radiometer measurements were selected."

Page 10, line 7: typo: lover W → lower W

done

Page 10, line 12: "...very close to the sea, from where humid airmasses are transported all over the day"; Page 10, line 15: "...due to the presence of a breeze circulation, advecting air from the sea"; Page 10, lines 23-24: "However, further analyses, as the correlation between the humidity and the wind, are necessary to confirm this point." → Are there any data of wind speed and direction available for the three locations? It would be interesting to see the wind patterns and if there is any correlation with the water vapor content.

We inserted information of wind direction and the correspondent transported W for all the sites. We modified the text as follows:

"Looking at Figure 4a, referred to summertime, it is worth highlighting that Valencia is the site where high W values (>30 mm) are more homogeneously distributed over time, with a very slight increment in the afternoon due to breeze circulation. This is principally due to the location of this site, very close to the sea, from where humid air masses are transported all over the day. This kind of distribution of greater water vapor content is visible also in the other seasons, showing a sort of homogeneity of W distribution all over the year. In Figure 4b a bivariate polar plot with smoothing, obtained from openair package, is shown. W content, for the entire year, in polar coordinates is shown by wind speed (radius of the circles) and direction. Mean contents are calculated for wind speed-direction 'bins' (e.g. 0-1, 1-2 m/s, ... and 0-10, 10-20 degrees etc). It is evident from this plot that the largest amount of W is brought from Easterly winds, being the seacoast 10km East from the site.

In Rome W values >35 mm are mostly recognizable during summer afternoons, from about 14 UTC, due to the presence of a breeze circulation, advecting air from the sea (Figure 4c). The importance of wind from SW (that is from the sea) in transporting W to the site, is highlighted in Figure 4d, whereas lower W content is mostly recorded when wind comes from N direction, having also the highest speed. In all seasons greater water vapor content is retrieved in the early morning and late afternoon showing, also for this site, a generally homogeneous W yearly distribution. A smaller number of measurements is available in Rome during the middle part of the day in all seasons. This is mostly due to the formation of convective clouds at around 12 UTC, favored by the urban heat island phenomenon, that didn't allow the photometer to operate.

In Aosta, as shown in Figure 4f, the greater amount of W comes from East direction, that is from the Po Valley, a humid region with higher atmospheric stability and weaker winds, and mostly during summer and autumn seasons; elevated values of W (>35 mm) during summer were retrieved more frequently in the morning, but this hourly distribution was found also in autumn for $W>25$ mm (Figure 4e). This behavior could be caused by the atmospheric stability; in the late morning, especially in summer and fall when the insolation is higher, valley-mountain flows develop mixing the humid air of the lower levels with the dried air above. Then, winds aloft could remove part of this humidity by advection, decreasing the water content of the air column. The other seasons conversely show more homogeneous W distribution during the day. Low W content associated to winds from W , is due to the Foehn. When wind comes from this side, air masses passed the Alps and arrived over Aosta drier.”

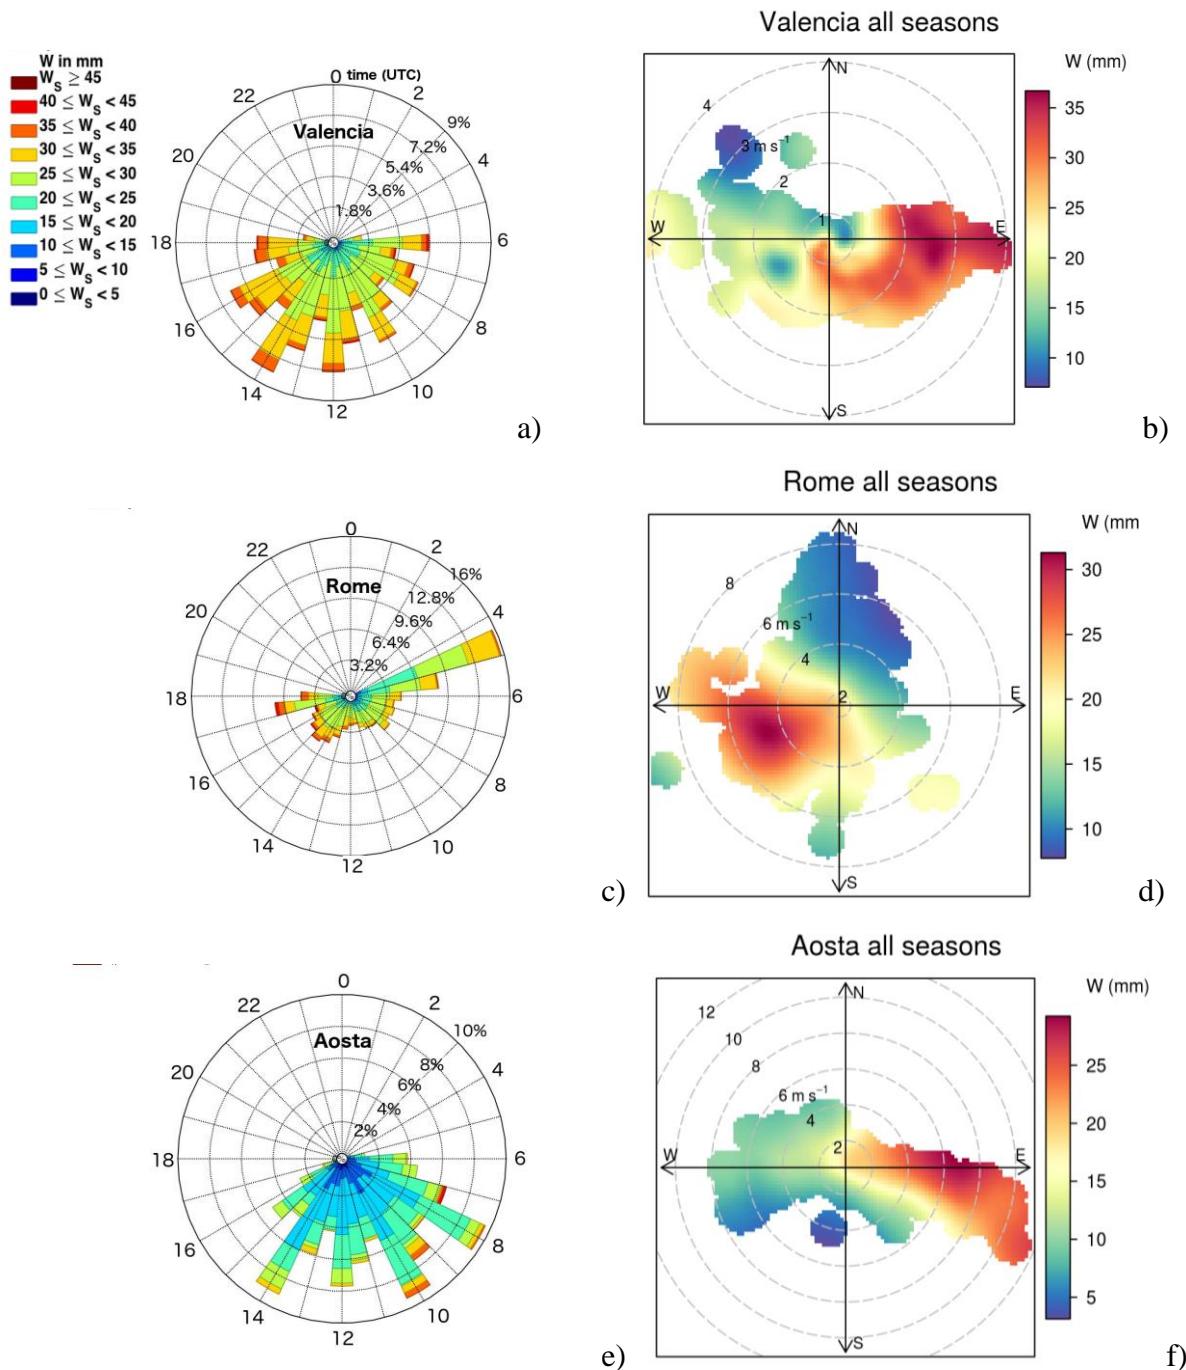


Figure 4: plots a, c, e, -polar plot showing the distribution of W values, **during summer season**, grouped according to their numeric range; the 24 quadrants are hours in UTC; the radius represents the frequency of events normalized to the number of point of the season. **The frequency scales are different for the three histograms.** Plots b, d, f, - bivariate polar plot with smoothing, showing the distribution of W content, for the entire year, by wind speed (radius of the circles) and direction.

Page 10, line 17: typo: par → part

Done

Page 10, lines 26-27: "...comparing measurements within 1 minute of difference" → It is not clear to me if you use the closest value within 1 min or you compare averages within 1 min.

The sentence has been changed "within 1 minute of difference (if more than one measurement of W_{GPS2} was found, their average was performed)"

Page 11, line 17: "...for measurements within 1 minute" → Again, do you mean averaged within 1 min?

The sentence has been changed "within 1 minute of difference (if more than one measurement of W_{AER} was found, their average was performed)"


Page 18, Fig. 2: In the bottom panel you should change the symbol for Aosta to open squares.

done

Page 20, Fig. 4: You should mention in the caption that the measurements presented here refer to summer season. Why not presenting the histograms for all seasons? At least consider including winter measurements. Also, mention in the figure caption that the frequency scales are different for the three histograms.

The caption was changed as: "polar plot showing the distribution of W values, **during summer season**, grouped according to their numeric range; the 24 quadrants are hours in UTC; the radius represents the frequency of events normalized to the number of point of the season. **The frequency scales are different for the three histograms.**"

Comparing the histograms in the different seasons, we noticed that the information content provided by the winter is not very significant to highlight the main differences among the 3 sites. During this season a smaller number of measurements is available, mostly in Aosta (due also to the sun being behind the mountains) and in Rome (high clouds presence in the middle of the day). Moreover, the range of values assumed by W is not very wide (see below Figures). Spring and autumn are very similar to summer season, except for the values assumed by W. For these reason we considered not important adding more plots.

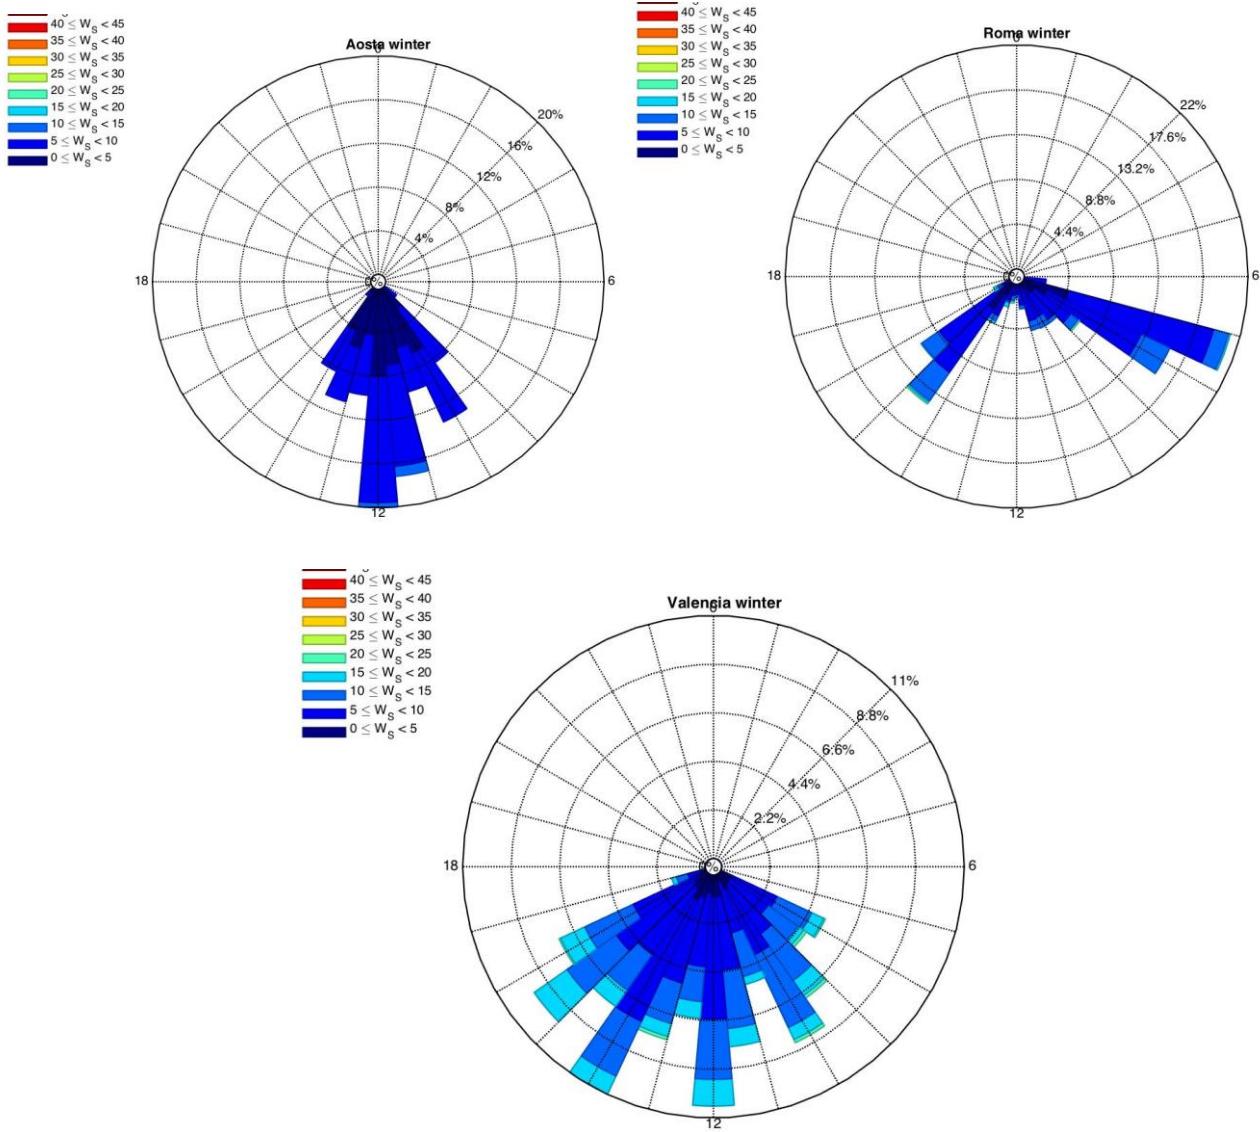

Pages 22-23, Fig. 6 and 7: Consider mentioning the site in the captions. Especially in Fig 7 where Valencia is not mentioned at all.

done

Page 27, Table IV: typo: Tab → Table. Again, consider mentioning the measurement site in the caption.

done

Answers RC2

We thank the reviewer for the positive general comment on our work. We answered point by point to his comments as shown below:

General comments:

i) It is very interesting the approach of having the coefficients recalculated every second day. I think it would be extremely interesting to have some results presented on the day to day variations or stability of them or even some link to other atmospheric variables if possible. At the end, how much is the final W retrieval affected if a more infrequent schedule is adopted. It would be really valuable to conclude some guidelines on the operational use of the method on this prospective.

We agree with the suggestion of the reviewer. A sensitivity study about the time frequency of external measurements (both daily and monthly but also inside a single day) is needed for building a guideline on the operational use of the method, maybe also delivering a software. However, we believe that such study needs time and an accurate analysis, and it could take to an addition of more sections to this paper, already long.

Therefore, we retain this idea very good for further investigations and we explicitly mentioned it as a future prospect of the research.

We added the following sentence at the end of the conclusions:

Finally, a sensitivity study about the time frequency of the independent external measurements (both daily and monthly but also inside a single day) will be a future prospect of this research in order to build a guideline on the operational use of the methodology and delivering a software

ii) All the statistics of the biases among GPS and POM retrievals are presented in a relative approach in the text. Only in table 3 and 4 are presented absolute values of biases. It would be really useful to add some absolute values and corresponding statistics in the discussion. For example figure 5, suggests that the spread of differences should be almost in the same order at all 3 classes and probably lower at the very low W class. There the absolute values of the biases would add more to the interpretation of the intercomparison.

Absolute values of biases for each class of Figure 5 are already listed in table III. We commented the results in terms of absolute values as below (red are new comments):

"The comparison between W_P and W_{GPS2} for Rome and Valencia (Table III) when all W classes are analysed, shows high R^2 , varying from 0.98 and 0.96; RMSD assumes values from 1.35 mm (6.43%) and 1.67 mm (8.09%), and the Bias is within -0.01 mm (0.34%) and -0.20 mm (-0.05%), therefore within the estimated error ΔW_P . Investigating separately the 3 classes (divided using the thresholds on the W_{GPS2} dataset) the greatest difference was found for the first class in terms of %RMSD (9.17% - 14.51%) but for the same class it was the smallest in terms of absolute RMSD (0.75 mm - 1.13 mm); conversely for the same class the smallest difference was found in terms of Bias, both in percentage and absolute values, varying from -0.03 mm (0.60%) and -0.17 mm (-0.52%). However, each class remained within the ΔW_P error.

The retrieval of W_P for Aosta was generally less performing than for the other sites. For the entire W classes, RMSD and Bias were found to be the highest values, being 13.57% (1.97 mm) and -3.45%, (-0.88 mm) respectively, while R^2 is the lowest among the three sites (0.95). Also for this site the greatest value of %RMSD (18.00%) and the smaller one of RMSD (1.29 mm) was found for the first class and the Bias (both percentage and absolute values) remained for each class within the ΔW_P error. The lower quality performance of the methodology in this site is discussed in section 4. "

Specific comments

p.1 line 30. RMSD is not a well know abbreviation. It should be written in full form here.

Done

Section 2. At the description of the 3 sites I would suggest to add some more info regarding important aspects of the sunphotometric methods, such as statistics about hours of sunlight or cloud coverage or expected SZA range throughout seasons. Also, it should be added that Rome and Aosta are in Italy, as not all readers are not familiar with south Europe.

The location of all the site is already declared at the beginning of the section 2, after the coordinates.

We added the following information at the end of each paragraph describing the sites :

Zenith angle for Rome varies within the interval [18.46° - 65.31°], and hours of sunlight recorded in 2010 were 2431.8 8 (provided by the Italian air Force)..

Zenith angle for Burijassot varies within the interval [16.07° - 62.91°] and hours of sunlight recorded in 2011 were 2678.7.

Zenith angle for Aosta varies within the interval [22.31° - 69.14°] and hours of sunlight recorded in 2011 were 2396.

p. 4 line 9 Are there any differences in the 940nm channel between POM 1 and POM 2? If yes, report them and also report which was used in each of the 3 datasets.

The 940 nm filters installed by PREDE in both the models is the same : Fujitok with 50%BW = 10 nm.

p.4 section GNSS/GPS. Since GPS receivers are located up to 7km from the sunphotometers, it would be really useful to have some reference on the spatial variability of W, and how much it could affect the validation.

Unfortunately there isn't any other historical measurement of W around the 3 sites, useful for analysing the spatial variability of W. However for Rome (2 km distant) and Aosta (0.5 km) the GPS is practically collocated. The only site where the antenna is 7 km far from the sunphotometers location is Valencia, but due to the orography of this site we retain W distribution homogeneous.

p.5 line18 ZTD some definition on ZTD is needed.

Done

p.5 line 30 NWP abbreviation is not explained anywhere in the text.

Done

p.6 line 23. And p.7 line 4

A little attention in explaining T. The formula written here is only the transmittance due to the presence of W in the atmosphere. The way it is written is seems that there is no dependence on aerosols and Rayleigh scattering in this bandpass. Restate this sentence so that this is clear.

We restated the sentence as below:

Precipitable water vapour content from ESR/PREDE-POM sun-sky radiometer (W_p) was calculated using the methodology described in Campanelli et al. (2014). **For specific spectral regions in the near infrared, where absorption of dominant trace gases can be considered negligible, we can express the transmittance of the atmosphere (T_{atm}) as follows: $T_{atm} = e^{-m_0(\tau_R + \tau_a)} \cdot T$, where m_0 is the relative optical airmass (Kasten and Young, 1989), τ_a and τ_R are the extinction aerosol optical depth and the molecular Rayleigh scattering at 940 nm respectively, and T is the transmittance of the water vapour, $T = e^{-a(mW)^b}$ with m the water vapour optical airmass, calculated according to Kasten, 1966, and W the columnar water vapour content (Bruegge et al., 1992).**

p.9 line 19-20. The uncertainty calculated here is just the relative deviation of GPS and POM retrievals. This is a statistical measure which shows very well how the biases are spread. But it is not the total uncertainty of the retrieval which should include instrumental uncertainties, errors introduced at different steps of the method and their spread, and any other systematic errors. It should be restated so that is clear that this is not the total uncertainty of W retrieval.

The following sentence has been added after formula 7:

It must be beard in mind that this uncertainty is a statistical measure but not the total uncertainty of W retrieval which should include instrumental uncertainties, errors introduced at different steps of the method and their spread, and any other systematic errors.

p10- line 16. Although it is not presented somewhere in the study, I assume that higher uncertainties are expected in sunphotometric methods at very high SZAs, which is usually the case in early morning and late afternoon. I suggest adding some information and discussion about that at this point.

We missed to write an information about the data selection in term of airmass value. We added the following sentence at the beginning of Section 4. **In order to limit the influence of largest uncertainties at very high solar zenith angles, we selected the data having $m < 8$.** However a sensitivity study about the uncertainty introduced for high SZA can be added to study about sensitivity to the time frequency of external independent measurements.

Figure 3. the caption is note descriptive enough. It should be restated to be clear what are the data points in this plot.

The caption has been changed as below:

Temporal behaviors of W_P retrieved with the presented methodology, for the years 2010 (Rome), 2011 (Valencia) and 2014 (Aosta).

Figure 7: It is not stated which station's dataset is used in these plots.

Done

Precipitable water vapor content from ESR/SKYNET Sun-sky radiometers: validation against GNSS/GPS and AERONET over three different sites in Europe.

Monica Campanelli¹, Alessandra Mascitelli^{1, 2}, Paolo Sanò¹, Henri Diémoz³, Victor Estellés⁴, Stefano Federico¹, Anna Maria Iannarelli⁵, Francesca Fratarcangeli², Augusto Mazzoni², Eugenio Realini⁶, Mattia Crespi², Olivier Bock⁷, Jose A. Martínez-Lozano⁴, Stefano Dietrich¹

¹Institute of Atmospheric Sciences and Climate, (ISAC), National Research Council (CNR), Via Fosso del Cavaliere 100, 00133, Rome, Italy

²Geodesy and Geomatics Division – DICEA, University of Rome "La Sapienza", via Eudossiana, 18, 00184 Rome, Italy.

¹⁰³Environmental Protection Agency (ARPA), Loc. Grande Charrière 44 - 11020 Saint-Christophe, Aosta, Italy.

⁴Dept. Física de la Terra i Termodinàmica, Universitat de València, Burjassot (Valencia), Spain.

⁵SERCO SPA - Via Sciadonna 24 - 00044 Frascati, Rome.

⁶Geomatics Research and Developments (GReD) srl, via Cavour, 2, 22074 Lomazzo (CO), Italy

⁷IGN LAREG, Univ Paris Diderot, Sorbonne Paris Cité, 5 rue Thomas Mann, 75205 Paris Cedex 13, France

¹⁵Correspondence to: Monica Campanelli (m.campanelli@isac.cnr.it)

Abstract. The estimation of the precipitable water vapor content (W) with high temporal and spatial resolution is of great interest in both meteorological and climatological studies. Several methodologies based on remote sensing techniques have been recently developed, in order to obtain accurate and frequent measurements of this atmospheric parameter. Among them, the relative low cost and easy deployment of sun-sky radiometers, or sun-photometers, operating in several international networks, allowed the development of automatic estimations of W from these instruments with high temporal resolution. However the great problem of this methodology is the estimation of the sun-photometric calibration parameters. The objective of this paper is to validate a new methodology based on the hypothesis that the calibration parameters characterizing the atmospheric transmittance at 940 nm are dependent on vertical profiles of temperature, air pressure and moisture typical of each measurement site. To obtain the calibration parameters some simultaneously seasonal measurements of W , from independent sources, taken over a large range of solar zenith angle and covering a wide range of W , are needed. In this work yearly GNSS/GPS dataset were used for obtaining a table of photometric calibration constants and the methodology was applied and validated in three European ESR-SKYNET network sites, characterized by different atmospheric and climatic conditions: Rome, Valencia and Aosta. Results were validated against the GNSS/GPS and AErosol Robotic NETwork (AERONET) W estimations. In both the validations the agreement was very high with a percentage RMSD of about 6%, 13% and 8% in the case of GPS intercomparison at Rome, Aosta and Valencia, respectively, and of 8% in the case of AERONET comparison in Valencia.

Analysing the results by W classes, the present methodology was found to clearly improve W estimation at low W content when compared against AERONET in term of %Bias, bringing the agreement with the GPS (considered the reference one), from a %Bias of 5.76 to 0.52.

1 Introduction

5 The precipitable water vapor content, hereafter referred as W , is the total atmospheric water vapor contained in a vertical column of unit cross-sectional area extending between any two specified levels, commonly expressed in terms of the height to which that water substance would stand if completely condensed and collected in a vessel of the same unit cross-section (American Meteorological Society, 2015). The estimation of this quantity is of great interest in meteorological and climatological studies. Near real-time W measurements can be used for weather diagnoses and forecasting applications (Poli
10 et al., 2007; Hong, 2015), and for studying meteorological disturbances occurring in some areas in order to improve the prediction of local heavy rainfall, a difficult task with current mesoscale numerical prediction models (Realini et al., 2014; Bock et al. 2016). Water vapor plays also a key role in the Earth's climate system leading the hydrological cycle and affecting the global radiation budget as greenhouse gas (Schmidt et al., 2010). Also microphysical processes leading to the formation of clouds are influenced by W variations, whose effect on the size, shape, and chemical composition of aerosols can modify their
15 role in the direct and indirect radiative forcing (Yu et al., 2014; Haywood et al., 2011).

Therefore it is really important to perform measurements of W with high temporal and spatial resolution, because of its high variability in both space and time across the Earth. Several methodologies have been recently developed in order to obtain accurate estimations: Global Navigation Satellite System (GNSS), including the Global Positioning System (GPS) (Bevis et al., 1992; Guerova et al., 2016), microwave radiometers (Elgered et al., 1982) and sun-photometers (Campanelli et al., 2014; Halthore et al., 1997; Alexandrov et al. 2009), are the automatic remote sensing instruments able to provide precise and frequent measurements of W . All of them have some pro and cons. The GNSS methodology is based on the signal received from positioning satellites by ground-based antennas; W calculated with this technique has a high temporal resolution (typically from 30 seconds to tens of minutes, depending on the processing strategy), and if the network of ground receivers is very dense, a high spatial resolution as well. However the networks of receivers do not provide automatically the final product, that
25 is W , and to get the highest accuracy out of the GPS measurements, careful post-processing using available scientific softwares must be performed (Bock and Doerflinger, 2001). For what concerns microwave radiometers, they have a very high temporal resolution (up to 1 second) and good accuracy but, because of the cost of the instrument and maintenance needed, there are not many installed all over the world. Finally, the relatively low-cost and easy deployment of sun-photometers, allowed the establishment of several international networks operating in the last 30 years worldwide. AErosol Robotic NETwork
30 (AERONET) network (Holben 1998; Smirnov 2004), Global Atmospheric Watching – Precision Filter Radiometer (GAW-PFR) network (Wehrli, 2000; Nyeki et al., 2005) and European Skynet Radiometers (ESR-SKYNET) network (Campanelli et al., 2012, 2014) are providing operationally free estimation of W , or developing algorithms and open source packages for

improving the retrieval of this important atmospheric parameter. However, the great problem of this methodology is the estimation of the sun-photometric calibration parameters. The objective of this paper is to validate a new methodology, originally developed and applied at a single site in Japan (Campanelli et al., 2014), at three European ESR-SKYNET sites characterized by different atmospheric and climatic conditions. The methodology is based on the hypothesis that the calibration 5 parameters characterizing the atmospheric transmittance at 940 nm (the wavelength used by sun photometers for retrieving W), are dependent on vertical profiles of temperature, air pressure and moisture typical of each measurement site. To obtain calibration parameters, simultaneous and season-dependent measurements of W are needed, taken over a large range of solar zenith angle and covering a wide range of W . In the present paper yearly GPS datasets are used to obtain a table of photometric 10 calibration constants for each site, covering a range of W from 0 to 40 mm. Results are validated against a co-located AERONET sun photometer and a subset of GPS measurements.

2 Measurement sites and equipment

The methodology for the determination of precipitable water vapour content from sun-sky radiometers was applied to measurements taken at three ESR sites (Figure. 1): Rome (12.500° E, 41.900N°, 83 m asl, Italy), Burjassot-Valencia (0.418°W, 39.508°N, 60 m asl, Spain), and Saint-Christophe – Aosta (7.357° E, 45.742°N, 570 m asl, Italy), during three different years: 15 2010, 2011 and 2014, respectively. The sites under study are different both in location and in atmospheric conditions.

Rome is an urban site, with about 3.0 million of inhabitants, 25 km east from the Mediterranean Sea, in the middle of an undulating plain. The atmosphere is affected by traffic emission, but also semi-rural particulates and, especially during summer season, by sea breeze and desert dust advection from Saharan region. **Zenith angle for this site varies within the interval [18.46° - 65.31°], and hours of sunlight recorded in 2010 were 2431.8 (provided by the Italian air Force).**

20 Burjassot is an urban site located in the metropolitan area of Valencia (Spain) with approximately 1.4 million inhabitants, 10 km west from the coast and 5 km northwest from the Valencia city center. Therefore, it is mainly affected by urban pollution, but also by rural aerosols from non-irrigated inland areas and marine aerosols from the Mediterranean Sea (mainly under the sea breeze dynamics). Occasional events of mineral dust from the Sahara and biomass burning from Mediterranean type forests happen mainly during summer months. In general, its environment is relatively humid, mainly when the site is under the effect 25 of the sea air mass; however, during the Saharan air advections, or when the wind flows mainly from inland Iberian Peninsula, the environment can be very hot and dry. **Zenith angle for this site varies within the interval [16.07° - 62.91°] and hours of sunlight recorded in 2011 were 2678.7.**

Saint-Christophe is located in the Aosta Valley, 3 km far from the small city of Aosta (about 30.000 inhabitants). The location 30 is in a semi-rural context, partially influenced by anthropogenic activity both on local (emissions from cars, heating systems, steel mill) and regional (advection from the Po valley) scale. The prevalent wind circulation is forced by mountain-valley and mountain-plain breezes, and Föhn episodes are not infrequent. The ground surface is covered with soil, grass, and buildings

and during wintertime with snow. Zenith angle for this site varies within the interval [22.31° - 69.14°] and hours of sunlight recorded in 2011 were 2396.

The different atmospheric conditions typical of each site, and therefore the seasonal variability of W , make these locations appropriate for a validation of the proposed technique.

5

2.1 Sun-sky radiometers

A sun-sky radiometer is a narrow band filter photometer able to perform measurements of direct solar and diffuse sky irradiances at some selected wavelengths and at several scattering angles.

- 10 The three ESR sites under study are equipped with the standard SKYNET network instrument, that is a sun-sky radiometer model POM-01 or POM-02, produced by PREDE Co., Ltd, Japan. Although mainly used for studying atmospheric aerosol optical and physical properties in clear sky conditions, these instruments also perform irradiance measurements at 940 nm for water vapour studies. The methodology used in this paper has been specifically developed for estimating columnar water content from POM sun-sky radiometers (W_P), but can also be applied to other spectral radiometers.
- 15 A CIMEL CE318 sun-sky radiometer part of AERONET network (often called simply sun photometer), is operating in Valencia since 2007, co-located with the ESR-POM since 2008. This instrument, also aimed at the characterization of atmospheric aerosols, performs the same kind of measurements of POMs model, but has some technical differences that require a further calibration for the diffuse radiance, not needed in the POMs model (Campanelli et al., 2007). Precipitable water vapour content from this instrument (W_{AER}) is calculated using the official AERONET inversion algorithm (Smirnov et al., 2004) and successive updates, providing also the aerosol products.

20 Table I shows the most important characteristics of both the POM and CIMEL sun-sky radiometers.

2.2 GNSS/GPS receivers

Three dual-frequency GNSS/GPS receiver stations (hereafter called simply GPS) were used for estimating the precipitable water vapour content, hereafter called W_{GPS} .

- 25 The MOSE system (12.493° E, 41.893° N, ellipsoidal height: 120.6m, altitude: 72.14m) is located on the roof of the Faculty of Engineering, University of Rome "La Sapienza", about 2km far from the sun-sky radiometer position. This system is part of the EUREF Permanent GNSS Network and the observational files, in Receiver INdependent EXchange Format (RINEX) used for the retrieval of W_{GPS} , were provided by the Geodesy and Geomatics Division, University of Rome "La Sapienza".
- The AOST system (7.345° E, 45.741° N, ellipsoidal height: 624.1m, altitude: 570.97m), is located in Valle d'Aosta region, 30 about half km far from the sun-sky radiometer position; it is part of the NetGEO network and the observational files, for the calculation of W_{GPS} , were provided by the NetGEO network operators. For both the above stations dataset with time interval of 30 seconds was used to retrieve W_{GPS} with a temporal resolution of 15 minutes.

The VALE system (0.3376°W, 39.481°N, ellipsoidal height: 77.7m, altitude: 26.88m) is located on the roof of the Escuela de Cartografia y Geodesia of Universidad Politecnica de Valencia, Spain, about 7 km east from the sun-sky radiometer position. This system part of the EUREF Permanent GNSS Network and RINEX data are available from EUREF website (<http://www.epnccb.oma.be>). For this station W_{GPS} was retrieved with time interval of 1 hour.

5 3 Methodology

3.1 GPS receivers

Dry air and water vapour molecules in the troposphere affects GNSS signals by lowering their propagation velocities with respect to vacuum (Saastamoinen, 1973; Bevis et al., 1992). A diminished speed results in a time delay in the signal propagation along the satellite-receiver path, that multiplied by the vacuum speed of light adds an extra-distance to the satellite-receiver

10 geometrical one. It is worth reminding here that the tropospheric delay (the word delay is usually referred to the extra distance and is expressed in meters) due to the dry air and water vapour molecules, is just one out of many other systematic errors affecting GNSS observations, which are to be accounted for in order to achieve sub-centimeter accuracy positions. During GNSS data processing, the contribution of dry air and water vapour to the total delay are separated and estimated in the zenith direction. This leads to the definition of three delay parameters: ZTD (Zenith Total Delay), ZHD (Zenith Hydrostatic Delay),

15 and ZWD (Zenith Wet Delay), related by the $ZTD = ZHD + ZWD$ (Bevis et al., 1992; Guenoca et al., 2016). If from the positioning point of view this delay is just a systematic error to be removed, it puts forward GNSS as a tool for the remote sensing of the troposphere water vapour content. Since many years, the meteorological community has started to consider this by-product of high-accuracy positioning as one of the available observations, and time series of GNSS tropospheric water vapour delays are currently assimilated by some number of numerical weather prediction models, in some cases in a routinely 20 way (Bennitt and Jupp, 2012; Gerova et al., 2016). The methodology to retrieve columnar water vapour content consists in the following steps:

25 1) the satellite-related parameters (ephemeris-orbits and satellite clocks) provided by the Centre for Orbit Determination in Europe (CODE) are used as input in the Bernese GNSS Software 5.0 for station VALE and 5.2 for stations M0SE and AOST (www.bernese.unibe.ch/docs/DOCU52.pdf), in order to estimate the values of the ZTD from the satellite-receiver range observations of a selected receiver. The Bernese software, developed at the Astronomical Institute of the University of Bern (AIUB) is a scientific package meeting highest quality standards for geodetic and further GNSS applications. In this work, only the GPS signals were processed.

For what concerns the M0SE receiver, being part of the EUREF Permanent GNSS Network, the coordinates provided by CODE in the Solution INdependent EXchange format (SINEX) files are known and the Precise Point Positioning (PPP) 30 absolute positioning and coordinates constrained methodology was used in the Bernese analysis. As regards AOST receiver, the SINEX files are not available and the PPP and free network solution methodology was used, allowing the Bernese GNSS Software to estimate also the station coordinates. Station VALE was processed in double-difference mode within a global

network as a loosely constrained solution (10 m). The ZTD estimates were quality checked based on inspection of ZTD time series and formal errors following the methodology described in Bock et al. (2016).

2) From the values of ZTD, W_{GPS} can be calculated using Pressure and Temperature predicted by a Numerical weather
5 prediction (NWP) model or measured at the surface by weather stations located nearby the GNSS station. These dataset, were
provided by the Agenzia Regionale per la Protezione Ambientale (ARPA) Lazio for MOSE station and by Regione Valle
d'Aosta for AOST receiver. For station VALE, the surface pressure values from ECMWF reanalysis (ERA-Interim) were used.
The height difference between receivers and weather stations has been corrected according to Realini et al. (2014). Latitude
10 and altitude of receivers, read in the RINEX files are also used to convert ZTD to precipitable water content W_{GPS} , using the
procedure by Bevis et al. (1992). This technique allows calculating the ZHD and the ZWD. Finally, according to Askne et al.,
(1987), Eq.(1) returns the amount of IWV (Integrated Water Vapour),

$$IWV = K(Tm) * ZWD \quad (1)$$

15 where the coefficient K depends on the vertically integrated mean temperature (Tm) (Davis et al., 1985) and can be obtained
either from meteorological models or by the linear relationships proposed by Bevis et al. (1992): $Tm \sim 70.2 + 0.72Ts$, where
 Ts is the measured temperature. In the analysis of Aosta GPS data, the Bevis equation was used, whereas for VALE, ECMWF
data were used. Consequently, the values of W are obtained dividing the value of IWV by the water density (1000 kg m⁻³).
Many studies have assessed the accuracy of GPS IWV estimates by comparison with measurements from other sensors (e.g.
20 microwave radiometers, radiosondes, lidars...). It is well recognized that results are dependent on the IWV itself, and thus on
the geographic location (cold/warm climates) and on time (cold/warm or dry/wet season), but also on GPS processing options
and of course on the quality of measurements from the reference sensor. Recent measurement campaigns performed at mid-
latitudes have demonstrated RMS differences < 0.1 cm or 4-7% (Bock et al., 2013; Bonafoni et al., 2013; Pérez-Ramírez et
al., 2014) which can be considered as representative for this study.

25 3.2 Sun sky radiometers

3.2.1 ESR/PREDE-POM

Precipitable water vapour content from ESR/PREDE-POM sun-sky radiometer (W_P) was calculated using the methodology
described in Campanelli et al. (2014). For specific spectral regions in the near infrared, where absorption of dominant trace
gases can be considered negligible, we can express the transmittance of the atmosphere (T_{atm}) as follows: $T_{atm} =$
30 $e^{-m_0(\tau_R + \tau_a)} \cdot T$, where m_0 is the relative optical airmass (Kasten and Young, 1989), τ_a and τ_R are the extinction aerosol
optical depth and the molecular Rayleigh scattering at 940 nm respectively, and T is the transmittance of the water vapour,
 $T = e^{-a(mW)^b}$ with m the water vapour optical airmass, calculated according to Kasten, 1966, and W the columnar water

vapour content (Bruegge et al., 1992). The main aspect of this technique is the consideration that the atmospheric transmittance in the water vapour band, depends on the vertical profile of temperature, pressure and moisture of each site of measurement, as much as its characteristic parameters a and b , whose values depend on the characteristics of the interferential filter, but also vary with the columnar water vapour amount. This procedure allows the estimation of a and b parameters directly from the 5 measurements taken by the sun-sky radiometer, potentially containing the information on seasonal changes in vertical profiles of temperature, air pressure and moisture occurring in the site of measurement, and not relying on any radiative transfer calculation, therefore reducing simulation errors.

The direct solar irradiance F (mA) measured by the POM sun-sky radiometer at the 940 nm wavelength in clear sky conditions, can be expressed by Eq. (2):

$$10 \quad V = V_0 e^{-m_0(\tau_a + \tau_R)} e^{-a(mW)^b}, \quad (2)$$

where V_0 is the solar calibration constant, that is the extra-terrestrial solar irradiance in current units (mA).

The procedure for the retrieval of a , b and V_0 , completely described in Campanelli et al. (2014), is here briefly summarized.

Equation (2) can be also written in the form,

$$15 \quad y = \ln V_0 - ax, \quad (3)$$

$$\text{with } \begin{cases} y = \ln V + m \cdot (\tau_a + \tau_R) \\ x = (m \cdot W)^b \end{cases} \quad . \quad (4)$$

τ_a is estimated at wavelength $\lambda = 940$ nm, according to the well-known Ångström formula in Eq.(5),

$$\tau_a(\lambda) = \beta \lambda^{-\alpha} \quad (5)$$

where α is the Ångström exponent, and β is the atmospheric turbidity parameter. α and β are determined by the regression 20 from Eq. (5) where the spectral series of τ_a are retrieved by the sun-sky radiometer measurements taken at the other visible and near infrared wavelengths 400, 500, 675, 870, and 1020 nm.

From Eq.(4) x -values are calculated for several different values of b and each time the (x, y) squared correlation coefficient is calculated; then the maximization of the (x, y) squared correlation coefficient is used to determine the best exponent b . Once the optimal b is retrieved, the series of x -values is computed and used in Eq. (3) where the regression line of y versus x allows 25 the retrieval of the coefficients a and V_0 . The errors affecting a , b and V_0 retrievals are evaluated using a Monte Carlo method as explained in (Campanelli et al., 2014).

This regression line is a modified version of Langley plot where V_0 is retrieved by plotting y versus the product ax , with $x = (m \cdot W)^b$. This approach, as demonstrated in Campanelli et al. (2014), extends the application of the Langley methods to cases where the time patterns of W is not stable.

30 Once parameters V_0 , a and b have been determined, the values of precipitable water content W_P can be calculated according to the Eq.(6):

$$W_P = \frac{1}{m} \cdot \left[\frac{1}{a} \cdot (\ln V_0 - y) \right]^{\frac{1}{b}}. \quad (6)$$

In order to calculate x values in Eq. (4), an independent dataset of columnar water vapour W , measured by other instrumentation (such as radiosondes, microwave radiometers or GPS receivers) taken over a large range of solar zenith angle, simultaneously with the sun-sky radiometer irradiance measurements, is needed. If seasonal dependent measurements of W are available, it is possible to calculate a table of calibration constants (a, b) as function of the amount of columnar water vapour typical of the 5 site under consideration. This table can be used for the calculation of W_p until the instrument is moved to another location or its status is deteriorated.

3.2.2 AERONET/CIMEL

In the AERONET methodology (Perez-Ramirez et al., 2014), the transmittance T at 940 nm is fitted to those generated from the HITRAN 2000 spectral database (Rothman et al., 2003) using the Spherical Harmonics (SHARM) radiative transfer code 10 (Lyapustin, 2005), then the coefficients a and b are computed by a curve-fitting procedure of T as a function of W . The output of the HITRAN 2000 spectral database is convolved with recently measured filter response functions (Smirnov et al., 2004). Each AERONET instrument has its own unique set of a and b values depending on the filter configuration, and these 15 coefficients are considered fixed until the filter is changed. Since only one pair of a and b parameters is used, the dependence of T on the vertical profile of temperature, pressure and moisture that can seasonally happen at each site, is neglected, introducing uncertainties in their retrieval. The use of a different database for the determination of water vapour transmittance, 20 could also affect their value.

Once the coefficients a and b are known, the calibration constant V_0 is calculated by another modified Langley method, from 25 observations taken at a high mountain site (Reagan et al., 1986; Bruegge et al., 1992; Halthore et al., 1997). This modified method, differently from the one used in the ESR/PREDE-POM procedure, determines V_0 as the intercept of the straight line obtained by fitting y versus the power term m^b in Eq (3 and 4). In this case, as demonstrated in Campanelli et al., (2014) the stability of the W time pattern is required in order to avoid calibration errors. Finally using the retrieved calibration parameters a, b and V_0 the precipitable water vapour content, W_{AER} , can be calculated from Eq (6).

4 Estimation of calibration constants

W_{GPS} obtained by the three GPS receivers in Rome, Aosta and Valencia was used as independent dataset for calculating the 25 calibration constants of the co-located ESR/PREDE-POM sun-sky radiometers. The cloud screening of radiometers measurements was performed by selecting those measurements whose root mean square deviation (RMSD) between measured and reconstructed diffuse sky irradiance at all the wavelengths, used for aerosol study, and all angles, is lower than 20%. For the Rome site, an additional procedure was applied consisting in inter-comparing the selected measurements with those provided by a co-located Multi Filter Rotating Shadow band Radiometer (MFRSR), whose cloud screening is performed 30 following the methodology by Alexandrov et al. (2004). **In order to limit the influence of largest uncertainties at very high solar zenith angles, we selected the data having $m < 8$.**

The closest W_{GPS} retrievals within 30 minutes, 15 min before and after the sun-sky radiometer measurements were selected. Then the simultaneous $[W_{GPS}, V]$ dataset was divided in two parts by picking every other day, among the available days: one part $[W_{GPS1}, V_1]$ was used for the application of the methodology and then the estimation of the calibration constants, the other 5 part of GPS estimations (W_{GPS2}) was used to validate the W_P retrievals. The two GPS dataset were found being equally populated and with similar frequency distributions, and the statistical independence between the W_{GPS2} data used for the validation and W_P was ensured.

Because a and b parameters are supposed to depend on the total amount of water vapour, the entire yearly independent W_{GPS1} dataset was divided in 3 classes: [0 – 10] mm; [10 – 20] mm and [20 – 40] nm; an insufficient number of points was found 10 with water vapour larger than 40 mm, for the 3 sites. The sun-sky radiometer calibration parameters (a , b , and V_0) for each site and class were calculated (Table II, Figure 2).

In the first application of this methodology (Campanelli et al. 2014), performed for calibrating a sun sky radiometer at a Japanese site characterized by a wide yearly range of W (from few mm up to about 60 mm), nearly parabolic opposite behaviors of a and b as function of W were found. The similar behavior of the boundary W classes (being two maxima of the distribution) 15 was demonstrated being linked to two different atmospheric regimes, with similar W vertical distribution: trapping of W due to winter inversion and occurrence of convection in summer. Both these regimes have a vertical structure with a well-mixed layer at the bottom and a rapid decrease upward. This behavior is recognizable in Aosta for the higher W class. In this season in fact the well-mixed layer at the bottom is likely due to humid polluted air masses transported from the Po Valley region, starting from late afternoon and staying in the atmosphere up to the morning. This advection was observed by ceilometer 20 measurements for what concern the increase of suspended particles in the atmosphere, and by hygrometers for the growth of absolute humidity (Diémoz et al., 2016). Unfortunately there are no vertical profile measurements of W in this site to verify this statement. Conversely in Rome and Valencia all the classes seem characterized by similar synoptic situations.

Looking at Figure 2, a slight fictitious tendency of V_0 on the water vapour class is recognizable. We remind that the retrieved 25 V_0 in this methodology should be considered as an effective calibration constant whose variation could not be related to a real instrumental drift. Nevertheless, its total uncertainty (estimated as the standard deviation of the assumed values in each class divided by their average) resulted to be about 4%, 8% and 14% for Rome, Valencia and Aosta, respectively.

The uncertainty affecting the retrieval of W_P (ΔW_P %) was estimated (as in Eq 7) by calculating the percentage RMSD between W_P and the W_{GPS1} dataset, used for calibrating the sun sky radiometer:

$$RMSD = \sqrt{\langle (W_P - W_{GPS1})^2 \rangle};$$

$$30 \quad \Delta W_P \% = \frac{RMSD}{\langle W_{GPS1} \rangle} \cdot 100; \quad (7)$$

It must be beard in mind that this uncertainty is a statistical measure but not the total uncertainty of W retrieval which should include instrumental uncertainties, errors introduced at different steps of the method and their spread, and any other systematic errors.

The estimated uncertainties (Table II) values are comparable with that of AERONET retrievals (Perez-Ramirez et al., 2014) that is approximately 10%, with the exception of Aosta where a value of 20%, with a RMSD of 2.7 mm, is obtained. This is due mainly to two reasons: one is that the denominator $\langle W_{GPSI} \rangle$ in Eq 7 is smaller for Aosta than for the other two sites, resulting in higher ΔW_P % value; the other is related to the performance of GPS measurements in sites with rough orography.

5 In fact, the methodology used for the calculation of ZTD assumes an azimuthal isotropy of the atmosphere above the antenna, within a conical field of view with an angular aperture of about 170° (since the elevation angle cut-off was set to 5°) centered in the site where the antenna is located. However, the orography can make the distribution of fluxes at high level quite complex and not uniform; the rougher the orography, such that surrounding the Aosta site, the greater is the atmospheric anisotropy and therefore, in principle, the error introduced by the failure of the hypothesis assumed by GPS methodology. This degradation 10 of the quality of GPS retrieval, not quantifiable, together with the missing of a large amount of GPS data in Aosta during the summer months, make the fitting procedures used for the retrieval of calibration constants less stable and therefore increased the uncertainty in their estimation.

5 Intercomparison of methodologies

Once the calibration parameters a, b and V_0 , characterizing each sun-sky radiometer, were estimated for all the water vapour

15 classes, water vapour from sun-sky radiometer W_P was directly calculated as in Eq (6) using the Table II parameters and the iterative procedure described in Campanelli et al., (2014). Figure 3 shows the retrieved time pattern of W_P for all the sites. As expected winter season is the driest period in the three sites, and in summer Aosta shows a lower W content compared to Rome and Valencia. Seasonal angle histogram of the hourly distribution of W values grouped according to their numeric range, were 20 performed in order to highlight the main differences among the 3 sites. Looking at Figure 4a, referred to summertime, it is worth highlighting that Valencia is the site where high W values (>30 mm) are more homogeneously distributed over time, with a very slight increment in the afternoon due to breeze circulation. This is principally due to the location of this site, very close to the sea, from where humid air masses are transported all over the day. This kind of distribution of greater water vapor content is visible also in the other seasons, showing a sort of homogeneity of W distribution all over the year. In Figure 4b a 25 bivariate polar plot with smoothing, obtained from openair package, is shown. W content, for the entire year, in polar coordinates is shown by wind speed (radius of the circles) and direction. Mean contents are calculated for wind speed-direction ‘bins’ (e.g. 0-1, 1-2 m/s,... and 0-10, 10-20 degrees etc). It is evident from this plot that the largest amount of W is brought from Easterly winds, being the seacoast 10km East from the site.

In Rome W values >35 mm are mostly recognizable during summer afternoons, from about 14 UTC, due to the presence of a breeze circulation, advecting air from the sea (Figure 4c). The importance of wind from SW (that is from the sea) in transporting 30 W to the site, is highlighted in Figure 4d, whereas lower W content is mostly recorded when wind comes from N direction, having also the highest speed. In all seasons greater water vapor content is retrieved in the early morning and late afternoon showing, also for this site, a generally homogeneous W yearly distribution. A smaller number of measurements is available in

Rome during the middle part of the day in all seasons. This is mostly due to the formation of convective clouds at around 12 UTC, favored by the urban heat island phenomenon, that didn't allow the photometer to operate.

In Aosta, as shown in Figure 4f, the greater amount of W comes from East direction, that is from the Po Valley, a humid region with higher atmospheric stability and weaker winds, and mostly during summer and autumn seasons; elevated values of W (>35 mm) during summer were retrieved more frequently in the morning, but this hourly distribution was found also in autumn for $W>25$ mm (Figure 4e). This behavior could be caused by the atmospheric stability; in the late morning, especially in summer and fall when the insolation is higher, valley-mountain flows develop mixing the humid air of the lower levels with the dried air above. Then, winds aloft could remove part of this humidity by advection, decreasing the water content of the air column. The other seasons conversely show more homogeneous W distribution during the day. Low W content associated to winds from W , is due to the Foehn. When wind comes from this side, air masses passed the Alps and arrived over Aosta drier. W_P for each site was then validated against W_{GPS2} (the part of the GPS dataset not used for the calibration) comparing measurements within 1 minute of difference (if more than one measurement of W_{GPS2} was found, their average was performed). RMSD and Bias, defined in Eq 8, as well as squared correlation coefficient R^2 , slope and intercept of the fitting straight line, were used for the statistical analysis, whose results are shown in Table III and Figure 5.

$$RMSD = \sqrt{<(W_{GPS2} - W_P)^2>} ; \quad \%RMSD = \frac{\sqrt{<(W_{GPS2} - W_P)^2>}}{< W_P >} * 100; \quad (8)$$

$$Bias = <(W_{GPS2} - W_P)>; \quad \%Bias = <\left(\frac{W_{GPS2} - W_P}{W_P} * 100\right)>;$$

15

The comparison between W_P and W_{GPS2} for Rome and Valencia (Table III) when all W classes are analysed, shows high R^2 , varying from 0.98 and 0.96; RMSD assumes values from 1.35 mm (6.43%) and 1.67 mm (8.09%), and the Bias is within -0.01 mm (0.34%) and -0.20 mm (-0.05%), therefore within the estimated error ΔW_P . Investigating separately the 3 classes (divided using the thresholds on the W_{GPS2} dataset) the greatest difference was found for the first class in terms of %RMSD (9.17% - 14.51%) but for the same class it was the smallest in terms of absolute RMSD (0.75 mm – 1.13 mm); conversely for the same class the smallest difference was found in terms of Bias, both in percentage and absolute values, varying from -0.03 mm (0.60%) and -0.17 mm (-0.52%). However, each class remained within the ΔW_P error.

The retrieval of W_P for Aosta was generally less performing than for the other sites. For the entire W classes, RMSD and Bias were found to be the highest values, being 13.57% (1.97 mm) and -3.45%, (-0.88 mm) respectively, while R^2 is the lowest among the three sites (0.95). Also for this site the greatest value of %RMSD (18.00%) and the smaller one of RMSD (1.29 mm) was found for the first class and the Bias (both percentage and absolute values) remained for each class within the ΔW_P error. The lower quality performance of the methodology in this site is discussed in section 4.

Co-located with the ESR-SKYNET/POM, by the University of Valencia, there is an AERONET/CIMEL simultaneously operating in 2011. Since the philosophy used by the two networks for the radiometer's calibration is substantially different, it

is worthwhile comparing the columnar precipitable water content estimated by the two methodologies and verify if there are some improvements in assuming the calibration parameters dependent on the vertical distribution of W , and then on its total amount, respect to the commonly used assumption of fixed values.

Figure 6 shows the scatter plot of AERONET estimation (W_{AER}) vs W_P for measurements within 1 minute of difference (if 5 more than one measurement of W_{AER} was found, their average was performed). A very high squared correlation coefficient was found (Table IV) between the two series (0.99), with a total %Bias of 1.61% (0.01 mm). However, analysing the results by classes, a larger discrepancy is evident for the first class in terms of %RMSD (10.33%) and %Bias (9.16%) within the combined uncertainty of both W_P and W_{AER} , with an overestimation of AERONET retrieval.

W_{AER} was then compared against W_{GPS} showing a %Bias of -0.97% and %RMSD of 7.62%, if all the classes are considered.

10 The negative bias, consisting in an underestimation of AERONET retrieval, was also documented by Pérez-Ramírez et al., (2014) who found values varying from 2.2% to 7.9% depending on the site under study, when compared estimations from AERONET versus GPS. However the agreement against GPS was not so good for the first class of W_{AER} where a higher positive discrepancy was found (%Bias of 5.76) with respect to the one showed in the comparison between W_P and W_{GPS} (0.52%) in the same class. Looking at Figure 7, in fact, it is clear that the difference between W_{AER} and W_P has a decreasing 15 trend with increasing W (Figure 7, a) being greater than 10% (threshold of AERONET uncertainty) mostly for values below 15 mm, which is about the first class of W . A similar trend (even if less marked) is visible between W_{AER} and W_{GPS} (Figure 7, b). Conversely there is no clear tendency in the difference between W_P and W_{GPS} (Figure 7, c). This confirms that the methodology here proposed takes to a general improvement of W estimation, particularly evident for low W content, in agreement with the findings in Campanelli et al., (2014), where the assumption of variable of a and b parameters increased the 20 agreement with GPS retrievals of about 10% for the first W class respect to the commonly assumption of fixed a and b .

6 Conclusions

A methodology for retrieving precipitable water content W_P from sun-sky radiometers measurements at 940 nm was applied to three sites of the ESR-SKYNET network with different atmospheric and climatic conditions. In order to provide W_P , the sun-sky radiometer must be calibrated in terms of the solar calibration constant V_0 , that is the solar radiation incident at the top 25 of the atmosphere, and the calibration parameters characterizing the atmospheric transmittance at this wavelength, a and b . This methodology considers that a and b are dependent on vertical profiles of temperature, air pressure and moisture typical of each measurement site, and therefore allows for the calculation of pairs of (a , b) values for several classes of W . To obtain the calibration parameters, GPS-based yearly independent estimations of W , simultaneously with the sun-sky radiometer measurements, were used and a table of calibration constants, covering a range of W from 0 to 40 mm, was built for each site. 30 In this work the GPS dataset was divided in two parts by picking every other day, among the available days: one part was used for the calibration of the sun-sky radiometer, the other part for the validation.

In principle it is needed to use one entire year of W independent measurements for building the calibration table, however also a smaller dataset can be used, provided that it is taken over a large range of solar zenith angle and it covers a wide range of W . The obtained W_P values were characterized by an uncertainty ΔW_P below 10% for Rome and Valencia, and of 20% for Aosta. The yearly time pattern of W_P for each site was then validated against the part of the GPS dataset not used for the calibration and against an AERONET sun photometer co-located in Valencia. In the former case for Rome and Valencia the agreement was found to be within the uncertainty ΔW_P when all the classes together are analyzed, whereas for Aosta a %RMSD of about 14% was found. Investigating separately the 3 classes, the greatest difference was found for the first class in terms of %RMSD: 9.18%, 14.51% and 18%, for Rome, Valencia and Aosta respectively.

When compared against the AERONET retrieval, the agreement was found very good and within the uncertainties of both methodologies, if all the classes together are considered. However analyzing the results by classes, and after a cross-check among W_P , GPS and AERONET estimates, it was highlighted that the present methodology is able to generally improve W estimation, particularly for low W content in term of %Bias, bringing the agreement with the GPS (considered the reference), from a %Bias of 5.76 to 0.52. This finding is in agreement with what already demonstrated in Campanelli et al., (2014), where the assumption of variable of a and b parameters was compared with the results from the assumption of fixed a and b .

The present methodology can be easily applied to other kind of sun photometers or radiometers measuring the solar direct radiation at 940 nm wavelength, as Precision Filter Radiometers (PFR) or Multi Filter Rotating Shadowband Radiometers (MFRSR), provided that Angström, exponent and aerosol optical depth at 940 nm are available. The calibration table containing a and b values for each W class, can be used until the instrument is not moved to another location, or submitted to maintenance. In these cases all the calibration parameters must be recalculated.

The problem in the application of this methodology is however the availability of an independent, simultaneous W dataset to be used for calibrating the sun-sky radiometer, or any other similar sun photometer. In Campanelli et al., (2014) the possibility of using a rough estimation of the needed W dataset was tested, using surface observations of moisture parameters that are much more common than W values estimated by other equipment. The test provided very interesting results but still needs to be improved and validated in different sites and climatic conditions, that will be the next task for this kind of research. **Finally, a sensitivity study about the time frequency of the independent external measurements (both daily and monthly but also inside a single day) will be a future prospect of this research in order to build a guideline on the operational use of the methodology and delivering a software.**

Acknowledgments

We thank ARPA Valle D'Aosta and ARPA Lazio for providing ground measurements observations needed for the elaboration of GPS measurements.

We also thank Dr. Marco Cacciani of the University of Rome, La Sapienza, Department of Physics, G24 laboratory, for hosting the PREDE-POM sun-sky radiometer of Rome.

The Spanish Ministry of Economy and Competitiveness and the Valencia Autonomous Government are acknowledged for projects CGL2015-64785-R, CGL2015-70432-R and PROMETEU II/2014/058, that allowed the Burjassot-Valencia site measurements.

5 References

Alexandrov, M.D., Marshak A., Cairns B., Lacis A. A., Carlson B.E.: Automated cloud screening algorithm for MFRSR data, *Geophysical Research Letters*, vol. 31, l04118 doi:10.1029/2003GL019105, 2004.

American Meteorological Society, Precipitable Water Vapor, Glossary of Meteorology. (Available at http://glossary.ametsoc.org/wiki/Precipitable_water), 2015.

10 Askne, J. and Nordius, H: Estimation of tropospheric delay for microwaves from surface weather data, *Radio Science* Volume 22, Number 3, Pages 379-386 DOI: 10.1029/RS022i003p00379, 1987.

Bevis, M., S. Businger, T. A. Herring, C. Rocken, R. A. Anthes, and R. H. Ware : GPS meteorology: Remote sensing of atmospheric water vapor using the global positioning system, *J. Geophys. Res.*, 97(D14), 15787–15801, doi:10.1029/92JD01517, 1992.

15 Bennett, Gemma V.; Jupp, Adrian. Operational assimilation of GPS zenith total delay observations into the Met Office numerical weather prediction models. *Monthly Weather Review*, 2012, 140.8: 2706-2719.

Bock, O. Doerflinger, E. : Atmospheric modelling in GPS data analysis for high accuracy positioning. *Phys. Chem. Earth*, 26, 373-383, 2001.

20 Bock, O., Bosser, P., Bourcy, T., David, L., Goutail, F., Hoareau, C., Keckhut, P., Legain, D., Pazmino, A., Pelon, J., Pipis, K., Poujol, G., Sarkissian, A., Thom, C., Tournois, G., Tzanos, D., : Accuracy assessment of water vapour measurements from in-situ and remote sensing techniques during the DEMEVAP 2011 campaign at OHP. *Atmos. Meas. Tech.* 6: 2777-2802, 2013.

Bock, O., Bosser, P., Pacione, R., Nuret, M., Fourrié, N. and Parracho, A. : A high-quality reprocessed ground-based GPS dataset for atmospheric process studies, radiosonde and model evaluation, and reanalysis of HyMeX Special Observing Period. *Q.J.R. Meteorol. Soc.*, 142: 56–71. doi:10.1002/qj.2701, 2016,

25 Bonafoni, S., Mazzoni, A., Cimini, D., Montopoli, M., Pierdicca, N., Basili, P., Ciotti, P., Carlesimo, G., : Assessment of water vapor retrievals from a GPS receiver network, *GPS Solut* 17: 475. doi:10.1007/s10291-012-0293-5, 2013.

Bruegge, C. J., Conel, J. E., Green, R. O., Margolis, J. S., Holm, R. G., and Toon, G.: Water vapor column abundances retrievals during FIFE, *J. Geophys. Res.*, 97, 18759–18768, 1992.


30 Campanelli, M., Estellés, V., Tomasi, C., Nakajima, T., Malvestuto, V., and Martínez-Lozano, J.A., Application of the SKYRAD Improved Langley plot method for the in situ calibration of CIMEL Sun-sky photometers, *Applied Optics* Vol. 46, No. 14, 2007.

Campanelli, M., Estellés, V., Smyth, T., Tomasi, C., Martínez- Lozano, M. P., Claxton, B., Muller, P., Pappalardo, G.,

- Pietruczuk, A., Shanklin, J., Colwell, S., Wrench, C., Lupi, A., Mazzola, M., Lanconelli, C., Vitale, V., Congeduti, F., Dionisi, D., and Cacciani, M.: Monitoring of Eyjafjallajoekull volcanic aerosol by the new European SkyRad users(ESR) sun-sky radiometer network, *Atmos. Environ.*, 48, 33–45, 2012.
- 5 Campanelli, M., Nakajima, T., Khatri, P., Takamura, T., Uchiyama, A., Estellés, V., Liberti, G. L. and Malvestuto V., Retrieval of characteristic parameters for water vapour transmittance in the development of ground-based sun-sky radiometric measurements of columnar water vapour, *Atmos. Meas. Tech.*, 7, 1075–1087, www.atmos-meas-tech.net/7/1075/2014/ doi:10.5194/amt-7-1075-2014, 2014.
- Davis J, Herring T, Shapiro I, Rogers A, Elgered Geodesy by radio interferometry: effects of atmospheric modelling errors on estimates of baseline length, *Radio Science* Volume 20, Issue 6 Pages 1593–1607 DOI:10.1029/RS020i006p01593, 1985.
- 10 Diémoz H., Magri, T., Pession, G., Zublena, M., Campanelli, M., Gobbi, G. P., Barnaba, F., Di Liberto, L. and Dionisi, D., Thermally-driven advections of aerosol-rich air masses to an Alpine valley: Theoretical considerations and experimental evidences, *EGU General Assembly*, 2016, Vienna.
- Elgered G., B.O.Rönnäng, J.I.H. Askne, Measurements of atmospheric water vapor with microwave radiometry, *Radio Science*, Volume 17, Number 5, pages 1258-1264, September-October 1982.
- 15 Guerova, G., Jones, J., Douša, J., Dick, G., de Haan, S., Pottiaux, E., Bock, O., Pacione, R., Elgered, G., Vedel, H., and Bender, M.: Review of the state of the art and future prospects of the ground-based GNSS meteorology in Europe, *Atmos. Meas. Tech.*, 9, 5385-5406, doi:10.5194/amt-9-5385-2016, 2016
- Halthore, R. N., Eck, T. F., Holben, B. N., and Markham, B. L.: Sun photometric measurements of atmospheric water vapor column abundance in the 940nm band, *J. Geophys. Res.*, 102, 4343–4352, doi:10.1029/96JD03247, 1997
- 20 Haywood, J. M., N. Bellouin, A. Jones, O. Boucher, M. Wild, and K. P. Shine, The roles of aerosol, water vapor and cloud in future global dimming/brightening, *J. Geophys. Res.*, 116, D20203, doi:10.1029/2011JD016000, 2011.
- Holben, B. N., Eck, T. I., Slutsker, I., Tanré, D., Buis, J. P., Setzer, A., Vermote, E., Reagan, J. A., Kaufman, Y. J., Nakajima, T., Lavenu, F., Jankowiak, I., and Smirnov, A.: AERONET – A federated instrument network and data archive for aerosol characterization, *Remote Sens. Environ.*, 66, 1–16, 1998.
- 25 Hong L., Yunchanga C., Xiaominb W., Zhifangb X., Haishena W., Henga H., Meteorological applications of precipitable water vapor measurements retrieved by the national GNSS network of China, *Geodesy and Geodynamics*, vol 6 no 2, 135-142. <http://dx.doi.org/10.1016/j.geog.2015.03.001>, 2015.
- Kasten, F. (1966), A new table and approximation formula for the relative optical air mass, *Arch. Met. Geophys. Biokl. Ser. B*, 14(2), 206-233.
- 30 Kasten, F. and Young, A. T.: Revised optical air mass tables and approximation formula, *Appl. Optics*, 28, 4735–4738, 1989.
- Lyapustin, A. I., Radiative transfer code SHARM for atmospheric and terrestrial applications, *Appl. Opt.*, 44, 7764–7772, 2005.

- Pérez-Ramírez, D., D. N. Whiteman, A. Smirnov, H. Lyamani, B. N. Holben, R. Pinker, M. Andrade, and L. Alados-Arboledas, Evaluation of AERONET precipitable water vapor versus microwave radiometry, GPS, and radiosondes at ARM sites, *J. Geophys. Res. Atmos.*, 119, 9596–9613, doi:10.1002/2014JD021730, 2014.
- Nyeki, S., Vuilleumier, L., Morland, J., Bokoye, A., Viatte, P., Mätzler, C., and Kämpfer, N., A 10-year integrated atmospheric water vapor record using precision filter radiometers at two high-alpine sites, *Geophys. Res. Lett.*, 32, L23803, doi:10.1029/2005GL024079, 2005.
- Poli P, Moll P, Rabier F, Desrozier G, Chapnik B, Berre L, Healy SL, Andersson E, El Guelai FZ.: Forecast impact studies of zenith total delay data from European near real - time GPS stations in Météo France 4DVAR. *J. Geophys. Res. Atmospheres*. 112: 1984–2012, 2007.
- 10 Reagan, J. A., L. W. Thomason, B. M. Herman, and J. M. Palmer, : Assessment of atmospheric limitations on the determination of the solar spectral constant from ground-based spectroradiometer measurements, *IEEE Trans. Geosci. Electron.*, GE-24, 258–265, 1986.
- Realini E., Kazutoshi Sato, Toshitaka Tsuda, Susilo and Timbul Manik. An observation campaign of precipitable water vapor with multiple GPS receivers in western Java, *Indonesia Progress in Earth and Planetary Science* 20141:17
- 15 DOI: 10.1186/2197-4284-1-17, 2014
- Rothman, L. S.; Barbe, A.; Benner, D. Chris; Brown, L. R.; Camy-Peyret, C.; Carleer, M. R.; Chance, K.; Clerbaux, C.; Dana, V.; Devi, V. M.; Fayt, A.; Flaud, J.-M.; Gamache, R. R.; Goldman, A.; Jacquemart, D.; Jucks, K. W.; Lafferty, W. J.; Mandin, J.-Y.; Massie, S. T.; Nemtchinov, V.; Newnham, D. A.; Perrin, A.; Rinsland, C. P.; Schroeder, J.; Smith, K. M.; Smith, M. A. H.; Tang, K.; Toth, R. A.; Vander Auwera, J.; Varanasi, P.; Yoshino, K., The HITRAN molecular spectroscopic database: 20 Edition of 2000 including updates through 2001, *J. Quant. Spectrosc. Radiat. Transfer*, 82, 5–44, doi:10.1016/S0022-4073(03)00146-8, 2003.
- Saastamoinen, J. Contributions to the theory of atmospheric refraction. *Bulletin Géodésique (1946-1975)*, 1973, 107.1: 13-34.
- Schmidt, G. A., R. A. Ruedy, R. L. Miller, and A. A. Lacis , Attribution of the present-day total greenhouse effect, *J. Geophys. Res.*, 115, D20106, doi:10.1029/2010JD014287, 2010.
- Smirnov, A., B. N. Holben, A. Lyapustin, I. Slutsker, and T. F. Eck, AERONET processing algorithms refinement: Proceedings of AERONET workshop, El Arenosillo, Spain, NASA/GSFC AERONET project, 2004.
- Yu S., Alapati K., Mathur R., Pleim J., Zhang Y., Nolte C., Eder B., Foley K., Nagashima T., Attribution of the United States “warming hole”: Aerosol indirect effect and precipitable water vapor, *Scientific Reports* 4, Article number: 6929 , 30 doi:10.1038/srep069292014.
- Wehrli, C., Calibrations of filter radiometers for determination of atmospheric optical depths, *Metrologia*, 37, 419–422, 2000.

Figures

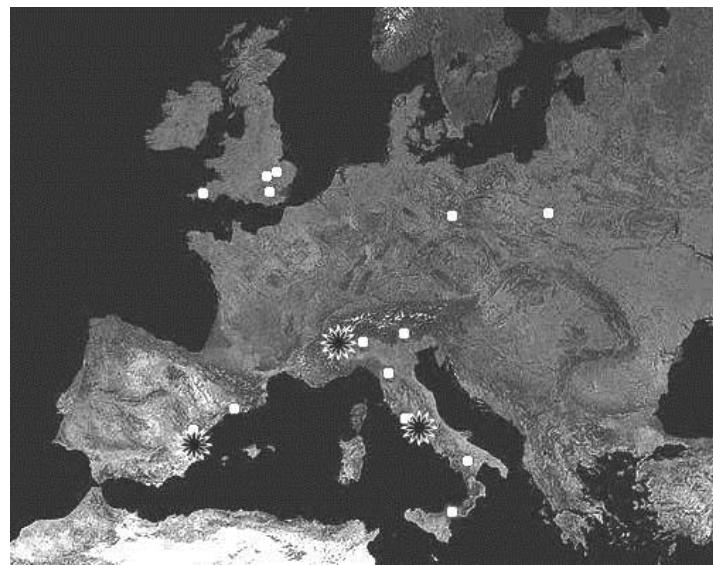

5

Figure 1: Geographical position of ESR sites in the European region (white dots) and of the stations used in this work (black stars).



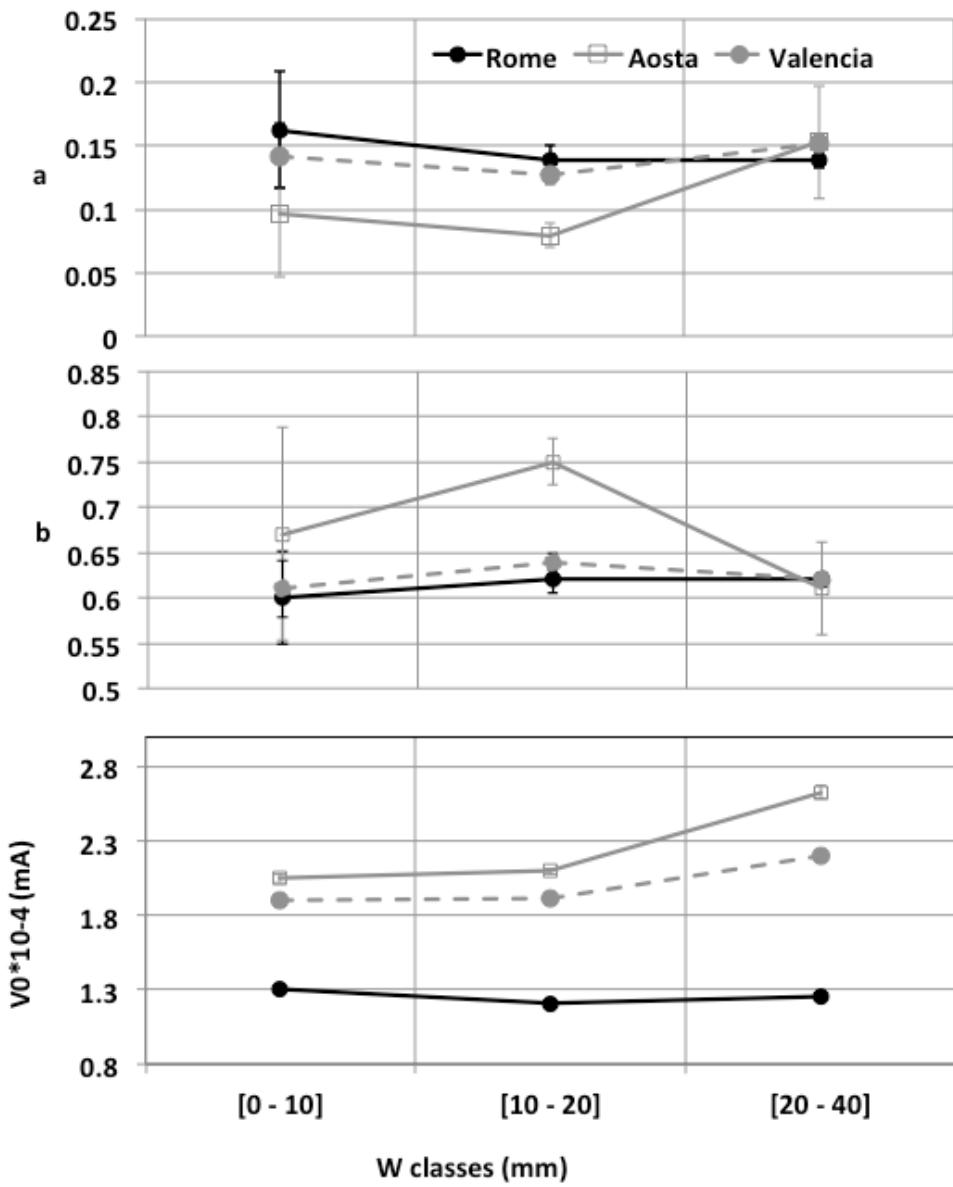


Figure 2: behaviour of the estimated calibration parameters vs W classes. The errors bars are the errors affecting the parameters as evaluated using a Monte Carlo method.

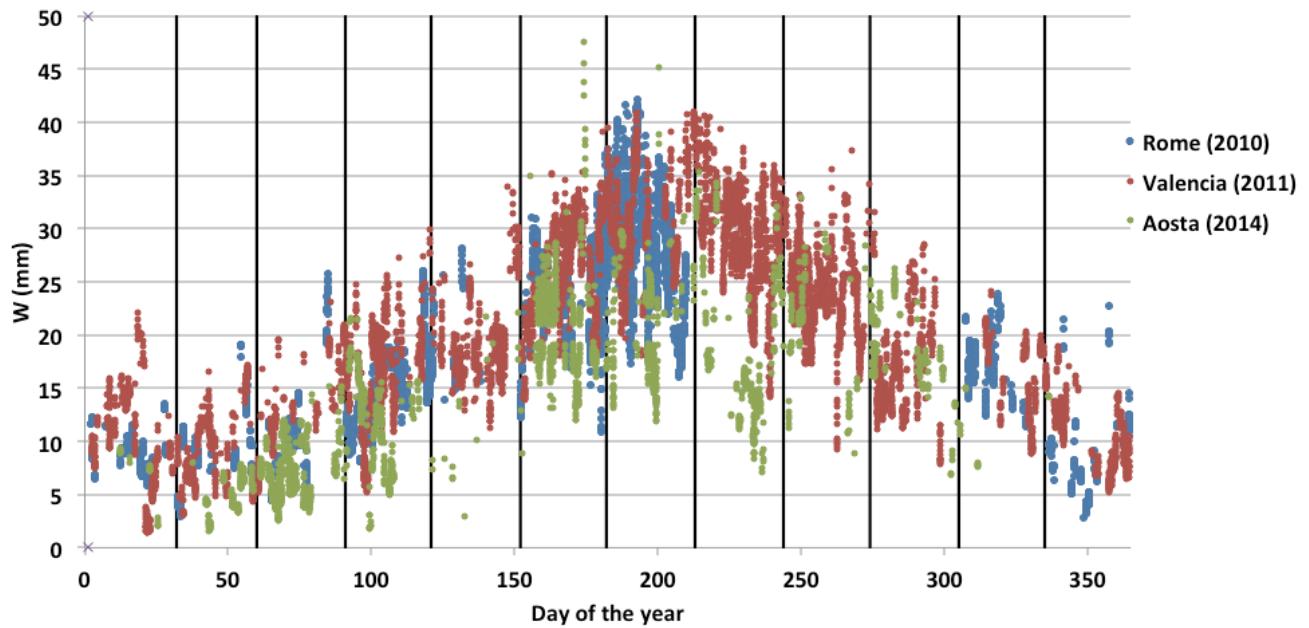


5


Figure 3: Temporal behaviors of WP retrieved with the presented methodology, for the years 2010 (Rome), 2011 (Valencia) and 2014 (Aosta).

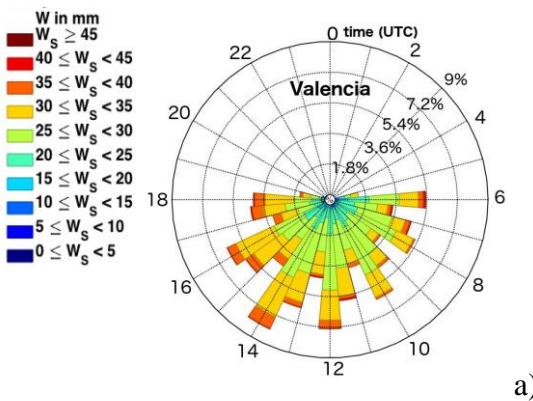


a)

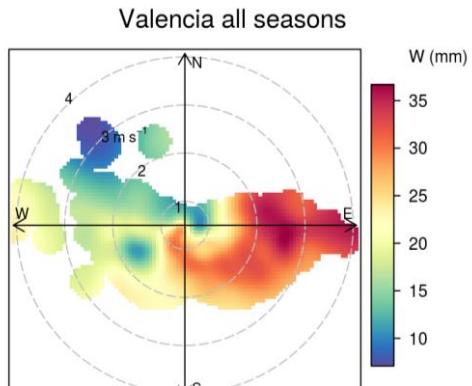


b)

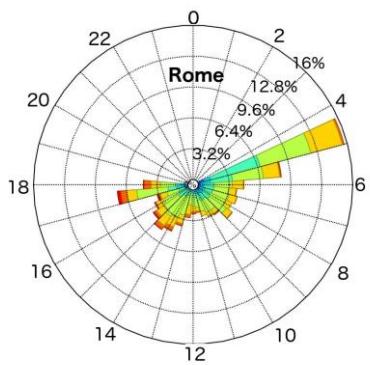


c)

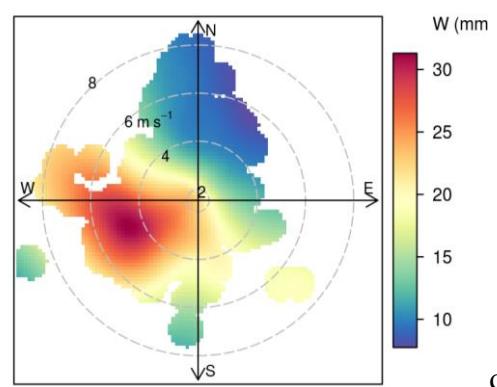

d)

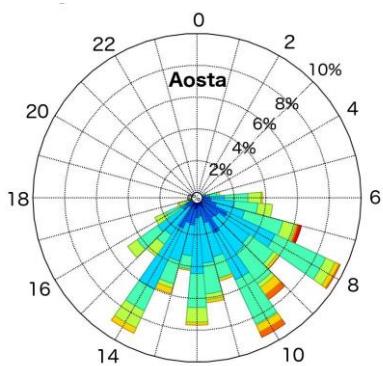

e)

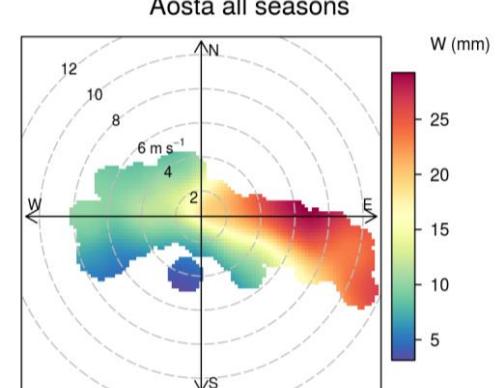

f)

5

Figure 4: plots a, c, e, -polar plot showing the distribution of W values, **during summer season**, grouped according to their numeric range; the 24 quadrants are hours in UTC; the radius represents the frequency of events normalized to the number of point of the season. **The frequency scales are different for the three histograms.** Plots b, d, f,- bivariate polar plot with smoothing, showing the distribution of W content, for the entire year, by wind speed (radius of the circles) and direction.

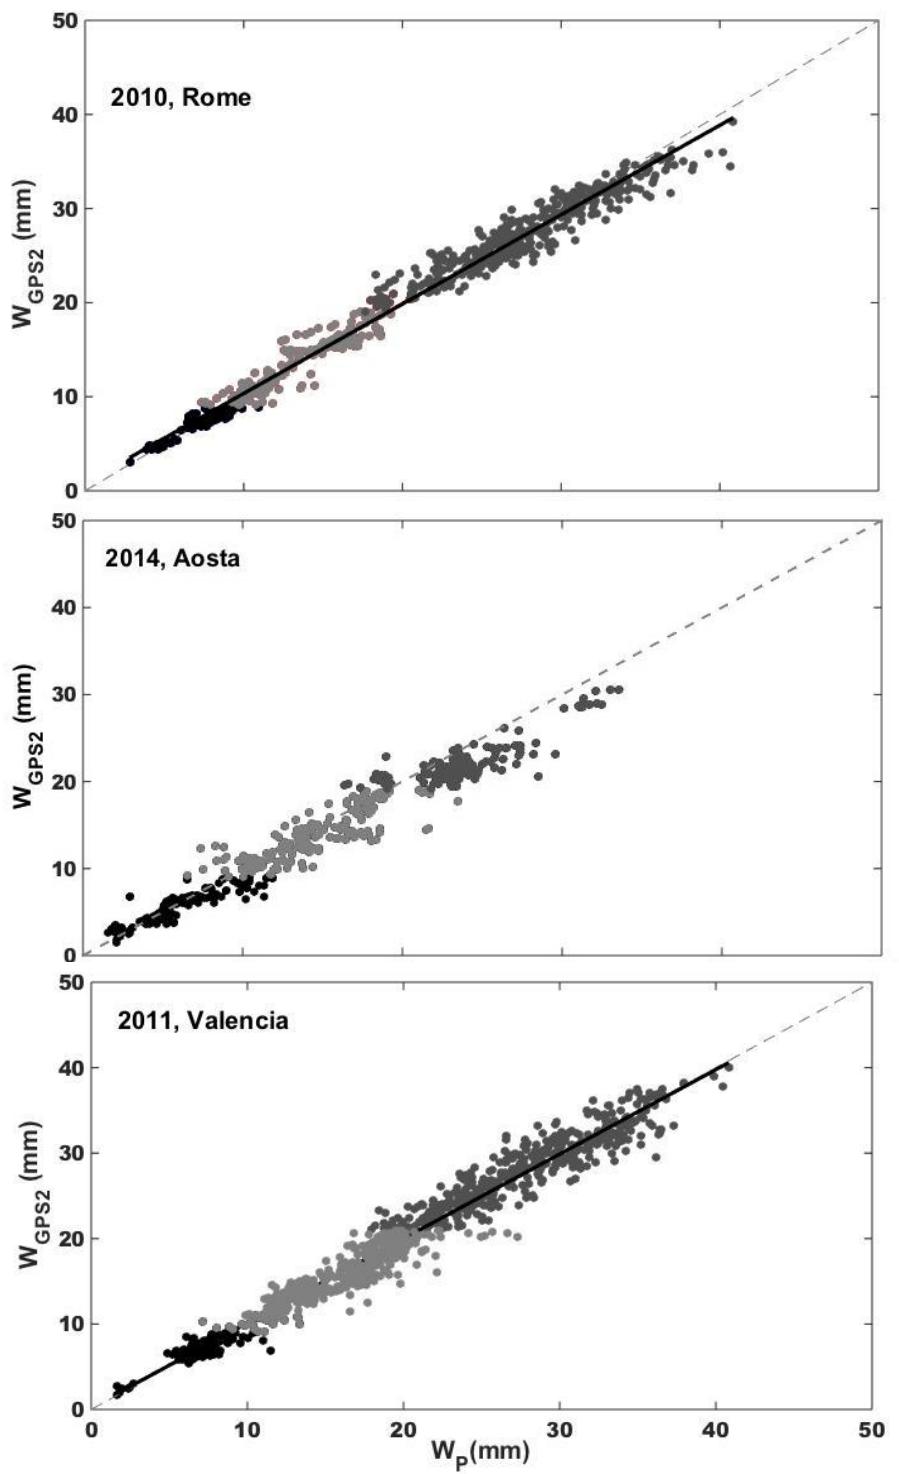


Figure 5: Scatter plot of W_{GPS2} vs W_P . Alternations of black and greys indicate the three water vapour classes


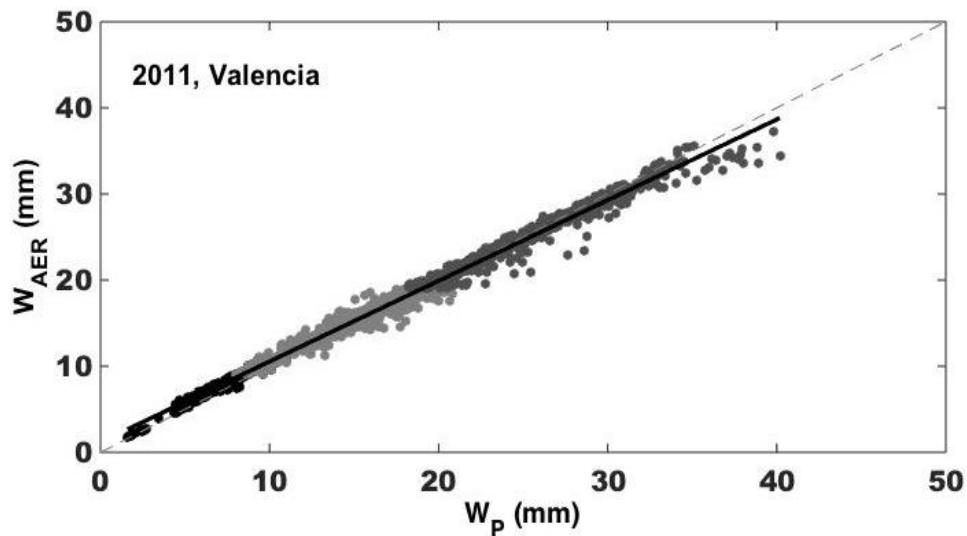


Figure 6: Scatter plot of W_{AER} vs W_P for Valencia site; alternations of black and greys indicate the three water vapour classes

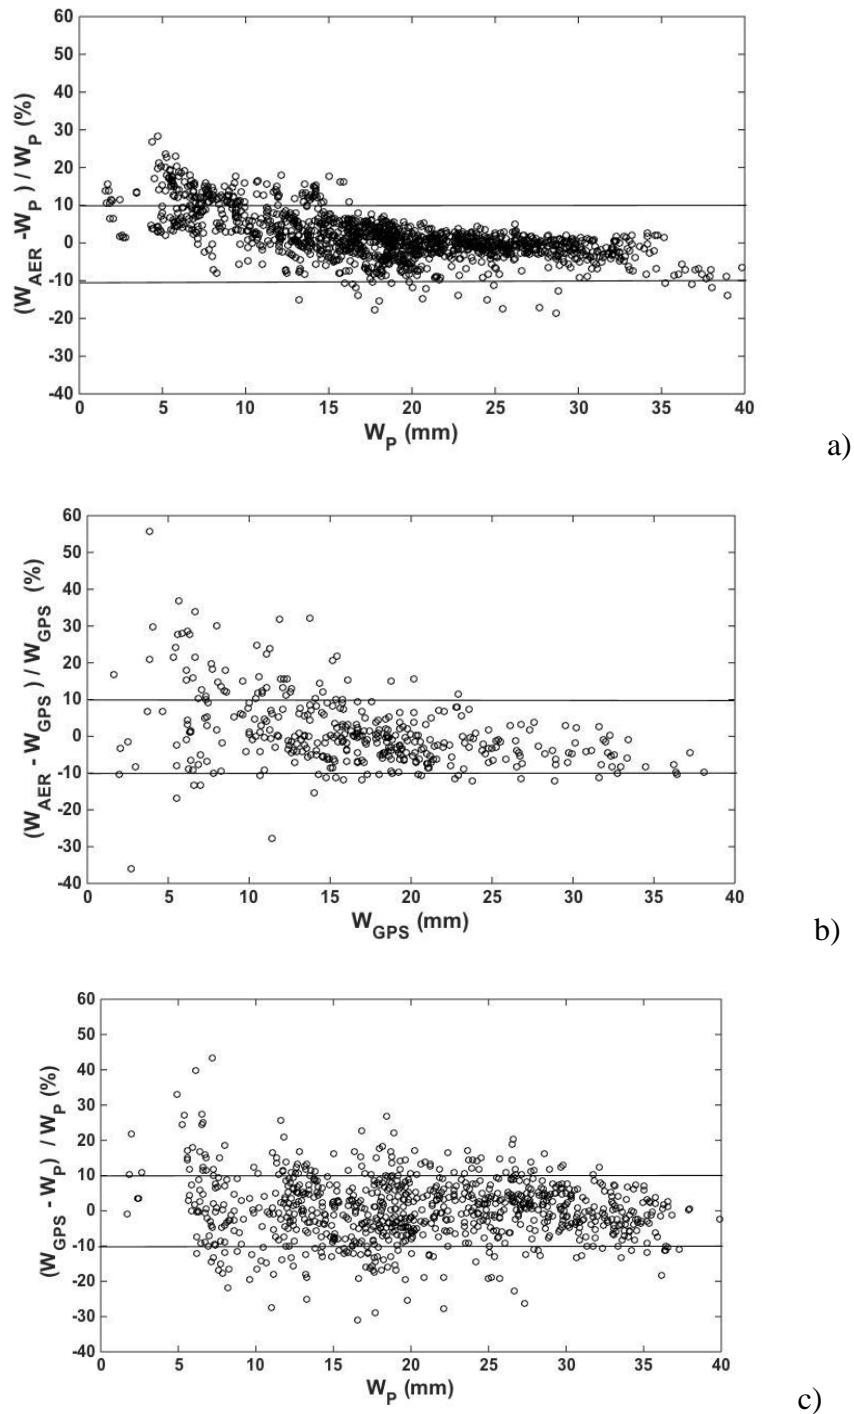

5 **Figure 7: percentage relative differences between W_{AER} and W_P (a), W_{AER} and W_{GPS} (b), and W_{GPS} and W_P (c) for Valencia site.**

Site	Network	Model	Wavelengths	View Angle
Rome	ESR	PREDE-POM01	340,400,500, 675,870,940,1020	1.0°
Aosta	ESR	PREDE-POM02	315,340,380,400,500,675,870,940,1020,1600,2200	1.0°
Valencia	ESR	PREDE-POM01	315,440,500,675,870,940,1020	1.0°
Valencia	AERONET	CIMEL-CE318	340,380,440,500,675,870,940,1020,1640	1.2°

5

10

Table I: characteristics of the sun-sky radiometers located at the three sites. The exact wavelengths of the CIMEL at Valencia can slightly change depending on particular instrument replacements

Classes (mm)	N. points	a	b	$V_0 \times 10^{-4}$ (mA)	Δa	Δb	$\Delta V_0 \times 10^{-4}$ (mA)	$\langle W_{GPSI} \rangle$ (mm)	RMSD (mm)	ΔW_P %
Rome										
[0 – 10]	29	0.162	0.60	1.31	0.046	0.05	0.01			
[10 – 20]	162	0.138	0.62	1.21	0.012	0.02	0.01	19.0	1.4	7
[20 – 40]	291	0.139	0.62	1.25	0.006	0.01	0.01			
Aosta										
[0 – 10]	57	0.097	0.67	2.05	0.050	0.12	0.03			
[10 – 20]	139	0.079	0.75	2.10	0.010	0.03	0.02	13.4	2.7	20
[20 – 40]	128	0.153	0.6	2.63	0.045	0.05	0.04			
Valencia										
[0 – 10]	32	0.142	0.61	1.90	0.025	0.03	0.02			
[10 – 20]	193	0.127	0.64	1.91	0.007	0.01	0.01	21.1	1.6	8
[20 – 40]	374	0.152	0.62	2.20	0.007	0.01	0.01			

Table II: for each class and each site are listed the number of data points, the optimal values of calibration constants, their estimated errors, the mean value of W and the estimated uncertainty of W_P

R^2 (N points); slope, intercept (mm)		RMSD (mm); % RMSD	Bias (mm) ; % Bias
Classes (mm)	W_{GPS2}, W_P	W_{GPS2}, W_P	$W_{GPS2} - W_P$
Rome			
[0 – 10]	0.88 (162); 0.85,1.22	0.75; 9.17	-0.03; 0.60
[10 – 20]	0.90 (215); 0.97, 0.60	1.11; 8.09	0.21; 1.89
[20 – 40]	0.90 (424); 0.81,4.76	1.57; 5.64	-0.39; -0.88
All classes	0.98 (722); 0.95, 0.84	1.35; 6.43	-0.20; -0.05
Aosta			
[0 – 10]	0.86 (191); 0.76,1.26	1.29; 18.00	-0.43; -1.72
[10 – 20]	0.80 (247); 0.77,2.84	2.10; 13.20	-0.82; -3.70
[20 – 40]	0.71 (131); 0.62,7.32	2.61; 10.89	-1.72; -6.38
All classes	0.95 (468); 0.88,0.84	1.97; 13.57	-0.88; -3.45
Valencia			
[0 – 10]	0.79 (122); 0.72,2.01	1.13; 14.51	-0.17; -0.52
[10 – 20]	0.79 (372); 0.81,2.74	1.58; 9.84	-0.36; -1.50
[20 – 40]	0.87 (479); 0.88,3.49	1.89; 7.02	0.29; 1.57
All classes	0.96 (877); 0.99,0.23	1.67; 8.09	-0.01; 0.34

Table III: parameters of the statistical analysis in the comparison against sunphotometer and GPS water vapour estimations;
 5 squared correlation coefficient, slope and intercept of the fitting lines, RMSD and Bias

R^2 (N points); slope, intercept (mm)		RMSD (mm); %RMSD		Bias (mm) ; % Bias		
Classes (mm)	W_{AER}, W_P	W_{AER}, W_{GPS}	W_{AER}, W_P	W_{AER}, W_{GPS}	$W_{AER} - W_P$	$W_{AER} - W_{GPS}$
Valencia						
[0 – 10]	0.96(249); 1.00,0.55	0.84(78);0.93,0.82	0.74; 10.33	1.00;14.20	0.61; 9.16	0.35; 5.76
[10 – 20]	0.94(800); 0.88, 2.05	0.90(247);0.83,2.59	0.89; 5.56	1.15;7.34	0.14; 1.59	-0.003;-1.02
[20 – 40]	0.96 (660); 0.90,2.32	0.92(119);0.84,3.23	0.98; 3.92	1.59;6.30	-0.30; -0.95	-0.69;-2.28
All classes	0.99 (1481); 0.94, 1.18	0.97(383);0.91,1.29	0.91; 4.95	1.28;7.62	0.01; 1.61	-0.12;-0.97

Table IV: parameters of the statistical analysis in the comparison against W_{AER} of W_P and W_{GPS} estimations for Valencia site; squared correlation coefficient, slope and intercept of the fitting lines, RMSD and Bias