

Referee #1

We would like to thank the anonymous reviewer #1 for valuable comments and support to improve the paper. In the revised manuscript, all these comments have been fully addressed, please see below. Comments of the reviewer are in black. **Our responses are in red.**

General comments:

The scientific question of this manuscript is clear and this study is innovative. The paper is well structured in the sections of instrumentation, data analysis and uncertainty estimation. I would suggest an improvement of the Introduction section, and a further discussion about the temporal pattern of the advection term on the basis of Fig. 18. Additionally, English language should be double checked.

Revision/response: Thank you for the good assessment of our paper. The Introduction section was re-organized. Figs. with results of measurements were discussed more detailed. The English language was checked as well as possible. Furthermore, during the article processing of final revised papers for publication in AMT, English language copy-editing is included which will polish last shortcomings.

Specific comments:

Introduction section

- Page 2 Line 8 says 'significant values', and Line 31 mentioned the threshold value of ' $5 \mu\text{mol m}^{-2} \text{s}^{-1}$ '. It would be better to organized them into one paragraph.

Revision/response: The sentences were organized into one paragraph.

- Page 2 Line 27 talks about the recent measurements of advection, while Page 3 Line 12 talks about the uncertainties of these measurements. It would be better to organized them into one paragraph.

Revision/response: The parts of text about measurements and uncertainties were organized into one paragraph.

- Page 3 Line 33. Separate the texts from 'Consequently' as a new paragraph.

Revision/response: The text was separated and organized as a new paragraph.

English check, such as:

- Page 2 Line 17 should be 'with V_m as..., c as..., t as...'

Revision/response: The sentence was corrected.

- Page 2 Line 31. single sentence merge to a paragraph.

Revision/response: Two sentences were merged and replaced to the first part of the Introduction.

- Page 7 Line 21 to Page 8 Line 6. and Page 8 Line 30 should be written in past tense.

Revision/response: We wrote the first sentence of this paragraph in Past Tense. We did not change the sentences 'Fluxes of CO₂ (NEE), H₂O (evapotranspiration) and sensible heat are available on a half-hourly basis.' and 'which are permanently updated according to sensor and software development'. The

EC measurements have been active since 2002 (permanent measurement station). Present Perfect is used here, because the action is continuing until now.

Page 8 Line 5: 'class-a-pan' should begin with capitalized letter.

Revision/response: It was corrected.

- Page 8 Line 25: should be 'which was equipped'.

Revision/response: It was corrected.

The two equations in Eq. (3) can be numbered separately.

Revision/response: The two equations were numbered separately.

Fig. 1 can be merged with Fig. 2.

Revision/response: The two Figs. were merged into Fig. 1.

We would like to thank the anonymous reviewer #2 for careful reading of the manuscript and thoughtful comments which allowed us to improve the revised paper. In the revised manuscript, all these comments have been fully addressed, please see below. Comments of the reviewer are in black. **Our responses are in red. The changed text is additionally highlighted.**

General Summary and Comments: Overall the paper is well structured and detailed, specially through Sections 2-4. Combining some of the figures into one group of figures would be useful (e.g. Figures 8 and 9 or Figures 14 to 18) since they are often talked about concurrently. It would also be beneficial to combine or summarize the uncertainties shown in Tables 2-4 with respect to the temperature and wind values for better readability. The results sections are light on details why the CO₂ concentrations for the proposed approach are as different compared to the EC measurement (Specific Comments). Another sentence or two pointing toward the potential error sources and how it could be reduced would be useful for further studies. Overall well put together, but some minor revisions necessary.

There are spots where the writing needs to be cleaned up and clarification but these do not impede the reading of the work (See Technical Comments below).

Revision/response: Some of the figures were grouped together (in revised version: Figs. 13a, b, 14 a, b) to improve the comparability of results. The uncertainties used for further analysis were summarized in Table 4 and recalculated into wind and temperature uncertainties. Further specific and technical comments were treated below.

Specific Comments:

Please note: In the following, we explain the technical details of acoustic measurements. However, we did not add all the details into the manuscript because they are frequently out of scope. The explanations of the methods (A-TOM, OP-FTIR, soil chamber measurements), analysis, and results are included in the text of the revised manuscript.

Pg. 5, Ln 5-7: Are there not effects from wind passing from behind the microphones on the sound collection or are the microphones directional so this is not a concern?

Revision/response: We fully agree that the flow field around the microphone can influence the measurement of the sound signal, especially with respect to additional noise from the air flowing around the microphone. For this reason, we used wind screens for the microphones (please see text section 3.2.1 par. 1) to prevent flow-induced wind noise which disturb the received signal and reduce the signal-to-noise ratio (SNR). With the applied wind screens it is possible to receive a nearly undisturbed sound signal at the condenser microphone. Furthermore, the loudspeakers have a distinct directivity pattern. The locations of the microphones, which should receive a sound signal, are tailored to the directivity of the loudspeakers.

Pg. 9, Ln 17. What was the output power of the speakers?

Revision/response: The maximal output (sound pressure level) of the loudspeakers (in combination with an amplifier) is 100 dB.

Pg. 12, Ln 13-17: Can you provide more detail on the soil chamber measurement cycle? How long were the chambers closed for each interval and how was the concentration measured (see comment for Pg. 33, Figure 17).

Revision/response: The text was changed. Additional information explains the soil chamber measurements in more detail: The chambers installation was done one day before the data acquisition started to avoid any influences by disturbances due to the collar insertion. The obtained CO₂ data can be applied for the comparison with the spatially resolved GHG concentrations. The soil chamber measurements were done in accordance to ICOS protocol for automated chamber measurements (Pavelka and Acosta, 2016). We chose a sampling interval of two measurements per chamber per hour for the data acquisition period. An observation length of 120 s was chosen for the single soil flux measurements. Additionally, a pre-purge of 120 s and a post-purge of 45 s for each flux measurement were selected. The initial values of CO₂ concentration after the pre-purging and before the chamber closing were taken from the measured time series of the observation period for the determination of the considered CO₂ concentrations at the ground-level.

Pg. 13, Ln 5: “growing sound frequencies”; what does this mean with respect to the 7-kHz frequency used?

Revision/response: The used 7-kHz-signal meets the requirements of the signal analysis to produce the necessary accuracy in travel-time analysis. In general, the travel-time uncertainty decreases for increasing sound frequencies due to the process of signal analysis. It would be desirable to apply higher sound frequencies than 7 kHz. However, air absorption is a limiting factor which prevents the use of higher sound frequencies for the sound path distances under consideration (50-70 m). The sound absorption is about 8-9 dB/100 m for the used sound frequency of 7 kHz and typical values of meteorological quantities (DIN ISO 9613-1, 1993, temperature: 15 °C, relative humidity: 50 %, air pressure: 101325 Pa). It reaches values of more than 19 dB/100 m for a 10-kHz-signal which makes an application of high-frequency signals for acoustic sounding impossible at distances exceeding a few decameters (with the speakers we used).

The text was changed:

The used sound frequency is a compromise between the desired low travel-time uncertainty and the necessary high SNR. In general, the travel-time uncertainty is decreasing for increasing sound frequencies due to the process of signal analysis. Furthermore, higher frequencies allow for a high-pass filtering of received signals in order to exclude ambient low-frequency noise from data analysis which, in turn, enhances SNR. However, air absorption (see Sect. 4.1.1) is a limiting factor, which increases with increasing frequencies and thus prevents the use of arbitrarily high sound frequencies for the sound path distances under consideration. In view of additional acoustic ground effects (see Sect. 4.1.2), an optimal sound frequency of 7 kHz results for the investigated length scale up to 100 m. In view of additional acoustic ground effects (see Sect. 4.1.2), an optimal sound frequency of 7 kHz results for the investigated length scale up to 100 m.

Pg. 18, Ln 5-6: How much does the uncertainty decrease with the increased path lengths? If this is the case, why not use as long of a path length as possible instead of the “minimal path length of 50m”? What is the minimum path length that would generate usable data?

Revision/response: The uncertainty of temperature and wind depends on the path length d according to the following equations (Eqs. 18 and 19 in the former manuscript):

$$\Delta T_{av} = 2 \sqrt{\frac{T_{av}}{\gamma_{tr} R_{tr}}} \Delta \tau \left(\frac{(\gamma_{tr} R_{tr} T_{av}) + v_{Ray}^2}{d} \right)$$

$$\Delta v_{Ray} = \Delta \tau \left(\frac{(\gamma_{tr} R_{tr} T_{av}) + v_{Ray}^2}{d} \right)$$

Example: The uncertainty of temperature will decrease by the factor of 2 (about 0.3 K \rightarrow 0.15 K, 0.2 m/s \rightarrow 0.1 m/s) if the path length is doubled (50 m \rightarrow 100 m).

The longest sound paths of the acoustic array (nearly a square) are about 71 m (diagonals of the square). To estimate the maximum uncertainty it is necessary to use the minimum path length, i.e. 50 m. That's why we used the wording 'minimal path length'.

Generally, it would be desirable to use longer paths to provide a minimum uncertainty of travel time. However, sound absorption and geometrical sound attenuation are increasing with growing path lengths followed by a decreasing SNR. Furthermore, the effects of sound reflection at the ground as well as refraction due to sound speed gradients have to be considered (see section 4.1.2). These phenomena of sound propagation prevent the application of longer sound paths with the used sound frequency of 7 kHz and the desired low travel-time uncertainty. If a lower sound frequency (with different loudspeakers, amplifiers, analog/digital converters...) is applied, then longer sound paths are possible (e.g., Ziemann et al., 2002).

The minimum path length depends on the application and the desired uncertainty of wind components and temperature. It depends also on the used hardware for analog/digital conversion and their possible resolution which depends on frequency.

We already used acoustic remote sensing for smaller field scales (e.g., Barth et al., 2013) or within a wind tunnel.

Reference:

Ziemann, A., K. Arnold, and A. Raabe, 2002: Acoustic Tomography as a Remote Sensing Method to Investigate the Near-Surface Atmospheric Boundary Layer in Comparison with In Situ Measurements. *J. Atmos. Oceanic Technol.*, 19, 1208–1215, [https://doi.org/10.1175/1520-0426\(2002\)019<1208:ATAARS>2.0.CO;2](https://doi.org/10.1175/1520-0426(2002)019<1208:ATAARS>2.0.CO;2)

Barth M, Fischer G, Raabe A, Weiße F, Ziemann A., 2013: Remote sensing of temperature and wind using acoustic travel-time measurements. *Meteorologische Zeitschrift* 22:103-109. doi: 10.1127/0941-2948/2013/0385

The text was changed:

For a travel-time accuracy of 78.125 μs and a path length of 50 m (minimum distance for the used geometry of sound paths), a maximum temperature uncertainty of about 0.3 K results for the instantaneous single path measurement.

Pg 18. Ln 22: Section 3.2.1 didn't mention any amplifiers. Were amplifiers used and how did you generate the sound wave for the speakers?

Revision/response: The sound wave is calculated by an own MATLAB script and generated by an acoustic multi-channel spectrometer card with four output channels (Harmonie PCI octav, SINUS Messtechnik GmbH, Germany, see section 3.3.1). Eight loudspeakers can be supplied with a signal by using this technique. The generated signal is delivered from the PC with the 'Harmonie' PCI card to an amplifier (Intersonic maxound mx 210). It amplifies the signal depending on the type of the connected loudspeaker (max. 100 dB for the used VISATON loudspeaker). Each of the Intersonic amplifiers has two separate channels. Two speakers are connected to each channel and are simultaneously supplied by the artificial signal. Overall, we used two amplifiers identical in construction.

Pg. 20, Ln 20-21: How stable was the frequency of the loudspeakers? How much of an error would this contribute to the results or was it negligible?

Revision/response: In our case, the influence of frequency stability of the loudspeaker is negligible. The high-end VISATON loudspeaker is characterized by a very high stability of frequency. The extremely light diaphragm made of a titanium-aluminum alloy has, in addition to an extremely dynamic pulse response, a very linear frequency response. If other loudspeakers will be applied, their frequency stability should be at least within a range of +/- 100 Hz around the desired signal frequency (see section 4.1.2 Reflection at ground surface).

Table 2: Could the corresponding wind and temperature errors be added to this table and Tables 3 and 4?

Revision/response: Table 3 contains real travel time differences between the arrival of the direct and the reflected sound rays. This travel time difference cannot be recalculated directly into temperature and wind uncertainties. A travel-time accuracy of 78.125 μs (= 4 samples/51.2 kHz) was applied for the further uncertainty analysis of sound speed, wind speed, and temperature for one instantaneous travel-time measurement along one sound path. This uncertainty of the measured travel time from the signal analysis (Table 2) and the uncertainties from the straight-ray approximation were summarized in Table 4. The corresponding wind and temperature errors were added in the revised version.

Table 4 was changed as follows:

Table 1: Comparison of travel-time uncertainties: Above: Travel-time difference (in sample units), recalculated temperature and wind speed differences in brackets, between straight-line and curved sound path through the atmosphere for a maximum vertical gradient of effective sound speed of 0.6 s^{-1} (during nighttime) on a summer day over grassland. Below: travel-time uncertainty (temperature and wind speed uncertainty in brackets) due to signal analysis using (CCF), see Sect. 4.1.1.

	Distance source-receiver in m	Height above ground in m
--	----------------------------------	--------------------------

		1.5	3.0
Uncertainty due to travel-time difference between straight-line and curved sound path	50.0	2 (0.2 K; 0.1 ms ⁻¹)	0
	70.0	6 (0.3 K; 0.2 ms ⁻¹)	1 (0.1 K; 0.0 ms ⁻¹)
Uncertainty due to signal analysis of travel time measurements	50.0/70.0	4 (0.3/0.2 K; 0.2/0.1 ms ⁻¹)	

Pg. 21, Ln 14-15: Overnight turbulence is not zero, there is still some minimal turbulence, but it may be negligible for this application. How much does turbulence negate the ground effects? Would this mean that daytime measurements are less error prone so better to validate the results of this method?

Revision/response: Salomons (2001) gives examples (especially numerical simulations) for the ground effect with and without turbulence. Thereby the turbulence was approximated by using von-Kármán spectrum of refractive-index fluctuations. Turbulence causes fluctuations of the instantaneous sound speed around the average value. Furthermore, turbulence causes fluctuations of the amplitude and phase of the sound waves travelling along the ray paths. The turbulent phase fluctuations are particularly important for the ground effect due to interference minima (interference of direct and reflected sound path). The interference minimum is considerably reduced by turbulence due to the phase fluctuations. The ground attenuation is limited to a value of about 20 -30 dB for maximum negative interference due to the influence of turbulence.

The SNR of the measured signal depends on the interference pattern due to the ground effect (depending on sound frequency, distances of loudspeaker and microphones, and heights of acoustic devices above ground surface). The influence of the 'ground dip' on the SNR is smaller if the atmosphere is more turbulent. That means that the requirements on frequency stability of loudspeakers and the geometry of the acoustic array are lower in comparison to atmospheric conditions with minimal turbulence. It is necessary to assume non-turbulent conditions to estimate the maximal uncertainty of the method.

We agree with the referee that daytime measurements are less error-prone considering this aspect of possible error sources. On the other side, the wind speed is normally increasing during daytime. This will lead to higher wind noise and a lower SNR. This effect is frequently higher than the ground effect, provided that an optimized sound frequency and acoustic array is applied for the measurements.

Pg. 27, Ln 6-8: Are the sonic temperatures the virtual sonic temperature or converted to ambient air temperature? The text refers to T_{air} and sonic temperature ($_v$).

Revision/response: We are aware of the difference between sonic temperature (= acoustic virtual temperature = T_{av}) and the ambient air temperature (T_{air}). Regarding the influences on sonic temperature we assumed relatively stable conditions concerning air humidity within 1-min intervals. Especially the variation of air temperature will have an impact on sonic temperature. That's why we considered the sonic temperature variability within 1-min intervals for the estimation of maximum air temperature error ϵ_T .

Pg. 28, Ln 3: Why was 20% chosen as the error level used?

Revision/response: Polak et al. (1995) stated important rules concerning temperature sensitivity and approximated requirements for passive measurements. As shown in Fig. 10 (revised manuscript) a reasonable absorbance errors lesser than 20 % can be achieved for an absolute value of ϵ_T smaller than 0.4 K. The presentation of absorbance data in Fig. 11(b) (revised manuscript) shows the variability of absorbance and their increasing noise due to increased air temperature error $\epsilon_T > 0.4$ K and decreased temperature differences $|T_B - T_{air}| < 2$ K. This consideration leads to the selection of time periods with absorbance errors lesser than 20 % (error range stated also in Polak et al., 1995).

Pg. 29, Ln 8: What constitutes “reasonable errors”?

Revision/response: The text was changed: Based on the previous data evaluation the absorbance spectra of the night time period from 10th – 11th July showed reasonable absorbance errors smaller than 20 % and were chosen for the subsequent quantitative analysis (Fig. 11b – revised manuscript).

Pg. 32, Figure 16: The FTIR CO₂ concentrations are high compared to the EC measurements (Figure 17); is this a product of the line averaging or error within the FTIR/EC measurement systems?

Revision/response: There are only few experiences described in literature comparing point sensor and line-averaging ORS (Optical Remote Sensing) measurements. Furthermore, there are a few studies on ground-based ORS applications in micrometeorology targeting GHG fluxes. All references point out the limited comparability between OP-FTIR and point-scale measurements. These references report:
→ Differences in comparison of different line-averaging methods (e.g., OP-TDLAS, OP-FTIR) concerning retrieved path-integrated line concentrations (US EPA, 2011, von Bobruzki et al., 2010, Thoma et al., 2005) for different gases

→ Experiments with a controlled release of target gases (e.g., CH₄, C₂H₂ from a point source) representing mostly an underestimation of measured path-integrated concentrations (Polak et al., 1995, Reiche et al., 2014)

From our side, differences between the measured CO₂ concentration (point-like and line-averaged) are expected due to the different volumes considered by the two different methods. OP-FTIR method used path lengths up to > 100 m including a field of view of about 10 mrad. As described in the answer to the comment ‘Pg. 33, Figure 17’, we assume heterogeneities in the spatial CO₂ concentration due to heterogeneities in soil composition and soil respiration, slight topographic variability, variability in vegetation cover, etc. Furthermore, the measurements were carried out in different heights above ground (EC at 3 m, passive OP-FTIR Rapid at 0.9 m). Hence, the comparability of the point-scale

measurements of CO₂ concentration at the EC tower with the OP-FTIR data is limited. A sophisticated quantification of differences between the point-scale and the line-averaging approach would require defined/artificial sources and/or a spatially distributed net of point-sensors to measure CO₂ concentrations.

References:

- von Bobruzki, K., Braban, C.F., Famulari, D., Jones, S.K., Blackall, T., Smith, T.E.L., Blom, M., Coe, H., Gallagher, M., Ghalaieny, M., McGillen, M.R., Percival, C.J., Whitehead, J.D., Ellis, R., Murphy, J., Mohacsi, A., Pogany, A., Junninen, H., Rantanen, S., Sutton, M.A., Nemitz, E., 2010. Field inter-comparison of eleven atmospheric ammonia measurement techniques. *Atmos. Meas. Tech.* 3, 91-112.
- Thoma, E.D., Shores, R.C., Thompson, E.L., Harris, D.B., Thorneloe, S.A., Varma, R.M., Hashmonay, R.A., Modrak, M.T., Natschke, D.F., Gamble, H.A., 2005. Open-Path Tunable Diode Laser Absorption Spectroscopy for Acquisition of Fugitive Emission Flux Data. *Journal of the Air & Waste Management Association* 55, 658-668.
- US-EPA, 2011. Optical remote sensing for measurement and monitoring of emissions flux. Handbook US environmental protection agency , Research Triangle Park.

Pg. 33, Figure 17: Soil chambers and EC CO₂ measurements are not equivalent due to the height difference thus proximity to the source and the measurement style. At what point in the soil chamber cycle did the concentration measurement take place? Could you combine Figures 16 and 17 so the comparison between the concentration values were easier?

Revision/response: The variability in CO₂ concentration measured by different techniques is not surprising. The main influences for the observed differences can be described by the different height of measurements above ground and the different measurement volumes.

Concerning the soil respiration data, the authors would like to give some comments using other references: Davidson et al. (2002) noted: Heterogeneity also exists within sites that appear mostly homogeneous to the investigator's eye. Hence the investigator is always faced with the question of how many chambers are needed to adequately estimate the mean and variance of CO₂ fluxes within a site that is considered relatively homogeneous. Rodeghiero and Cescatti (2008) stated, that the variation of CO₂ fluxes that is relevant to chamber measurements is often at the scale of centimeters, reflecting the sizes of rocks in soils, disturbances of soil fauna, pockets of fine root proliferation, and remnants of decaying organic matter. Whilst it is widely recognized that substrate availability, soil temperature and moisture largely influence the temporal and seasonal variability of soil CO₂, the environmental factors controlling the spatial variability of CO₂ effluxes are still poorly understood (Rodeghiero and Cescatti, 2008). Darenova et al. (2016) showed a spatial heterogeneity in soil flux for a grassland site of 17% (chamber measurements at a spatial scale of 50 m, 2x 1 week measurements, every 30 min for each chamber). Rochette et al. (1991) pointed out, that the determination of spatial pattern in soil respiration processes would help to interpolate between measurements and significantly reduce the number of sampling points required to estimate mean field values – a topic still under discussion up to now (Darenova et al., 2016).

The installation of the soil respiration chambers (SC) offered data from a distinct sampling point suitable to obtain an overview about the soil respiration as a source for atmospheric CO₂ concentration.

Despite the spatial proximity of the two chambers to the EC tower, there are obviously differences in SC data itself as well as distinct differences in the temporal behaviour considering the comparison of EC data and SC data (former Fig. 17). Hence, the application of two soil respiration chambers placed nearby the EC station and with a distance of 5 m apart from each other at the edge of the observation field cannot be considered as a representative overview about the situation of the whole considered observation field (desirably homogeneous). However, the assumed heterogeneity in soil fluxes is influencing the optical measurements, although the OP-FTIR provides a spatial mean averaged across the optical line. Planned further investigations have to include more chamber measurements distributed in a wider spatial range to cover this aspect, but with respect for the potential disturbance due to additional equipment within the observation field.

See also comment to Pg. 12, Ln 13-17!

The (former) Figs. 16 and 17 were combined into one Figure with two parts (Fig. 14 a and b). On one hand it is possible to distinguish all graphs. On the other hand the concentration values can be easier compared within the new Fig. 15.

References:

- Rochette, P, Desjardins, RL, Pattey E. 1991. Spatial and temporal variability of soil respiration in agricultural fields. *Can. J. Soil Sci.* 71:189-196.
- Davidson, EA, Savage, K, Verchot, LV, Navarro, R. 2002. Minimizing artifacts and biases in chamber-based measurements of soil respiration. *Agr. Forest Meteorol.* 113: 21–37.
- Rodeghiero M, Cescatti A. 2008. Spatial variability and optimal sampling strategy of soil respiration. *Forest Ecol Manage.* 255:106–112.
- Darenova E, Pavelka M, Macalkova L. 2016. Spatial heterogeneity of CO₂ efflux and optimization of the number of measurement positions. *Eur J Soil Biol.* 75:123–34.

Pg. 33, Ln 7-8: Is the difference a product of the potential error within the measurement technique? In Ln 13-15 on Page 30 you state that the uncertainty was determined in studies based on with stronger temperature contrasts between the target gas and ambient air so couldn't the maximum uncertainty be even larger here? With only one point measurement of ambient CO₂ (EC station), I don't think it is reasonable to make a generalization like this without support from other works. There was a 100+ ppm difference in the line average (R72-R73) compared to the point measurement (EC), only approximately 10 m away; that large of a difference in the concentration needs to be explained.

Revision/response: We are aware of the increased differences between line-averaged concentration and point measurement data. However, as above mentioned in comment to Pg. 33, Figure 17, there are also distinct differences between EC and SC time series in order of more than 100 ppm. As mentioned in text (last paragraph of section 4.2), our estimated range of maximum concentration uncertainty for the experiment was confirmed by other passive OP-FTIR investigations (e.g., Allard et al., 2005, Sulub and Small, 2007, Kira et al., 2015). However, most of these studies are based on hot gases with high temperature contrasts between background and target gas compounds (volcanic gases, exhaust gases) or on the determination of non-atmospheric GHG gases (industrial gases, aerosols). Hence, they reported smaller SNR and total errors than we had determined (e.g., error for volcanic CO₂ concentrations 4-10% by Allard et al., 2005).

We totally agree, the generalized statement we formulated is not sustainable with the data shown here using only one point sensor (EC station) as verification and we have to change this passage. However, we need to express that with the available funds for the project an application / purchase of a distributed net of single point sensors was not possible. For further experiments this aspect will be included in experimental design, especially with the underlying question to observe potential spatial pattern in CO₂ concentration and to quantify differences between the different methodical approaches of point-scale and line-averaging methods.

The text was changed as follows:

Obviously, a distinct similarity in concentration time series is observable for all measurements, but there are also significant differences concerning measured amplitudes of CO₂ concentration. The point measurements (SC and EC data) underlined the present variability in horizontal as well as in vertical distribution, also perceptible in OP-FTIR data. Furthermore, the chamber measurements at ground surface illustrated the increased spatial variability of CO₂ concentration during nighttime caused by soil respiration processes. Despite the spatial proximity of the two chambers to the EC tower, there are obviously differences in soil respiration data itself as well as distinct differences in the temporal behavior considering the comparison to the EC data. This spatial heterogeneity in soil flux for a grassland site can be caused by the variability in soil moisture, changes in soil fauna composition, and the amount of above-ground biomass (Davidson et al., 2002, Rodeghiero and Cescatti, 2008, Darenova et al., 2016). The data of Grillenburg experiment supports the approach of combined line-averaging and point measurements: OP-FTIR measurements provided path-integrated values covering assumed spatial concentration variability in a single measurement and yielded spatially averaged concentration values. However, a certainly limited comparability between results of point sensor and line-averaging measurements is expected due to the different volumes considered by the different methodical approaches and due to the effect of undersampling caused by the heavily limited number of point sensors.

Pg. 34, Ln 12: The range of uncertainty is very large and could change the sign of the horizontal advection values. Does the error range scale with the magnitude of the advection? How do we account for the uncertainty when comparing with EC-based advection?

Revision/response: The maximum uncertainty of the wind component is temporally constant. It depends only on the travel-time uncertainty and the distance. Compared with this, the maximum uncertainty of the horizontal gradient of CO₂ concentration depends on the maximum uncertainties of the concentrations at the two optical paths (Fig. 16 of the former manuscript). These concentrations and therewith their uncertainties are temporally variable according to the derivation in section 4.2. The total maximum uncertainty of horizontal advection is calculated using the error propagation law (Eq. 25 of the former manuscript). The variable wind speed must also be included into this equation of maximum uncertainty. In this way, the error range scales with the magnitude of advection: smaller values with smaller values of advection and vice versa. The error estimation gives a maximum uncertainty of the advection derived by the proposed SQuAd method. The same strategy of error calculation should be worked out for the EC method (not only statistical uncertainties). Then it would be possible to compare the uncertainties of the two methods directly. It is a valuable advice of the referee and a perspective of a

future study, but out of the scope for the actual manuscript with focus on the applicability and uncertainty of SQuAd approach.


Pg. 34, Ln 18: What was the wind direction for this period? Did it remain constant or did it change with time? The change in sign of the v component in Figure 14 implies a changing wind direction and does this change the upstream source region for CO₂ hence much larger advection?

Revision/response: The wind direction changed within the considered period according to Fig. 14 (in the former manuscript) from south-south-west directions until midnight up to westerly directions after 1 a.m. local time. The changing wind direction leads probably to another upstream source region for CO₂, see Fig. 1. In southerly direction there is a greater area of grassland until reaching the forest. In westerly direction, a more heterogeneous surface is situated in about 200 m distance from the measurement array. This could also lead to changes in advection. Beside the upstream source region for CO₂, the wind speed is the controlling factor of advection. The wind speed decreased noticeably together with the changed wind direction.


The estimation of the source area (also applying a boundary layer model) is a remaining task of the SQuAd project. The results of this study will be published in a future paper together with the data analysis of the whole measurement period.

Pg. 35, Ln 24-26: “It is expectable that. . .”. My understanding is the differences in concentration measurements is a product of measurement height and measurement principle, not just line versus point measurements. Some difference is expected from the line versus point measurement but there were points where the line average concentration (FTIR) doubled the point concentration (EC and SC) (Figures 16 and 17). This magnitude of difference in the concentration values doesn't seem to be just a difference in line versus point measurement averaging. I would expect the SC concentrations to be highest because of their proximity to the ground (CO₂ source). Under-sampling of fluxes is different than under- or over-sampling the concentration values and the resulting advection values.

Revision/response: It is not surprising, that we discovered a correlation between initial values of near-ground atmospheric CO₂ concentration and the determined soil fluxes for the nighttime hours (see figure).

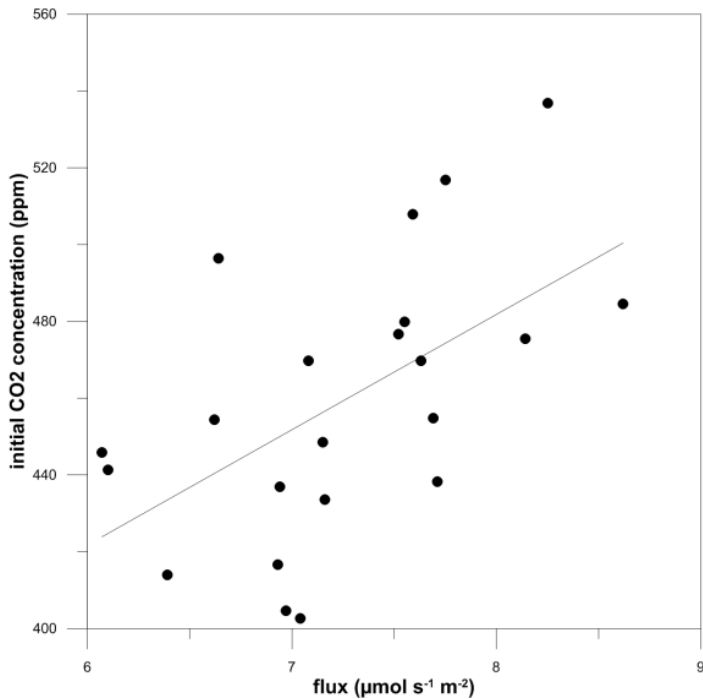

Hence, we assume similarities between soil flux heterogeneities and near surface CO₂ concentration pattern. Additionally, latter is also influenced by the slight topography and slightly variable vegetation parameters (e.g. grass species, slightly different height of vegetation). We agree that soil respiration is the main source for CO₂ in the atmosphere at the grassland site. However, due to the limited number of chambers the representativeness of the chosen location is not guaranteed for the whole field of observation. Many investigations in literature describe the interpolation uncertainties using chamber measurements by local effects (see also comment Pg. 33, Figure 17). Soil moisture variability is one of the most affecting parameters (e.g., Darenova et al., 2016). Actually, we observed differences in soil moisture data between the two chambers – in amplitude and also in temporal behaviour (see figure).

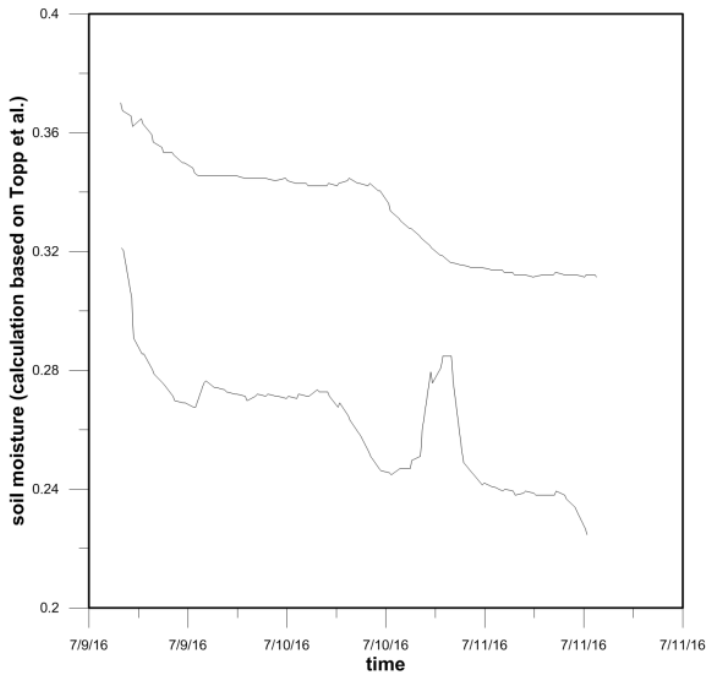

A detailed investigation of these site specific feedback processes is quite interesting and would require a long-term observation of soil CO₂ efflux at different locations at Grillenburg site, which was not part of our project.

Changed text:

Thereby, the different measurement volumes of point-like and line-averaging measurement methods should be taken into account. We observed higher concentration values from spatially integrating and representative measurements in comparison to point measurements which could be affected by undersampling of real-world fluxes (Siebicke et al., 2011) and near-ground CO₂ concentration variability, too. The environmental factors driving the spatial variability of soil CO₂ fluxes are still poorly understood (Rodeghiero and Cescatti, 2008). Variability in physical soil properties (e.g., soil moisture, clay content), disturbances in soil fauna and the amount of above-ground biomass can produce spatial soil respiration heterogeneity also within a more or less homogeneous look alike grassland site (Davidson et al., 2002, Darenova et al. 2016). Hence, the spatial determination of GHG concentrations only based on point information requires an optimized vertically and horizontally distributed instrumental setup of point sensors. This is necessary for a representative site characterization avoiding the undersampling of the complex flow phenomena. Hence, the overarching application of line-averaging measurements can help to overcome the limitations of distributed single sensors providing integrative spatial data across an extended path less affected by local unrepresentative fluctuations.

Pg. 35, Ln 20: What is the error on the cited horizontal advection values; is the range you found similar to these studies?

Revision/response: Zeri et al. (2010) provided a standard error to the mean for their data (Fig. 2). The uncertainty (standard error to the mean) for horizontal advection is linked to the absolute (mean) value, but not with a simple linear dependency. Data sorted according to u^* and averaged every 100 records. Considering only the nighttime data, the maximum value of horizontal advection amounts to $6.5 \mu\text{mol m}^{-2} \text{s}^{-1}$ with $\pm 0.7 \mu\text{mol m}^{-2} \text{s}^{-1}$ for uncertainty.

The maximum uncertainty is about $1 \mu\text{mol m}^{-2} \text{s}^{-1}$.

Marcolla et al. (2014) used standard deviation of high-frequency measurements as a measure of uncertainty. The uncertainty of horizontal advection was dependent on the kind of measurement: a higher uncertainty (maximum about $7 \mu\text{mol m}^{-2} \text{s}^{-1}$) results without buffer volumes in comparison to measurements with added buffer volumes (maximum uncertainty about $2.5 \mu\text{mol m}^{-2} \text{s}^{-1}$).

We derived a maximum uncertainty which is higher than the data of these references due to the other method of calculation. The received values of uncertainties ($3\text{-}38 \mu\text{mol m}^{-2} \text{s}^{-1}$), depending on the time and the amount of advection itself, are greater in comparison to an investigation of purely statistical uncertainties. Thereby, it is important to notice that we applied a maximum error calculation of the used methods A-TOM and passive OP-FTIR to be on a safe side for further applications, please see section 5 Conclusions and outlook.

Technical Comments

Pg. 1, Ln 22: “Thereby. . .”, “Additionally” may be a better word.

Revision/response: The wording was changed according to the suggestion.

Pg. 1, Ln 27: Considering averaging. . .” does not need “Considering” and is missing a comma: “Averaging over a period of 30 minutes, the standard error”.

Revision/response: The wording was changed according to the suggestion.

Pg. 2, Ln 2: “A closing gap for balance. . .” would be better as “Closing the gap for. . .”

Revision/response: We decided to let the text in the way it is because the wording satisfies the meaning.

Pg. 2, Ln 4: “measurement of flows” awkward phrasing

Revision/response: The wording was changed into ‘flow measurements’.

Pg. 2, Ln 31: “considered advective fluxes” Vertical or horizontal advection?

Revision/response: The text was clarified:

Zeri et al. (2010) considered nighttime turbulent fluxes greater than $5 \mu\text{mol m}^{-2} \text{s}^{-1}$ as high values. . . . If vertical and/or horizontal advective CO_2 fluxes exceed such turbulent fluxes, then the advection influence can be considered as high.

Pg. 3, Ln 1: This sentence is misleading since substantial advection can occur in any land-cover type, the only requirement is a CO_2 gradient to exist (e.g. Feigenwinter et al., 2008). I believe what the authors are attempting to convey is advection is commonly the largest error source in complex terrains.

Revision/response: The text was clarified:

Advection is a significant error source applying EC method mainly in complex terrain or in areas with land use changes (Aubinet, 2008).

Pg. 3, Ln 5-6: How much reduction in annual CO₂ uptake? And in which forest?

Revision/response: One example is the Renon/Ritten, Italy, located at 1735 m. a.s.l. on a south exposed steep forested alpine slope (Feigenwinter et al., 2010) with a persistent slope wind system: The reported sink of 450 g C m⁻² for this forest (Norway Spruce with tree heights between 20 and 30 m, and a LAI of 5.5) is significantly reduced due to adding the (nighttime) advective fluxes to NEE. If total ecosystem respiration (TER) is estimated from the soil respiration, the advection corrected nighttime NEE would roughly increase by a factor of 1.8 and 3, dependent on the wind regime. These factors would be 2 until 6 for if TER is estimated from the sum of nighttime turbulent CO₂ fluxes and changes in storage during well mixed conditions. The text was changed:

Taking such advective fluxes into account, a significant reduction of the reported annual CO₂ uptake of forests might be a feasible consequence (e.g. at the Renon/Ritten site, Feigenwinter et al., 2010).

Pg. 3, Ln 27: Remove extra parenthesis

Revision/response: It was changed according to the suggestion.

Pg. 5, Ln 19: Replace “several” with “two”.

Revision/response: The wording was changed according to the suggestion.

Pg. 6, Ln 25: Don't need “Then,”.

Revision/response: It was changed according to the suggestion.

Pg. 6, Ln 29: Not a complete sentence; rewrite.

Revision/response: It was changed (‘are based on’) to complete the sentence.

Pg. 7, Ln 18-19: Combine “The permanent EC. . .” and “Meanwhile is it. . .” into one sentence. Define “ICOS-D (C3 station)”.

Revision/response: The text was changed:

The permanent EC station is working within FLUXNET since 2002 (e.g. Hussain et al., 2011a) and meanwhile within the network ICOS-D.

Pg. 8, Ln 10: “class-a-pan” should be “Class A pan”.

Revision/response: It was changed.

Pg. 9, Ln 17: “speakers for frequencies” should be “speakers with frequencies”.

Revision/response: It was changed according to the suggestion.

Pg. 14, Figure 6: Could you add the sent signal as well to illustrate the time shift?

Revision/response: The sent signal is shown in Fig. 5 (it starts at time 0 ms). In order to calculate the cross-correlation function (cp. Fig. 6, upper panel), the sent signal is shifted over the received signal

(Fig. 6, lower panel). The time shift, where the maximum of the cross-correlation function is achieved (= maximum accordance between the sent and the received signal) corresponds to the travel time of the signal.

Pg. 17, Ln 26: Need a comma between “50 m” and “a maximal”.

Revision/response: It was changed.

Pg. 18, Ln 4: Remove “For”, so “A minimal path length. . .”.

Revision/response: It was changed according to the suggestion.

Pg. 19, Ln 16: “The latter is influenced. . .”, don’t need “one”.

Revision/response: It was changed.

Pg. 21, Ln 5-10: This paragraph feels out of place. Some of this information was presented earlier in the section.

Revision/response: The text was deleted at this place and changed at section 4.1.2, par. 3:

In practice, the sound source and the receiver are close to the ground which makes sound propagation more complex. There are not only direct sound waves between loudspeaker and microphone, but also ground-reflected sound waves (Fig. 6). This wavelet integrates the conditions of the air layer between the ground surface and the receiver. Additionally, the interference between those sound waves can lead to considerable effects which are estimated hereafter.

Pg. 21, Ln 16-17: “It was proven, whether. . .”, which of the two were proven, that you can separate the two sound wave parts or it wasn’t possible to separate the two parts?

Revision/response: The text was clarified:

It was examined whether the directly propagating and the reflected sound wave parts could be separated due to their time delay at the receiver.

Pg. 22, Ln 9-10: Repeat from earlier.

Revision/response: The text was changed:

Furthermore, the real measurement height of the acoustically derived wind velocity and temperature can be slightly smaller than the geometrical height of the acoustic devices above ground because the received signal contains partially the properties of the atmospheric layer between ground surface and microphone.

Pg. 22, Ln 22-23: “. . .vertical wind and temperature gradients. . .”; vertical gradient of the horizontal wind? And what “horizontal ones”? Horizontal temperature gradient or wind gradient? Which wind components in the horizontal? Be specific.

Revision/response: The wording was changed to specify wind components and gradients: ‘Thereby, vertical gradients of horizontal wind velocity and temperature are especially important because they are usually greater than associated horizontal gradients.’

Pg. 23, Ln 12: “solves”, not “is solving”.

Revision/response: It was changed.

Pg. 23, Ln 14: “were”, not “was”.

Revision/response: It was changed.

Pg.23, Ln 15: “. . .their vertical gradients. . .”, vertical gradient of which component?

Revision/response: The wording was changed to specify vertical gradients: ‘Calculation of temperature, wind velocity, and humidity profiles were followed by a calculation of the effective sound speed and its vertical gradients as average over 30 min for several local times (Fig. 9). At the transmitter height of 1.5 m or 3 m, positive vertical gradients of effective sound speed can be expected for a sound propagation in wind direction.’

Pg. 23, Ln 16-18: Which gradient is being referred to in these sentences, wind speed, temperature, and/or speed of sound?

Revision/response: It is the gradient of effective sound speed: ‘At the transmitter height of 1.5 m or 3 m, positive vertical gradients of effective sound speed can be expected for a sound propagation in wind direction.’

Pg. 23, Ln 20-25: Why not talk about this when Figure 7 was introduced earlier?

Revision/response: The main content of (former) Fig. 7 is to illustrate the effect of sound reflection at the ground surface (paths of sound waves propagating above a ground surface). This effect is described in the paragraph that follows the Figure. The effect of sound refraction is described later in this section. For this reason the (former) Fig. 7 is placed at the beginning of the section describing the ground reflection. A back reference is given later to this figure.

Pg. 24, Ln 19: “controlled”, does this mean measured?

Revision/response: The wording was changed into ‘measured’.

Pg. 25, Ln 7-8: “Actually, no signal is receiving. . .” What is this sentence trying to say, it makes no sense.

Revision/response: The wording was changed to explain that theoretically no sound ray would reach the microphone for upwind conditions: For such conditions, theoretically no signal reaches the microphone which is located at the same height level as the loudspeaker but several decameters away from the speaker.

Nevertheless, due to a finite extent of the microphone, its spherical directional pattern and due to the scattering effect of atmospheric turbulence (Salomons, 2001), it is almost always possible to detect a signal in upwind direction if the wind speed is smaller than 6 m s^{-1} at a height of acoustic devices and therewith the vertical gradient is moderate (around 0.3 s^{-1}).

Pg.25, Ln 9: What percent is “mostly possible” to measure an upwind-directed signal?

Revision/response: The wording was changed, see comment Pg. 25, Ln 7-8.

Pg. 25, Ln 10: “if the wind speed and therewith. . .” what is a “moderate gradient?” This sentence is awkward and needs to be clarified.

Revision/response: The text was clarified, see comment Pg. 25, Ln 7-8.

Pg. 25, Ln 23-24: “imply the main important inherent. . .” what influence is this referring to?

Revision/response: Infrared spectral data are mainly controlled by the environmental conditions such as pressure and temperature variations.

Pg. 35, Ln 23: “our results. . .maybe worth looking into.” How else should the results be viewed and why weren’t these ideas presented? It’s possible a unique event occurred this night to produce a large advection value since the EC flux was large as well; this appears to be a case for analysis of more nights under various conditions to better vet the methodology.

Revision/response: The main focus of the paper lies on the description of the line-averaging methods and the detailed derivation of uncertainties of the SQuAd approach. First results of measurements were also presented, discussed and compared with values from literature. We agree with the referee that presentation and discussion of advection results is not complete (e.g. comparison of different nighttime measurement, complete data analysis), but this was out of the papers scope. The interest of the referee strongly motivates us to prepare a further paper presenting all results of the measurement campaign. The text was changed:

In this respect our results at relatively flat grassland site and using the line-averaging methods are worthy of discussions. Thereby, the different measurement volumes of point-like (measurements based on EC) and line-averaging measurement methods (OP-FTIR, A-TOM) should be taken into account. We observed higher concentration values from spatially integrating and representative measurements in comparison to point measurements which could be affected by undersampling of real-world fluxes (Siebicke et al., 2011) and near-ground CO₂ concentration variability, too. The environmental factors driving the spatial variability of soil CO₂ fluxes are still poorly understood (Rodeghiero and Cescatti, 2008). Variability in physical soil properties (e.g., soil moisture, clay content), disturbances in soil fauna and the amount of above-ground biomass can produce spatial soil respiration heterogeneity also within a more or less homogeneous look alike grassland site (Davidson et al., 2002, Darenova et al. 2016). Hence, the spatial determination of GHG concentrations only based on point information requires an optimized vertically and horizontally distributed instrumental setup of point sensors. This is necessary for a representative site characterization avoiding the undersampling of the complex flow phenomena. Hence, the overarching application of line-averaging measurements can help to overcome the limitations of distributed single sensors providing integrative spatial data across an extended path less affected by local unrepresentative fluctuations.

Pg. 35, Ln 23: “Thereby, the different measurement volumes. . .” To what is this sentence referring? Feels out of place.

Revision/response: The text was changed, see comment Pg. 35, Ln 23.

Pg. 35, Ln 24-26: “It is expectable that. . .”. “Expected”, not “expectable”.

Revision/response: The wording was changed.

Pg. 35, Ln 26 and 28: Two Siebicke et al. papers are cited (2011 and 2012) but only one is present in the reference list.

Revision/response: The reference Siebicke et al. (2011) was added in the reference list.

Pg. 36, Ln 3: “to be on a safe side” should be “to be on the safe side”.

Revision/response: The wording was changed.

Pg. 36, Ln 9: “will allow enhancing the security” could be “will enhance the security. . .”

Revision/response: The wording was changed.

Pg. 36, Ln 16: “has to take into account” should be “has to be taken into account”.

Revision/response: The wording was changed.

Pg. 36; Ln 21-23: “Thus a highly. . .”, This sentence would read better as “The results from a high number of optical and acoustic paths can be used. . .”

Revision/response: The wording was changed according to the suggestion.

Line-averaging measurement methods to estimate the gap in the CO₂ balance closure – possibilities, challenges and uncertainties

Astrid Ziemann¹, Manuela Starke¹, Claudia Schütze²

¹Chair of Meteorology, TU Dresden, Dresden, 01062, Germany

5 ²Department for Monitoring and Exploration Technologies, Helmholtz Centre for Environmental Research, Leipzig, 04318, Germany

Correspondence to: Astrid Ziemann (astrid.ziemann@tu-dresden.de)

Abstract. An imbalance of surface energy fluxes using the eddy covariance (EC) method is observed in global measurement networks although all necessary corrections and conversions are applied to the raw data. Mainly during ~~night-time~~nighttime, advection can occur resulting in a closing gap that consequently should also affect the CO₂ balances. There is the crucial need for representative concentration and wind data to measure advective fluxes. Ground-based remote sensing techniques are an ideal tool as they provide the spatially representative CO₂ concentration together with wind components within the same voxel structure. For this purpose, the presented SQuAd (Spatially resolved Quantification of the Advection influence on the balance closure of greenhouse gases)-approach applies an integrated method combination of acoustic and optical remote sensing. The innovative combination of acoustic travel-time tomography (A-TOM) and open-path Fourier transform infrared spectroscopy (OP-FTIR) will enable an upscaling and enhancement of EC measurements. OP-FTIR instrumentation offers the significant advantage of real-time simultaneous measurements of line-averaged concentrations for CO₂ and other greenhouse gases (GHGs). A-TOM is a scalable method to remotely resolve 3D wind and temperature fields. The paper will give an overview about the proposed SQuAd-approach and first results of experimental tests at the FLUXNET site Grillenburg in Germany.

Preliminary results of the comprehensive experiments reveal a mean ~~night-time~~nighttime horizontal advection of CO₂ of about 10 μmol m⁻² s⁻¹ estimated by the spatially integrating and representative SQuAd method. ~~Thereby~~Additionally, uncertainties in determining CO₂ concentrations using passive OP-FTIR and wind speed applying A-TOM are systematically quantified. The maximum uncertainty for CO₂ concentration was estimated due to environmental parameters, instrumental characteristics, and retrieval procedure with a total amount of approx. 30 % for a single measurement. Instantaneous wind components can be derived with a maximum uncertainty of 0.3 m s⁻¹ depending on sampling, signal analysis, and environmental influences on sound propagation. ~~Averaging~~After the application of averaging over a period of 30 minutes, the standard error of the mean values can be decreased by a factor of at least 0.5 for OP-FTIR and 0.1 for A-TOM depending on the required spatial resolution. The presented validation of the joint application of the two independent, non-intrusive methods is in the focus of attention concerning their ability to quantify advective fluxes.

1 Introduction

A closing gap for energy balance measurements which affects the balance closure of greenhouse gases (GHGs), ~~e.g. e.g.~~ CO₂, is still observed at all stations in global measuring networks (Marcolla et al., 2014). This imbalance exists although all necessary corrections and calculations are applied to the ~~flow measurements of flows~~ using the eddy covariance (EC) method (e.g., Foken et al., 2010, Mauder et al., 2006). Obviously, the existing measurement methods do not capture all relevant transport mechanisms, especially during calm and stable ~~night-timenighttime~~ conditions. There has been a common agreement that EC measurements tend to underestimate carbon fluxes in such situations (e.g., Moncrieff et al., 1996, Baldocchi et al., 2000, Paw U et al., 2000). In this context, advection is an important mechanism. Advective fluxes can reach significant values, especially at low-turbulent conditions (Aubinet et al., 2003). ~~Zeri et al. (2010) considered night-time turbulent fluxes greater than 5 μmol m⁻² s⁻¹ as high values. This value is in agreement with observations at other sites (Rebmann et al., 2004, Siebicke et al., 2012). If magnitude of vertical and/or horizontal advective CO₂ fluxes order-of-magnitude is similar to those of other fluxes e.g. e.g., such turbulent fluxes, then the advection influence on the carbon balance is important (Aubinet et al., 2003) of CO₂ greater than 5 μmol m⁻² s⁻¹ as high values, when they exceeded 5 μmol m⁻² s⁻¹. This value is in agreement with observations at other sites (Rebmann et al., 2004, Siebicke et al., 2012).~~

That ~~effect~~ causes an uncertainty in the crucial determination of the CO₂ mass balance of natural surfaces, ~~e.g. e.g.~~ forests. Thereby, an almost 50 % reduction of the estimated potential of forests as a carbon sink is possible (Siebicke et al., 2012). This uncertainty has an impact on the confidence level of climatological forecast models and consequently on the reliability of adaptation strategies to climate change (Richardson et al., 2012). Thus, the measurement of advection remains an important issue for accurate carbon sink or source estimates.

The following simplified equation for CO₂ mass conservation (NEE = net ecosystem exchange) includes the mentioned advective fluxes and is commonly used ~~e.g. e.g.~~ within FLUXNET (e.g., Feigenwinter et al., 2008):

$$NEE = \int_0^{z_r} \frac{1}{V_m} \frac{\partial \bar{c}(z)}{\partial t} dz + \frac{1}{V_m} \overline{w'c'(z_r)} + \int_0^{z_r} \frac{1}{V_m} \overline{w(z)} \frac{\partial \bar{c}(z)}{\partial z} dz + \int_0^{z_r} \frac{1}{V_m} \left(\overline{u(z)} \frac{\partial \bar{c}(z)}{\partial x} + \overline{v(z)} \frac{\partial \bar{c}(z)}{\partial y} \right) dz \quad (1)$$

~~$$NEE = \int_0^{z_r} \frac{1}{V_m} \frac{\partial \bar{c}(z)}{\partial t} dz + \frac{1}{V_m} \overline{w'c'(z_r)} + \int_0^{z_r} \frac{1}{V_m} \overline{w(z)} \frac{\partial \bar{c}(z)}{\partial z} dz + \int_0^{z_r} \frac{1}{V_m} \left(\overline{u(z)} \frac{\partial \bar{c}(z)}{\partial x} + \overline{v(z)} \frac{\partial \bar{c}(z)}{\partial y} \right) dz \quad (1)$$~~

with V_m as the molar volume of dry air, c ~~is as~~ the CO₂ molar fraction (μmol mol⁻¹), t ~~is as~~ the time, u , v , and w ~~areas~~ the wind velocity components in x , y , and z directions, respectively. Overbars indicate Reynolds averaging, typically over a time of 30 min.

The first term on the right-hand side describes the rate of change in storage of CO₂. The second term refers to the turbulent vertical flux which is usually measured as EC flux at the reference height z_r above ground surface. Third and fourth terms are the non-turbulent vertical and horizontal advection terms, respectively. In practice, finite differences are used to approximate the spatial derivatives in Eq. ~~(1)~~. The horizontal advection at a reference height is simplified to:

~~$$F_{Hor} = \frac{1}{V_m} \left(\bar{u} \frac{\Delta \bar{c}}{\Delta x} + \bar{v} \frac{\Delta \bar{c}}{\Delta y} \right) \Delta z \quad (2)$$~~

where the wind components and horizontal concentration gradients are representative for a specific height layer Δz .

An equivalent equation could be derived for the vertical advection.

~~Advection occurs is a significant error source applying EC method mainly in the presence of flows associated with topographical slopes in complex terrain or in areas with land use changes (Aubinet, 2008). Marcolla et al. (2014) measured within the ADVEX experiment ADVEX during situations dominated by the a local slope wind system. The authors observed positive horizontal and vertical advection (typical values around 7 and 3 $\mu\text{mol m}^{-2} \text{s}^{-1}$, respectively) in coincidence together with downslope winds at night. Otherwise, and slightly negative horizontal advection (typical values around $-2 \mu\text{mol m}^{-2} \text{s}^{-1}$) concurred together with upslope winds during the day. Taking such advective fluxes into account, a would significantly reduction of the reported annual CO_2 uptake of the investigated forests might be a feasible consequence (e.g., at the by a factor of Renon/Ritten site, Feigenwinter et al., 2010).~~

~~A typical daily pattern of advection was described by several authors: advection is maximal after sunset, when higher gradients of CO_2 concentration are expected to occur with the onset of stable stratification (e.g., Kutsch et al., 2008). Siebicke et al. (2012) found an additional second maximum for stable stratification and low air temperature due to radiative cooling at the end of the night. Sun et al. (2007) reported also significant horizontal CO_2 advection during transition periods in the early evening and early morning when turbulence intensity is low.~~

Experimental investigation of the advective CO_2 fluxes started in the late nineties (Lee, 1998). Several recent studies tried to quantify the effect of advection in the near surroundings of flux tower sites (e.g., Siebicke et al., 2012, Marcolla et al., 2014). The studies varied from 2D configurations (e.g., Aubinet et al., 2003) to more sophisticated 3D experimental designs (e.g., Feigenwinter et al., 2008).

~~Zeri et al. (2010) considered advective fluxes of CO_2 as high when they exceeded $5 \mu\text{mol m}^{-2} \text{s}^{-1}$. This value is in agreement with observations at other sites (Rebmann et al., 2004, Siebicke et al., 2012).~~

~~Advection occurs mainly in presence of flows associated with topographical slopes or with land use changes (Aubinet, 2008). Marcolla et al. (2014) measured within the experiment ADVEX during situations dominated by the local slope wind system positive horizontal and vertical advection (typical values around 7 and 3 $\mu\text{mol m}^{-2} \text{s}^{-1}$, respectively) together with downslope winds at night and slightly negative horizontal advection (typical values around $-2 \mu\text{mol m}^{-2} \text{s}^{-1}$) together with upslope winds during the day. Taking such advective fluxes into account would significantly reduce the reported annual CO_2 uptake of the investigated forest.~~

~~A typical daily pattern of advection was described by several authors: advection is maximal after sunset, when higher gradients of CO_2 concentration are expected to occur with the onset of stable stratification (e.g., Kutsch et al., 2008). Siebicke et al. (2012) found an additional second maximum for stable stratification and low air temperature due to radiative cooling at the end of the night. Sun et al. (2007) reported also significant horizontal CO_2 advection during transition periods in the early evening and early morning when turbulence intensity is low.~~

Advection measurements are mostly affected with large uncertainties (Rebmann et al., 2010). A big challenge is the accurate measurement of horizontal concentration gradients which are often small in relation to the measurement uncertainty (Heinesch et al., 2007). Additionally, a synchronous observation of horizontal gradients is not possible if several measurement points are sequentially sampled. Because of the limited spatial resolution of observations, the spatial CO₂ concentration as well as the flow field is systematically under-sampled (Aubinet et al., 2010). This common limitation of point-based gradient measurements leads to an inadequate spatial and temporal sampling of the underlying phenomena (Marcolla et al., 2014).

Furthermore, advection is most likely a scale-overlapping process (Feigenwinter et al., 2010). The lack of knowledge of the variability of scalar gradients in space and time has been identified as one of the most likely reasons inhibiting significant progress in solving the ~~night-time~~ problem of underestimating carbon dioxide emissions from forested sites (Aubinet et al., 2010, Thomas, 2011). Marcolla et al. (2014) explained that the uncertainty due to the sampling in time and space with classical single point measurements can be two magnitudes larger at low measurement levels (i.e. at 0.5 m) in comparison to the instrumental uncertainty. The higher number of sample points in time and space results in a better temporal and spatial averaging and reduces the impact of local effects (e.g., heterogeneous vegetation structure) on the 30-min averages derived by Siebicke et al. (2012). Horizontal and vertical resolutions of measurements as well as the size of the control volume are two crucial points for the experimental setup of actual sensor networks with multiple point measurements (Feigenwinter et al., 2010).

Another possibility to provide an adapted data sampling in space and time are line-integrating measurement methods which are generally able to determine the required quantities of CO₂ advection. As one of the first examples, Leuning et al. (2008) used perforated tubing at several levels to perform line-integrated concentration measurements. But the combination of line-integrated concentration measurements with adequate and spatially representative measurements of wind components remained challenging (Siebicke et al., 2012).

-Consequently, the main objective of the current study is to develop and apply an adapted line-averaging method to measure wind components using acoustic tomography (A-TOM) and CO₂ concentrations applying open-path Fourier transform infrared spectroscopy (OP-FTIR). These methods are introduced in Sect. 2. The innovative combination of ground-based remote sensing methods was applied within the SQuAd project (Spatially resolved Quantification of the Advection influence on the balance closure of greenhouse gases) to quantify the distribution of CO₂ concentrations and wind vectors in a consistent spatio-temporal resolution applying a special set-up and analysis procedures (Sect. 3). A central point for further applications is the estimation of uncertainties of the proposed measurement and analysis methods including temporal and spatial resolution (Sect. 4). First results of ~~night-time~~ measurements of horizontal advection over a grassland site are discussed and compared with typical values of other studies (Sect. 4, 5). Further developments and applications of the presented method combination are proposed in Sect. 5.

2 Line-averaging measurement and analysis methods

2.1 Acoustic travel-time tomography A-TOM

Acoustic travel-time tomography is a ground-based remote sensing technique that uses the dependence of sound speed in air on wind velocity and temperature along the sound path (Wilson and Thomson, 1994). Thereby, approximations are commonly applied to represent the sound speed in a moving medium considering an effective, motionless medium. The most common of these assumptions is the effective sound speed approximation (Rayleigh, 1945, Ostashev and Wilson, 2016):

$$c_{eff}(T_{av}, \mathbf{v}_h) = c_L(T_{av}) + \mathbf{s} \cdot \mathbf{v}_h \quad \text{with} \quad \underline{c_L(T_{av}) = \sqrt{\gamma_d R_d T_{av}}} \quad (3)$$

$$c_L(T_{av}) = \sqrt{\gamma_d R_d T_{av}} \quad (4)$$

Here, T_{av} is the acoustic virtual temperature (= sonic temperature). In addition to air temperature, T_{av} accounts for effects of moisture on sound speed due to different molar masses of dry air and water vapour ($R_d = 287.05 \text{ J kg}^{-1} \text{ K}^{-1}$: specific gas constant of dry air) as well as their different ratios of specific heat capacities for constant pressure and constant volume ($\gamma_d = 1.4$: ratio of specific heat capacities for dry air). \mathbf{v}_h is the horizontal wind velocity, c_L is the sound speed for an adiabatic sound propagation after Laplace (1816) depending on air temperature and air moisture, and \mathbf{s} is the unit vector tangential to the sound ray path between sound source and receiver. For sound propagation near the ground with small elevation angles (Ostashev and Wilson, 2016), the effective sound speed is often used in the form:

$$c_{eff}(T_{av}, v_h) = c_L(T_{av}) + v_h \cdot \cos \varphi = c_L(T_{av}) + v_{Ray}, \quad (5)$$

where φ is the angle between the azimuthal direction of sound propagation and the horizontal wind speed v_h , and v_{Ray} is the wind speed in direction of sound propagation.

Effective sound speed can be estimated from travel-time measurements:

$$\tau = \int_{x_S}^{x_R} \frac{ds}{c_{eff}}, \quad (6)$$

where τ is the acoustic travel-time of a signal propagating along a sound path with distance elements ds between sound source at position x_S and receiver at x_R . Travel-time measurements of acoustic signals propagating along different paths through an air volume give information on the spatial distribution of sound speed within the investigated area. Exactly knowing positions of loudspeakers and microphones, spatial distributions of flow and temperature fields can be reconstructed applying inverse algorithms (e.g. Ostashev et al., 2009). As a remote sensing method, one advantage of acoustic travel-time tomography is its ability to measure the meteorological quantities without disturbing the area under investigation due to insertion of sensors. The scalable method enables inertia-free measurements without influences of radiation on the sensor. Furthermore, temperature and wind speed can be recorded simultaneously with this measurement method (Vecherin et al., 2006).

Acoustic tomography as a measurement and analysis method has been further developed since the late 1990s (Ziemann et al., 1999, Arnold et al., 2001). This method was used to monitor spatially resolved wind and temperature fields for different

environmental conditions, ~~e.g.~~e.g., in rural (Ziemann et al., 2002) or urban environments (Tetzlaff et al., 2002) with heterogeneous surface properties (Raabe et al., 2005) as well as on different spatial scales, from indoor wind tunnel length scales (Barth and Raabe, 2011, Barth et al., 2007) up to outdoor areas with acoustic path lengths of several 100 m (Arnold et al., 2004). Thereby, several inversion techniques were developed and validated regarding their potential for special applications (Fischer et al., 2012). First joint investigations using A-TOM and optical spectrometers confirmed the suitability of combined line-integrating measurements of GHG exchange between surface and atmosphere (Barth et al., 2013, Schäfer et al., 2012).

The performance of A-TOM to reconstruct wind and temperature fields mainly depends on ~~several~~two factors (Ziemann et al., 2007):

(1) the accuracy of travel-time estimates which is influenced by the signal characteristics (e.g., frequency, kind of signal) and the method of data analysis (correlation technique) and (2) the sound path length and its uncertainty due to sound propagation effects, especially refraction and reflection of sound waves, as well as positioning accuracy of sound sources and receivers.

Thus, the setup of the A-TOM measurements (e.g., positioning of loudspeakers and microphones to optimize the signal-to-noise ratio, SNR) determines the accuracy of the wind components for the calculation of advection. A detailed treatment of uncertainties is given in ~~chapter~~Sect. 4.1.

2.2 Open path Fourier transform infrared (OP-FTIR) spectroscopy

The open, unobstructed atmosphere can be described as a complex, multi-component system controlled by parameters such as wind, temperature variation, rain, and pressure fluctuations. The driving parameters for the infrared (IR) transmittance of the atmosphere are the presence and the concentration of gas molecules and the length of the optical pathways. The interactions between IR energy and molecules cause characteristic absorption or emission lines in the measured spectra (Griffiths and de Haseth, 2007). The concentration of gases along the optical pathway can be retrieved by using the Beer-Lambert law. Open-path technology concepts are applied to measure the absorption loss along an optical path in ambient air. For passive measurements, changes in the main infrared atmospheric window with respect to absorbing gases are recorded. For active systems, an IR beam is transmitted through open, unobstructed atmosphere and the measurement obtained represents an integrated gas concentration along the optical path - so called 'path integrated concentration values – PIC' (DIN EN 15483, 2009). The transmissivity of the atmosphere is more or less controlled by the presence of H₂O und CO₂. Hence, due to the strong interference with water and carbon dioxide we can identify three main spectral windows available for OP-FTIR measurements in wavenumber regions (ν): (1) 700 – 1300 cm⁻¹ (passive / active OP-FTIR), (2) 1900 – 2250 cm⁻¹, and (3) 2400 – 3000 cm⁻¹ (window 2 and 3 only for active OP-FTIR usable; Marshall et al., 1994).

The wavenumber-dependent IR intensity after passing through an absorbing sample $I(\nu)$ can be described by

$$I(\nu) = I_0(\nu) \cdot \exp\{-t(\nu)\}$$

~~(7)(776)~~

where $I_0(\nu)$ is the IR intensity emitted from IR source and $t(\nu)$ represents the optical depth, a sum function over all absorption lines α_i multiplied with concentration c_i (substance amount) of the molecules i and the path length d :

$$t(\nu) = d \cdot \sum_i \alpha_i(\nu) c_i = d \cdot \alpha_T(\nu) \cdot c_T + d \cdot \sum_{i=1} \alpha_{i-1}(\nu) c_{i-1}. \quad (8)(887)$$

The optical depth $t(\nu)$ includes the absorption behavior of the target molecule (α_T, c_T) as well as the influence of all interfering atmospheric molecules along the measured optical path d .

Hence, Eq. (67) can be written as

$$I(\nu) = I_0(\nu) \cdot \exp\left\{-d \cdot \sum_{i=1} \alpha_{i-1}(\nu) c_{i-1}\right\} \cdot \exp\{-d \cdot \alpha_T(\nu) \cdot c_T\} \\ = I_0^*(\nu) \cdot \exp\{-d \cdot \alpha_T(\nu) \cdot c_T\}. \quad (9)(998)$$

The expression $I_0^*(\nu)$ represents the background spectrum including absorption due to all disturbing molecules.

OP-FTIR spectroscopy is proven to be a powerful technique enabling online monitoring of fugitive emissions for industrial, environmental and health applications (e.g., Harig and Matz, 2001, Griffith et al., 2002, DIN EN 15483, 2009). It allows spatial characterization of emissions and can be applied non-invasively as an automated surveillance method in large and potentially inaccessible areas (Schütze et al., 2015). Furthermore, ground-based optical remote sensing methods like OP-FTIR are well suited to study dynamic atmospheric processes due to their avoidance of any disturbances upon emission and/or sampling processes (Reiche et al., 2014, Schütze and Sauer, 2016). Several successful applications of active and passive OP-FTIR are reported in terms of air quality monitoring, dynamic atmospheric processes observations and emission rate estimations in boundary layer (e.g., Griffith et al., 2002, Allard et al., 2005, Schäfer et al., 2012, Chen et al., 2015).

The-Then, the technique is often combined with other micrometeorological investigations and provides information on several GHG target gases, such as CO₂, CH₄, NH₃, and N₂O (Griffith et al., 2012, Wilson and Flesch, 2016). Flesch et al. (2016) emphasize the potential of combined micrometeorological and OP-FTIR measurements for enhanced GHG emission determinations.

The determined gas concentrations are based on the retrieval of concentration values from measured IR spectra. The concentration value obtained is associated with an uncertainty that characterizes the dispersion due to random and systematic errors caused by the measurement and the data processing procedures (Schütze and Sauer, 2016). Thus, instrumental characteristics, applied infrared sources, environmental parameters, and retrieval algorithms represent the main sources of uncertainty. The assessment of uncertainties for these influencing factors relating to the Grillenburg experiment will be discussed in chapter 4.2.

3 Site, experimental set-up, and data analysis

3.1 Grassland EC site Grillenburg

A joint experiment with A-TOM and OP-FTIR techniques as well as additional measurement equipment was carried out within the SQuAd project at the EC site Grillenburg. The grassland test site (380 m a.s.l., 50 °57 '04 " N, 13 °30 '50 " E) is

located in the middle of a large clearing (40 hectare area) within the Tharandt Forest, 30 km away from Dresden in Germany (Figure 1). (Figure 1) (Figure 1) (Figure 1).



Figure 1: Map of Grillenburg, meadow in light green, Tharandt Forest in dark green, area under investigation is marked by the blue rectangle (Source of maps: Grillenburg area: OpenStreetMap, https://www.openstreetmap.org/#map=16/50.9501/13.5122, Germany: http://www.mygeo.info/landkarten/deutschland/Deutschland_Topographie_2007.jpg, GNU free documentation license) Scheme of area under investigation (see also Fig. 1) with location of several devices and auxiliary equipment: ATOM1-4 (4 masts for travel time tomography Δ TOM), dashed lines mark acoustic paths, R72/73 (2 Bruker Rapid, passive OP-FTIR), D1/2 and S1/2 (2 Bruker EM27, active OP-FTIR with source and detector), Young1/2 (2 masts, each equipped with 2 ultrasonic anemometers), Black1-5 (5 black screens for passive OP-FTIR), EC tower, SC soil respiration chamber measurements.

An eddy flux tower was established there at a meadow which is extensively managed with 2 to 4 hay harvests per year. The mesophytic hay meadow is dominated by couch grass (*Agropyron repens* ~~Agropyronrepens~~), meadow foxtail (*Aleopecurus pratensis*), yarrow (*Achillea millefolium*), common sorrel (*Rumex acetosa*), and white clover (*Trifolium repens*) (Prescher et al., 2010). Cows, sheep or horses were rarely grazing there. Neither mineral nor organic fertilizers have been applied at this site since 1987. The permanent EC station is working within FLUXNET since 2002 (e.g. e.g., Hussain et al., 2011a) and Meanwhile it is a part meanwhile within the network of ICOS-D₂ (C3 station). Grillenburg is an atmospheric carbon sink (Prescher et al., 2010). However, the NEE values show large inter-annual differences (e.g. e.g., from -177 g C m^{-2} , 2006 to -62 g C m^{-2} , 2005). The mean Net Ecosystem Productivity (NEP) is about $80 \text{ g C m}^{-2} \text{ a}^{-1}$ since 2005. After incorporation of carbon export due to harvest of hay, the permanent grassland becomes a CO_2 source of about $60 \text{ g C m}^{-2} \text{ a}^{-1}$ (ICOS-D Website, 2017).

The EC station was actually equipped with the following EC measurement technique to determine turbulent CO_2 - and H_2O -fluxes at a height of 3 m above ground: ultrasonic anemometer GILL R3-50 (Gill Instruments, Lymington, UK) and close-path measurements with IR gas analyzer (IRGA) LI-7000 (LiCor Inc., Lincoln, NE, USA). Fluxes of CO_2 (NEE), H_2O

(evapotranspiration) and sensible heat are available on a half-hourly basis. Based on the general EUROFLUX guidelines (Aubinet et al., 2000), Grünwald and Bernhofer (2007) described the calculation and correction of the fluxes which are permanently updated according to sensor and software development.

5 | Additionally, air temperature and air humidity, soil temperature and soil heat flux, global and net radiation, photosynthetically active radiation as well as precipitation and evaporation (~~Class A~~~~class a~~~~pan~~) are measured at the station permanently.

The nearby climate station is delivering data since 1862 and is at the same location since 1955. The annual mean temperature is 7.8 °C and the annual mean precipitation is 901 mm (period 1981-2010).

3.2 Experimental set-up in July 2016

10 | The special observation period (SOP) was carried out shortly after the harvest of hay in Grillenburg from 8th until 18th of July in 2016. Two periods were of special interest because of high solar radiation during the day (convective boundary layer) and the building up of a stably stratified boundary layer during ~~night-time~~~~nighttime~~: 9th until 11th and 15th until 18th of July.

On the 8th of July, shortly after the set-up, the test site was affected by a thunderstorm. Therefore, the measurements started on the next day. At this time the area of investigation was influenced by a high ridge whose axis was directed from north to south across the center of Germany on the 11th. In its northern part the ridge was overrun by strong warm air advection due to an upper air trough which travelled eastward towards Ireland. Within the broad-based warm sector, very warm air masses from the southwest influenced the experimental site especially on the 10th and 11th. The air mass was potentially unstably layered but was also strongly capped due to the low-tropospheric warm air advection. After this, the weather conditions changed to rainy days due to a trough over central Europe which led to a break of the measurements. On 15th of July a high ridge from the Biscay to the North Sea started to influence the weather conditions. Initially, fairly moist and cool air reached the area with a north-westerly wind direction. The following days were characterized by an intermediate high.

15 | In order to obtain statements on advection during the SOP, information on spatially distributed CO₂ concentrations was estimated from scanning passive OP-FTIR devices. For continuous calibration, two active OP-FTIR devices have been applied. A-TOM was configured in such a way that spatially averaged wind velocities could be measured in two different heights above the ground (1.5 m, 3.0 m). As reference for the line-averaged A-TOM measurements, two masts, ~~each of~~ which ~~were~~ equipped with two ultrasonic anemometers (Young) at two heights (1.5 m and 3.0 m), were arranged at the side of the A-TOM measurement area (see Fig. ~~12~~).

The total area under investigation, approx. 120 m x 120 m, is marked in Fig. 1. All locations were measured using GPS and by a high-precision theodolite (tachymeter).

20 | The acoustic measuring field ~~is-was~~ limited by the position of the acoustic devices, which ~~are~~~~were~~ mounted on telescopic masts at the corners of the field (ATOM1...4). The height difference within the acoustic measuring field (Fig. 1) ~~was~~ about 2.2 m, estimated from own tachymeter measurements. The terrain rises in northern direction from the EC station (near to

ATOM1) to the location of mast ATOM3. Between the masts equipped with ultrasonic anemometers (Young1 and Young2, horizontal distance of 65 m), the difference in terrain height is approx. 0.5 m.

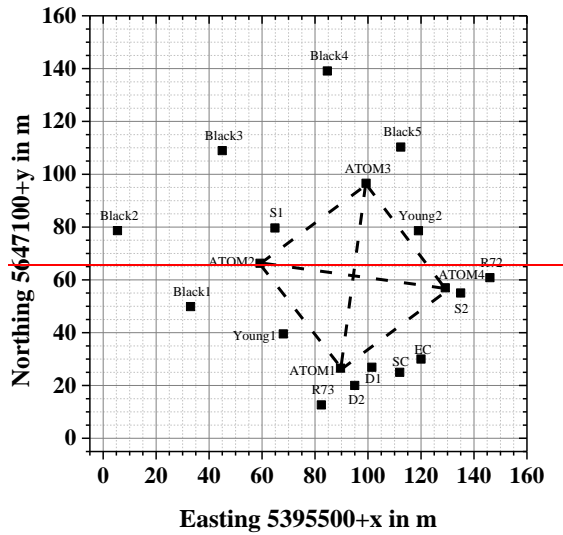


Figure 2: Scheme of area under investigation (see also Fig. 1) with location of several devices and auxiliary equipment: ATOM1-4 (4 masts for travel time tomography A-TOM), dashed lines mark acoustic paths, R72/73 (2 Bruker Rapid, passive OP-FTIR), D1/2 and S1/2 (2 Bruker EM27, active OP-FTIR with source and detector), Young1/2 (2 masts, each equipped with 2 ultrasonic anemometers), Black1-5 (5 black screens for passive OP-FTIR), EC tower, SC soil respiration chamber measurements.

3.2.1 Set-up wind measurements

The A-TOM area inside this field extended to about 50 m x 50 m (Fig. 1 Fig. 2). For wind velocity estimation, a tested tomographic measurement system was adapted to the proposed measurements at two height levels (1.5 m and 3 m). Four high-end horn speakers ~~for~~ with frequencies above 5 kHz (TL16H, 8 Ohm, Visaton) and four free-field prepolarized microphone units (½", Type 4189-A-021, Brüel&Kjær) with windscreens were built up at telescopic masts with special booms at both heights above ground surface. Thus, each mast was equipped with two loudspeakers and two microphones (Fig. 23).

For typical sound speeds of 340 m s^{-1} the maximum travel-time for the introduced A-TOM set-up was 0.2 s due to the maximum length of sound paths of about 70 m. The time interval between successive measurements (estimation of travel-time data along all relevant sound paths) was 20 s due to the duration of signal analysis and data storage of all 24 single measurements (12 at each height level: i.e. forth and back between ATOM1-2, 1-4, 1-3, 2-3, 2-4, 3-4, see Fig. 1 Fig. 2).

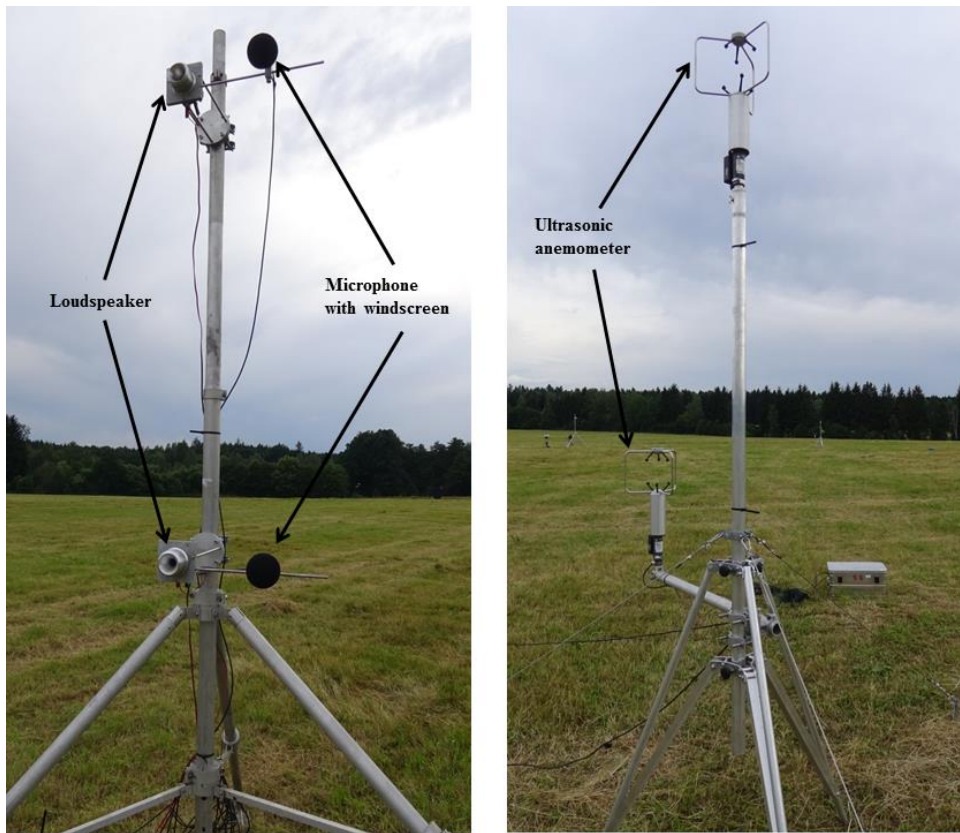


Figure 223: Left: Telescopic mast (A-TOM2) with acoustic equipment at two height levels, in 1.5 m and 3 m above grassland, single tree line 220 m away and Tharandt Forest at a distance of 450 m in the background (southwest direction). Right: Telescopic mast with ultrasonic anemometers at 1.5 m and 3 m height (Young2).

5

The described acoustic system can be enhanced in future experiments with additional sound sources and receivers to increase the spatial resolution of the measurements which is especially desirable for the application of tomographic data analysis.

The four supplementary ultrasonic anemometers (YOUNG8100V, R. M. Young Company, Michigan, USA) were mounted side by side at a height of 2.26 m above ground at the EC station Grillenburg for a period of 6 days (10th – 16th June) shortly before the SOP. The obtained data were compared among each other to guarantee that all devices are measuring the same value, a requirement to calculate vertical or horizontal gradients with high accuracy. Although all anemometers are of the same kind, series, and age, there are differences in acoustic virtual temperature due to the special characteristics of the individual instrument. One anemometer was used as reference. Regressions between the temperature data of the reference and the other devices were calculated. These equations were used during the SOP to correct the measured temperature values

15 of the ultrasonic anemometers. For the wind velocity, the quantity of primary interest, such a correction was not necessary.

3.2.2 Set-up concentration measurements

Successful application of the non-intrusive methods A-TOM and OP-FTIR requires agreement in the investigated air volume and the spatial resolution of trace gas concentration and wind components. Thus, the OP-FTIR technique was built up within and around the A-TOM array (Fig. 12).

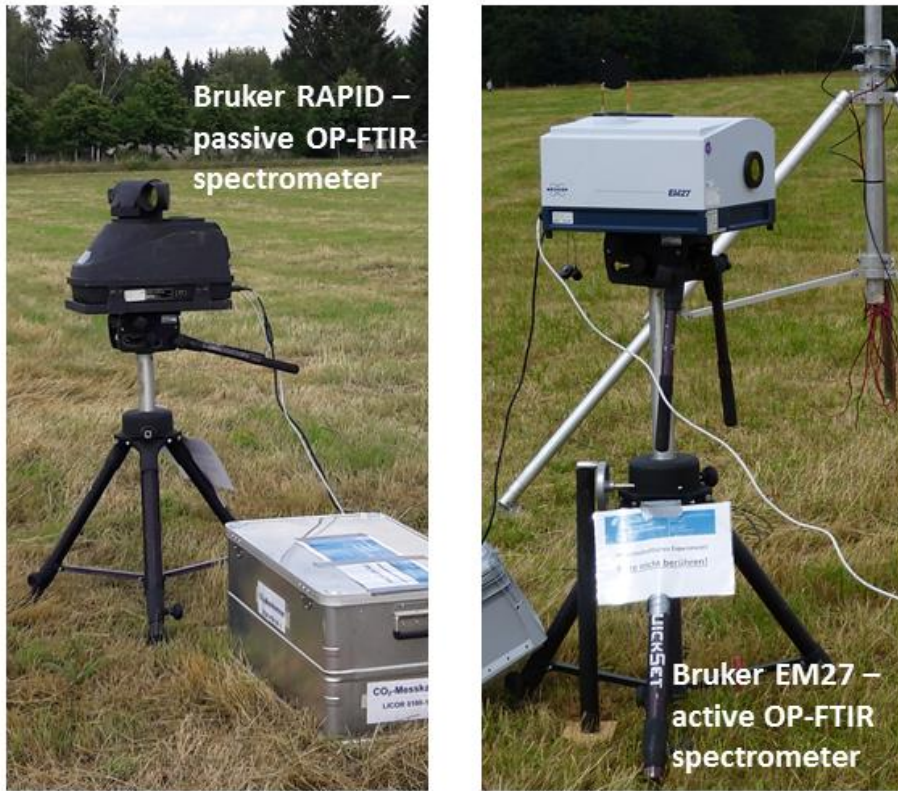


Figure 334: OP-FTIR spectrometer used for SOP at Grillenburg site. Left: passive Bruker RAPID, right: active Bruker EM27 detector unit applied in bi-static mode with a separate IR source (not in figure).

For our OP-FTIR investigations (Fig. 34) we used two BRUKER EM 27 systems (Bruker Optik GmbH, Ettlingen, Germany) in bistatic operation mode including NiCr glowers as field IR source for active measurements and two BRUKER RAPID spectrometers (Bruker Daltonik GmbH, Leipzig, Germany) for passive investigations. Both devices include narrow-band MCT (mercury cadmium telluride) detectors and can be characterized by its instrumental parameters (Table 1).

A detailed description of equipment characteristics for both devices is listed by Schütze and Sauer (2016).

The installation of the spectrometers and associated instruments (sources, screens) was undertaken avoiding any influences on micrometeorological and acoustic measurements. Furthermore, the optical pathways had to be aligned without

obstructions. The active OP-FTIR measurements were carried out on two perpendicularly aligned optical paths situated in close vicinity to the A-TOM equipment (Fig. 2.1). The two EM27 spectrometers (at a height of 0.9 m) and their associated IR sources were installed obtaining optical path lengths of 52 m and 64 m, respectively. The spectral measurements were carried out in 2 minutes sampling intervals including a co-addition of 20 spectra to improve the signal-to-noise ratio (SNR).

~~Table 1: OP-FTIR spectrometer device parameters.~~

Instrumental parameter	Bruker RAPID	Bruker EM27
modus	Passive	Active / passive
IR source	Ambient	NiCr glower at 1200 °C
detector	MCT	MCT
resolution	4 cm⁻¹	4 cm⁻¹
Field of view (FOV)	10 mrad	10 mrad

For passive measurements the two RAPIDs were installed at the outer edges of the field of investigation in a distance of 80 m from each other and at a height of 0.9 m above ground. Five black background screens were used as potential targets for the passive measurements. A complete measurement consisted of 12 different single beam acquisitions with 6 different horizontal directions per device aiming at an even distribution of optical path ways inside the field of investigation. The sampling interval was 5.5 minutes. For each measurement an internal temperature controlled black body within the spectrometer device was applied as a defined radiation source to calibrate the instrument.


In order to obtain information on ground surface CO₂ concentration and soil emission, a LI-COR 8100 system including a multiplexer LI-8150 and two long-term chambers were installed nearby the EC tower (Fig. 12). ~~The chambers installation was done one day before the data acquisition started to avoid any influences by disturbances due to the collar insertion. The obtained CO₂ data can be applied for the comparison with the spatially resolved GHG concentrations. The soil chamber measurements were done in accordance to ICOS protocol for automated chamber measurements (Pavelka and Acosta, 2016). We chose a sampling interval of two measurements per chamber per hour for the data acquisition period. An observation length of 120 s was chosen for the single soil flux measurements. Additionally, a pre-purge of 120 s and a post-purge of 45 s for each flux measurement were selected. The initial values of CO₂ concentration after the pre-purging and before the chamber closing were taken from the measured time series of the observation period for the determination of the considered CO₂ concentrations at the ground-level. We chose a sampling interval of two measurements per chamber per hour for the data acquisition period. The chambers installation was done one day before acquisition started to avoid any influences by disturbances due to the collar insertion. The obtained CO₂ data can be applied for the comparison with the spatially resolved GHG concentrations.~~

3.3 Data analysis

3.3.1 Signal processing and analysis of acoustic travel-time measurements

The acoustic measurements are controlled by an in-house developed software (MATLAB) which comprises generation of sound signals, control of sound transmission and reception, as well as subsequent real-time signal analysis. The core hardware (analogue/digital conversion) is an acoustic multi-channel spectrometer card (Harmonie PCI octav, sample rate: 51.2 kHz, SINUS Messtechnik GmbH, Germany) which offers 8 input and 4 output channels that are synchronized on a common time basis (Holstein et al., 2004, Barth and Raabe, 2011). This, in turn, is a precondition for accurate travel-time measurements.

Acoustic signals with a frequency of 7 kHz and a special signature (sine signal with 2x2 oscillations and a break between them, Fig. 4-5) are used. ~~The applied sound frequency is a compromise between the desired low travel-time uncertainty and the necessary high SNR. In general, the travel-time uncertainty is decreasing for increasing sound frequencies due to the process of signal analysis. Furthermore, higher frequencies allow for a high-pass filtering of received signals in order to exclude ambient low-frequency noise from data analysis which, in turn, enhances SNR. However, air absorption (see Sect. 4.1.1) is a limiting factor, which increases with increasing frequencies and thus prevents the use of arbitrarily high sound frequencies for the sound path distances under consideration. In~~ ~~The 7 kHz signal is a compromise between the desired low travel-time uncertainty and the necessary high SNR. First requirement is fulfilled with growing sound frequencies. The last one requires minimal environmental effects, especially sound absorption in air which increases with growing frequency. Furthermore, higher frequencies allow for a high-pass filtering of received signals in order to exclude ambient low-frequency noise from data analysis which, in turn, enhances SNR.~~ ~~Considering view of -in-additional~~ acoustic ground ~~surface~~-effects (see Sect. 4.1.2), an optimal sound frequency of 7 kHz results for the investigated length scale up to 100 m.

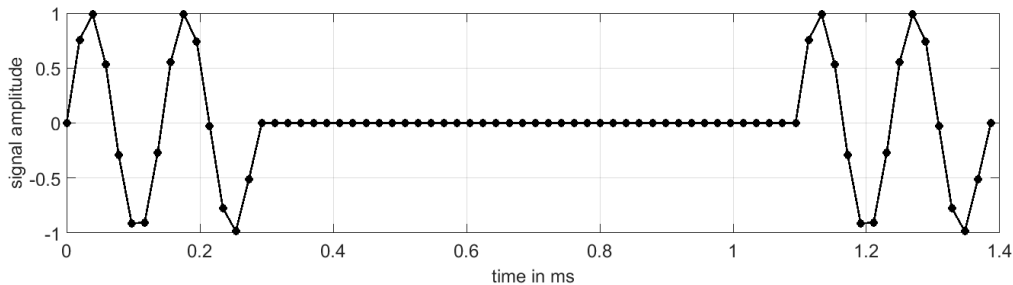

~~Figure 4-5: Theoretical acoustic signal consisting of two times two sine periods with a frequency of 7 kHz interrupted by a break. The sample rate of the analog to digital converter is 51.2 kHz. After propagating through the atmosphere, the sound signal was received by the microphones, and high-pass filtered. The analogue acoustic signals ~~are~~ were sampled by the acoustic spectrometer card with a sample rate of 51.2 kHz, i.e. with a time resolution of 19.5 μ s. The delay time between output and input channels is known and constant and can be therefore neglected in the further analysis of accuracy. Subsequently, the sent signal ~~is~~ was cross-correlated with the received signal. The maximum of the cross-correlation function~~

(CCF) corresponds to the best fit of the sent signal pattern within the received signal. The associated time-shift corresponds to the sought travel time (Hussain et al., 2011b; Fig. 5).

To increase the accuracy of the detected maximum, an interpolation with a sinc function is applied which leads to an increased temporal resolution by a factor of about 10. Thus, an uncertainty for travel-time estimation of about $2 \mu\text{s}$ results from sampling (Holstein et al., 2004).

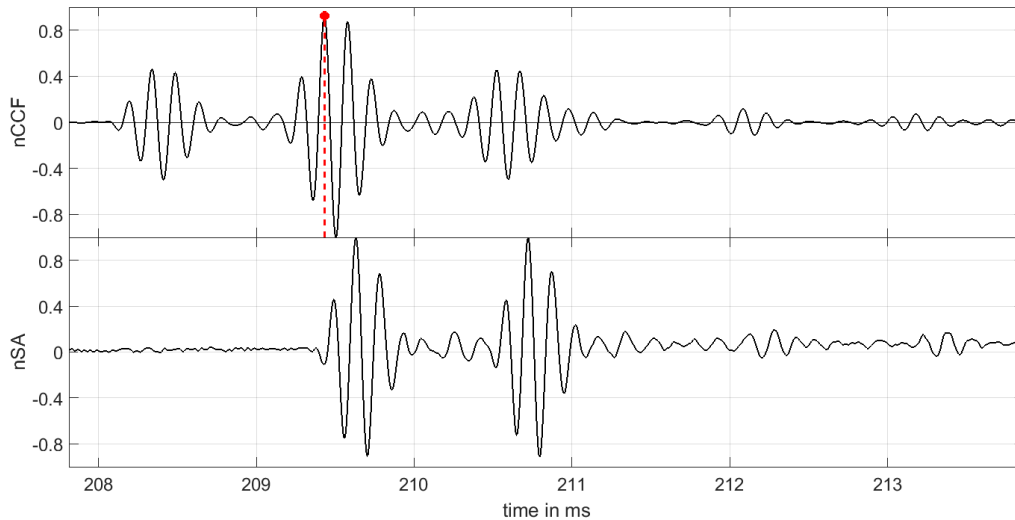


Figure 556: Example of a received acoustic signal (normalized signal amplitude, nSA, lower panel, distance of source and receiver: 70.45 m) and corresponding normalized cross correlation function (nCCF, upper panel) between the received and the generated signal. The maximum position of nccf is marked with a filled (red) point. The associated time lag corresponds to the travel time of the signal.

After propagating through the atmosphere, the sound signal was received by the microphones, and high pass filtered. The analog acoustic signals are sampled by the acoustic spectrometer card with a sample rate of 51.2 kHz, i.e. with a time resolution of $19.5 \mu\text{s}$. The delay time between output and input channels is known and constant and can be therefore neglected in the further analysis of accuracy. Subsequently, the sent signal is cross correlated with the received signal. The maximum of the cross correlation function (CCF) corresponds to the best fit of the sent signal pattern within the received signal. The associated time shift corresponds to the sought travel time (Hussain et al., 2011b; Fig. 6).

To increase the accuracy of the detected maximum, an interpolation with a sinc function is applied which leads to an increased temporal resolution by a factor of about 10. Thus, an uncertainty for travel time estimation of about $2 \mu\text{s}$ results from sampling (Holstein et al., 2004).

The A-TOM masts marked the corners of a rectangle at each level above surface (see Fig. 12). In order to separate the scalar influence of temperature and the vectorial influence of wind velocity on the speed of sound between a source and a receiver (Eq. (34)), sound propagation is considered in opposing directions. Similar to the analysis of ultrasonic measurements

(e.g., Hanafusa et al., 1982), the assumption of reciprocal sound propagation (straight ray propagation between two pairs of speakers and microphones) ~~is was~~ applied:

$$c_{eff\,forth} = \frac{d}{\tau_{forth}} = \sqrt{\gamma_d R_d T_{av}} + v_{Ray}, \quad c_{eff\,back} = \frac{d}{\tau_{back}} = \sqrt{\gamma_d R_d T_{av}} - v_{Ray}.$$

~~$$(10) c_{eff\,forth} = \frac{d}{\tau_{forth}} = \sqrt{\gamma_d R_d T_{av}} + v_{Ray}, \quad c_{eff\,back} = \frac{d}{\tau_{back}} = \sqrt{\gamma_d R_d T_{av}} - v_{Ray}.$$~~

~~(10109)~~

Here, d is the distance between sound source and receiver, v_{Ray} is the wind component in direction of sound propagation (cp. Eq. (4)), and τ_{forth} and τ_{back} are estimated travel times in opposing directions. If the distance d is known, it follows from Eq. (109):

~~$$\sqrt{T_{av}} = \frac{d}{2\sqrt{\gamma_d R_d}} \left(\frac{1}{\tau_{forth}} + \frac{1}{\tau_{back}} \right) \text{ and}$$~~

~~$$(11) \sqrt{T_{av}} = \frac{d}{2\sqrt{\gamma_d R_d}} \left(\frac{1}{\tau_{forth}} + \frac{1}{\tau_{back}} \right) \text{ and}$$~~

~~(111110)~~

~~$$v_{Ray} = \frac{d}{2} \left(\frac{1}{\tau_{forth}} - \frac{1}{\tau_{back}} \right).$$~~

~~$$(12) v_{Ray} = \frac{d}{2} \left(\frac{1}{\tau_{forth}} - \frac{1}{\tau_{back}} \right).$$~~

~~(121211)~~

In this way, the derivation of wind components along six sound paths as line-averaged data set is possible. Wind components u (in east direction) and v (in north direction) are calculated from Eq. (11+12) for each of two sound paths approximately perpendicular to each other (e.g., path between ATOM1-ATOM2 and ATOM1-ATOM4, Fig. 12).

3.3.2 Spectral data acquisition and processing of OP-FTIR measurements

The passive and active IR spectrometer systems were linked with their own controlling laptops using OPUS software (Bruker Optics Inc.). The software provides interfaces to control measurement options such as spectral region for measurement, wavenumber resolution, and parameters for discrete Fourier transform, apodization function, and repeat intervals. Additionally, for passive measurements a user-written macro-program is necessary for controlling the instrument. This macro contains the detailed measurement sequence for a whole passive scan including the parameters for the preceding internal blackbody measurements and the acquisition parameters for the different scans (number of scan directions, vertical and horizontal lens angle, repetition rate).

An OP-FTIR spectroscopic measurement results in a single beam spectrum (SBS). It describes the distribution of signal intensity with respect to the wavenumber. The active SBS covers a wavenumber region between 600 and 3900 cm^{-1} , the passive SBS ranges between 600 and 1600 cm^{-1} . Subsequent data processing of SBSs is necessary for concentration analysis.

In practice, the spectra obtained by spectrometer device are controlled by instrumental line shape f_{ILS}

$$I'(v) = I(v) \otimes f_{ILS}(v)$$

(13)(131312)

where \otimes represents convolution.

- 5 A transmission spectrum $TR(v)$ of the sample can be obtained by dividing the measured spectrum $I'(v)$ by the measured or simulated background spectrum $I_0^{*'}(v)$ which is also influenced by f_{ILS} :

$$TR(v) = \frac{I'(v)}{I_0^{*'}(v)}$$

(14)(141413)

- 10 The absorbance spectrum $A(v)$ of the target component is introduced as a linear function related to target compound concentration:

$$A(v) = -\log_{10} \left(\frac{I(v)}{I_0(v)} \right) = 0.4343 d \cdot \alpha_T(v) \cdot c_T$$

(15)(151514)

The crucial difference between active and passive OP-FTIR measurements results from the availability of different $I_0(v)$ sources:

- 15
- active: superposition of non-modulated artificial IR source (wavenumber region 700 – 4000 cm^{-1}) and additional ambient (passive) background emissions for wavenumbers lower than 1500 cm^{-1}
 - passive: only ambient background emissions resulting from black body radiation according to Planck's law limited to wavenumber region between 700 and 1500 cm^{-1} . This emission is a function of radiometric temperature (temperature of the IR emitting surface).

- 20 The data processing of active spectra includes the emission correction of SBSs for lower wavenumber regions, the calculation of transmission spectra based on reference spectra, and the determination of spectral windows for CO_2 concentration analysis. The concentration retrieval uses a non-linear least square fitting of measured by calculated spectra using HITRAN spectral library (Rothman et al., 2013).

- 25 The processing of passive spectral data is different compared to active spectra. Passive OP-FTIR measures radiation from background traversing the atmosphere between the background and the spectrometer. The black body radiation $B(v, T)$ can be described according to Planck's radiation law

$$B(v, T) = \frac{2 h c^2 v^3}{\exp\left(\frac{h c v}{k_B T}\right) - 1}$$

$$(16) B(v, T) = \frac{2 h c^2 v^3}{\exp\left(\frac{h c v}{k_B T}\right) - 1}$$

(161615)

- 30 where h is Planck constant, c is speed of light, and k_B is Boltzmann constant. In order to obtain radiance spectra or brightness temperature spectra, a radiometric calibration of SBSs is necessary. This calibration algorithm is based on the SBS

measurement of an ideal black body within the spectrometer device at two known temperatures: T_C = ambient temperature and $T_H = 353$ K. The radiance spectra $L(\nu, T)$ of a measured $SBS(\nu, T)$ can be obtained after Revercomb et al. (1988) from

$$L(\nu, T) = \frac{SBS(\nu, T) - SBS(\nu, T_C)}{SBS(\nu, T_H) - SBS(\nu, T_C)} (B(\nu, T_H) - B(\nu, T_C)) + B(\nu, T_C).$$

(17)(171716)

5 The determination of transmission spectra $TR(\nu)$ requires a radiative transfer model that includes the radiance of the background $L_B(\nu, T_B)$ as well as the self-radiance of the considered air volume $B(\nu, T_{air})$ (Liu et al., 2008):

$$TR(\nu) = \frac{L(\nu, T) - B(\nu, T_{air})}{L_B(\nu, T_B) - B(\nu, T_{air})} = \frac{L(\nu)}{L_0(\nu)}.$$

(18)(181817)

10 Similar to the active spectra processing, the calculated transmission spectra can be analyzed to obtain PIC values based on the minimization of the difference between measured and simulated spectra. For both OP-FTIR techniques the non-linear relation between spectral signature of the target gas and its column density is used for the quantification. The radiative transport model and the influences of the applied spectrometer are required input parameters. The column density is the unknown model parameter. The forward modeling approach is based on the calculation of synthetic spectral windows (10 – 100 cm^{-1}) including the consideration of multiple parameters such as column density for each species (including additional atmospheric substances), background radiation, temperature, pressure, and instrumental line shape functions. In the next step the synthetic and measured spectral windows are compared. Least-squares fitting algorithms (e.g., classical least squares regression CLS, partial least squares regression PLS) are applied in order to minimize iteratively the difference between both of them (Harig and Matz, 2001, Griffith et al., 2012, Cieszczyk, 2014).

4 Results and discussion

20 4.1 Uncertainty of A-TOM-wind and temperature measurements

4.1.1 Accuracy of travel-time estimates

Technical, signal-dependent, and methodological issues influence the travel-time determination leading to uncertainties due to sampling, signal analysis and cross-correlation, calculation of sound speed, and recalculation of wind speed and temperature.

25 First Most important of all, the SNR should be as high as possible. Thus, sound attenuation due to sound propagation effects should be minimised. A point source generates spherical waves in an unbounded homogeneous atmosphere (e.g. e.g., Salomons, 2001). In this simple case the sound pressure level at a microphone can be calculated from the sound power of the loudspeaker together with the effects of spherical spreading, i.e. geometrical sound attenuation, and attenuation due to air absorption. Atmospheric absorption is primary dependent on sound frequency and secondary on air temperature and humidity. The attenuation of sound level is about 8-9 dB/100 m for the used sound frequency of 7 kHz and typical values of

30

meteorological quantities (DIN ISO 9613-1, 1993, temperature: 15 °C, relative humidity: 50 %, air pressure: 101325 Pa). Together with spherical spreading, a sound attenuation of 49-55 dB results for distances between 50 and 70 m. This free-field attenuation is always occurring and must be considered if one prepares the amplifiers and loudspeakers for measurements.

5 Additionally, disturbing sound near the microphones should be avoided. The flow field itself leads to the most important disturbance. With the used windscreens a maximum wind speed of about 6 m s^{-1} is desirable without a noticeably changed characteristic of microphone sensitivity. Otherwise, higher efforts are necessary to protect the microphones against environmental sound.

10 It was explained in Sect. 3.3.1 that the analogue signal is sampled with a sample rate of 51.2 kHz (time resolution of $19.5 \mu\text{s}$). The travel-time estimation is improved by using an interpolation technique which results in an uncertainty of about $2 \mu\text{s}$ for the travel-time data from sampling algorithm.

15 The period duration of a 7-kHz-signal is $1/7000 \text{ Hz} \approx 143 \mu\text{s}$, i.e. about $51.2 \text{ kHz}/7 \text{ kHz} \approx 7.3$ samples for a digitization frequency of 51.2 kHz. Neighbouring maxima of the CCF are separated by about 7 samples. To rate this value it is helpful to calculate the typical travel-time variations (i.e. $\Delta\tau$) in sample units due to variability of meteorological data (Table 2).
Table 2: Variability of acoustic travel time (in rounded sample units) due to changes of temperature and wind speed for a mean temperature of about 8°C .
A change in temperature of 1 K results (for a windless atmosphere) in a variation of about 0.6 m s^{-1} in sound speed (see Eq. (43)). In comparison to that, the variations in wind speed (wind component along sound path) result in equal changes of sound speed. If there are variations in both quantities, temperature and wind speed, the effects on the effective sound speed are summed up according the Eq. (34).

20 ~~Table 2: Variability of acoustic travel time (in rounded sample units) due to changes of temperature and wind speed for a mean temperature of about 8°C .~~

To decrease the uncertainty due to analysis of CCF, it is possible to use the maximum of CCF's absolute value. In this way, the neighbouring maxima are separated only by about 3.7 samples. This value for the travel-time accuracy of $78.125 \mu\text{s}$ (= 4 samples/51.2 kHz) is applied for the further uncertainty analysis of sound speed, wind speed, and temperature for one instantaneous travel-time measurement along one sound path.

The influence of a faulty variable x_i on the result y can be estimated by means of the Taylor series. If the absolute value of error Δx_i is small enough, the Taylor series can be aborted after the linear term resulting in an estimation of maximum error $\Delta y = \sum_i \left| \frac{\partial y}{\partial x_i} \right| \Delta x_i$. The complete derivation of temperature and wind uncertainty is shown in Appendix A. It results from Eq.

30 ~~(A4): (303029):~~

$$\Delta T_{av} = 2 \sqrt{\frac{T_{av}}{\gamma_d R_d}} \Delta \tau \left(\frac{(\gamma_d R_d T_{av}) + v_{Ray}^2}{d} \right).$$

$$(19) \Delta T_{av} = 2 \sqrt{\frac{T_{av}}{\gamma_{\#} R_{\#}}} \Delta \tau \left(\frac{(\gamma_{\#} R_{\#} T_{av}) + v_{Ray}^2}{d} \right).$$

(191918)

For a travel-time accuracy of 78.125 μs and a ~~minimal~~ path length of 50 m (minimum distance for the used geometry of sound paths), a maximum temperature uncertainty of about 0.3 K results for the instantaneous single path measurement. The uncertainty of relative wind measurements is only depending on the uncertainty of travel-time measurements. Assuming again that travel-time errors along one and the same path are identical, it follows from Eq. ~~(A5):(313130):~~

$$\Delta v_{Ray} = \Delta \tau \left(\frac{(\gamma_d R_d T_{av}) + v_{Ray}^2}{d} \right).$$

$$(20) \Delta v_{Ray} = \Delta \tau \left(\frac{(\gamma_{\#} R_{\#} T_{av}) + v_{Ray}^2}{d} \right).$$

(202019)

~~For Assuming~~ a minimal path length of 50 m results in a maximum wind component uncertainty for the instantaneous single path measurement of about 0.2 m s^{-1} . With increasing path lengths, the uncertainty of temperature and wind components is decreasing.

Considering these uncertainties as standard deviation of a single measurement, the standard error of mean values decreases by the factor $1/\sqrt{n}$ if the measurement is repeated n -times under one and the same boundary and environmental conditions. Applying averaging over 30 minutes (90 independent measurements, i.e. $1/\sqrt{90} = 0.1$) results in statistical uncertainties of 0.03 K and 0.02 m s^{-1} , if all single measurement results are usable.

4.1.2 Accuracy of sound path estimation

The uncertainty of line-averaged wind and temperature data is further influenced by several additional effects of the sound propagation between a loudspeaker and a microphone: absorption in air, reflection at ground surface, and refraction due to wind and temperature gradients.

~~A point source generates spherical waves in an unbounded homogeneous atmosphere (e.g. Salomons, 2001). In this simple case the sound pressure level at a microphone can be calculated from the sound power of the loudspeaker together with the effects of spherical spreading, i.e. geometrical sound attenuation, and attenuation due to air absorption. Atmospheric absorption is primary dependent on sound frequency and secondary on air temperature and humidity. The attenuation of sound level is about 8-9 dB for a distance of 100 m for the used sound frequency of 7 kHz and typical values of meteorological quantities (DIN ISO 9613-1, 1993, temperature: 15 °C, relative humidity: 50 %, air pressure: 101325 Pa). Together with spherical spreading, a sound attenuation of 49-55 dB results for distances between 50 and 70 m. This free field attenuation is always occurring and must be considered if one prepares the amplifiers and loudspeakers for measurements.~~

Additionally to these effects, sound refraction (see below) and sound reflection occurs.

In practice, the sound source and the receiver are close to the ground which makes sound propagation more complex. There are not only direct sound waves between loudspeaker and microphone, but also ground-reflected sound waves (Fig. 67). This wavelet integrates the conditions of the air layer between the ground surface and the receiver. Additionally, the interference
5 between those sound waves can lead to considerable effects which are estimated hereafter.

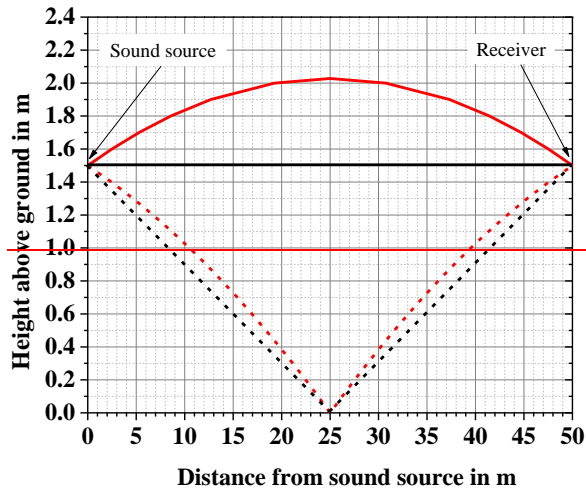


Figure 667: Scheme of sound wave reflection at the ground surface: direct (solid lines) and reflected (dashed) sound paths, with (red) and without (black) atmospheric refraction due to sound speed gradients.

Reflection at ground surface


To estimate the effect of reflection at ground surface, an idealized case is considered (see Ostashev and Wilson, 2016): the air and ground are homogeneous half spaces without any ambient motion. It follows, that the total sound field at a receiver
15 may be assumed as the sum of sound traveling along a direct path from the source, plus sound traveling along a path that is reflected by the ground (Fig. 67, black lines). Thereby, waves propagating along the air/ground interface are not included. It is reasonable to use this assumption so long as the angle between the ray path and the ground is not too small (nearly grazing sound incidence).

Assuming that the two sound waves are coherent, there is a constructive or destructive interference. The sound level of the
20 received signal increases or decreases compared to the free-field, unbounded sound propagation. Calculations after Salomons (2001) for a spherical sound wave travelling through a homogeneous atmosphere with reflection at a homogeneous ground surface are dependent on the sound propagation geometry (path length differences of the direct and the reflected path), the sound frequency, and the reflection coefficient. The latter ~~one~~ is influenced by the impedance of the ground surface which is usually parameterized by the sound frequency and the acoustic flow resistance (Delany and Bazley, 1970).

Commonly, the so-called relative sound level, i.e. the difference between the sound pressure level with and without (i.e. unbounded free-field sound propagation) ground surface, is applied to quantify the ground effect at the receiver (Ostashev and Wilson, 2016). A positive relative sound level marks amplification (maximum of 6 dB), a negative one ~~an~~ attenuation of sound level (in theory, an infinitely high attenuation is possible).

5 It is essential for a high accuracy of acoustic travel-time measurements to provide SNR as large as possible at the receiver. Hence, a positive relative sound level should be ensured which can be realized using a suitable combination of sound frequency, distance between loudspeaker and microphone as well as heights of the acoustic devices above ground surface. Values of relative sound level for a grassland site (with acoustic flow resistance of $200 \text{ kPa s}^{-1} \text{ m}^{-2}$) and the geometry of A-TOM measurements are shown in Fig. 78. For more detailed information to the calculation steps, please see [e.g. e.g.](#)
 10 Salomons (2001) and Ziemann et al. (2013).

For a distance of 50 m between loudspeaker and microphone and a signal frequency of 7 kHz, the relative sound level is near or greater than 0 dB for both heights (Fig. 8a7a, b). That means an amplification of received sound level due to the ground effect. Higher or lower frequencies cause a so called ground dip, i.e. a strong decrease of sound level due to negative interference phenomenon. The greater the height of acoustic devices above ground surface, the higher is the sensitivity of the
 15 relative sound level to frequency (Fig. 8b-7b in comparison to a). An increasing distance from sound source (50 m in comparison to 70.7 m, the latter one corresponds to the diagonals of A-TOM measurement field) mitigates the risk of a ground dip in the investigated frequency range.

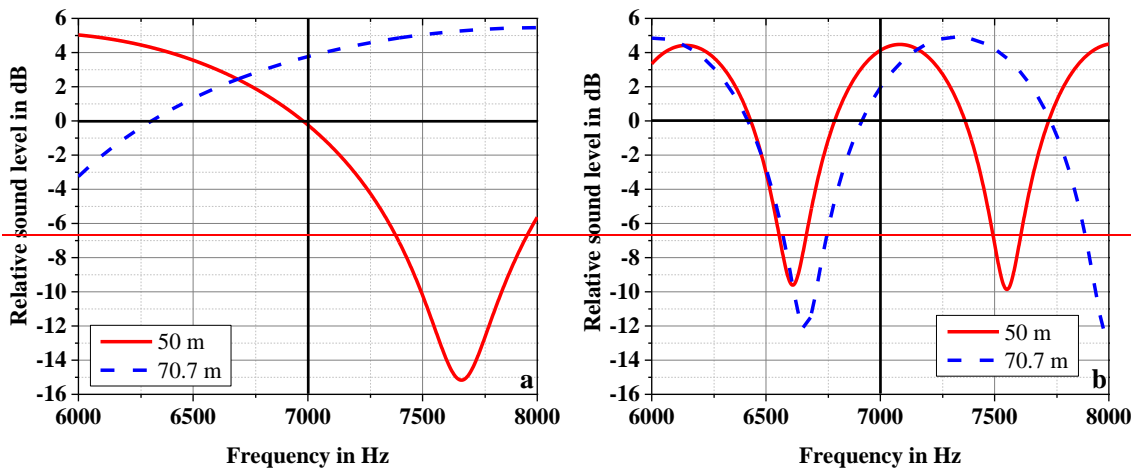

20 **Figure 778:** Relative sound level depending on the sound frequency and on the distance (red solid line: 50 m, blue dashed line: 70.7 m) from the sound source to the receiver for a grassland surface. The height of the acoustic devices above ground is 1.5 m (a) and 3.0 m (b), respectively.

Fig. ~~9a-8a~~ shows again the lower number of ground dips for the lower measurement level of 1.5 m above ground surface. For an increasing height of 3 m above surface (Fig. ~~9b8b~~), the sensitivity of relative sound level on the distance increases due to a growing number of ground dips. Furthermore, the sound level attenuation increases for a growing distance. Thus, sound path lengths of 50 m and 70 m together with a signal frequency of 7 kHz are favourable because of an optimized SNR of the received signal. Additionally, Fig. ~~8-7~~ and Fig. ~~9-8~~ demonstrate the requirements for the frequency stability of the ~~sound used loudspeakers sources~~. The applied loudspeakers meet these demands.

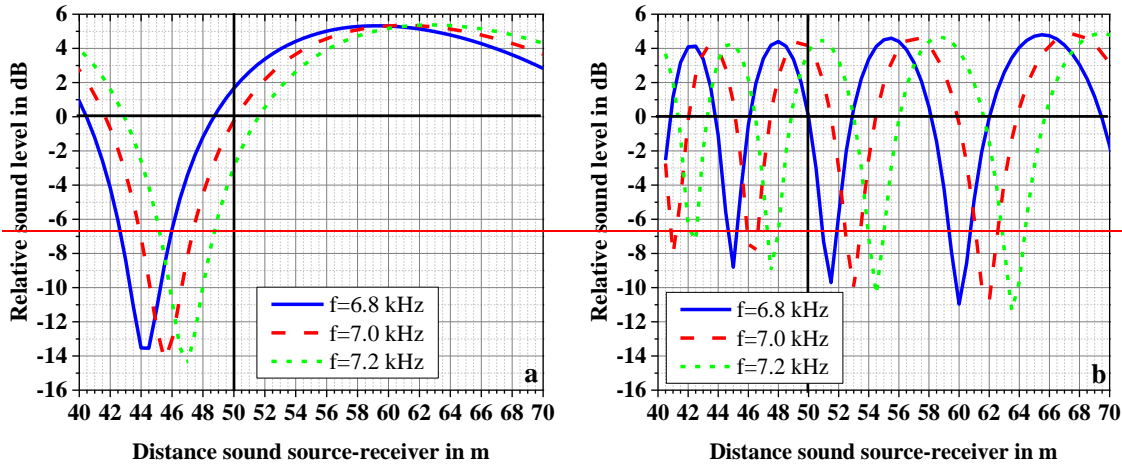


Figure 889: ~~Relative sound level depending on the distance and on the sound frequency for a grassland surface. The height of the acoustic devices above ground is 1.5 m (a) and 3.0 m (b), respectively.~~

~~As already mentioned, the received signal at the microphone contains two parts. First one is the direct wave propagating through the air layer at one and the same height above ground between sound source and receiver. Second one is a wave that is reflected by the ground. This wavelet integrates the conditions of the air layer between the ground surface and the receiver. Assuming coherent waves and long enough signals emitted by the loudspeaker, the above described interference effects are possible.~~

For outdoor sound propagation, atmospheric turbulence occurs and results in phase and amplitude fluctuations of the sound waves. This effect reduces the coherence between the direct and the reflected sound wave followed by partly attenuated and blurred interference impacts on the measured sound level. Especially the ground dip is reduced due to turbulence which increases the SNR at the receiver for special sound frequencies and propagation geometries. In this way, the results of Figs. ~~787~~ and ~~898~~ show rather extreme values of the ground effect influencing the received sound level with ~~out out~~ atmospheric turbulence. Very low turbulent conditions occur e.g. e.g., during night-time with nighttime conditions weak or no wind.

Additionally, the finite length of the signal (Fig. ~~45~~) has to be considered to evaluate the ground effect. It was examined whether the directly propagating and the reflected sound wave parts could be separated due to their time delay at the

receiver. Thereby, straight-line sound paths, i.e. a homogeneous atmosphere, were again assumed. The time difference between direct and reflected signal arrivals is growing up with increasing height above ground of acoustic devices (Table 3)(Table 3Table 3).

~~Table 3: Time difference (in sample units) between signal arrivals of direct and ground reflected wave parts for a constant and homogeneous sound speed (temperature of 8 °C, calm).~~

Distance source receiver in m	Height above ground in m
50	1.5 ————— 3.0
70	14 39

The greater the distance to the receiver, the smaller is the time difference. For the sound propagation at the lower level (1.5 m above ground) and a sound frequency of 7 kHz, i.e. period duration of about 0.14 milliseconds (approx. 7 sample units), the signals of direct and reflected waves cannot be distinguished because the signal itself has a length of approx. ten periods (approx. 1.4 ms = 72 sample units). This leads to a received signal containing the acoustic ground effect in the measured sound level. The strength of this effect depends on the amount of atmospheric turbulence and the interference of direct and reflected sound waves. ~~Furthermore, the received signal contains partially the properties of the atmospheric layer between ground surface and microphone. Hence~~Furthermore, the real measurement height of the acoustically derived wind velocity and temperature can be slightly smaller than the geometrical height of the acoustic devices above ground because the received signal contains partially the properties of the atmospheric layer between ground surface and microphone. Using a shorter signal length, the onset of direct and reflected signals could be distinguished, but along with decreasing certainty of travel-time determination.

In addition to the effect of reflection at ground surface, refraction due to wind and temperature gradients has to be considered for outdoor sound propagation.

Refraction due to sound speed gradients

Atmospheric refraction can be described as a changed propagation direction of sound waves (e.g. e.g., Salomons, 2001). The resulting curved sound paths lead to a deviation from the straight-line sound propagation. The assumption of reciprocal sound propagation, i.e. along straight lines between transmitter and receiver, allows the simplified separation between the temperature and the wind influence on the acoustic travel time (Eq. (10).9)). However, it is questionable to what extent the refracting effect due to temperature and wind gradients affects this assumption. Thereby, vertical gradients of horizontal wind velocity and temperature gradients are especially important because they are usually greater than associated horizontal onesgradients.

At first, the effect of downward refraction on the travel-time measurements is estimated because this kind of refraction happens usually during cloudless nights with a stably stratified atmosphere. Downward refraction occurs due to positive gradients of effective sound speed (see Eq. (3)), for instance during a temperature inversion or/and for a sound propagation in wind direction assuming an increasing wind speed with height above ground. If one supposes, that the curved rays can be approximated by circular arcs (strictly speaking only valid in a motionless medium) depending on a constant vertical sound speed gradient in a stratified atmosphere (e.g., Attenborough et al., 2007), then the path length differences dl between curved (first term) and straight-line ray (second term = d) can be calculated from Snell's law as follows:

$$dl = \sin \alpha_S \int_{z_S}^{z_R} \frac{c_{eff}(z)}{\sqrt{c_{effS}^2 - c_{eff}(z)^2 \sin^2 \alpha_S}} dz - d \quad \text{with} \quad c_{eff}(z) = c_{effS} + z \frac{dc_{eff}(z)}{dz} \quad (21)$$

Here, α_S is the emission angle at sound source (polar angle of sound path measured from the positive z -axis, $\alpha_S > 0$), z_S and z_R are the heights of source and receiver, respectively, c_{effS} is the effective sound speed at the height of sound source and $dc_{eff}(z)/dz$ marks the constant vertical sound speed gradient. This equation can be easily solved in discretized form with finite thickness of several atmospheric layers. Thereby, the emission angle of sound rays is varied step by step until getting a connecting line between sound source and receiver point of the given measurement set-up. To estimate typical values of effective sound speed profiles on a cloudless summer day similar to experimental conditions, a numerical simulation of meteorological conditions was performed using HIRVAC (HIgh Resolution Vegetation Atmosphere Coupler; Mix et al., 1994, Ziemann, 1998, Goldberg and Bernhofer, 2001). The two-dimensional version of this boundary layer model (approx. 100x100 model layers, Queck et al., 2015) is solving the basic equations for momentum, temperature, and humidity. It contains additional terms describing the exchange of energy and humidity between vegetation and atmosphere at each model level. Calculation of temperature, wind velocity, and humidity profiles was followed by a calculation of the effective sound speed in sound propagation direction and its vertical gradients as average over 30 min for several local times (Fig. 9-10).

At the transmitter height of 1.5 m or 3-m, positive vertical gradients of effective sound speed can be expected for a sound propagation in wind direction. In general, the vertical gradients increase with decreasing height. Highest downwind gradients occur at nighttime and reach strong values of 0.57 s^{-1} (0.25 s^{-1}) at a height of 1.5 m (3 m). In comparison, the gradients at noon are significantly smaller mainly due to differences in the temperature profile between night (temperature inversion) and day (decreasing temperature with height). Figure 7 (red lines) shows an example for the calculated curved sound rays applying a sound speed gradient of about 0.6 s^{-1} . The height of the curved sound path above the measurement height of 1.5 m (3 m) is about 0.5 m (0.2 m) for a distance of 50 m and 1.0 m (0.5 m) for a 70 m distance between sound source and receiver. Over this height range, the direct sound path between loudspeaker and receiver integrates atmospheric conditions due to refraction. Additionally, the effect of ground reflection occurs again (Fig. 67, dashed red lines) which leads to a further integrating effect of a height layer with finite thickness around the measurement height.

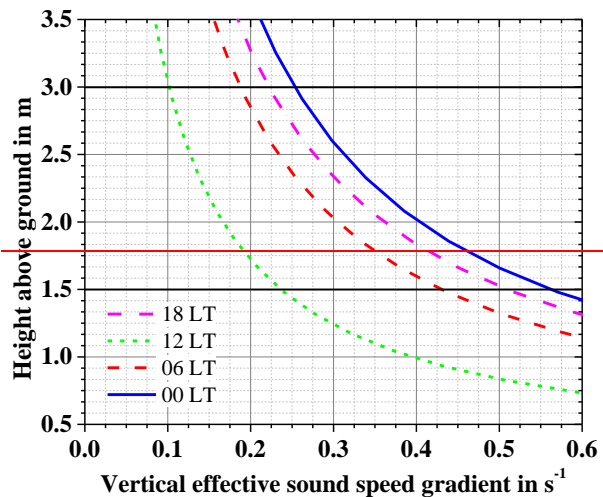


Figure 9910: Vertical profiles of vertical effective sound speed gradient (30-min-mean) in sound propagation direction simulated by HRVAC for homogeneous grassland (vegetation height=0.3 m, Leaf Area Index=2) on 15th of July (exemplarily for a cloudless summer day similar to experimental conditions) for different daytimes (LT=Local Time).

5

Outgoing from the simulated vertical sound speed gradients, a travel-time difference between curved and straight-line direct sound path is calculated according to Eq. (201), including the different sound speed values along the different sound paths (Table 4). Please note that the used sound speed gradients are the maximum values in the simulated diurnal cycle. Therefore, the uncertainty estimation above represents a rather conservative estimation.

10

These travel-time differences are mostly smaller than the travel-time uncertainty due to the signal analysis (4 sample units, see Sect. 4.1.1). Especially for short distances at a height of 3 m the difference is negligible. Only at longer distances and smaller measurement heights above ground, the same magnitude of uncertainties occurs. In this case it has to be proven during the further data and uncertainty analysis, that the measured vertical sound speed gradients are similar to the simulated ones. Thus, considering downwind gradients especially for night-time conditions, the vertical sound speed gradient should be measured, controlled, e.g. e.g. using accompanying ultrasonic measurements to ensure the applicability of reciprocal sound propagation.

15

Table 4: Comparison of travel time uncertainties: Above: Travel time difference (in sample units) between straight line and curved sound path through the atmosphere for a maximum vertical gradient of effective sound speed of 0.6 s^{-1} (during nighttime) on a summer day over grassland. Below: travel time uncertainty due to signal analysis using (CCF), see Sect. 4.1.1.

20

Uncertainty due to travel-time difference between straight line and curved sound path	Distance source-receiver	Height above ground in m
	in m	
	50.0	1.5 ————— 3.0
	\approx	\emptyset

	70.0	6	±
Uncertainty due to signal analysis of travel time measurements	50.0/70.0	4	(0.3/0.2 K; 0.2/0.1 ms ⁻¹)

The analysis of measured vertical temperature gradients shows (see Sect. 4.3) that the above presented estimation of uncertainty mostly reflects a worst case. For further investigations in this study, the data at a height of 1.5 m above ground were used only for the short distance of 50 m. The deviation from the straight-ray approximation leads in this case to an additional travel-time uncertainty of 2 sample units according to Table 4.

Finally, the sound propagation against the wind direction is considered. Only negative sound speed gradients result from the investigations with the boundary layer model HIRVAC. Maximum gradients occur at midday (here not shown). This leads to an upward directed refraction of the sound waves in the atmosphere. For such conditions, theoretically no signal reaches the microphone which is located at ~~one and~~ the same height level as the loudspeaker. but several decameters away from the speaker. Nevertheless, due to a finite extent of the microphone, its spherical directional pattern and due to the scattering effect of atmospheric turbulence (Salomons, 2001), it is mostly almost always possible to detect a signal in upwind direction if the wind speed is smaller than 6 m s⁻¹ at the height of acoustic devices and therewith the vertical gradient is moderate (around 0.3- s⁻¹). ~~However, a low SNR frequently occurs in this case which has to be included in the travel-time analysis with adequate data quality flags.~~ If a travel-time could be analyzed, the above explained uncertainty estimation for downward refraction can also be applied for the upward refracting case.

To sum up the outcomes of Sect. 4.1, following maximum uncertainties result for measurements at a height of 1.5 m above ground and for distances between loudspeaker and microphone of 50 m: (1) 4 sample units due to signal analysis, (2) 2 sample units due to sound refraction. The resulting travel-time uncertainty of 6 sample units can be recalculated into an uncertainty of about 0.4 K and 0.3 m s⁻¹ for instantaneous temperature and wind measurements (see Sect. 4.1.1). Applying averaging over, e.g., 30 minutes results in statistical uncertainties of about 0.04 K and 0.03 m s⁻¹.

4.2 Uncertainty of OP-FTIR-CO₂ measurements

Despite the great potential of OP-FTIR spectroscopic measurements, the technology is not commonly used for ground-based micrometeorological atmospheric monitoring due to the uncertainties in obtaining reliable information from the measured spectra (Cieszyk, 2014). The uncertainties for the retrieval of gas concentration from OP-FTIR spectra can be classified in (1) ambient environmental influences, (2) instrumental influences, and (3) data processing influences.

~~Infrared spectral data are mainly controlled by the environmental conditions such as pressure and temperature variations. The environmental pressure and temperature variations during the measurements imply the main important inherent influence for infrared spectral data.~~ Horrocks et al. (2001) demonstrated that especially temperature has a significant impact on retrieval

error and is an important parameter under consideration for subsequent data processing. The challenge to determine gas concentration using passive OP-FTIR under conditions with changing temperatures was described by Cieszczyk (2014).

Following Eq. (178), the main drawback and source for uncertainty in concentration determination processing from passive spectra obviously result from the dependency of signal amplitude from the difference between background temperature T_B (thermal IR radiation) and target compound temperature T_{air} , which is assumed to be in thermal equilibrium with considered air volume. Usually, for passive OP-FTIR remote sensing this temperature difference is only a few Kelvins which affects an increasing error for the difference between spectral radiance of the background and the air (Polak et al., 1995, Harig et al., 2006). Using the approach proposed by Polak et al. (1995) the impact on transmission spectra can be analyzed by introducing a disturbed air temperature T'

$$T' = T_{air} + \varepsilon_T$$

(22)(222221)

where ε_T is a given temperature error. This error leads to an erroneous spectral radiance of the air volume ε_L
 $\varepsilon_L = B(\nu, T') - B(\nu, T_{air})$.


(23)(232322)

The disturbed transmission $TR'(\nu)$ is then given by

$$TR'(\nu) = \frac{TR(\nu) - \varepsilon_L/L_0}{1 - \varepsilon_L/L_0}$$

(24)(242423)

Using Eq. (145) the disturbed absorbance can be calculated using $TR'(\nu)$. Figure (140) shows the relative absorbance error $\Delta A/A$, which is directly related to the error of column density $\Delta(c_T \cdot d) / (c_T \cdot d)$, as a function of ε_T for various temperature differences ($T_B - T_{air}$). As expected, the error for absorbance is increasing enormously for small temperature differences. Reasonable absorbance errors can be achieved for an absolute value of ε_T smaller than 0.4 K.

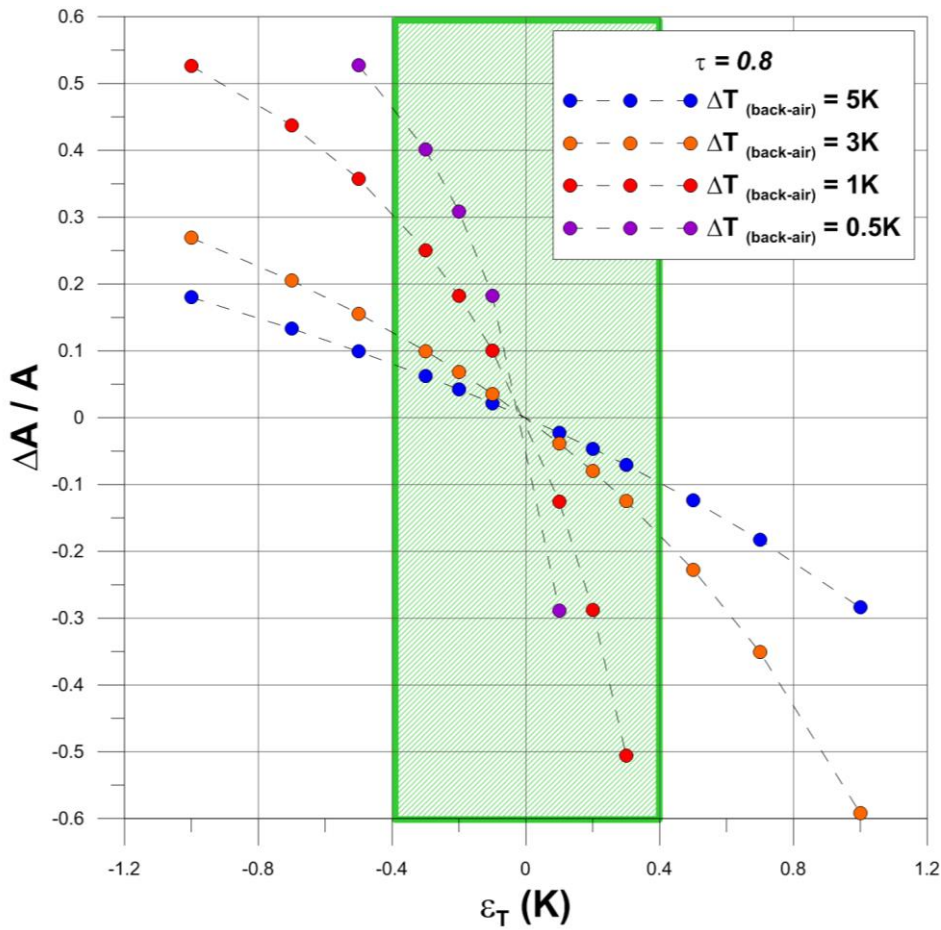

~~Figure 101011: The relative absorbance error $\Delta A/A$ as a function of a given temperature error ϵ_T for various temperature differences $(T_B - T_{air})$. The errors were calculated for a transmission value $\tau = 0.8$ at wavenumber 800 cm^{-1} .~~

- 5 In the case of Grillenburg experiment the passive radiance spectra were analyzed in accordance to Harig and Matz (2001) to determine the temperature difference between background and ambient air. In two spectral regions the spectra were fitted to the Planck radiation function using a non-linear least-square algorithm. In the spectral range less than 700 cm^{-1} , the atmosphere is more or less opaque and the spectral data contain the radiation temperature of the ambient air T_{air} in the vicinity of the spectrometer device. The information on background radiation temperature T_B was derived from the spectral
- 10 region between 850 and 1300 cm^{-1} . The obtained temperature differences $(T_B - T_{air})$ were compared to the horizontal temperature variability derived from 1-minute mean values of sonic temperature (= acoustic virtual temperature) measurements, which is used as the presumed ϵ_T .-(Fig. ~~1211~~)-

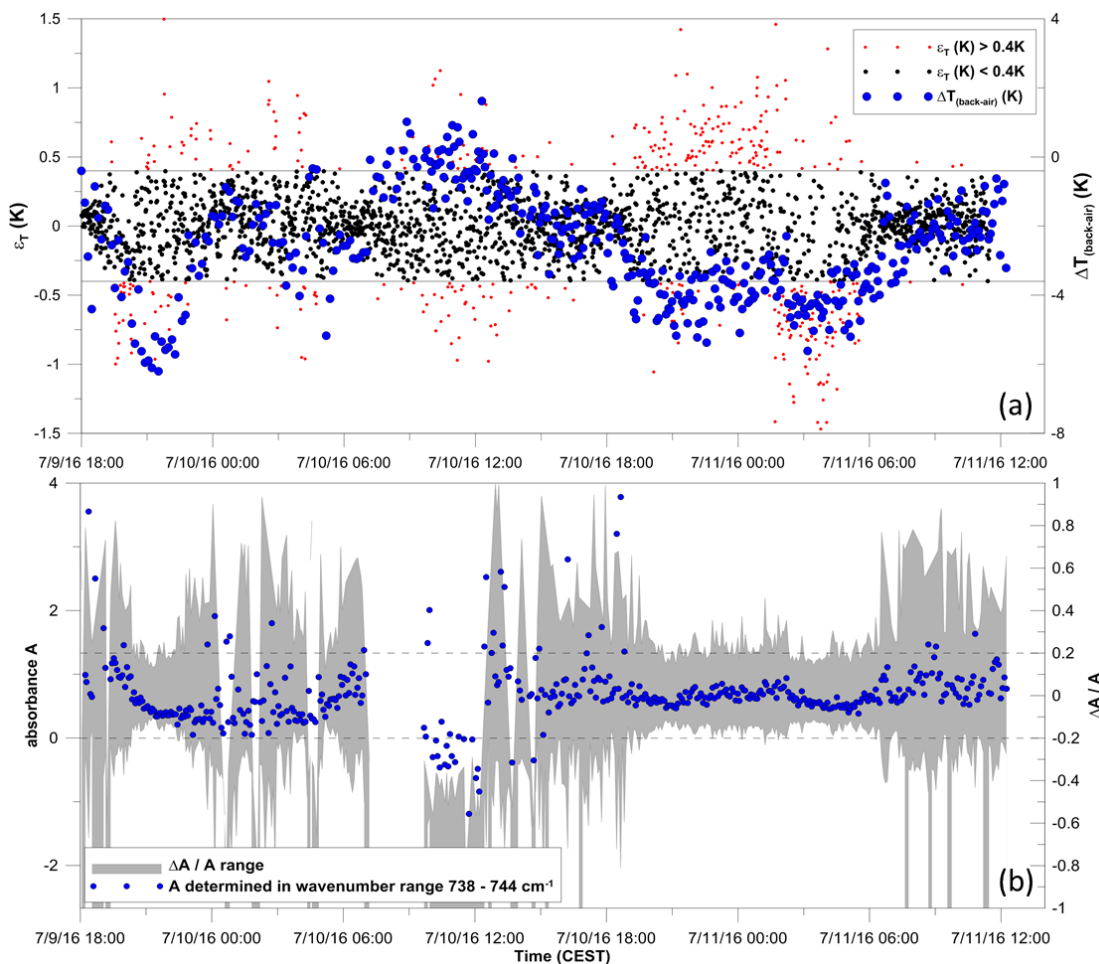


Figure 11112: (a) Comparison of obtained temperature differences ($T_B - T_{air}$) derived from passive radiance spectra and measured horizontal sonic temperature differences derived from two measurement points. Latter is used as estimation for the air temperature error ϵ_T . (b) The temperature data reveal measurements resulting in increased relative absorbance errors higher than 20% due to increased air temperature error $\epsilon_T > 0.4K$ and decreased temperature differences $|T_B - T_{air}| < 2 K$.


For the considered period more than 90 % of the horizontal sonic temperature differences at two measurement points are less than 0.4 K. Furthermore, especially in the night-time increased absolute values of temperature differences between background and air ($|T_B - T_{air}| > 2 K$) were observed. In these periods relative absorbance errors less than $\pm 20\%$ are achievable. However, in periods around the noontime the passive radiance spectra reveal the thermal equilibrium of background and air. Hence, these periods are not suitable for further concentration analysis due to the extreme relative absorbance errors and have to be disregarded in the further data analysis.

From instrumental side, the wavenumber resolution accuracy and the instrumental line shape (ILS) or apparatus function describes the influence of the spectrometer on the measured spectra. Each spectrometer device convolves the IR intensity

due to absorbance effects with this device characteristic function. The ILS is responsible for distortion of spectra caused by the finite detector area and finite optical path difference within the spectrometer. Most of the variation in ILS is driven by the instrumental resolution and the effective FOV due to misalignments of optical components inside the spectrometer. These doubts in true ILS of the applied spectrometer can lead to uncertainties in smoothing of spectral information and later on in concentration determination errors. Horrocks et al. (2001) estimated a concentration retrieval error of about 2 % due to an ILS uncertainty by measuring defined gas concentrations under fixed conditions. However, recent investigations concerning sensitivity of OP-FTIR retrievals by Smith et al. (2011) point out that using a broader spectral feature for concentration retrieval is suitable for the minimization of the effect of ILS on individual absorption lines.

The applied apodization functions (e.g., boxcar, triangular) and the internal optical path difference mainly control the influence in terms of spectral resolution. Manufacturer's maintenance specification concerning a wavenumber accuracy of 13 % at resolution of 4 cm^{-1} was used to estimate an instrumental uncertainty based on simulation of absorbance spectra. The HITRAN Application Programming Interface (HAPI) is a set of Python routines for the easy access and processing of IR spectroscopic data for different gases and its isotopologues available in HITRAN database (Kochanov et al., 2016). The features of the modular routines provide, among others, the receipt of the line-by-line data into a local database as well as the simulation of high-resolution spectra accounting for pressure, temperature, optical path length, and instrumental settings. The influence of an uncertainty of wavenumber resolution on absorbance is shown as an example in Fig. 1312. The simulation of the absorbance spectra includes environmental conditions similar to the Grillenburg experiment ($T = 298 \text{ K}$, $p = 1 \text{ atm}$, CO_2 line concentration = 40,000 ppm-m) and typical instrumental settings (e.g., triangular apodization function). The obtained relative absorbance errors $\Delta A/A$ range between 2 and 6.5 %.

Based on the previous data evaluation, the absorbance spectra of the night time period from 10th – 11th July showed reasonable absorbance errors smaller than 20 % and were chosen for the subsequent quantitative analysis (Fig. 11b). This period covered an interval of 9.5 hours and included 108 spectra for each measured optical path direction. The concentration retrieval is based on chemometric techniques applied to the absorbance spectra deriving spectral properties which are related to quantitative information. It included the usage of least-squares fitting comparing parts of the measured absorbance spectra with simulated reference spectra. The algorithm is previously well described for instance by Griffiths and de Haseth (2007) and Smith et al. (2011). Reference IR spectra including instrumental line shape were generated by using the HAPI routines (Kochanov et al., 2016). Additional Python routines were designed for the selection of spectral windows and the comparison of measured and simulated spectra based on the classical least-squares approach (CLS) as a straightforward algorithm (Shao et al., 2010). Actually, different retrieval methods to obtain concentration values from measured spectra are available (e.g., CLS, partial least-squares regression PLS). Smith et al. (2011) observed an increasing underestimation of the CLS-based method at higher path lengths. However, for Grillenburg experimental setup the optical path lengths and the expected line concentrations were sufficiently low to use a CLS-based retrieval approach neglecting the Beer-Lambert law nonlinearity.

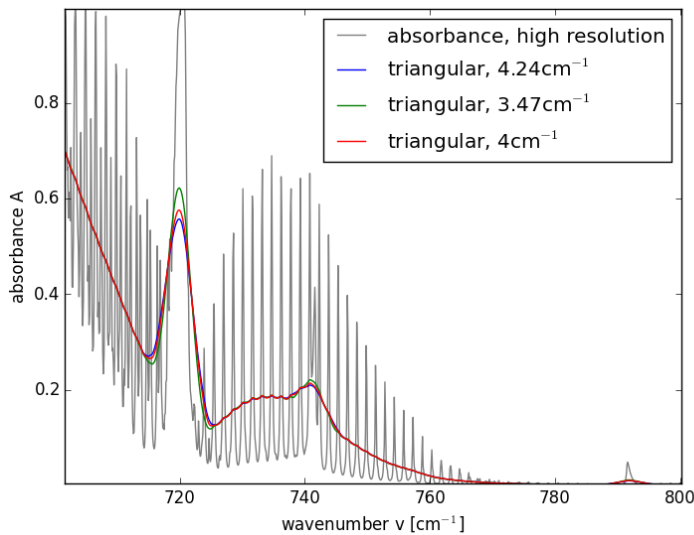

~~Figure 121213: Example of simulated CO₂ absorbance spectra (line concentration 40,000 ppm-m, T = 298 K, p = 1 atm) for wavenumber region 700–800 cm⁻¹. The relative absorbance error ΔA/A for a known uncertainty in wavenumber resolution accuracy given by manufacturer's specifications is in the range between 2–6.5%. Besides the wavenumber accuracy, also the applied apodization function (here triangular) affects the relative absorbance error.~~

~~Based on the previous data evaluation the absorbance spectra of the night time period from 10th–11th July showed reasonable errors and were chosen for the subsequent quantitative analysis (Fig. 12b). This period covered an interval of 9.5 hours and included 108 spectra for each measured optical path direction. The concentration retrieval is based on chemometric techniques applied to the absorbance spectra deriving spectral properties which are related to quantitative information. It included the usage of least-squares fitting comparing parts of the measured absorbance spectra with simulated reference spectra. The algorithm is previously well described for instance by Griffiths and de Haseth (2007) and Smith et al. (2011). Reference IR spectra including instrumental line shape were generated by using the HAPI routines (Kochanov et al., 2016). Additional Python routines were designed for the selection of spectral windows and the comparison of measured and simulated spectra based on the classical least-squares approach (CLS) as a straightforward algorithm (Shao et al., 2010). Actually, different retrieval methods to obtain concentration values from measured spectra are available (e.g., CLS, partial least-squares regression PLS). Smith et al. (2011) observed an increasing underestimation of the CLS-based method at higher path lengths. However, for Grillenburg experimental setup the optical path lengths and the expected line concentrations were sufficiently low to use a CLS-based retrieval approach neglecting the Beer-Lambert law nonlinearity.~~

A spectral window ranging from 700 to 760 cm⁻¹ was used for the determination of CO₂ line concentrations due to the significant absorbance feature of CO₂ molecules within this wavenumber region. The quantitative accuracy was determined from fit residuals of the calculated and measured absorbance spectra. Only measurements with valid fitting errors smaller than 3 % were defined as acceptable for further data analysis.

For the Grillenburg experiment the maximum uncertainty for CO₂ concentration determination from passive OP-FTIR measurements was estimated based on the considered systematic influences due to environmental parameters, instrumental characteristics, and retrieval procedure with a total amount of approx. 30 % for a single measurement. This value for total uncertainty seems to be high compared to active OP-FTIR investigations (Horrocks et al. 2001, Smith et al. 2011). The uncertainty of temperature difference between background and considered atmospheric gas compound could be identified as the main error source for the passive measurements and a threshold of 2 K for data filtering was defined. In summary, the total uncertainty represents the maximum error estimation, valuable for the validation of the method in terms of applicability to determine spatial concentration variations for the micrometeorological investigations addressed by this study. The estimated range of maximum concentration uncertainty for our experiment was confirmed by other passive OP-FTIR investigations (e.g., Allard et al., 2005, Sulub and Small, 2007, Kira et al., 2015). However, most of these studies are based on hot gases with high temperature contrasts between background and target gas compounds (volcanic gases, exhaust gases) or on the determination of non-atmospheric GHG gases (industrial gases, aerosols).

4.3 Applicability of combined A-TOM and OP-FTIR measurements



At this point, the uncertainties of the two methods, A-TOM and OP-FTIR, are known. Single, instantaneous values of wind components, measured by A-TOM, can be derived with an uncertainty of 0.3 m s⁻¹ for the described setup of the Grillenburg experiment (height of 1.5 m above ground and path lengths of 50 m). After averaging over a time period of 30 min the statistical uncertainty amounts to about 0.023 m s⁻¹.

The wind component in x -direction, u , was calculated as a spatial mean along the two paths between the measurement positions ATOM1 and ATOM4 as well as ATOM2 and ATOM3 (see Fig. 12). The sound path between ATOM1 and ATOM4 is parallel to the optical path R72 – R73 of OP-FTIR measurements. The perpendicular wind component v was derived by averaging the line-integrated wind measurements between ATOM1 and ATOM2 as well as ATOM4 and ATOM3 (parallel to OP-FTIR-path R72 – Black4).

~~Figure 14~~ Figure 13a shows that the wind speed was relatively small during the exemplarily investigated ~~night-time~~ nighttime in July 2016 at the Grillenburg site. Furthermore, after midnight the wind speed was steadily falling to mean values smaller than 1 m s⁻¹.

These low wind conditions near the surface during a clear night were supported by a stably stratified atmosphere. Figure 13b determines a positive vertical temperature gradient during all night-time hours.

Between 3 and 5 o'clock a noticeably high value of the temperature gradient occurs together with very small wind speed values and a changing wind direction shortly before the onset of this sharp increase in stability. Thereby, the A-TOM measurements are showing a similar behaviour in comparison to the measurements using sonic anemometers. Mostly, the spatially averaged data are similar to all point data. However, there are greater differences between the data from sonic anemometers especially during times of high vertical gradients and times of highly variable gradients, respectively.

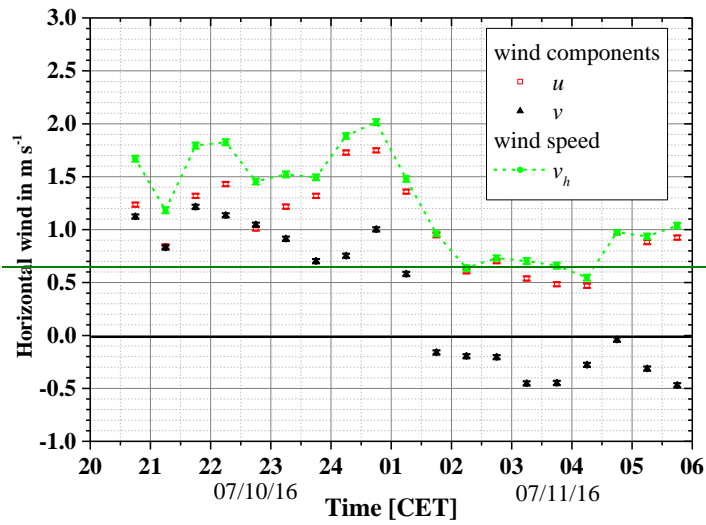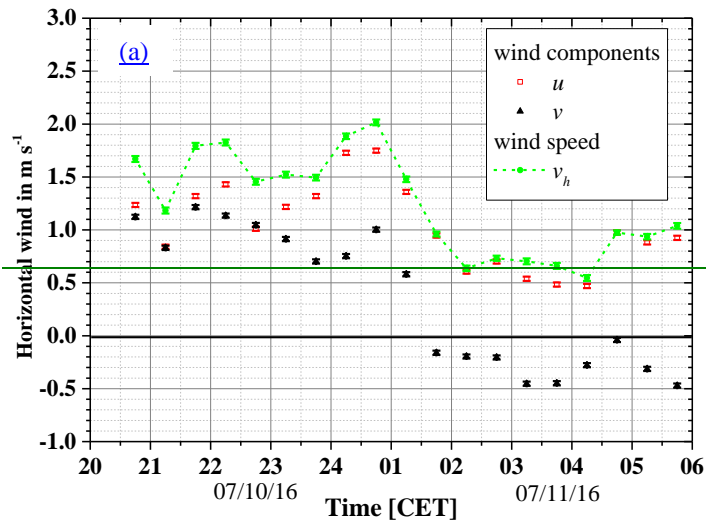

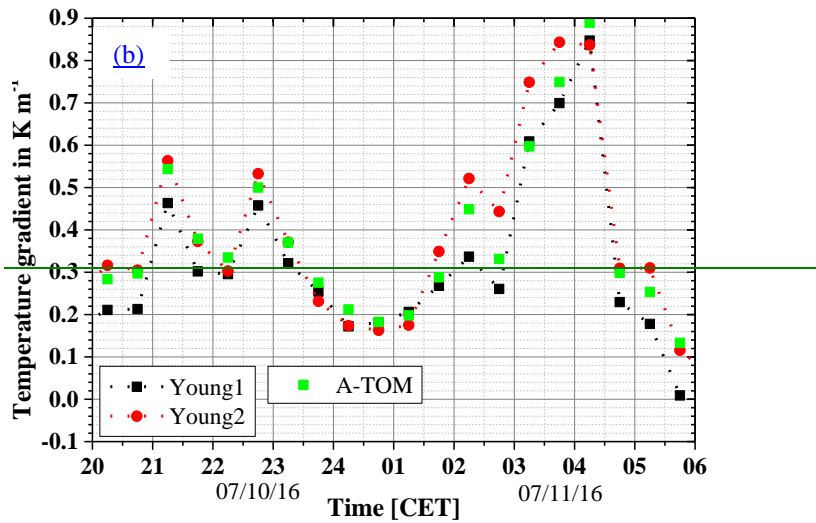



Figure 131314: Averaged (30 min) data: (a) horizontal wind speed at a height of 1.5 m measured by A-TOM and with maximum uncertainties; (b), vertical gradient ($z - 1.5$ m) of acoustic virtual temperature measured by sonic anemometers (Young1/2 see Fig. 1) and by A-TOM as spatial mean (50×50 m²).

5 Absolute CO₂ concentrations, measured by OP-FTIR, are estimated with a maximum uncertainty of 30 % for a single measurement. Considering the application of averaging over a period of 30 minutes, the standard error of the mean values can be decreased at least by a factor $1/\sqrt{4} = 0.5$, because not all single data values could be used for further analysis. Recognising the time-dependent (i.e. concentration-dependent) calculation of uncertainty in Sect. 4.2, the single measurement uncertainty amounts to a maximum value between 20 and 30 %. Based on the recalculation of relative into an absolute error values including the averaging time of 30 min and only considering all night-time measurements, an averaged, statistical uncertainty of approx. 70 ppm is resulting. Smaller values of uncertainty can be obtained for smaller concentrations. Values with a determined uncertainty greater than 30 % are excluded from further analysis. Thereby, exemplary concentrations along the two paths between the measurement positions (see Fig. 1) R72 - Black4 (distance: 100 m) and R72 - R73 (80 m) were analysed. Figure 14a shows the temporal and spatial differences of CO₂ concentrations along the two mentioned optical paths at the Grillenburg site during night-time measurements. Again, the special time period around 4 o'clock is standing out with comparably higher concentrations accompanied by significant spatial differences.

These low wind conditions near the surface during a clear night were supported by a stably stratified atmosphere. Figure 153b determines a positive vertical temperature gradient during all nighttime hours.

20 Between 3 and 5 o'clock a noticeably high value of the temperature gradient occurs together with very small wind speed values and a changing wind direction shortly before the onset of this sharp increase in stability. Thereby, the A-TOM measurements are showing a similar behaviour in comparison to the measurements using sonic anemometers. Mostly, the

spatially averaged data are similar to all point data. However, there are greater differences between the data from sonic anemometers especially during times of high vertical gradients and times of highly variable gradients, respectively.

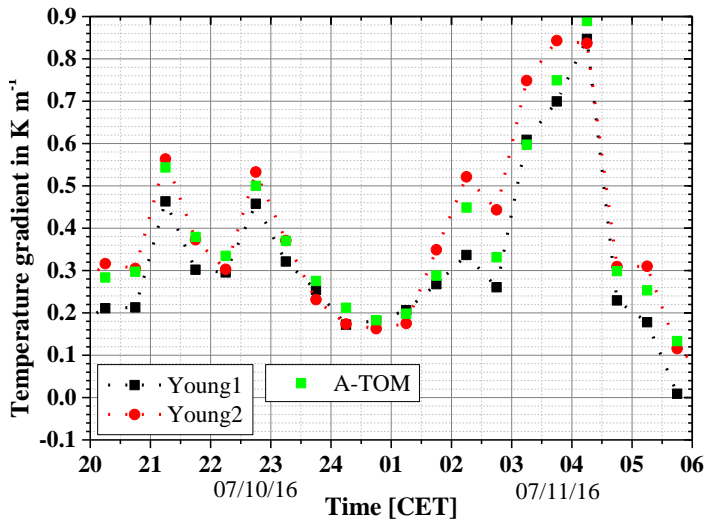


5 **Figure 1415: Averaged (30-min) vertical gradient (3–1.5 m) of acoustic virtual temperature measured by sonic anemometers (Young1/2 see Fig. 21) and by A-TOM as spatial mean (50 x 50 m²).**

10 ~~Absolute CO₂ concentrations, measured by OP-FTIR, are estimated with a maximum uncertainty of 30 % for a single measurement. Considering the application of averaging over a period of 30 minutes, the standard error of the mean values can be decreased at least by a factor $1/\sqrt{4} = 0.5$, because not all single data values could be used for further analysis. Recognising the time dependent (i.e. concentration dependent) calculation of uncertainty in Sect. 4.2, the single measurement uncertainty amounts to a maximum value between 20 and 30 %. Based on the recalculation of relative into an absolute error values including the averaging time of 30 min and only considering all nighttime measurements, an averaged, statistical uncertainty of approx. 70 ppm is resulting. Smaller values of uncertainty can be obtained for smaller concentrations. Values with a determined uncertainty greater than 30 % are excluded from further analysis. Thereby, exemplary concentrations along the two paths between the measurement positions (see Fig. 2) R72–Black4 (distance: 100 m) and R72–R73 (80 m) were analysed. Figure 164a shows the temporal and spatial differences of CO₂ concentrations along the two mentioned optical paths at the Grillenburg site during nighttime measurements. Again, the special time period around 4 o'clock is standing out with comparably higher concentrations accompanied by significant spatial differences.~~

20 The temporal and spatial variability of CO₂ concentration determined by OP-FTIR was compared to the results of the measurements taken by EC station (3 m above ground) and soil respiration chamber measurements at ground surface ((Figure 17Fig. 14b6). Obviously, a distinct similarity in concentration time series is observable for all measurements, but

there are also significant differences concerning measured amplitudes of CO₂ concentration. The point measurements (SC and EC data) underlined the present a distinct-variability in horizontal as well as in vertical distribution, also perceptible in OP-FTIR data. Furthermore, the chamber measurements at ground surface illustrated the increased spatial variability of CO₂ concentration during ~~night-time~~nighttime caused by soil respiration processes. Despite the spatial proximity of the two chambers to the EC tower, there are obviously differences in soil respiration data itself as well as distinct differences in the temporal behavior considering the comparison to the EC data. This spatial heterogeneity in soil flux for a grassland site can be caused by the variability in soil moisture, changes in soil fauna composition, and the amount of above-ground biomass (Davidson et al., 2002, Rodeghiero and Cescatti, 2008, Darenova et al., 2016). The data of Grillenburg experiment supports the approach of combined line-averaging and point measurements~~clearly demonstrated the main difference between line and point measurements~~: OP-FTIR measurements provided path-integrated values covering assumed spatial concentration variability in a single measurement~~(including the assumed spatial concentration variability)~~ and yielded spatially averaged concentration values. However, a certainly limited comparability between results of point sensor and line-averaging measurements is expected due to the different volumes considered by the different methodical approaches and due to the effect of undersampling caused by the heavily limited number of point sensors.

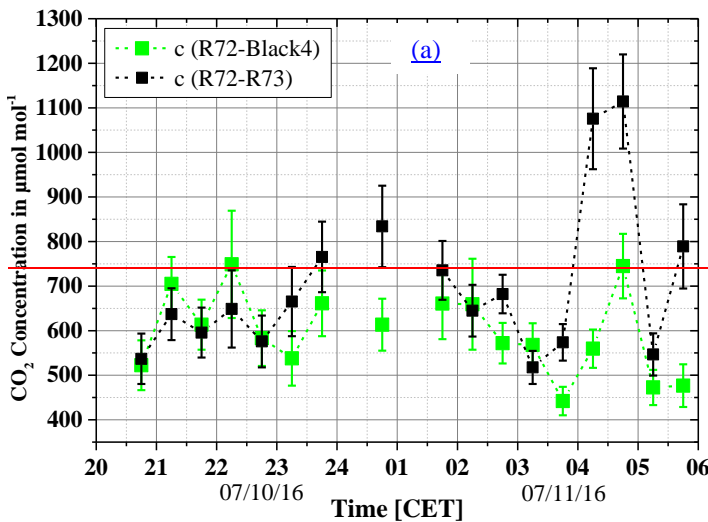


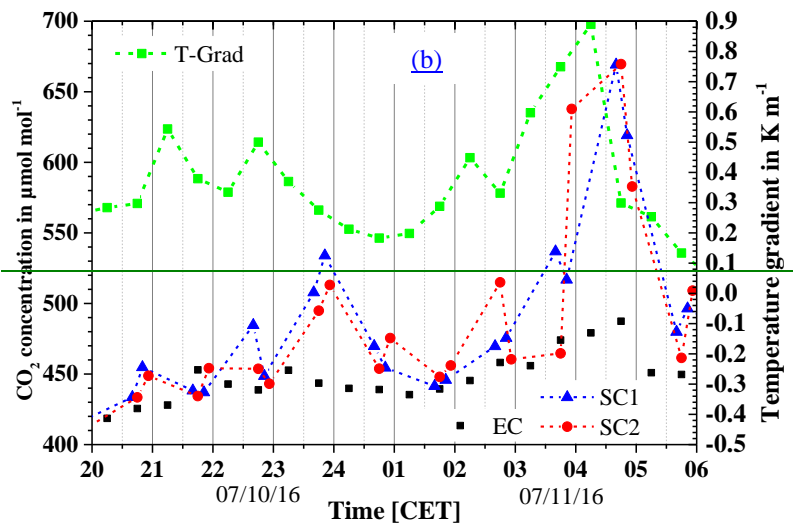


Figure 1516 14: Averaged (30 min) CO₂ concentration measured by: (a) OP FTIR at perpendicular paths at a height of 1.5 m above ground, representative for total investigation area with vertical extent due to field of view of 0.25 m, and with maximum uncertainties; (b): EC station at a height of 3.0 m, by two soil respiration chambers at the ground surface (SC1/2; horizontal distance between the chambers 5 m), and vertical temperature gradient measured by A TOM (3.0 — 1.5 m).

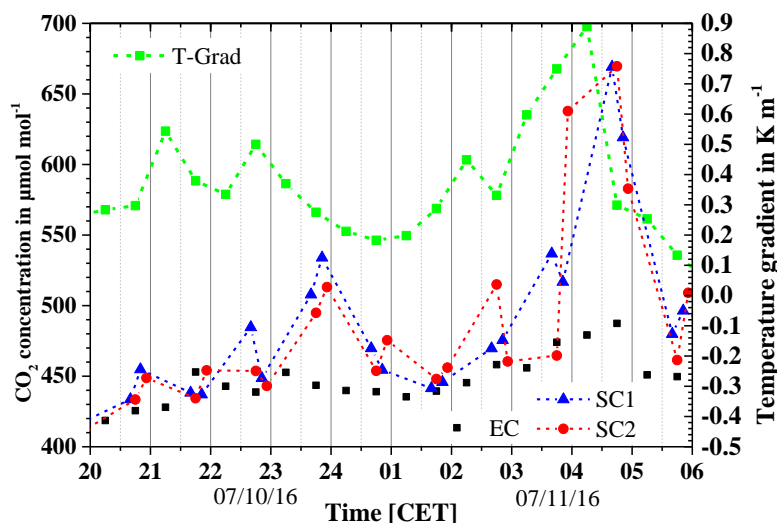

~~Figure 1617: Averaged (30 min) CO₂ concentration measured by EC station at a height of 3 m, measured by two soil respiration chambers at the ground surface (SC1/2: horizontal distance between the chambers 5 m), and vertical temperature gradient measured by A TOM (3—1.5 m).~~

5 In the next step of analyses, the horizontal advection and its uncertainty were calculated. Thereby, an adapted form of Eq. (2) was applied according to the analysed results so far:

$$F_{Hor} \approx \frac{1}{V_m} \left(\overline{v_h} \frac{\Delta \bar{c}}{\Delta d} \right) \Delta z$$

~~(25)(252524)~~

To roughly estimate the spatial concentration differences within the investigated area inside the square R72-Black4-Black2-
10 R73, two line-integrated concentrations and their difference were used: R72 - Black4 and R72 - R73. Because these two paths are perpendicular and include the total acoustic measurement area, the horizontal wind speed v_h was used in Eq. (245) instead of the wind components u and v . In this way, Eq. (245) gives an estimation of the spatially averaged and representative horizontal advection at the Grillenburg site.

To derive the maximum uncertainty of horizontal advection at a certain height level above ground, the error propagation law
15 is then applied to Eq. (24) with $\Delta d = 100$ m for an averaged difference of distance:

$$\Delta F_{Hor} = \frac{1}{V_m} \left(\left| \frac{\Delta \bar{c}}{\Delta d} \right| \Delta \overline{v_h} + \left| \overline{v_h} \right| \frac{\Delta \Delta \bar{c}}{\Delta d} \right) \Delta z = \frac{1}{V_m} \left(\left| \frac{\Delta \bar{c}}{\Delta d} \right| \left(\left| \frac{\overline{u}}{\overline{v_h}} \right| \Delta \overline{u} + \left| \frac{\overline{v}}{\overline{v_h}} \right| \Delta \overline{v} \right) + \left| \overline{v_h} \right| \frac{\Delta \Delta \bar{c}}{\Delta d} \right) \Delta z.$$

~~(26)~~

~~(262625)~~

Thereby it is assumed that the uncertainty of path length (Δd) estimations and layer thickness (Δz) determination is negligible
in comparison to the uncertainties of wind components and spatial concentration differences. It has to be noticed, that the
20 concentration error for a measurement along one optical path counts twice in the term $\Delta \Delta \bar{c}$ due to the spatial difference of concentrations $\Delta \bar{c}$. This behaviour results in relatively large values of the last term in Eq. (256), at least one magnitude larger than the first term which accounts for the wind uncertainty.

A value of $22.414 \cdot 10^{-3} \text{ m}^3 \text{ mol}^{-1}$ was applied for the molar volume of dry air V_m . The vertical layer thickness Δz is mainly
influenced by the field of view of the OP-FTIR measurements. ~~Assuming 10 mrad (see Table 1).~~ Assuming an averaged
25 vertical layer of 0.25 m ~~is investigated along a path length of 100 m and using~~ Using these values together with Eq. (256),
maximum uncertainties of $3 - 38 \mu\text{mol m}^{-2} \text{ s}^{-1}$ follow. In the light of temporary great values of horizontal advection and
including the spatially averaging and expanding effects of the method, the uncertainties are reasonable. Nevertheless, there
are several possibilities for further development of the combined method which will be discussed in Sect. 5.

~~Figure 185 shows the resulting estimation of horizontal advection at a height of 1.5 m above ground, representative for the
30 total investigation area of approx. 120 m x 120 m and an vertical extent of 0.25 m due to the field of view of optical
measurements. The spatial gradient derived from the spatial difference of CO₂ concentrations is the factor which decides the
sign of advection because the wind speed is always positive. In this way, the sign of advection is a bit arbitrary.~~

The temporal behaviour of advection is generally connected with that one of spatial concentration difference, but it is modulated by the wind speed. Mostly, the temporal variability of advection is coupled with temperature gradient until 3 o'clock. During this first time period, the course of advection and atmospheric stability is similar: increasing stability occurs together with increasing advection and vice versa. The turbulent CO₂ flux demonstrates frequently a similar behaviour. During the following time period, the wind turns, wind speed decreases, atmospheric stability increases remarkably, and EC flux increases too. It has to be noticed that EC fluxes during such low wind conditions should be treated with high caution (e.g. Aubinet et al., 2012). In comparison to that, the advection decreases sharply after 4 o'clock. This event is coupled with the rising near surface concentration of CO₂ measured by the soil respiration chambers and to lower extent by the EC system (Fig. 4b17) shortly after reaching the maximum of temperature gradient.

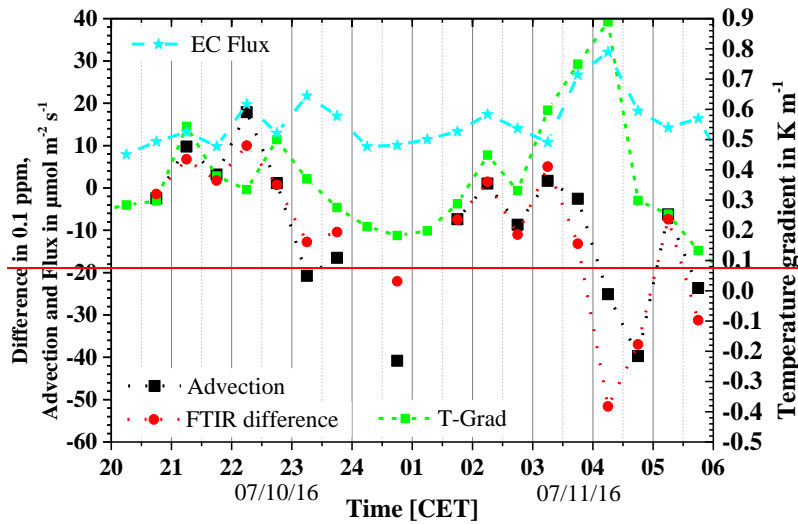


Figure 1815: Averaged (30 min) spatial difference of CO₂ concentration (OP FTIR) and horizontal advection (A TOM, OP FTIR) at a height of 1.5 m, vertical gradient (3.0—1.5 m) of acoustic virtual temperature (A TOM) and CO₂ flux at a height of 3.0 m (EC). Figure 15 shows the resulting estimation of horizontal advection at a height of 1.5 m above ground, representative for the total investigation area of approx. 120 m x 120 m and a vertical extent of 0.25 m due to the field of view of optical measurements. The spatial gradient derived from the spatial difference of CO₂ concentrations is the factor which decides the sign of advection because the wind speed is always positive. In this way, the sign of advection is a bit arbitrary.

The temporal behaviour of advection is generally connected with that one of spatial concentration difference, but it is modulated by the wind speed. Mostly, the temporal variability of advection is coupled with temperature gradient until 3 o'clock. During this first time period, the course of advection and atmospheric stability is similar: increasing stability occurs together with increasing advection and vice versa. The turbulent CO₂ flux demonstrates frequently a similar behaviour. During the following time period, the wind turns, wind speed decreases, atmospheric stability increases

5 remarkably, and EC flux increases too. It has to be noticed that EC fluxes during such low wind conditions should be treated with high caution (e.g.-e.g., Aubinet et al., 2012). In comparison to that, the advection decreases sharply after 4 o'clock. This event is coupled with the rising near-surface concentration of CO₂ measured by the soil respiration chambers and to lower extent by the EC system (Fig. 14b) shortly after reaching the maximum of temperature gradient. The changing wind direction leads probably to another upstream source region for CO₂. The estimation of the source area (also applying the boundary layer model HIRVAC) is a remaining task of the SQuAd project.

5 Conclusions and outlook

10 To close the known gap within energy balance which affects the CO₂ balance determinations, there is still a considerable requirement for adequate advection measurements. Up to now, there are a lot of measurements approximating the required quantities between points at selected transects. It has been shown that especially more detailed spatial information about flow properties and CO₂ distribution in the control volume would be necessary (Feigenwinter et al., 2008). Ground-based remote sensing techniques can provide spatially representative CO₂ concentration values together with wind components within the same voxel structure. For this purpose, the presented SQuAd-approach applies an integrated method combination of line-averaging acoustic tomography to measure wind components together with open-path Fourier transform infrared spectroscopy to derive spatially integrated CO₂ concentrations.

15 The derived values of mean advection around 10 $\mu\text{mol m}^{-2} \text{s}^{-1}$ (and sometimes higher) seem to be comparatively high (e.g.-e.g., Zeri et al, 2010). Similar values of about 50 $\mu\text{mol m}^{-2} \text{s}^{-1}$ for advection as well as CO₂ gradients of 1 $\mu\text{mol m}^{-2} \text{s}^{-1}$ were detected in more complex environments regarding topography and vegetation cover (Feigenwinter et al., 2010). In this respect our results at relatively flat grassland site and using the line-averaging methods ~~maybe-are~~ worthy of discussions looking into. Thereby, the different measurement volumes of point-like (measurements based on EC and SC) and line-averaging measurement methods (OP-FTIR, A-TOM) should be taken into account. We observed higher concentration values from spatially integrating and representative measurements in comparison to point measurements which could be affected by undersampling of real-world fluxes (Siebicke et al., 2011) and near-ground CO₂ concentration variability, too.

25 The environmental factors driving the spatial variability of soil CO₂ fluxes are still poorly understood (Rodeghiero and Cescatti, 2008). Variability in physical soil properties (e.g., soil moisture, clay content), disturbances in soil fauna and the amount of above-ground biomass can produce spatial soil respiration heterogeneity also within a more or less homogeneous look alike grassland site (Davidson et al., 2002, Darenova et al. 2016). Hence, the spatial determination of GHG concentrations only based on point information requires an optimized vertically and horizontally distributed instrumental setup of point sensors. This is necessary for a representative site characterization avoiding the undersampling of the complex flow phenomena. Hence, the overarching application of line-averaging measurements can help to overcome the limitations of distributed single sensors providing integrative spatial data across an extended path less affected by local unrepresentative

30

~~fluctuations. It is expectable that spatially integrating and representative measurements of concentrations lead to higher values in comparison to point measurements which could be affected by undersampling of real world fluxes (Siebicke et al., 2011).~~ Furthermore, the shown exemplary results were measured near the ground during stable stratification with remarkable amounts of temperature gradient as well as during low wind conditions. Several authors, ~~e.g. e.g.~~ Sun et al. (2007), Kutsch et al. (2008), Siebicke et al. (2012), found maximum advection during such conditions especially near the ground surface (Feigenwinter et al., 2008). The analysis of further data sets with additional concentration measurements and for additional time periods should confirm the derived results so far and the possibility to apply spatially averaging methods to measure advection of CO₂.

To demonstrate the applicability of the SQuAd-approach, the estimation of uncertainties of the used measurement and analysis methods was in the focus of attention. Thereby, it is important to notice that we applied a maximum error calculation of the used methods A-TOM and passive OP-FTIR to be on ~~athe~~ safe side for further applications. The received values of uncertainties (0.3 m s⁻¹ for wind components and 30 % for concentration for instantaneous data without averaging) are always greater in comparison to an investigation of purely statistical uncertainties, i.e. random errors which are usually described by the standard deviations of high-frequency measurements (~~e.g. e.g.~~ Marcolla et al., 2014, Aubinet et al., 2003).

Nevertheless, there are still possibilities to further decrease these uncertainties. Thereby, the data analysis of CO₂ concentrations will focus on all other optical paths of the passive OP-FTIR measurements as well as on the active OP-FTIR data. The generated data ~~_redundancy-redundancies~~ will ~~enhance~~~~allow~~~~enhancing~~ the security of measurement results. In this way, the presented estimation of maximum uncertainty will be reduced to smaller values which are typical for micrometeorological applications. Additionally, a higher frequency of measurements would decrease the statistical uncertainty of both methods, A-TOM and passive OP-FTIR.

Further tests to improve the accuracy of the applied OP-FTIR method will focus on an increasing temperature gradient between background and target gas as well as the determination of the influence of FOV on horizontal and vertical resolution. The integral concentration value based on spectral information along the optical path includes a smearing effect caused by the true FOV. Especially, for longer pathways and increased horizontal concentration gradients this effect has to be taken into account. Furthermore, slight misalignments can result in decreased data quality due to an unpredictable uncertainty in effectively considered path lengths and background radiations.

At the expense of temporal resolution and assuming stronger concentration differences between background and the searched air volume, the spatial resolution of the OP-FTIR-method can be further enhanced by measuring along a higher number of paths. In a similar way it is possible to increase the number of acoustic paths through the control volume. ~~The~~~~Thus, a highly results from a high enough~~ number of optical and acoustic paths ~~results which~~ can be used to apply a tomographic algorithm and to reconstruct spatially resolved wind and concentration fields.

The presented SQuAd-approach offers the possibility to complement previous findings of multi-location, point-like measurements. Thomas (2011) found fundamental differences in the space-time structure of the motions dominating the variability of the wind and temperature fields. This scale mismatch complicates the derivation of meaningful estimates of

horizontal advective fluxes without dense spatial information. The SQuAd-approach could be applied to provide the necessary spatially representative data. Thereby, one advantage of the A-TOM/OP-FTIR-method is the combined measurement of wind components and temperature together with several GHG's along similar paths and air volumes.

Though, there are still tasks concerning the improvement of combined measurement methods within the SQuAd-approach, the present study provides first examples of applying the new method to estimate a spatially representative advection during calm and stably stratified ~~night-timenighttime~~ conditions at a grassland site.

Appendix A

Using the assumption of reciprocal sound propagation (see Eqs. (11)(901) and ((401+2)), it follows for the uncertainty of the acoustic virtual temperature ΔT_{av} and wind component along sound path Δv_{Ray} :

$$\Delta T_{av} = \left(\left| \frac{\partial T_{av}}{\partial d} \right| \Delta d \right) + \left(\left| \frac{\partial T_{av}}{\partial \tau_{forth}} \right| \Delta \tau_{forth} \right) + \left(\left| \frac{\partial T_{av}}{\partial \tau_{back}} \right| \Delta \tau_{back} \right) \text{ and}$$
~~(A1) $\Delta T_{av} = \left(\left| \frac{\partial T_{av}}{\partial d} \right| \Delta d \right) + \left(\left| \frac{\partial T_{av}}{\partial \tau_{forth}} \right| \Delta \tau_{forth} \right) + \left(\left| \frac{\partial T_{av}}{\partial \tau_{back}} \right| \Delta \tau_{back} \right) \text{ and}$~~
~~(272726)~~

$$\Delta v_{Ray} = \left(\left| \frac{\partial v_{Ray}}{\partial d} \right| \Delta d \right) + \left(\left| \frac{\partial v_{Ray}}{\partial \tau_{forth}} \right| \Delta \tau_{forth} \right) + \left(\left| \frac{\partial v_{Ray}}{\partial \tau_{back}} \right| \Delta \tau_{back} \right).$$

~~(A2)(282827)~~

Differential measurements outgoing from a known initial state increase the accuracy because errors of the path length measurement can be compensated. With $\Delta d = 0$ it follows from Eqs. (A1)(272726) and (11):(111110):

$$\Delta T_{av} = \left(\left| \frac{\partial T_{av}}{\partial \tau_{forth}} \right| \Delta \tau_{forth} \right) + \left(\left| \frac{\partial T_{av}}{\partial \tau_{back}} \right| \Delta \tau_{back} \right) = \frac{1}{\gamma d \tau_{eff} R_{eff}} \frac{d^2}{2} \left(\frac{1}{\tau_{forth}} + \frac{1}{\tau_{back}} \right) \left(\frac{1}{\tau_{forth}^2} \Delta \tau_{forth} + \frac{1}{\tau_{back}^2} \Delta \tau_{back} \right)$$
~~(A3) (292928)~~

Assuming that travel-time errors along one and the same path in opposite directions (forth and back) are identical to $\Delta \tau$, the temperature uncertainty from Eq. (A3279) can be written:

$$\Delta T_{av} = \frac{1}{\gamma d R_d} \frac{d^2}{2} \Delta \tau \left(\frac{2\sqrt{\gamma R_d T_{av}}}{d} \right) \left(\frac{2(\gamma R_d T_{av}) + 2v_{Ray}^2}{d^2} \right).$$
~~(A4) $\Delta T_{av} = \frac{1}{\gamma_{eff} R_{eff}} \frac{d^2}{2} \Delta \tau \left(\frac{2\sqrt{\gamma_{eff} R_{eff} T_{av}}}{d} \right) \left(\frac{2(\gamma_{eff} R_{eff} T_{av}) + 2v_{Ray}^2}{d^2} \right).$~~
~~(303029)~~

The uncertainty of relative wind measurements is only depending on the uncertainty of travel-time measurements:

$$\Delta v_{Ray} = \left(\left| \frac{\partial v_{Ray}}{\partial \tau_{forth}} \right| \Delta \tau_{forth} \right) + \left(\left| \frac{\partial v_{Ray}}{\partial \tau_{back}} \right| \Delta \tau_{back} \right) = \frac{d}{2} \left(\frac{1}{\tau_{forth}^2} \Delta \tau_{forth} + \frac{1}{\tau_{back}^2} \Delta \tau_{back} \right).$$
~~(313130)~~

Acknowledgements

At first we want to thank our project partner Christian Bernhofer (Chair of Meteorology, TU Dresden) for initial impulses for the project, providing staff, and the equipped experimental site Grillenburg. We sincerely thank Armin Raabe (Leipzig Institute for Meteorology, University of Leipzig) for quick and easy loan of acoustic devices for A-TOM. Many thanks are going to Markus Hehn, Valeri Goldberg, Uwe Eichelmann, Heiko Prasse (Chair of Meteorology, TU Dresden), Andreas Schoßland, and Uta Sauer (Helmholtz Centre for Environmental Research Leipzig) for their support during preparation and implementation of the experiment.

[We are grateful to the referees for their constructive input.](#)

This work was supported by the German Research Foundation (DFG) [grant numbers ZI 623/10-1, SCHU 1428/3-1].

10 References

Allard, P., Burton, M., and Mure, F.: Spectroscopic evidence for a lava fountain driven by previously accumulated magmatic gas, *Nature*, 433, 407-410, 2005.

Arnold, K., Ziemann, A., and Raabe, A.: Tomographic monitoring of wind and temperature in different heights above the ground, *Acta Acustica United Acoustica*, 87, 703-708, 2001.

15 Arnold, K., Ziemann, A., Raabe, A., and Spindler, G.: Acoustic tomography and conventional meteorological measurements over heterogeneous surfaces, *Meteorol. Atmosph. Phys.*, 85, 175-186, 2004.

Aubinet, M.: Eddy covariance CO₂ flux measurements in nocturnal conditions: An analysis of the problem, *Ecol Appl*, 18, 1368-1378, 2008.

20 Aubinet, M.: Estimates of the annual net carbon and water exchange of forests: the EUROFLUX methodology, *Adv Ecol Res.*, 30, 113-175, 2000.

Aubinet, M., Heinesch, B., and Yernaux, M.: Horizontal and vertical CO₂-advection in a sloping forest, *Bound-Lay Boundary Layer Meteorol.*, 108, 397-417, 2003.

25 Aubinet, M., Feigenwinter, C., Bernhofer, C., Canepa, E., Heinesch, B., Lindroth, A., Montagnani, L., Rebmann, C., Sedlak, P., and Van Gorsel, E.: Advection is not the solution to the nighttime CO₂ closure problem—evidence from three inherently different forests, *Agric. For. Meteorol.*, 150, 655-664, 2010.

Aubinet, M., Feigenwinter, C., Heinesch, B., Laffineur, Q., Papale, D., Reichstein, M., Rinne, J., and Van Gorsel, E.: Nighttime Flux Correction. In: Aubinet, M., Vesala, T., and Papale, D. (eds) *Eddy Covariance: A Practical Guide to Measurement and Data Analysis*, Springer Netherlands, Dordrecht, pp. 133-157, 2012.

Attenborough, K., Li, K. M., and Horoshenkov, K.: *Prediction of outdoor sound propagation*, Taylor and Francis, 2007.

30 Baldocchi, D., Finnigan, J. J., Wilson, K., Paw U, K. T., and Falge, E.: On measuring net ecosystem carbon exchange over tall vegetation on complex terrain, *Bound-Lay Boundary Layer Meteorol.*, 96, 257-291, 2000.

- Barth, M. and Raabe, A.: Acoustic tomographic imaging of temperature and flow fields in air, [Meas Sci Technol](#), 22, 035102, 2011.
- Barth, M., Raabe, A., Arnold, K., Resagk, C., and du Puits, R.: Flow field detection using acoustic travel time tomography, [Meteorol. Z.](#), 16, 443-450, 2007.
- 5 Barth, M., Fischer, G., Raabe, A., Ziemann, A., and Weiße, F.: Remote sensing of temperature and wind using acoustic travel-time measurements, [Meteorol. Z.](#), 22, 103-109, 2013.
- Chen, M.-H.: A [Feasible Approach to Quantify Fugitive VOCs from Petrochemical Processes by Integrating Open-Path Fourier Transform Infrared Spectrometry Measurements and Industrial Source Complex \(ISC\) Dispersion Model](#), [Aerosol and Air Quality Research](#), 15.3, 1110-1117, 2015.
- 10 Cieszczyk, S.: Passive [Open-Path FTIR](#) measurements and spectral interpretations for in situ gas monitoring and process diagnostics, [Acta Phys Polonica A](#), 126, 673-678, 2014.
- [Darenova, E., Pavelka, M., and Macalkova, L.: Spatial heterogeneity of CO₂ efflux and optimization of the number of measurement positions](#), [Eur J Soil Biol](#), 75, 123-134, 2016.
- [Davidson, E.A., Savage, K., Verchot, L.V., and Navarro, R.: Minimizing artifacts and biases in chamber-based measurements of soil respiration](#), [Agr For Meteorol](#), 113, 21-37, 2002.
- 15 Delany, M. E. and Bazley, E. N.: Acoustical properties of fibrous absorbent materials, [Applied acoustics](#), 3, 105-116, 1970.
- DIN EN 15483: Luftqualität - Messungen in der bodennahen Atmosphäre mit der FTIR-Spektroskopie, Deutsche Fassung EN 15483:2008 (Ambient air quality – Atmospheric measurements near ground with FTIR spectroscopy; German version EN 15483:2008). Deutsche Norm, VDI/DIN-Handbuches Reinhaltung der Luft, Band 5, 2009.
- 20 DIN ISO 9613-1: Dämpfung des Schalls bei der Ausbreitung im Freien; Teil 1: Berechnung der Schallabsorption durch die Luft, Deutsche Fassung, ISO 9613-1 (Acoustics - Attenuation of sound during propagation outdoors - Part 1: Calculation of the absorption of sound by the atmosphere), Beuth-Verlag, 1993.
- Fischer, G., Barth, M., and Ziemann, A.: Acoustic tomography of the atmosphere: Comparison of different reconstruction algorithms, [Acta Acustica](#), 98, 534-545, 2012.
- 25 Feigenwinter, C., Bernhofer, C., ~~and~~ Eichelmann, U., Heinesch, B., Hertel, M., Janous, D., Kolle, O., Lagergren, F., Lindroth, A., Minerbi, S., Moderow, U., Mölder, M., Montagnani, L., Queck, R., Rebmann, C., Vestin, P., Yernaux, M., Zeri, M., Ziegler, W., and Aubinet, M.: Comparison of horizontal and vertical advective CO₂ fluxes at three forest sites, [Agric. For. Meteorol.](#), 148, 12-24, 2008.
- Feigenwinter, C., Mölder, M., Lindroth, A., and Aubinet, M.: Spatiotemporal evolution of CO₂ concentration, temperature, and wind field during stable nights at the Norunda forest site, [Agric. For. Meteorol.](#), 150, 692-701, 2010.
- 30 Flesch, T. K., Baron, V. S., Wilson, J. D., Griffith, D. W. T., Basarab, J. A., and Carlson, P. J.: Agricultural gas emissions during the spring thaw: Applying a new measurement technique, [Agric. For. Meteorol.](#), 221, 111-121, 2016.

- Foken, T., Mauder, M., Liebethal, C., Wimmer, F., Beyrich, F., Leps, J. P., Raasch, S., DeBruin, H. A. R., Meijninger, W. M. L., and Bange, J.: Energy balance closure for the LITFASS-2003 experiment, *Theor. Appl. Climatol.*, 101, 149-160, 2010.
- Goldberg, V. and Bernhofer, C.: Quantifying the coupling degree between land surface and the atmospheric boundary layer with the coupled vegetation-atmosphere model HIRVAC, *Ann. Geophys.*, 19, 581–587, 2001.
- Griffith, D. W. T., Leuning, R., Denmead, O. T., and Jamie, I. M.: Air–land exchanges of CO₂, CH₄ and N₂O measured by FTIR spectrometry and micrometeorological techniques, *Atmos. Environ.*, 36, 1833-1842, 2002.
- Griffith, D. W. T., Deutscher, N. M., Caldw, C., Kettlewell, G., Riggensbach, M., and Hammer, S.: A Fourier transform infrared trace gas and isotope analyser for atmospheric applications, *Atmos. Meas. Tech.*, 5, 2481-2498, 2012.
- Griffiths, P. R. and Haseth, J. A. D.: *Fourier Transform Infrared Spectroscopy*, 2 ed. John Wiley & Sons, New Jersey, 2007.
- Grünwald, T. and Bernhofer, C.: A decade of carbon, water and energy flux measurements of an old spruce forest at the Anchor Station Tharandt, *Tellus, B.*, 59, 387-396, 2007.
- Hanafusa, T., Fujitani, T., Kobori, Y., and Mitsuta, Y.: A New Type Sonic Anemometer-Thermometer for Field Operation, *Pap. Meteorol. Geophys.*, 33, 1-19, 1982.
- Harig, R. and Matz, G.: Toxic cloud imaging by infrared spectrometry: A scanning FTIR system for identification and visualization, *Field Anal. Chem. Tech. Analytical Chemistry & Technology*, 5, 75-90, 2001.
- Harig, R., Matz, G., and Rusch, P.: Infrarot-Fernerkundungssystem für die chemische Gefahrenabwehr, *Zivilschutzforschung*, 58, pp. 134, 2006 (in German).
- Heinesch, B., Yernaux, M., and Aubinet, M.: Some methodological questions concerning advection measurements: a case study, *Bound-Lay. Boundary-Layer Meteorol.*, 122, 457-478, 2007.
- Holstein, P., Raabe, A., Müller, R., Barth, M., Mackenzie, D., and Starke, E.: Acoustic tomography on the basis of travel-time measurements, *Meas. Sci. Technol.*, 15, 1420-1428, 2004.
- Horrocks, L. A., Oppenheimer, C., Burton, M. R., Duffell, H. J., Davies, N. M., Martin, N. A., and Bell, W.: Open-path Fourier transform infrared spectroscopy of SO₂: An empirical error budget analysis, with implications for volcano monitoring, *J. Geophys. Res.-Atmos.-Atmospheres*, 106, 27647-27659, 2001.
- Hussain, M. Z., Grünwald, T., Tenhunen, J. D., Li, Y. L., Mirzae, H., Bernhofer, C., Otieno, D., Dinh, N. Q., Schmidt, M., Wartinger, M., and Owen, K.: Summer drought influence on CO₂ and water fluxes of extensively managed grassland in Germany, *Agr. Ecosyst. Environ. Agriculture, ecosystems & environment*, 141, 67-76, 2011a.
- Hussain, Z. M., Sadik, A. Z., and O’Shea, P.: *Digital signal processing: an introduction with MATLAB and applications*, Springer Science & Business Media, 2011b.
- ICOS-D Website, —2017: <http://www.icos-infrastruktur.de/en/icos-d/komponenten/oekosysteme/beobachtungsstandorte/grillenburg-c3/>, last access 23 August (download 06.01.2017.)
- Kira, O., Dubowski, Y., and Linker, R.: Reconstruction of passive open-path FTIR ambient spectra using meteorological measurements and its application for detection of aerosol cloud drift, *Opt. Express*, 23, A916-929, 2015.

- Kochanov, R. V., Gordon, I. E., Rothman, L. S., Wcislo, P., Hill, C., and Wilzewski, J. S.: HITRAN Application Programming Interface (HAPI): A comprehensive approach to working with spectroscopic data, *J. Quant. Spectrosc. Radiat. Transfer*, 177, 15-30, 2016.
- Kutsch, W. L., Kolle, O., Rebmann, C., Knohl, A., Ziegler, W., and Schulze, E. D: Advection and resulting CO₂ exchange uncertainty in a tall forest in central Germany, *Ecol. Appl.*, 18, 1391-1405, 2008.
- Laplace, P. S.: Sur la vitesse du son dans l'air et dans l'eau, *Ann. Chim. Phys.*, 3 (2), 238-241, 1816.
- Lee, X.: On micrometeorological observations of surface-air exchange over tall vegetation, *Agric. For. Meteorol.*, 91, 39-49, 1998.
- Leuning, R., Etheridge, D., Luhr, A., and Dunse, B.: Atmospheric monitoring and verification technologies for CO₂ geosequestration, *Int. J. Greenh. Gas Con.*, 2, 401-414, 2008.
- Liu, Z. M., Liu, W. Q., Gao, M. G., Tong, J. J., Zhang, T. S., Xu, L., and Wei, X.L.: Retrieval algorithm of quantitative analysis of passive Fourier transform infrared (FTRD) remote sensing measurements of chemical gas cloud from measuring the transmissivity by passive remote Fourier transform infrared, *Chinese Physics B*, 17, 4184-4192, 2008.
- [Map Germany: http://www.mygeo.info/landkarten/deutschland/Deutschland_Topographie_2007.jpg](http://www.mygeo.info/landkarten/deutschland/Deutschland_Topographie_2007.jpg), GNU free documentation license, 2017.
- [Map Grillenburg: https://www.openstreetmap.org/#map=16/50.9501/13.5122](https://www.openstreetmap.org/#map=16/50.9501/13.5122), OpenStreetMap, 2017.
- Marcolla, B., Cobbe, I., Minerbi, S., Montagnani, L., and Cescatti, A.: Methods and uncertainties in the experimental assessment of horizontal advection, *Agric. For. Meteorol.*, 198, 62-71, 2014.
- Marshall, T. L., Chaffin, C. T., Hammaker, R. M., and Fateley, W. G.: An introduction to open-path FT-IR atmospheric monitoring, *Environ. Sci. Technol.*, 28, 224A-232A, 1994.
- Mauder, M., Liebenthal, C., Göckede, M., Leps, J.-P., Beyrich, F., and Foken, T.: Processing and quality control of flux data during LITFASS-2003, *Bound-LayBoundary-Layer Meteorol.*, 121, 67-88, 2006.
- Mix, W., Goldberg, V., and Bernhardt, K.-H.: Numerical experiments with different approaches under large-area forest canopy conditions, *Meteorol. Z.*, 3, 187-192, 1994.
- Moncrieff, J. B., Massheder, J. M., de Bruin, H., Elbers, J., Friborg, T., Heusinkveld, B., Kabat, P., Scott, S., Soegaard, H., and Verhoef, A.: A system to measure surface fluxes of momentum, sensible heat, water vapour and carbon dioxide, *J. Hydrol.*, 188-189, 589-611, 1997.
- Ostashev, V. E. and Wilson, D. K.: *Acoustics in moving inhomogeneous media*. CRC Press, Taylor & Francis Group, 2016.
- Ostashev, V. E., Vecherin, S. N., Wilson, K. D., Ziemann, A., and Goedecke, G. H.: Recent progress in acoustic travel-time tomography of the atmospheric surface layer, *Meteorol. Z.*, 18, 125-133, 2009.
- [Pavelka, M. and Acosta, M.: Protocol for chamber measurements of CO₂, N₂O and CH₄ fluxes, ICOS Protocols. Consolidated draft version, personal communication, 2016.](#)

- Paw U, K. T., Baldocchi, D. D., Meyers, T. P., and Wilson, K. B.: Correction of eddy-covariance measurements incorporating both advective effects and density fluxes, [Bound-LayBoundary Layer Meteorol.](#), 97, 487-511, 2000.
- Polak, M. L., Hall, J. L., and Herr, K. C.: Passive Fourier-Transform Infrared-Spectroscopy of Chemical Plumes - an Algorithm for Quantitative Interpretation and Real-Time Background Removal, [Appl- Optics](#), 34, 5406-5412, 1995.
- 5 Prescher, A. K., Grünwald, T., and Bernhofer. C.: Land use regulates carbon budgets in eastern Germany: From NEE to NBP, [Agric- For- Meteorol.](#), 150, 1016-1025, 2010.
- [Rodeghiero, M. and Cescatti, A.: Spatial variability and optimal sampling strategy of soil respiration, *Forest Ecol Manag.* 255, 106–112, 2008.](#)
- Queck, R., Bernhofer, C., Bienert, A., Eipper, T., Goldberg, V., Harmansa, S., Hildebrand, V., Maas, H. G., Schlegel, F., and
- 10 Stiller, J.: TurbEFA: an interdisciplinary effort to investigate the turbulent flow across a forest clearing, [Meteorol- Z.](#), 6, 637-659, 2015.
- Raabe, A., Arnold, K., Ziemann, A., Beyrich, F., Leps, J.-P., Bange, J., Zittel, P., Spieß, T., Foken, T., Göckede, M., Schröter, M., and Raasch, S.: STINHO - STructure of turbulent transport under INHOMogeneous surface conditions - part 1: The micro- α scale field experiment, [Meteorol- Z.](#), 14, 315-327, 2005.
- 15 Rayleigh, L.: The Theory of Sound, Vol. II, Dover, New York, ~~NY~~, 1945.
- Rebmann, C.: Kohlendioxid-, Wasserdampf- und Energieaustausch eines Fichtenwaldes in Mittelgebirgslage in Nordostbayern, [Bayreuther Forum Ökologie](#) 106, Bayreuther Institut für Terrestrische Ökosystemforschung (BITÖK), Bayreuth, Germany, 140 pp., 2004 (in German).
- Rebmann, C., Zeri, M., Lasslop, G., Mund, M., Kolle, O., Schulze, E. D., and Feigenwinter, C.: Treatment and assessment of
- 20 the CO₂-exchange at a complex forest site in Thuringia, Germany, [Agric- For- Meteorol.](#), 150, 684-691, 2010.
- Reiche, N., Westerkamp, T., Lau, S., Borsdorf, H., Dietrich, P., and Schütze, C.: Comparative study to evaluate three ground-based optical remote sensing techniques under field conditions by a gas tracer experiment, [Environ- Earth Sci.](#), 72, 1435-1441, 2014.
- Revercomb, H. E., Buijs, H., Howell, H. B., LaPorte, D. D., Smith, W. L., and Sromovsky, L. A.: Radiometric calibration of
- 25 IR Fourier transform spectrometers: solution to a problem with the High-Resolution Interferometer Sounder, [Applied Optics](#), 27, 3210-3218, 1988.
- Richardson, A. D., Aubinet, M., Barr, A. G., Hollinger, D. Y., Ibrom, A., Lasslop, G., and Reichstein, M.: Uncertainty quantification, In: Aubinet, M., Vesala, T., and Papale, D. (Eds.), *Eddy Covariance*, Springer, Dordrecht, pp. 173-209, 2012.
- Rothman, L. S., Gordon, I. E., Babikov, Y., Barbe, A., Chris Benner, D., Bernath, P. F., Birk, M., Bizzocchi, L., Boudon, V.,
- 30 Brown, L. R., Campargue, A., Chance, K., Cohen, E.A., Coudert, L. H., Devi, V. M., Drouin, B. J., Fayt, A., Flaud, J. M., Gamache, R. R., Harrison, J. J., Hartmann, J. M., Hill, C., Hodges, J. T., Jacquemart, D., Jolly, A., Lamouroux, J., Le Roy, R. J., Li, G., Long, D. A., Lyulin, O. M., Mackie, C. J., Massie, S. T., Mikhailenko, S., Müller, H. S. P., Naumenko, O. V., Nikitin, A. V., Orphal, J., Perevalov, V., Perrin, A., Polovtseva, E. R., Richard, C., Smith, M. A. H., Starikova, E., Sung, K.,

- Tashkun, S., Tennyson, J., Toon, G. C., Tyuterev, V. G., and Wagner, G.: The HITRAN2012 molecular spectroscopic database, *J. Quant. Spectrosc. Ra-Spectroscop. Radiat. Transfer*, 130, 4-50, 2013.
- Salomons, E. M.: Computational atmospheric acoustics, Kluwer Academic Publishers, Dordrecht, 2001.
- Schäfer, K., Grant, R. H., Emeis, S., Raabe, A., von der Heide, C., and Schmid, H.P.: Areal-averaged trace gas emission rates from long-range open-path measurements in stable boundary layer conditions, *Atmos. Meas. Tech.*, 5, 1571-1583, 2012.
- Schütze, C., Bräuer, K., Dietrich, P., Engnath, V., Gisi, M., Horak, G., Leven, C., Lübben, A., Möller, I., Nierychlo, M., Schlömer, S., Schuck, A., Serfling, U., Simon, A., Streil, T., and Sauer, U.: MONACO-Monitoring Approach for Geological CO₂ Storage Sites Using a Hierarchical Observation Concept, in: Liebscher, A. and Münch, U. (Eds.), Geological Storage of CO₂-Long Term Security Aspects, *GEOTECHNOLOGIEN Science Report No. 22*, Springer International Publishing, Cham, pp. 33-57, 2015.
- Schütze, C. and Sauer, U.: Challenges associated with the atmospheric monitoring of areal emission sources and the need for optical remote sensing techniques-an open-path Fourier transform infrared (OP-FTIR) spectroscopy experience report, *Environ. Earth Sci.*, 75:919, 1-14, 2016.
- Shao, L., Griffiths, P. R., and Leytem, A. B.: Advances in Data Processing for Open-Path Fourier Transform Infrared Spectrometry of Greenhouse Gases, *Anal. Chem. Analytical Chemistry*, 82, 8027-8033, 2010.
- [Siebicke, L., Steinfeld, G., and Foken, T.: CO₂-gradient measurements using a parallel multi-analyzer setup, *Atmos. Meas. Tech.*, 4, 409-423, 2011.](#)
- ~~Siebicke, L., Steinfeld, G., and Foken, T.: CO₂ gradient measurements using a parallel multi analyzer setup, *Atmos. Meas. Tech.*, 4, 409-423, 2011.~~
- Siebicke, L., Hunner, M., and Foken, T.: Aspects of CO₂ advection measurements, *Theor. Appl. Climatol.*, 109, 109-131, 2012.
- Smith, T. E. L., Wooster, M. J., Tattaris, M., and Griffith, D. W. T.: Absolute accuracy and sensitivity analysis of OP-FTIR retrievals of CO₂, CH₄ and CO over concentrations representative of "clean air" and "polluted plumes", *Atmos. Meas. Tech.*, 4, 97-116, 2011.
- Sulub, Y. and Small, G. W.: Quantitative determination of ethanol in heated plumes by passive Fourier transform infrared remote sensing measurements, *Analyst*, 132, 330-337, 2007.
- Sun, J., Burns, S. P., Delany, A. C., Oncley, S. P., Turnipseed, A. A., Stephens, B. B., Lenschow, D. H., LeMone, M. A., Monson, R. K., and Anderson, D. E.: CO₂ transport over complex terrain, *Agric. For. Meteorol.*, 145, 1-21, 2007.
- Tetzlaff, G., Arnold, K., Raabe, A., and Ziemann, A.: Observations of area averaged near-surface wind-and temperature-fields in real terrain using acoustic travel time tomography, *Meteorol. Z.*, 11, 273-283, 2002.
- Thomas, C. K.: Variability of Sub-Canopy Flow, Temperature, and Horizontal Advection in Moderately Complex Terrain, *Bound-LayBoundary-Layer Meteorol.*, 139, 61-81, 2011.

- Vecherin, S. N., Ostashev, V. E., Goedecke, G. H., Wilson, D. K., and Voronovich, A. G.: Time-dependent stochastic inversion in acoustic travel-time tomography of the atmosphere, *J. Acoust. Soc. Am.*, 119, 2579-2588, 2006.
- Wilson, D. K. and Thomson, D. W.: Acoustic tomographic monitoring of the atmospheric surface layer, *J. Atmos. Ocean Tech., Oceanic Technol.*, 11, 751-769, 1994.
- 5 Wilson, J. D. and Flesch, T. K.: Generalized flux-gradient technique pairing line-average concentrations on vertically separated paths, *Agric. For. Meteorol.*, 220, 170-176, 2016.
- Zeri, M., Rebmann, C., Feigenwinter, C., and Sedlak, P.: Analysis of periods with strong and coherent CO₂ advection over a forested hill, *Agric. For. Meteorol.*, 150, 674-683, 2010.
- Ziemann, A.: Numerical simulation of meteorological quantities in and above forest canopies, *Meteorol. Z.*, 7, 120-128, 10 1998.
- Ziemann, A., Arnold, K., and Raabe, A.: Acoustic travel time tomography. A method for remote sensing of the atmospheric surface layer, *Meteorol. Atmosph. Phys.*, 71, 43-51, 1999.
- Ziemann, A., Arnold, K., and Raabe, A.: Acoustic tomography as a remote sensing method to investigate the near-surface atmospheric boundary layer in comparison with in situ measurements, *J. Atmos. Ocean. Technol.*, 19, 1208-1215, 2002.
- 15 Ziemann, A., Balogh, K., and Arnold, K.: Modelling and measuring the atmospheric excess attenuation over flat terrain during night time conditions, *Meteorol. Z.*, 16, 429-441, 2007.
- Ziemann, A., Barth, M., and Hehn, M.: Experimental investigation of the meteorologically influenced sound propagation through an inhomogeneous forest site, *Meteorol. Z.*, 22, 221-229, 2013.

Table 1. OP-FTIR spectrometer device parameters.

<u>Instrumental parameter</u>	<u>Bruker RAPID</u>	<u>Bruker EM27</u>
<u>Modus</u>	<u>Passive</u>	<u>Active / passive</u>
<u>IR source</u>	<u>Ambient</u>	<u>NiCr glower at 1200 °C</u>
<u>Detector</u>	<u>MCT</u>	<u>MCT</u>
<u>Resolution</u>	<u>4 cm⁻¹</u>	<u>1 cm⁻¹</u>
<u>Field of view (FOV)</u>	<u>10 mrad</u>	<u>10 mrad</u>

Table 2. Variability of acoustic travel time (in rounded sample units) due to changes of temperature and wind speed for a mean temperature of about 8 °C.

<u>Distance source-receiver</u> <u>in m</u>	<u>Temperature variation of</u>		<u>Wind speed variation of</u>	
	<u>0.5 K</u>	<u>1.0 K</u>	<u>0.5 m s⁻¹</u>	<u>1.0 m s⁻¹</u>
<u>50</u>	<u>7</u>	<u>13</u>	<u>11</u>	<u>22</u>
<u>70</u>	<u>9</u>	<u>18</u>	<u>15</u>	<u>30</u>

Table 3. Time difference (in sample units) between signal arrivals of direct and ground-reflected wave parts for a constant and homogeneous sound speed (temperature of 8 °C, calm).

<u>Distance source-receiver</u> <u>in m</u>	<u>Height above ground in m</u>	
	<u>1.5</u>	<u>3.0</u>
<u>50</u>	<u>14</u>	<u>55</u>
<u>70</u>	<u>10</u>	<u>39</u>

Table 4. Comparison of travel-time uncertainties: Above: Travel-time difference (in sample units), recalculated temperature and wind speed differences in brackets, between straight-line and curved sound path through the atmosphere for a maximum vertical gradient of effective sound speed of 0.6 s^{-1} (during night-time) on a summer day over grassland. Below: travel-time uncertainty (temperature and wind speed uncertainty in brackets) due to signal analysis using CCF, see Sect. 4.1.1.

<u>Uncertainty due to</u>	<u>Distance source-receiver in m</u>	<u>Height above ground in m</u>	
		<u>1.5</u>	<u>3.0</u>
<u>travel-time difference between straight-line and curved sound path</u>	<u>50.0</u>	<u>2</u> <u>(0.2 K; 0.1 ms⁻¹)</u>	<u>0</u>
	<u>70.0</u>	<u>6</u> <u>(0.3 K; 0.2 ms⁻¹)</u>	<u>1</u> <u>(0.1 K; 0.0 ms⁻¹)</u>
<u>signal analysis of travel time measurements</u>	<u>50.0/70.0</u>	<u>4</u> <u>(0.3/0.2 K; 0.2/0.1 ms⁻¹)</u>	

5

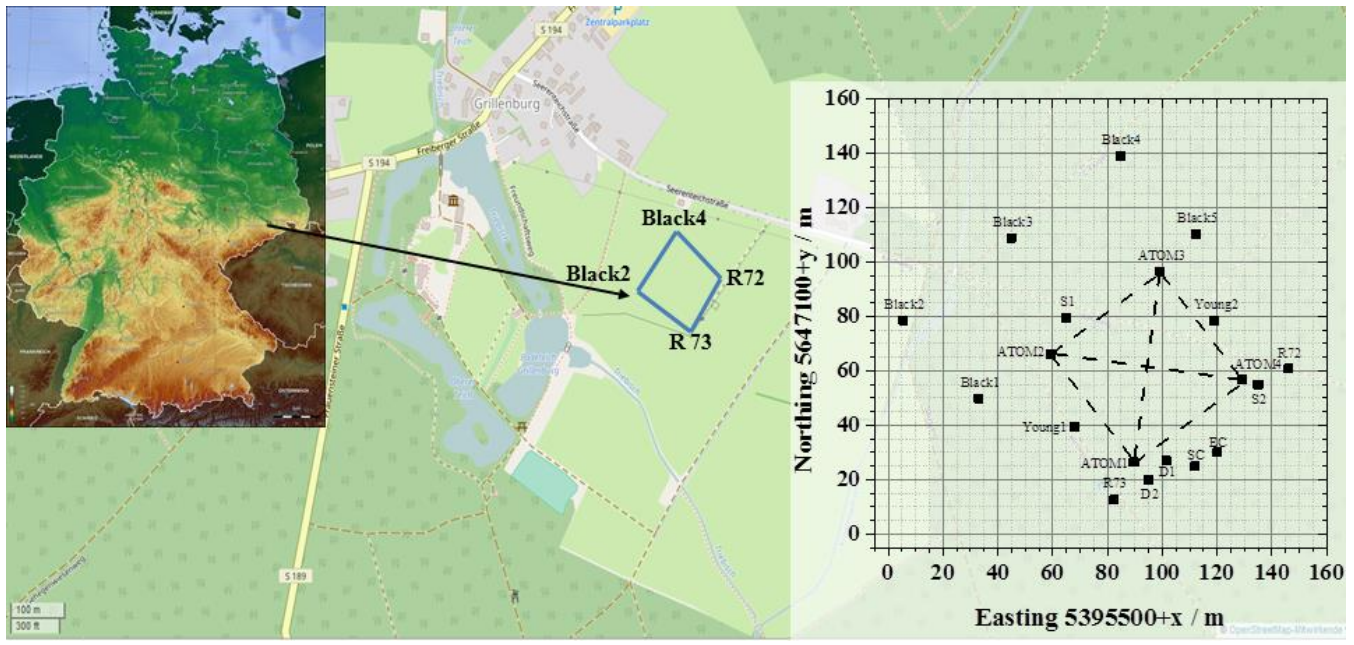


Figure 1. Map of Grillenburg (middle), meadow in light green, Tharandt Forest in dark green, area under investigation is marked by the blue rectangle (map Germany, 2017; map Grillenburg, 2017; see References) and scheme of area under investigation with location of several devices and auxiliary equipment: ATOM1-4 (4 masts for travel-time tomography A-TOM), dashed lines mark acoustic paths, R72/73 (2 Bruker Rapid, passive OP-FTIR), D1/2 and S1/2 (2 Bruker EM27, active OP-FTIR with source and detector), Young1/2 (2 masts, each equipped with 2 ultrasonic anemometers), Black1-5 (5 black screens for passive OP-FTIR), EC tower, SC soil respiration chamber measurements.

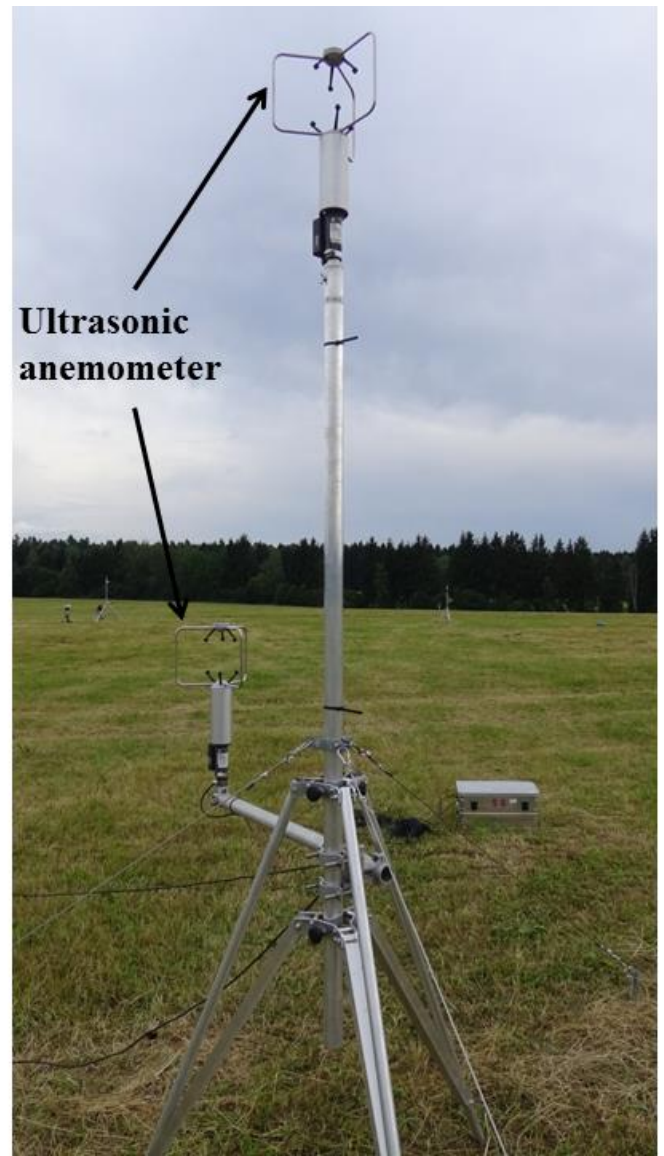
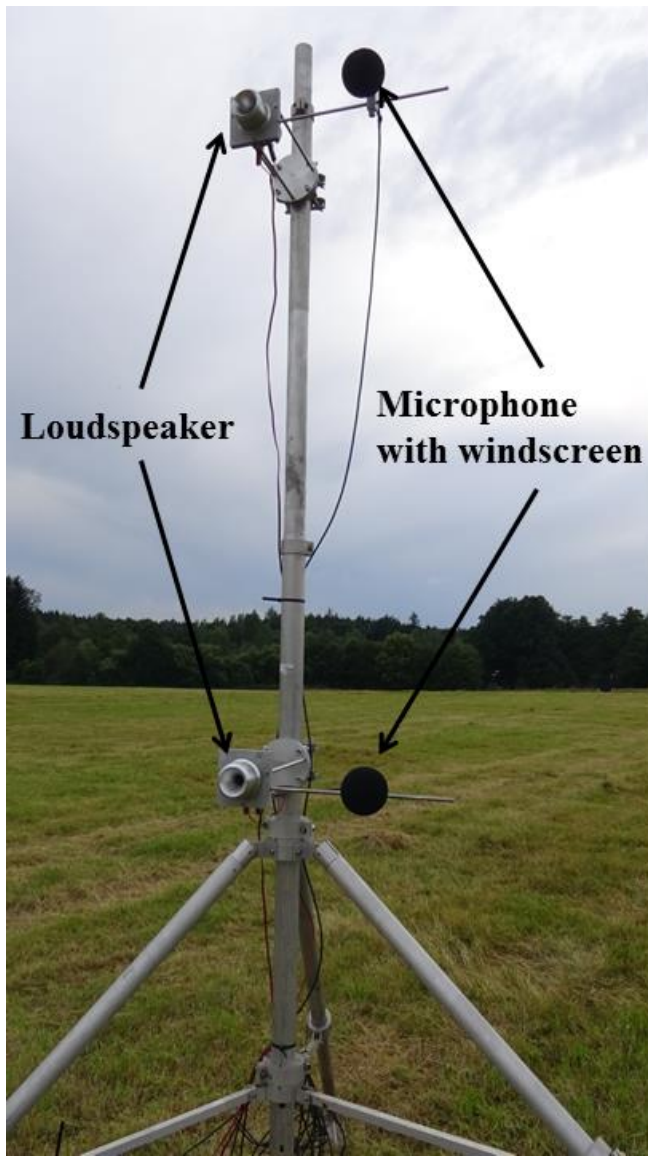


Figure 2. Left: Telescopic mast (A-TOM2) with acoustic equipment at two height levels, 1.5 m and 3 m, above grassland, single tree line 220 m away and Tharandt Forest at a distance of 450 m in the background (southwest direction). Right: Telescopic mast with ultrasonic anemometers at 1.5 m and 3 m height (Young2).



Figure 3. OP-FTIR spectrometer used for SOP at Grillenburg site. Left: passive Bruker RAPID, right: active Bruker EM27 detector unit applied in bistatic mode with a separate IR source (not in figure).

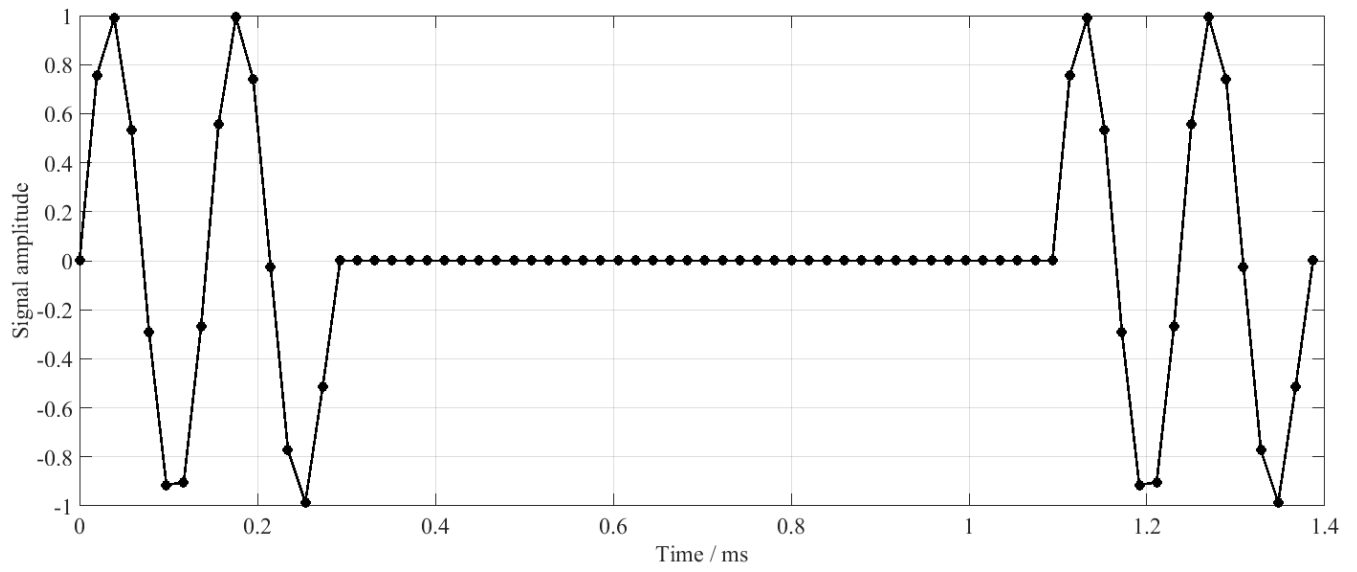


Figure 4. Theoretical acoustic signal consisting of two times two sine periods with a frequency of 7 kHz interrupted by a break. The sample rate of the analogue-to-digital converter is 51.2 kHz.

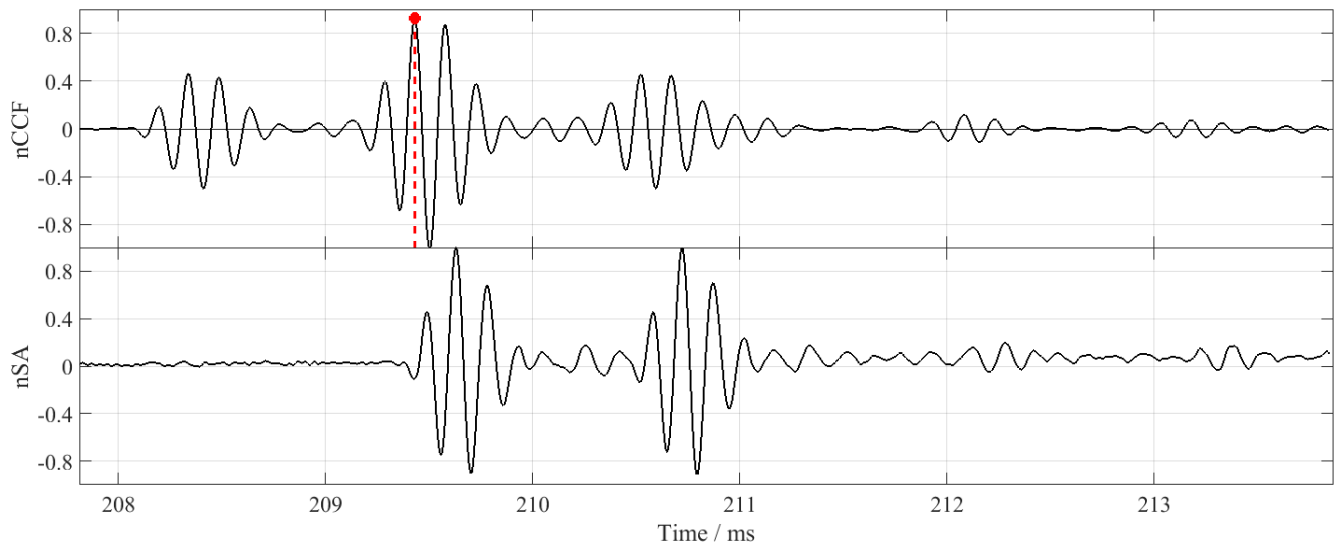


Figure 5. Example of a received acoustic signal (normalized signal amplitude, nSA, lower panel, distance of source and receiver: 70.45 m) and corresponding normalized cross-correlation function (nCCF, upper panel) between the received and the generated signal. The maximum position of nccf is marked with a filled (red) point. The associated time lag corresponds to the travel-time of the signal.

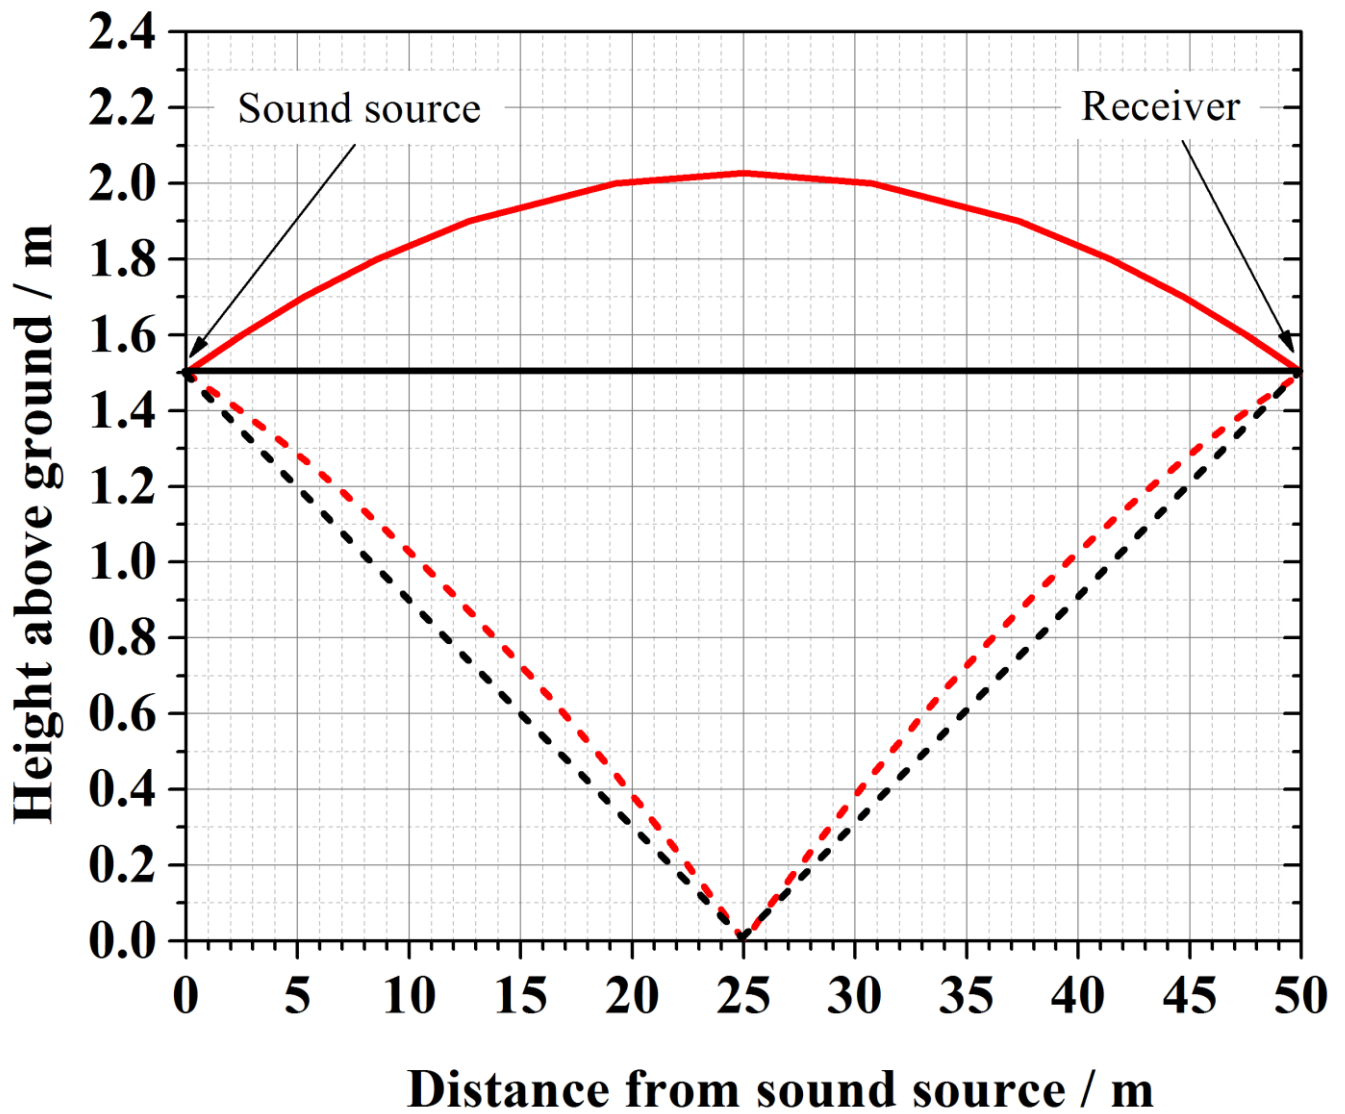


Figure 6. Scheme of sound wave reflection at the ground surface: direct (solid lines) and reflected (dashed) sound paths, with (red) and without (black) atmospheric refraction due to sound speed gradients.

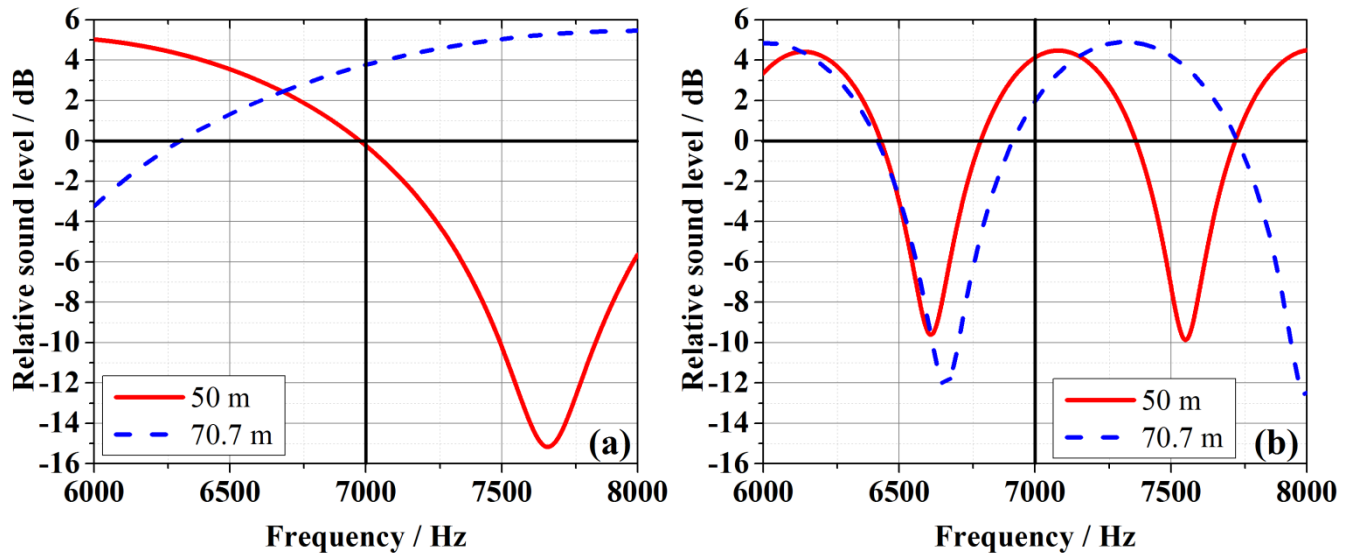


Figure 7. Relative sound level depending on the sound frequency and on the distance (red solid line: 50 m, blue dashed line: 70.7 m) from the sound source to the receiver for a grassland surface. The height of the acoustic devices above ground is 1.5 m (a) and 3.0 m (b), respectively.

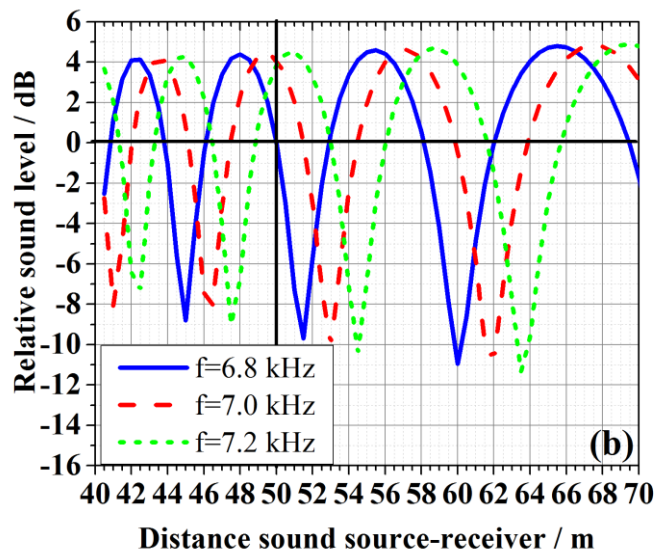
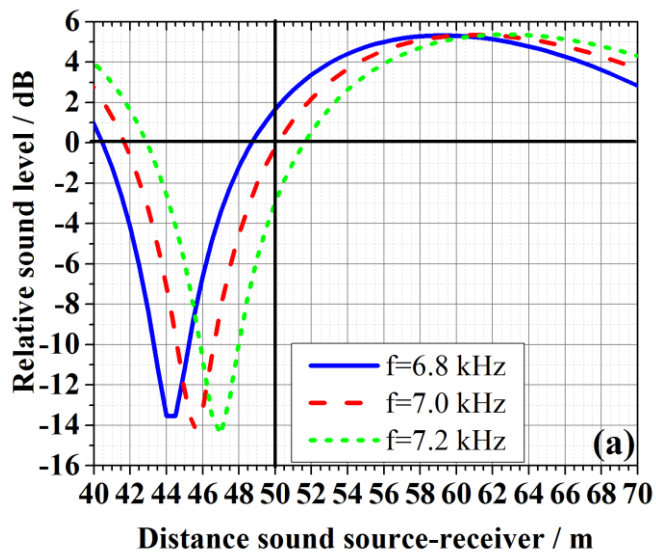


Figure 8. Relative sound level depending on the distance and on the sound frequency for a grassland surface. The height of the acoustic devices above ground is 1.5 m (a) and 3.0 m (b), respectively.

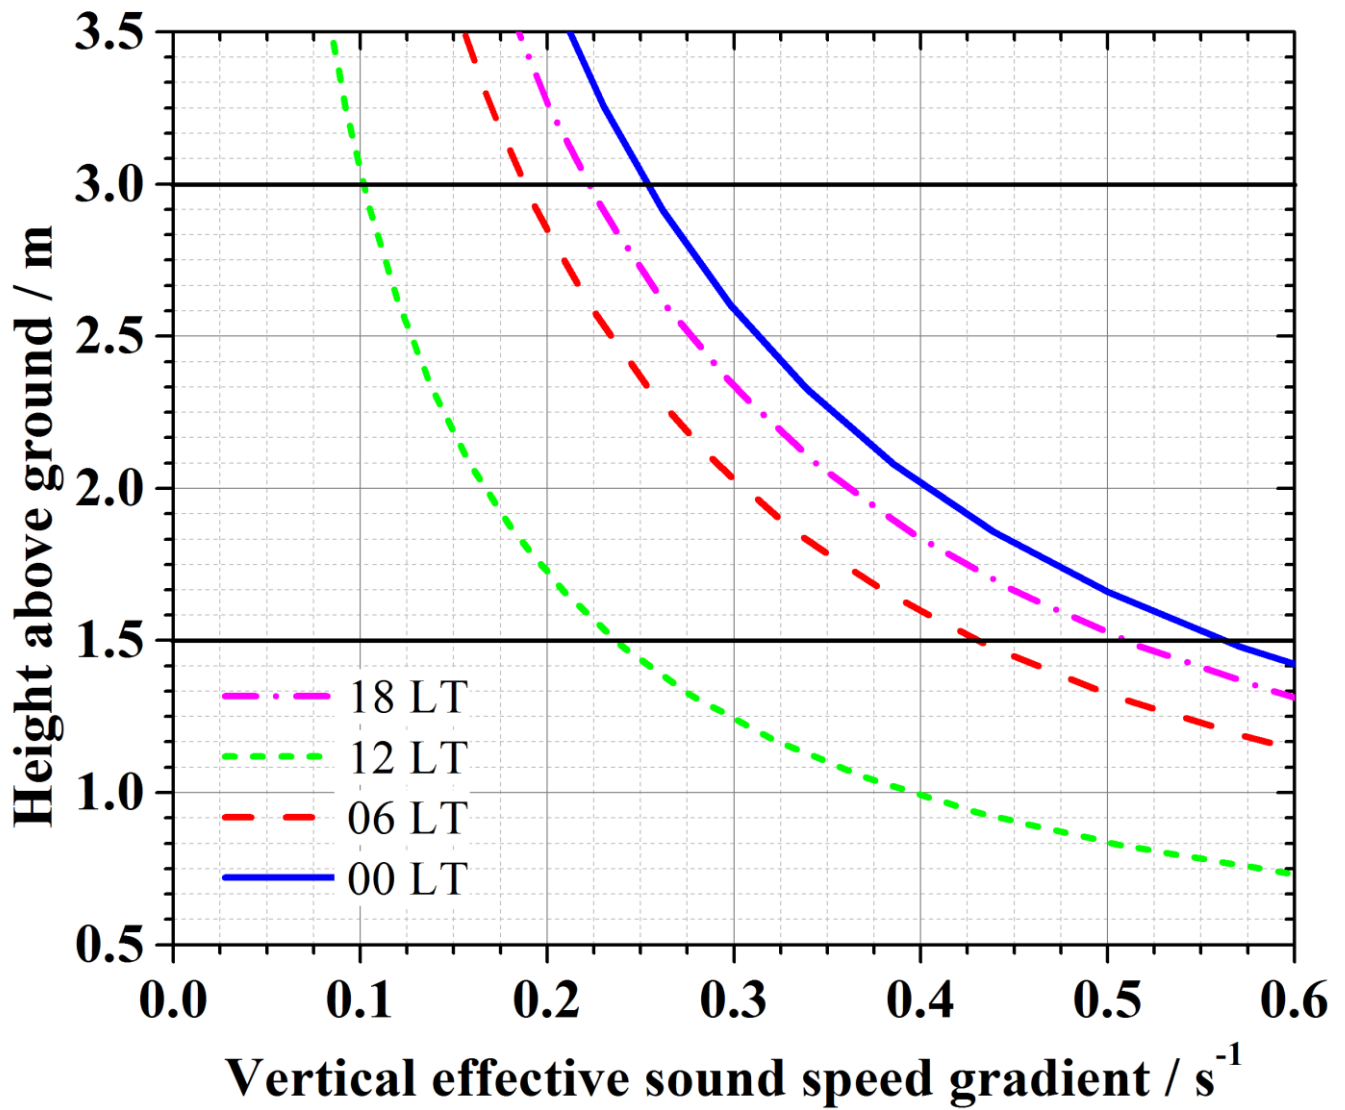


Figure 9. Vertical profiles of vertical effective sound speed gradient (30-min mean) in sound propagation direction simulated by HIRVAC for homogeneous grassland (vegetation height=0.3 m, Leaf Area Index=2) on 15th of July (exemplarily for a cloudless summer day similar to experimental conditions) for different daytimes (LT=Local Time).

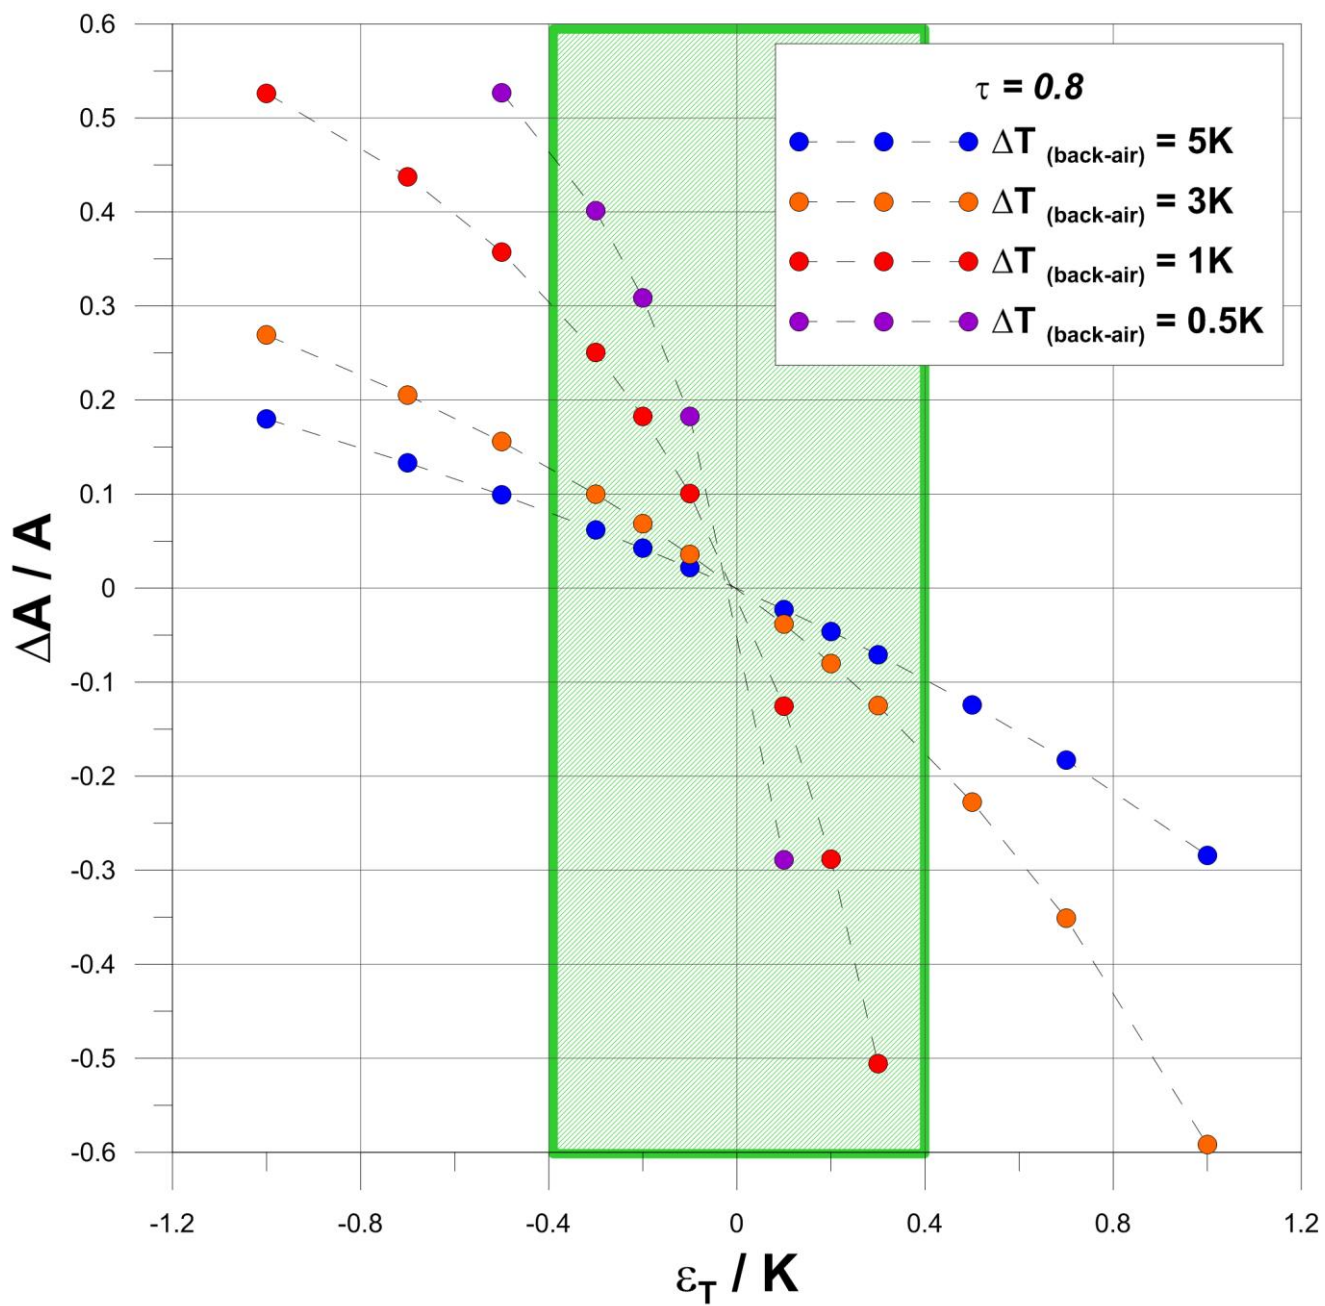


Figure 10. The relative absorbance error $\Delta A/A$ as a function of a given temperature error ϵ_T for various temperature differences ($T_B - T_{air}$). The errors were calculated for a transmission value $\tau = 0.8$ at wavenumber 800 cm^{-1} .

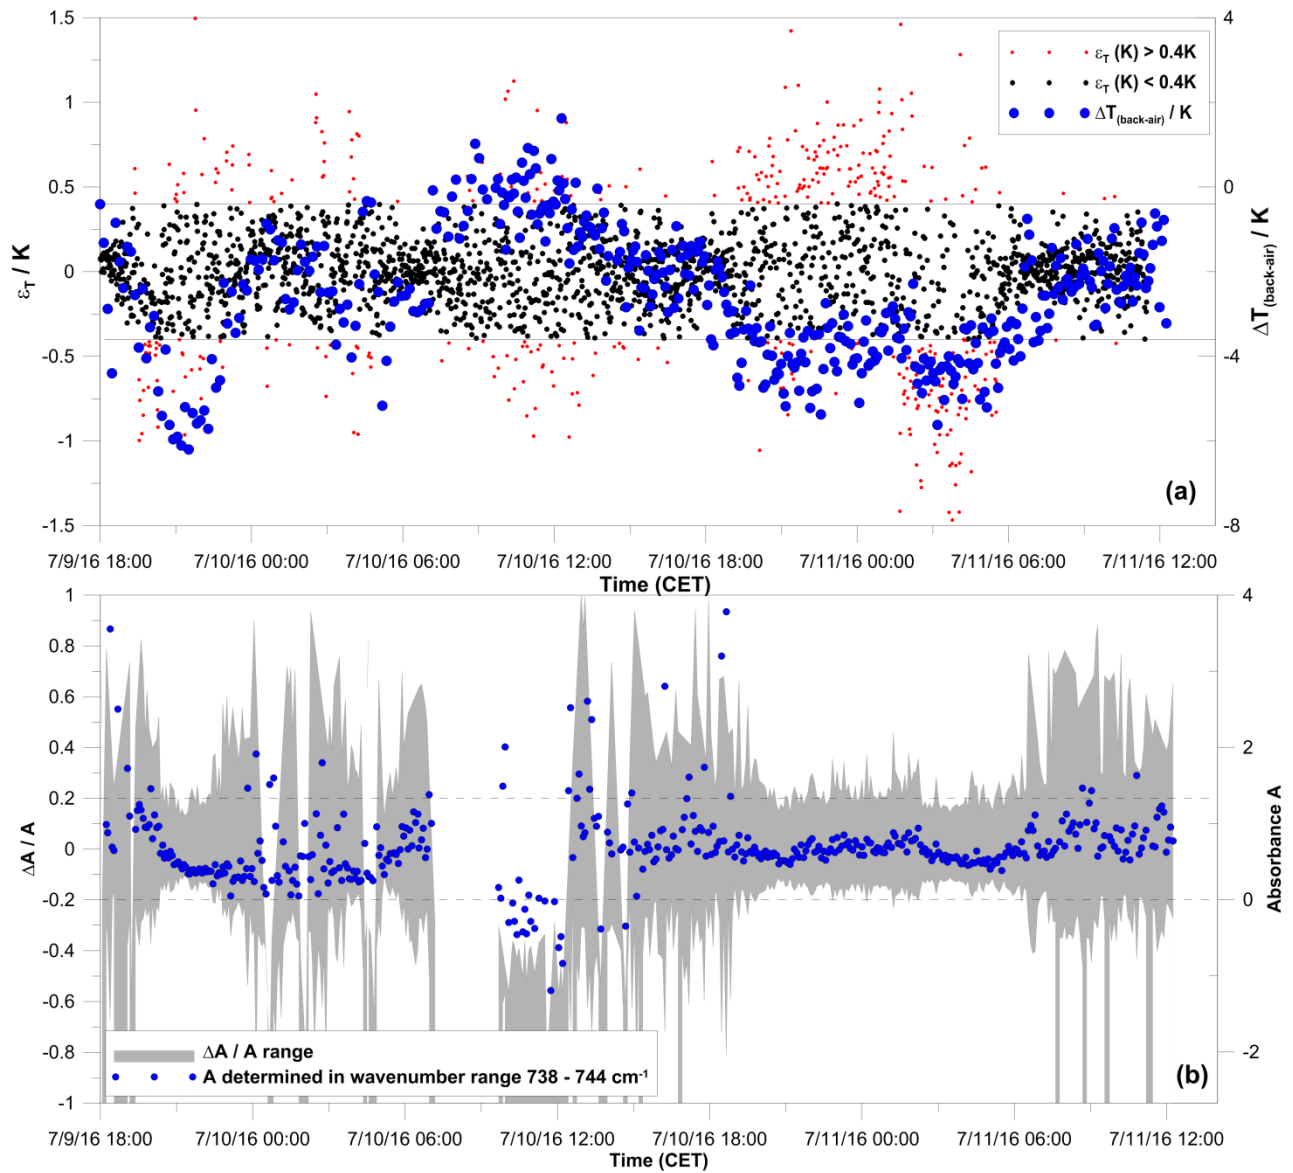


Figure 11. (a) Comparison of obtained temperature differences ($T_B - T_{air}$) derived from passive radiance spectra and measured horizontal sonic temperature differences derived from two measurement points. Latter is used as estimation for the air temperature error ε_T . (b) The temperature data reveal measurements resulting in increased relative absorbance errors higher than 20% due to increased air temperature error $\varepsilon_T > 0.4 K$ and decreased temperature differences $|T_B - T_{air}| < 2 K$.

5

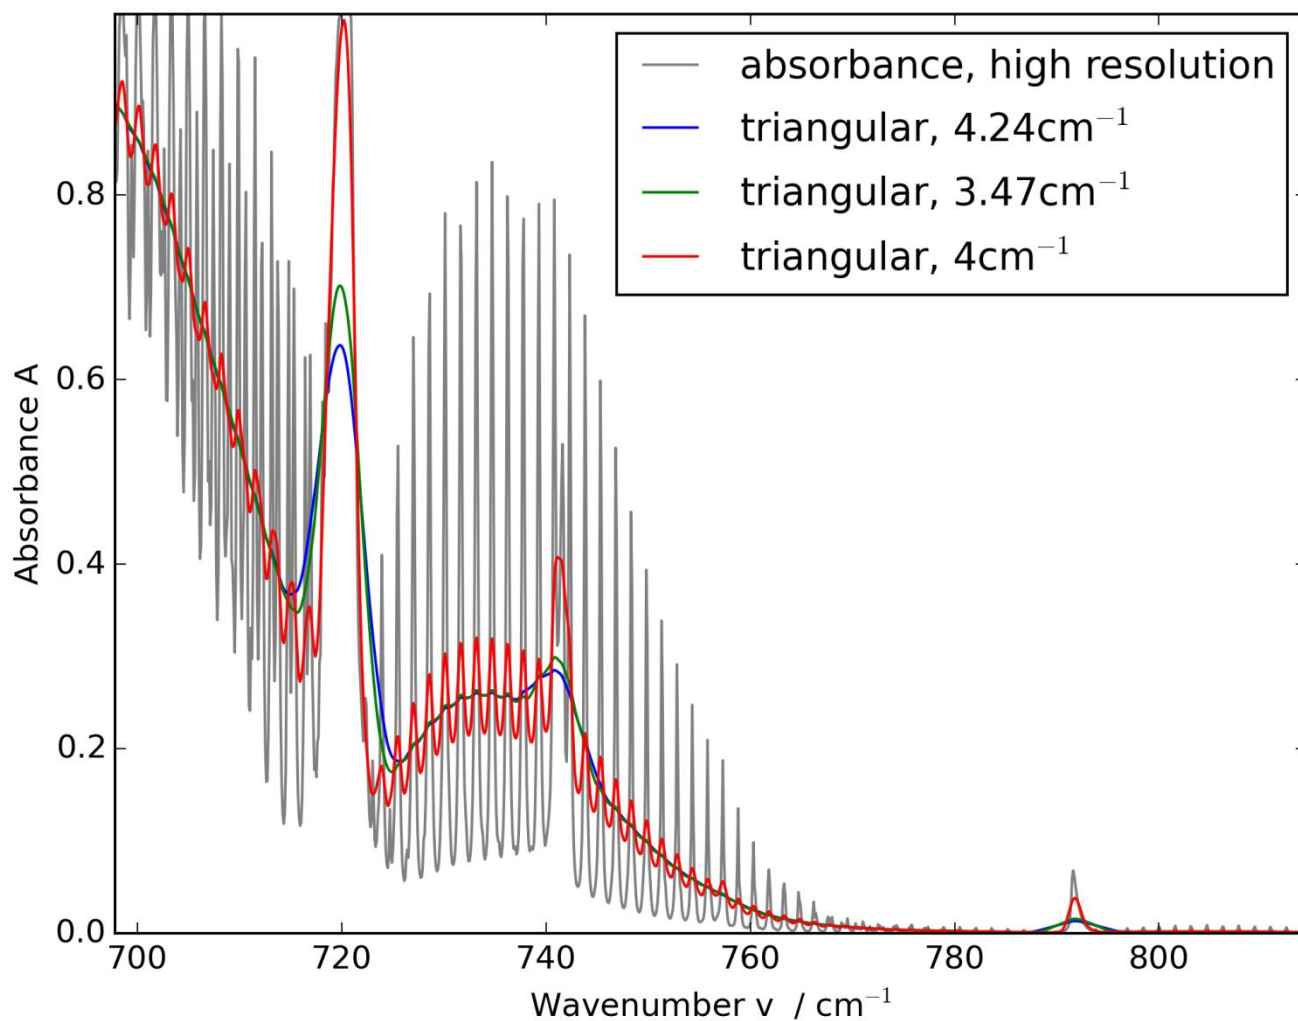


Figure 12. Example of simulated CO₂ absorbance spectra (line concentration 40,000 ppm-m, T = 298 K, p = 1 atm) for wavenumber region 700 – 800 cm⁻¹. The relative absorbance error $\Delta A/A$ for a known uncertainty in wavenumber resolution accuracy given by manufacturer's specifications is in the range between 2 – 6.5 %. Besides the wavenumber accuracy, also the applied apodization function (here triangular) affects the relative absorbance error.

5

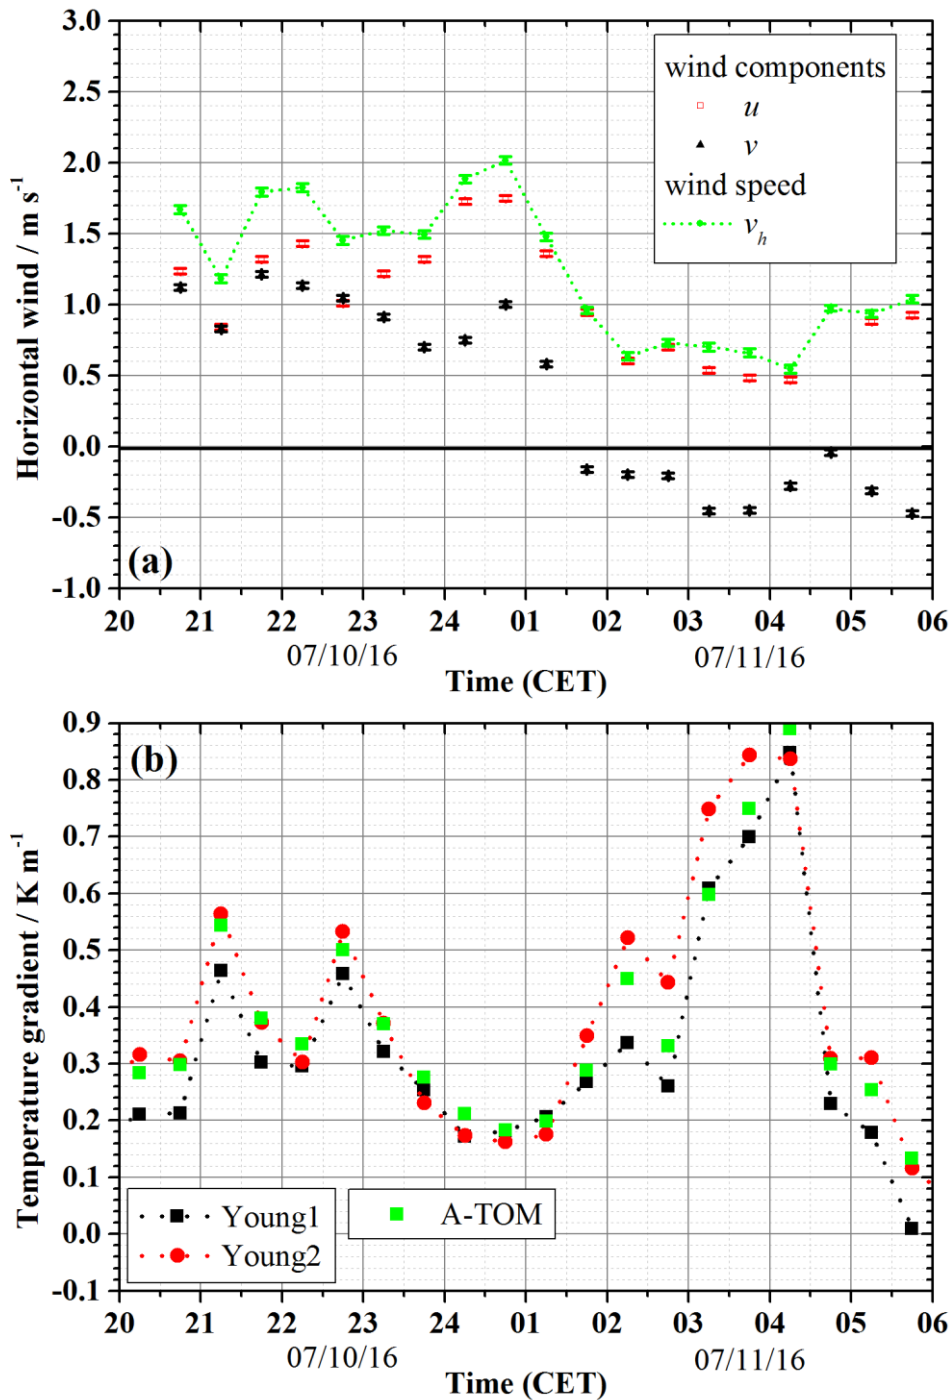


Figure 13. Averaged (30 min) data: (a) horizontal wind speed at a height of 1.5 m measured by A-TOM and with maximum uncertainties; (b) vertical gradient (3 – 1.5 m) of acoustic virtual temperature measured by sonic anemometers (Young1/2 see Fig. 1) and by A-TOM as spatial mean (50 x 50 m²).

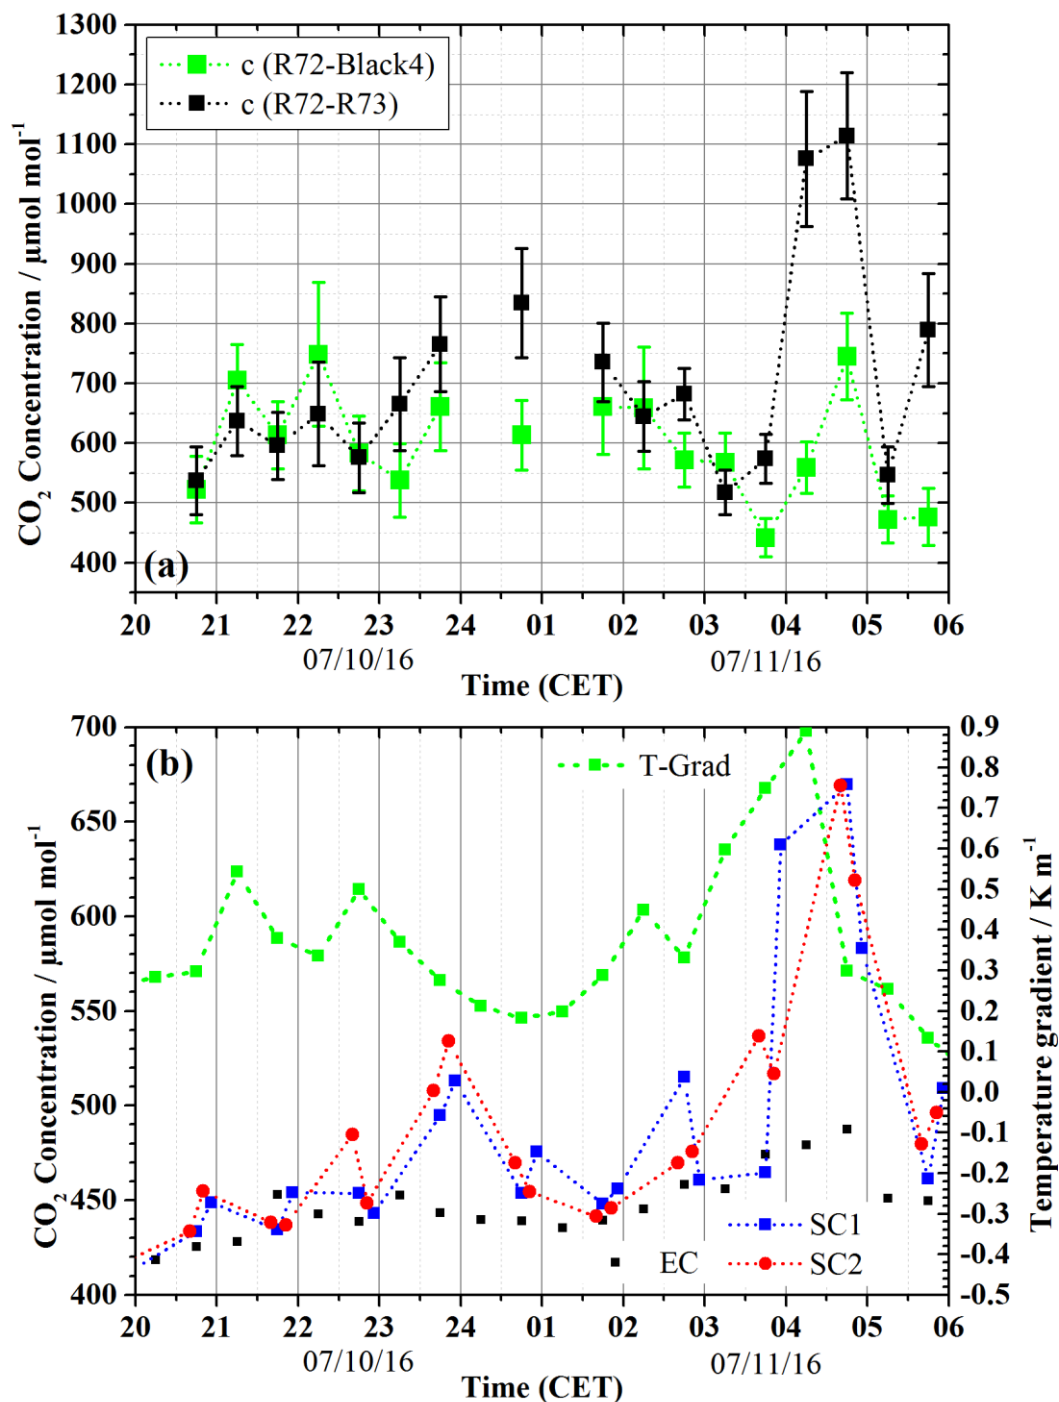


Figure 14. Averaged (30 min) CO₂ concentration measured by: (a) OP-FTIR at perpendicular paths at a height of about 1.0 m above ground, representative for total investigation area with vertical extent due to field of view, and with maximum uncertainties; (b): EC station at a height of 3.0 m, by two soil respiration chambers at the ground surface (SC1/2: horizontal distance between the chambers 5 m), and vertical temperature gradient measured by A-TOM (3.0 – 1.5 m).

5

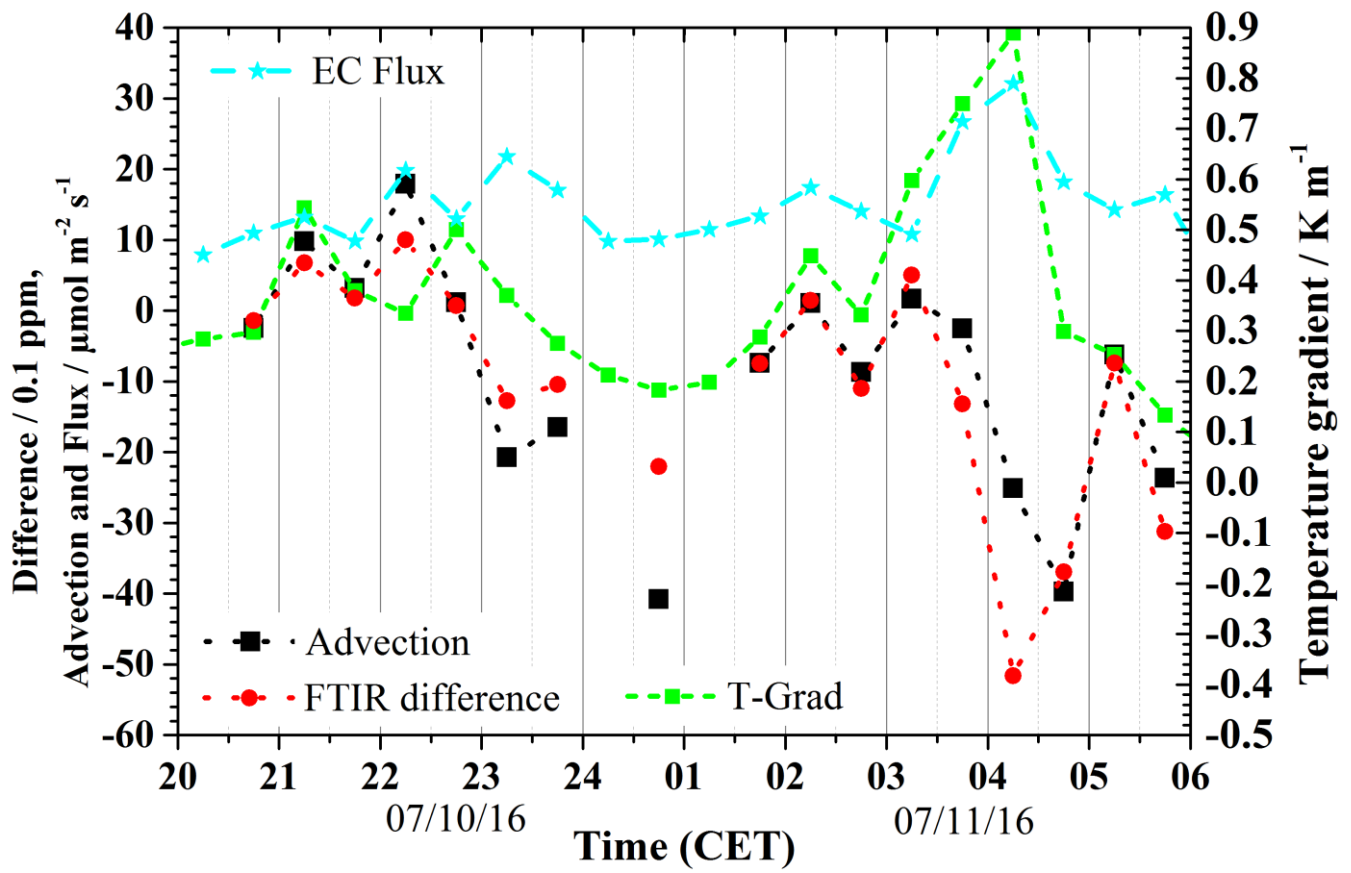


Figure 15. Averaged (30 min) spatial difference of CO₂ concentration (OP-FTIR) and horizontal advection (A-TOM, OP-FTIR) at a height of about 1.5 m, vertical gradient (3.0 – 1.5 m) of acoustic virtual temperature (A-TOM) and CO₂ flux at a height of 3.0 m (EC).