

Interactive discussion for **amt-2018-302**:

The Disdrometer Verification Network (DiVeN): a UK network of laser precipitation instruments

Response to Reviewer 1

The authors thank the reviewer for their time and consideration given to this manuscript.

The reviewer's comments have been listed below in **bold** and responded to individually in *red italics*.

General Comments:

The reviewer first thought that the purpose of the paper is to use Theis Laser Precipitation Monitor (LPM) to evaluate the radar-based precipitation phase algorithm over United Kingdom. The manuscript is actually evaluated Theis LPM phase algorithm with human observer. The manuscript also deals with the technical aspects of the data collection process from Theis LPM in near real time. The manuscript includes quite a bit information regarding precipitation measurements which are not relevant to this study. What is the relevance of tipping bucket gauges if the main purpose is related to the precipitation phase. The authors mentioned about dual-pol radar-based hydrometeor classification algorithm which was not used in this study. The section 1.1 is misleading regarding the main content/purpose of the study.

Perhaps, the key issue of the study is the Theis LPM precipitation phase algorithm which was disclosed by the manufacturer. As expected Theis LPM uses fall velocity versus particle size to determine the phase of the hydrometeor. In that regard, what is the accuracy of size and fall velocity. Is there any literature where the fall velocity has been presented? Even accurate fall velocity measurements, the study cannot comment on the error sources on the precipitation phase algorithm since this is not available.

The title of the manuscript is quite general and it is hard to extract the content of the paper from the title.

The authors dedicated a section on the installation and cost of DiVeN. The text is written in quite detail and perhaps too much detail information. The price of the each element of the network is given in pounds. It is expected that the price is fluid, changes with time and should not be included in peer-reviewed journal.

Section 4.2 describes the second case study. Unlike 4.1 and 4.3, this section deals with the size distribution measurements and rain intensity. The reader is get confused since this is not expected in this study. The reader would like to know more about the performance of Theis for precipitation phase. Section 4.3 was quite useful. It is understandable that the Theis and similar instruments can confuse light snow from drizzle since the fall speed are similar in this size regime. Going back to section 4.2, what is the purpose of presenting raindrop size distribution comparison. It is feasible that Theis may have splash drops but Joss-Waldvogel disdrometer and PWS100 are not standard and cannot be used as a reference. It is likely that they both underestimate small drops severely. Thurai and Bringi (2018, Journal of Applied Meteorology and Climatology) introduced Meteorological Particle Spectrometer which is sensitive to the small drops. The author should consider this study as a reference.

The manuscript is well written and has original aspects. Sections 2.2, 4.1, and 4.3 have useful information for future Theis LPM users. With a major revision, basically shortening the manuscript, the study has a potential to be published.

General comments response:

The purpose of the paper is to describe and introduce a new network of commercially available Thies LPM disdrometers in the UK. As such, the focus of the paper is on the discussions of the creation of the network, the details of the instruments that have been provided by the manufacturer and demonstrate the use of the dataset through the examination of some initial cases. The paper is not trying to critically evaluate the Thies or the internal algorithm that it uses for Present Weather type. Nor is it introducing the instrument as a new device — which the authors agree would require rigorous laboratory

experiments to justify the standalone skill of the instrument. The Thies LPM has been a commercially available product for over 10 years and the algorithms it utilizes are provided by the manufacturer.

The authors accept that, as originally presented, the introduction could cause a misinterpretation of the paper's purpose. The paper's focus is intended to be a description of a network and the dataset it is creating which has been created due to the need for a data set that could be used to compare to a surface radar hydrometeor type product. However, there are further uses for the network within the research community, which this paper seeks to encourage. Several changes have been made throughout the text to clarify the purpose of the paper. The notable changes are shown below.

1.1 Precipitation Instruments

changed to:

1.1 Motivation for DiVeN

2.2 paragraph 3 removed first sentence.

Abstract:

Here we describe the Disdrometer Verification Network and subjectively discuss the skill of the Thies LPM for hydrometeor type identification using specific cases from the first year of observations.

changed to:

Here we describe the Disdrometer Verification Network and present specific cases from the first year of observations.

Section 1.3:

This paper describes DiVeN and attempts to subjectively analyse the abilities of the Thies LPM instruments being used.

changed to:

This paper describes DiVeN and demonstrates the data products of the Thies LPM instruments being used.

Section 1.3

These events will provide a subjective analysis of the accuracy for the disdrometer instruments and thus determine the qualitative abilities of the network for HCA verification.

Changed to:

These events will provide an illustrative analysis of the observations being produced by all the individual disdrometer instruments within DiVeN.

Special Comments:

1) Page 2, line 6, what is the reference for moderate rainfall? The Glossary of American Meteorological Society defines the boundaries of rain intensities.

The authors have removed the word “moderate” as descriptor as it is rightly identified by the reviewer as an ambiguous definition.

2) Page 2, line 17, single polarization radar may or may not have the Doppler capability. Please clarify.

The authors agree with the reviewer and have removed all mentions of “Doppler” from the paragraph.

3) Page 2, line 20, what does it mean for composition?

The authors agree with the reviewer that the use of the word “composition” is misleading. It has now been removed.

“...requires additional knowledge about the size distribution and type of hydrometeors being observed.”

4) Page 2, line 21, The manuscript quotes hydrometeor or precipitation type. Perhaps, phase rather than type is more suitable. Folks use type for stratiform and convective rainfall in the literature.

The authors agree with this comment and, all instances of “precipitation type” are now altered to “hydrometeor type”. “Phase” would not encapsulate the different solid hydrometeors the instrument is able to detect.

5) Page 3, line 5, what is FAAM stands for?

The authors have added the definition of the acronym to page 3, line 2:

“Instrumented aircraft flights such as the Facility for Airborne Atmospheric Measurements (FAAM) take a swath volume...”

6) Page 3, line 15, the bin width is related to the accuracy of particle size not resolve differences between smaller drops.

This has been corrected in the text.

7) Page 3, lines 27-28, Please specify Parsivel as Parsivel-1.

This has been corrected in the text.

MC3E was for two months not two weeks. Also, please use a bigger city name (e.g. Ponca City, Oklahoma) rather than Tonkawa. Despite the fact that I participated the field campaign, I never heard Tonkawa.

This has been corrected in the text.

8) Page 4, line 14, Perhaps the sentence needs to be modified since Löffler-Mang and Joss (2000) paper describes Parsivel not Theis. While they are sister instruments, there are differences in their operation.

The authors agree with this comment and have changed the sentence to:

“Figure 1 in Löffler-Mang and Joss (2000) describes a similar instrument (Parsivel-1) with the same observing principle and is an excellent visualisation of the technique which is employed by the Thies LPM.”

9) Page 4, line 30, the authors says that the exact method of derivation does not need to be known. I disagree with this statement. This is one of the deficiencies of the study.

The study is not trying to point out specific problems with the Thies internal algorithm for PW Type and correct for them. The data will be taken as-is and not corrected since the internal algorithm is the intellectual property of Adolf Thies GMBH & CO. KG. We are simply trying to identify in which meteorological conditions the algorithm does a poor job so we can know when to trust it and when not to, in future work using this data. Phrasing has been changed to better reflect the reality of the situation.

Section 4 of this paper will qualitatively test the skill of the present weather code regardless of the algorithm it uses, such that the exact method of derivation does not need to be known.

changed to

Section 4 of this paper will qualitatively test the skill of the present weather code regardless of the algorithm it uses, since the exact method of derivation is not known.

10) Page 5, lines 1-2, Personal communication should be more explicit. Who is the person to be communicated with and what is his/her affiliation?

This has been corrected in the text.

Also, please correct Section 44.1 to 4.1

This has been corrected in the text.

11) Page 5, lines 4-7, the paragraph talks about the aircraft probes. What is the relevance? The aircraft probes are the sole source for the hydrometeor phase aloft

but cannot be observed continuously. They are research instrument, not operational.

The authors accept that the aircraft probes are off-topic and have removed the discussion describing the FAAM aircraft instruments.

12) Page 6, section 3.1. While it is important to report the challenges of the DiVeN sites, the section is quite long. For somebody who is not familiar with UK geography, it is easy to get lost. This section is subject to be shortened.

following this suggestion, the authors have removed the paragraph describing Scottish mountain sites and their relation to future radar HCA verification work.

13) Page 7, section 3.3 is perhaps the least favorite section of the manuscript. I am not frequent reviewer of the Atmospheric Measurement Techniques, so I am not sure if the detailed information on DiVeN costs are welcome. For a science paper, it is not. Before reading the manuscript, I could never imagine to read this kind of detailed information in the paper. Specifically, I am not sure what is the relevance of electricity cost in UK for a reader outside the country. I would say nearly 2/3 of the manuscript does not related to evaluation of the Theis LPM hydrometeor phase algorithm.

The authors wish to keep these technical details. The low-cost installation and continued low running costs of DiVeN are key aspect of the network's success, as the network would not be possible were the costs higher. There has also been considerable attention within the atmospheric science community about "low cost" sensors and we hope to contribute to this larger discussion. The authors leave the decision of the applicability of this material in an AMTD article to the Associate Editor.

14) Page 11, last line, gauge resolution should be 0.01 mm.

The authors have reviewed the Lambrecht technical details [https://www.lambrecht.net/upload/productDocuments/rain\[e\] Leaflet EN 1.pdf](https://www.lambrecht.net/upload/productDocuments/rain[e] Leaflet EN 1.pdf) which state a resolution of 0.001 mm is made but only reported at 0.01 mm resolution. We have changed the text to state:

"A high-resolution Lambrecht gauge (recorded resolution of 0.01 mm) on the site".

Further personal communication with Stephen Burt (30th March 2019):

“You and your referee are both right. In theory the gauge has a resolution of 0.001 mm, but in reality surface tension limits the flow of droplets this small into the funnel and thus into the weighed 'bucket' - gravity is insufficient to overcome surface tension until the droplet volume is somewhat larger. (I have made this point to Lambrecht...) The smallest resolvable drop is about 0.01 mm, and that's what I've set the resolution of my unit to. Even this resolution is only achievable once the funnel has been wetted - a dry funnel seems to require about 5 droplets to find their way in before anything happens. Even so, it's much more precise than a normal 0.2 mm TBR.”

Interactive discussion for **amt-2018-302**:

The Disdrometer Verification Network (DiVeN): a UK network of laser precipitation instruments

Response to Reviewer 2

The authors thank the reviewer for their time and consideration given to this manuscript.

The reviewer's comments have been listed below in **bold** and responded to individually in *red italics*.

*** General comments:**

The authors described and reported on the performance of a disdrometer network in the UK. I have found the work well written and without significant scientific flaws, as well as being of interest to precipitation researchers. For these reasons, I recommend publication after minor modifications.

*** Specific comments**

1) Page 3, line 22: "As of the time of writing this publication, operational net-works of disdrometers are uncommon". This may be true of optical disdrometer, but radar-based units have been used operationally for example in Canada to determine precipitation type from the early 1990s to about 2010 on all automatic stations. See <https://journals.ametsoc.org/doi/full/10.1175/2007JTECHA957.1> and references therein.

The authors thank the reviewer for pointing this out and have added this to the paper as quoted below:

"As of the time of writing this publication, operational networks of disdrometers are uncommon, with the notable exceptions of Canada (Sheppard, 1990) and

Germany. Networks of disdrometers solely for research purposes have been frequently deployed for short periods of time.”

2) Page 4, line 32, or somewhere else: What is the quantitative meaning of the quality index? For example, what does an index of 90% mean, beyond being better than one of 80% and worse than 95%?

The manufacturers describe the quality index as an ‘estimation’ which has many inputs and again the details are not provided in the instrument manual. Through personal communication the manufacturer mentions the number of particles in each bin and the overlap between the empirical relationships used (which are not provided) in the determination of this index. The manufacturer then goes on to dismiss the usefulness of the index in personal communication, listed below. However, the case studies in the paper show that it has some ability to show when the Present Weather code assignment is less confident e.g. in Figure 13 and especially in Figure 8 where mixed phase present weather codes have reduced quality index.

The manufacturers supplied the following, in a personal communication on 20 Sep 2017: (Manufacturer comments in blue italics)

1: Is there a function or equation you can give me to show how measuring quality is calculated?

1: We do not issue this info. Reason:

The quality of the measurement results can only be estimated by the LPM disdrometer by means of the number of particles measured in the individual internal range classes and the ambient temperature. Further influences of the quality are to be expected with corresponding wind speeds (depending on the type of precipitation type) and with very dense fog (+ light wind).

Conclusion: in our opinion it makes no sense to use this estimated value without further consideration of the environmental conditions.

2. How many hydrometeors are required to get 100%? For “no precipitation” how many are required for 100% accuracy?

2. REMARK: it’s only “our” ESTIMATION:

Example Hail: 2 particles ~ 50%

5 particles ~ 100%

Example No Precipitation 100%: max. 5 Drizzle-Particles

3. Does the disdrometer record the second highest probability class? E.g. if Snow is 87% and rain is 65%, can I see that, or does it just output the highest probability?

3. Prec-type classification is done according the WMO-codes.

E.g. if Rain and Snow is detected, the code 68(Rain AND Snow) is taken.

The so-called “measuring quality” value is not taken for this classification.

4. Can you tell me which speed/diameter bin is classified as each precipitation type? Where is the scientific evidence that those choices are correct? Is there an uncertainty on those classes?

4. For drizzle and rain we use the gunn-kinzer relation. The diameter/fall speed relation of hydrometeors are well measured, there are many scientific publications available. However, there are overlaps between some types of precipitation that lead to uncertainties in the measuring principle of this sensor.

3) Page 6, lines 9-11 : Given the simplicity of your assumptions (all drops measure 0.8 mm), I would reduce the reported accuracy of your probability of simultaneous occurrence to a single digit of precision, i.e., 0.09% and 7%. And at 0.8 mm, these are drops, not “droplets” (line 6).

This has been corrected in the text.

4) To what extent do you need Sections 3.2 and 3.3? I'll leave it to you to decide.

The authors wish to keep these technical details. The low-cost installation and continued low running costs of DiVeN are key aspect of its' success, and the network would not be possible were the costs higher. There has also been considerable attention within the atmospheric science community about “low cost” sensors and we hope to contribute to

this larger discussion. The authors leave the decision of the applicability of this material in an AMTD article to the Handling Associate Editor.

5) Page 11, line 26-27: “[The Doris event] will be a valuable case by which to compare the performance of radar hydrometeor classification schemes.”. Yes and no: It depends on the altitude of radar measurements compared to your ground-level measurements. In such events, if melting occurs at too low altitude, the radar may be blind to it. There are hence two aspects to HCA performance: Accuracy at altitude, and representativeness of the assessment at altitude to surface conditions, both of which being two very different research projects.

The authors appreciate the comment made and will consider it going forward in future research which is primarily on the radar-derived surface hydrometeor type products. The text has been changed to specify radar-derived surface hydrometeor type products only.

6) Page 12, line 20, on the effect of wind: A strong surface wind would also often create strong surface turbulence that may affect drop vertical velocity in addition to worsening edge effects.

“The fall speed of hydrometeors measured by the disdrometer may be affected by the wind, in particular winds tangent to the disdrometer as was the case here (N-S oriented beam, westerly wind).”

changed to:

“A strong surface wind is associated with turbulent eddies which have some vertical component. The intermittent vertical wind acts to widen the drop velocity distribution. Furthermore, turbulence breaks up droplets thus skewing the drop size distribution. Finally, winds tangent to the beam (N-S oriented beam, westerly wind) as was the case here, increase the number of beam-edge hits which reduce the quality of the data.”

*** Technical corrections, typos, etc :**

Page 5, line 4: Section 44.1 -> Section 4.1

This has been corrected in the text.

Page 5, line 30: 0.5 mm snow aggregate -> 0.5 mm ice crystal

This has been corrected in the text.

Page 6, line 13: Section 44.2 -> Section 4.2

This has been corrected in the text.

Page 11, line 26: its' -> its

This has been corrected in the text.

Page 12, line 10: Waldvögel -> Waldvogel

This has been corrected in the text.

Table 3 title: Disrometer -> Disdrometer

This has been corrected in the text.

Figure 13: Can you fix the alignment problem between the line plots (reporting on the minute mark) and the hydrometeor determination graphics (plotted in between the minute marks)?

The line plots on Figure 13 have been shifted forward by 30 seconds to indicate that a single point is valid across the minute labelled, thereby following the notation of the hydrometeor determination plot.

The Disdrometer Verification Network (DiVeN): a UK network of laser precipitation instruments

Ben S. Pickering¹, Ryan R. Neely III², and Dawn Harrison³

¹Institute for Climate and Atmospheric Science, School of Earth and Environment, University of Leeds, Leeds, Yorkshire, UK. LS2 9JT

²National Centre for Atmospheric Science, 71-75 Clarendon Rd, Leeds, Yorkshire, UK. LS2 9PH

³United Kingdom Meteorological Office, Fitzroy Rd, Exeter, UK. EX1 3PB

Correspondence: Ben S. Pickering (eebp@leeds.ac.uk)

Abstract. Starting in February 2017, a network of 14 Thies Laser Precipitation Monitors (LPMs) were installed at various locations around the United Kingdom to create the Disdrometer Verification Network (DiVeN). The instruments were installed for verification of radar hydrometeor classification algorithms but are valuable for much wider use in the scientific and operational meteorological community. Every Thies LPM is able to designate each observed hydrometeor into one of 20 diameter bins from ≥ 0.125 mm to > 8 mm, and one of 22 speed bins from > 0.0 m s⁻¹ to > 20.0 m s⁻¹. Using empirically-derived relationships, the instrument classifies precipitation into one of 11 possible hydrometeor classes in the form of a present weather code, with an associated indicator of uncertainty. To provide immediate feedback to data users, the observations are plotted in near real time (NRT) and made publicly available on a website within 7 minutes. Here we describe the Disdrometer Verification Network and ~~subjectively discuss the skill of the Thies LPM for hydrometeor type identification using~~ present specific cases from the first year of observations. Cases ~~presented~~ shown here suggest that the Thies LPM performs well at identifying transitions between rain and snow, but struggles with detection of graupel and pristine ice crystals (which occur infrequently in the United Kingdom) inherently, due to internal processing. The present weather code quality index is shown to have some skill without the supplementary sensors recommended by the manufacturer. Overall the Thies LPM is a useful tool for detecting hydrometeor type at the surface and DiVeN provides a novel dataset not previously observed for the United Kingdom.

15 *Copyright statement.* © Author(s) 2018. This work is distributed under the Creative Commons Attribution 4.0 License.

1 Introduction

Precipitation in all its various forms is one of the most important meteorological variables. In the UK, severe precipitation events cause millions of pounds worth of damage every year (Thornes, 1992; Penning-Rowsell and Wilson, 2006; Muchan et al., 2015). The phase of precipitation is also important. In winter, limited resources such as flood defenses, plows and grit will be allocated differently based on forecasts of hydrometeor type (Elmore et al. (2015); Gascón et al. (2018) and references therein). Accurate observations and forecasts of precipitation amount and type are therefore essential.

1.1 ~~Precipitation Measurements~~ Motivation for DiVeN

Observations of precipitation are traditionally conducted with networks of tipping bucket rain gauges (henceforth TBRs) such as the UK Met Office network described in Green (2010). TBR gauges funnel precipitation into a bucket which tips and empties when a threshold volume is reached. The threshold volume is typically equivalent to 0.2 mm depth of rainfall, which means the TBR has a coarse resolution and struggles to measure low rainfall rates over short intervals. For example, a rain rate of 2.4 mm hr⁻¹ (~~defined as moderate by the WMO~~) would only tip a TBR once every 5 minutes. Moreover, TBRs cannot detect ~~precipitation~~ hydrometeor type; only the liquid equivalent when the solid hydrometeors in the funnel melt naturally or from a heating element. Even liquid precipitation is poorly measured by TBRs. Ciach (2003) analysed 15 collocated TBRs and showed that considerable errors occur between the instruments, inconsistent across time and intensity scales. Finally, TBRs are easily blocked by debris and bird droppings, and the airflow around the instrument has been shown to influence the measurement (Groisman et al., 1994).

Weather radar can observe a large area at high spatial and temporal resolution. Since 1979 the United Kingdom Meteorological Office has operated and maintained a network of weather radars at C-band frequency (5.60-5.65 GHz) which, as of March 2018, consists of 15 radars. 5-min frequency volume data from each radar is quality controlled and corrected before an estimate of surface precipitation rate is derived. Surface precipitation rate estimates from each radar are then composited into a 1 km resolution product (Harrison et al., 2000).

The first operational ~~Doppler~~ weather radars only observed a single polarisation (Fabry, 2015). An issue with single-polarisation weather radar is that it only provides the radar reflectivity factor ~~and Doppler velocity~~ for the sample volume. Deriving an accurate quantitative estimate of the equivalent rainfall rate from radar reflectivity factor requires additional knowledge about the size distribution, ~~composition~~, and type of hydrometeors being observed.

Dual-polarimetric weather radars are better able to estimate the type of hydrometeor within a sample volume. Thus, variables derived from the dual-polarimetric returns provide information about the shape, orientation, oscillation and homogeneity of observed particles (Seliga and Bringi, 1978; Hall et al., 1984; Chandrasekar et al., 1990). This information may be used to infer the hydrometeor type through hydrometeor classification algorithms (HCAs). HCAs combine observed polarimetric variables using prior knowledge of typical values for each hydrometeor type, to identify the most likely hydrometeor species within a sample volume (Liu and Chandrasekar, 2000). Chandrasekar et al. (2013) gives an overview of recent work on HCAs.

Starting in mid-2012 and completing early-2018, every radar in the UK Met Office network was upgraded from single to dual-polarisation using in-house design and off-the-shelf components, re-using the pedestal and reflector from the original radar systems. To take advantage of the new information and to improve precipitation estimates, an operational HCA was developed within the Met Office, based on work at Météo France (Al-Sakka et al., 2013). While significant amounts of literature have been published on the technical improvement of HCAs (Chandrasekar et al., 2013), the verification of HCA skill has not been discussed as widely. There is a need for more rigorous validation of HCAs and DiVeN was created specifically for the verification of the UK Met Office radar network HCA.

Typically in-situ aircraft are used to verify radar HCA (Liu and Chandrasekar, 2000; Lim et al., 2005; Ribaud et al., 2016). Instrumented aircraft flights such as the Facility for Airborne Atmospheric Measurements (FAAM) take a swath volume using 20 Hz photographic disdrometer instruments (Abel et al., 2014). However there is no fall speed information, which distinguishes hydrometeor type with high skill due to distinct particle density differences (Locatelli and Hobbs, 1974). The lack of fall speed information on FAAM instruments means that the 1,200 images collected in every minute of flight must be visually analysed manually or with complex image recognition algorithms. The major disadvantage with FAAM data is the sparsity of cases due to the expense of operating the aircraft.

Therefore, in-situ surface observations must be utilised to expand the quantity of comparison data. A larger dataset allows bulk verification statistics to be performed on radar HCAs. Here we introduce a new surface hydrometeor type dataset and examine the skill of the dataset, independently of any radar instruments.

1.2 Precipitation Measurement with Disdrometers

A disdrometer is an instrument which measures the drop size distribution of precipitation over time. The drop size distribution (henceforth DSD) of precipitation is the function of drop size and drop frequency. Jameson and Kostinski (2001) provides an in-depth discussion on the definition of a DSD. Disdrometers typically record drop sizes into bins of nonlinearly increasing widths in-order-to-resolve-differences-between-smaller-droplets-due-to-the-accuracy-reducing-with-increasing-values.

The disdrometer is also a useful tool for verifying radar hydrometeor classification algorithms. Hydrometeor type can be empirically derived using information about the diameter and fall speed of the particle, which the Thies Laser Precipitation Monitor (LPM) instrument used in DiVeN is able to measure. The Gunn-Kinzer curve (Gunn and Kinzer, 1949) describes the relationship between raindrop diameter and fall speed. As diameter increases, the velocity of a raindrop increases asymptotically. Other velocity-diameter relations have been shown in the literature for snow, hail, and graupel which are well described in Locatelli and Hobbs (1974).

As of the time of writing this publication, operational networks of disdrometers are uncommon. However, networks-of-with-the-notable-exceptions-of-Canada (Sheppard, 1990) and Germany. Networks of disdrometers solely for research purposes have been frequently deployed for short periods of time. From March 2009 to July 2010 (16 months), 16 disdrometers were placed on rooftops within a 1 km by 1 km on the campus of the Swiss Federal Institute of Technology in Lausanne to study the inter-radar pixel variability in rainfall (Jaffrain et al., 2011). Another example of research using networked disdrometers is the Midlatitude Continental Convective Clouds Experiment (MC3E) (Jensen et al., 2016) which utilised 18 Parsivel-Parsivel-1 disdrometers and 7 2DVDs (2-Dimensional Video Disdrometers) within a 6 km radius of a central facility near TonkawaPonca City, Oklahoma. The project lasted for two-six weeks (22 April through 6 June 2011). DiVeN has an initial deployment phase of 3 years with a high expectation of renewal, which enables unique long-term research to be conducted on-with the data.

1.3 Paper Structure

This paper describes DiVeN and attempts-to-subjectively-analyse-the-abilities-demonstrates-the-data-products of the Thies LPM instruments being used. The first part of the paper provides a technical description of the disdrometer instruments used

in the network, the locations chosen to host the instruments, and data management in the network. Case studies from the first 12 months of DiVeN observations are then discussed. The case studies include rain-snow transitions in the 2017 named winter storm Doris, a convective rainfall event, and graupel observations. These events will provide ~~a subjective~~ an illustrative analysis of the ~~accuracy for the disdrometer instruments and thus determine the qualitative abilities of the network for HCA~~ verification observations being produced by all the individual disdrometer instruments within DiVeN. Enhanced scrutiny will be placed on the performance of the present weather code because this variable will be used to verify the Met Office radar HCAs.

2 Thies Clima Laser Precipitation Monitor

2.1 Specification

10 The instruments used in DiVeN (see Figure 1) are the Thies™ Laser Precipitation Monitor (LPM), model number 5.4110.00.200, which are described in detail in Adolf Thies GmbH & Co. KG (2011). To make observations the instrument utilises an infrared (785 nm) beam with dimensions 228 mm x 20 mm x 0.75mm, a total horizontal area of 45.6cm². The infrared beam is emitted from one end of the instrument and is directed to the other. A photo-diode and signal processor determine the optical characteristics including optical intensity which is reduced as a particle falls through the beam. The diameter of the hydrometeor
15 is inferred by the maximum amplitude of the signal reduction and the speed of the hydrometeor is estimated by the duration of the signal reduction. Figure 1 in Löffler-Mang and Joss (2000) describes a similar instrument (Parsivel-1) with the same observing principle and is an excellent visualisation of the ~~measurement technique used~~ technique which is employed by the Thies LPM. The signal processing claims to detect and remove particles that fall on the edge of the beam: “The measured values are processed by a signal processor (DSP), and checked for plausibility (e.g. edge hits).” No further details are given by
20 the manufacturer. The instrument is able to allocate individual hydrometeors into 20 diameter bins from 0.125 mm to > 8 mm, and 22 speed bins from > 0.2 m s⁻¹ to > 20 m s⁻¹.

The Thies disdrometer performs additional calculations on the incoming data which it attaches to the Telegram 4 serial output. Table 1 provides details of the variables and the range of possible values that the instrument is capable of recording. The quantity, intensity, and type of precipitation (drizzle, rain, snow, ice, grains, soft hail, hail as well as combinations of
25 multiple types) are calculated. ~~Precipitation-Hydrometeor~~ type is recorded as a present weather code. Table 2 lists all of the WMO Tab. 4680 present weather codes that the Thies Laser Precipitation Monitor is capable of recording. The present weather code is encoded as a number between 1–99 which has a corresponding description of the weather using the standardised codes from the World Meteorological Organization Table 4860 (WMO, 1988). The present weather descriptors cover most ~~precipitation-hydrometeor~~ types but not all; graupel is not explicitly mentioned, for example.

30 Hydrometeor type is inferred by the instrument, using empirical relationships between hydrometeor size and fall speed. The diameter–fall speed relation described in Gunn and Kinzer (1949) is the only relationship cited in the instrument manual but it is expected that further relationships are used for solid precipitation, undisclosed by the manufacturer. Section 4 of this paper

will qualitatively test the skill of the present weather code regardless of the algorithm it uses, ~~such that~~ since the exact method of derivation ~~does not need to be~~ is not known.

Lastly, the present weather code quality index (Table 1) is calculated based on the number of particles within each hydrometeor class. Thies do not recommended using the quality index without additional temperature and wind sensors which can be added to the disdrometer (personal communication ~~with Marc Hillebrecht, Adolf Thies GMBH & CO. KG,~~ 20 Sep 2017). Although DiVeN does not employ the additional sensors, the quality index is still published and can be a useful indicator as shown in Section 44.1.

2.2 Limitations

~~As with optical probes aboard aircraft which are used to observe precipitation, the sample area (0.372 cm^2 and 4.34 cm^2 respectively for the CIP-15 & CIP-100 used on FAAM) is several orders of magnitude smaller than a typical radar sample volume. However, the observing period of a disdrometer on the ground is many times longer than an aircraft for a given location. While the aircraft traverses a radar pixel in a few seconds, the disdrometer accumulates hydrometeor information over 1 minute which can then be tallied further to cover the periodicity of a radar volume scan. Longer integrations may alleviate the sample representativity error expected from the disdrometer as multiple regions of precipitation within a radar pixel can be detected. The radar sample volume is large but is only observed instantaneously compared to a disdrometer's longer temporal sample.~~

Tapiador et al. (2016) performed a physical experiment with 14 laser disdrometers (Parsivel-1) placed in close proximity (within 6 m^2) on the roof of a building in Toledo, Spain. Precipitation characteristics were calculated for one disdrometer's data, then for two instrument's combined data and so on until all 14 disdrometer's data were used. The aim was to test how many disdrometer's data were needed for the precipitation parameters to asymptote towards a stable value. It was found that a single disdrometer could underestimate instantaneous rain rate by 70%. Tapiador et al. (2016) proposed that large drops contribute disproportionately to the rain rate and that instantaneous measurements have a lower chance of measuring large drops because they are sparsely populated. The DiVeN disdrometers have a shortest temporal resolution of 1 minute which alleviates some of the sampling issues by allowing time for larger droplets to be observed.

~~This paper focuses on the hydrometeor type identification abilities of the instrument.~~ Hydrometeor type observations are less affected by the aforementioned sample size limitations as the dominant type can be estimated from a relatively small sample of the total precipitation. Theoretically only one hydrometeor needs to be sampled by the disdrometer to determine ~~precipitation~~ hydrometeor type. The ~~precipitation-hydrometeor~~ type accuracy is only as good as the diameter and fall speed measurements. In reality, the accuracy of the diameter and fall velocity measurements for a single particle are not accurate enough to determine the dominant hydrometeor phase from an instantaneous measurement. Furthermore, the fall velocity and diameter of small hydrometeors may be indistinguishably similar for several ~~precipitation-hydrometeor~~ types when observed by the disdrometer. Similar to the results of Smith (2016) for rainfall rate, the largest particles also give the strongest indication of hydrometeor type. This is because fall velocity is related to the density of the particle multiplicatively (Gunn and Kinzer, 1949), i.e. the difference in fall speed for a 5 mm raindrop and a 5 mm snow aggregate is large compared with the difference between a 0.5

mm raindrop and 0.5 mm ~~snow-aggregate~~ice crystal. Therefore the disdrometer can determine with greater confidence the type of hydrometeor when the hydrometeors are larger.

If the sample size of the instrument were larger and thus could count more particles at a faster rate, other limitations would occur. The instrument relies on observing one particle in the beam at any given time; the optical intensity of the beam must return to normal (no obstruction) for maximum confidence of speed observations. If two hydrometeors partially overlap vertically as they fall through the beam, the disdrometer will observe a double dipped reduction in optical intensity which the signal processor must account for. Similarly for diameter, if two hydrometeors fall through the beam simultaneously, the disdrometer will observe a hydrometeor twice as large at the same speed. The sample area is thus limited to reduce the possibility of overlapping particles. Again, Figure 1 in Löffler-Mang and Joss (2000) is an excellent diagram to aid the understanding of this limitation.

The chance of two ~~droplets~~drops being in the disdrometer at the same time is unlikely except in extremely high precipitation rates. To examine this, a Poisson distribution test is applied using the sampling volume of the disdrometer with increasing drop concentrations. Figure 2 shows that precipitation rates of greater than 10,000 drops min^{-1} are required before the probability of simultaneous drops in the beam occurring becomes non-negligible. There is a ~~0.093~~0.09% chance of 2 or more drops in the beam simultaneously for 10^4 drops min^{-1} observed by the disdrometer; 1 in every 1,075 drops. For a 10^5 drops min^{-1} observed by the disdrometer there is a ~~7.27~~% chance of 2 or more drops in the beam simultaneously; 1 in every 14 drops. For context, a drop count of 12,000 observed by a disdrometer located at NFARR Atmospheric Observatory, Chilbolton, England in March 2017 (see Section 4.2) was equivalent to 22 mm hr^{-1} . Rain rates approaching 100 mm hr^{-1} would be necessary for the chance of 2 drops existing in the beam simultaneously to be non-negligible. Such rainfall rates are extremely rare in the UK.

3 Description of the Network

3.1 DiVeN Locations

Disdrometers have similar site specification requirements as other precipitation instruments. Ideally a flat site with no tall objects or buildings nearby that can cause shadowing, and steps taken to minimise the splash of liquid droplets from the surrounding ground into the instrument. To this end, Thies recommends that the instrument be mounted on a 1.5 m pole above a grassy surface. A grassy surface also minimises convective upwelling from solar heating of the ground - a particular problem for concrete surfaces - which can slow hydrometeor fall speeds and create turbulence. Turbulence from buildings should also be avoided if possible since it acts to break larger particles into smaller particles, resulting in skewed drop size distributions.

The locations chosen for DiVeN cover a variety of geophysical conditions such as mountain peaks, valleys and flat regions, as well as inland and coastal sites. The locations also cover the full breadth of the climatology of precipitation totals and hydrometeor types in the UK (Fairman et al., 2015) with sites in wetter (Wales) and drier (East Anglia) regions as well as sites in warmer (southern England) and colder (northern Scotland) climates.

The typical range at which the Met Office radar HCA product will need to perform is < 120 km (maximum range used to produce surface rainfall rate composite). For the disdrometers to be representative when verification work is performed, the instruments in DiVeN are located at varying ranges from Met Office radars. Figure 3 shows the DiVeN site locations and the Met Office radar locations for comparison. Table 3 gives an overview of each site in DiVeN, including the coordinates, height a.m.s.l. and terrain characteristics.

~~Cairngorm Ski Centre is situated in a valley whilst Feshie is on a mountain ridge. Both sites are within 20 km of each other and will gather many cases of transitioning precipitation type due, primarily, to their altitude. In addition, Cairngorm Ski Centre and Feshie provide data in the most difficult observational environments for radars. Mountains block the lowest elevation radar scans meaning the typical ground-to-lowest-beam height in valleys is the largest of any location. These remote locations ensure that the dataset being accrued for radar HCA verification is representative of the full range of operational radar observing environments and will lead to a more rigorous radar HCA verification in the future.~~

Two instruments are located 10 m apart at NFARR Atmospheric Observatory in Chilbolton. These two instruments form part of an extended observational period of 12 months where their performance will be assessed against ~~the several~~ other precipitation sensors located at the same site, ~~which represent every possible method of observing precipitation at the surface.~~

A separate paper will be produced to address the results of ~~the this~~ dual-instrument study.

3.2 Installation

The main installation campaign occurred in February 2017 for 9 instruments. The Holme Moss site was installed shortly after in March, followed by Cairngorm and Feshie in June 2017. Dunkeswell is a Met Office installed site which was added to the network via a Raspberry Pi with 3G dongle being appended in July 2017. The last instrument to be installed was at Coverhead Estate in the Yorkshire Dales in December 2017, as a collaboration with Water@Leeds <http://water.leeds.ac.uk>.

Installation took around 2 hours at each site and consisted of: anchoring the tripod to the ground; attaching the disdrometer and data logging box; plugging the disdrometer cables into the power strip and the Raspberry Pi; cutting the power strip cable to length for the site. The installation was designed to be ‘as plug and play as possible’. Wiring of plugs, data and power cables onto the disdrometer and coding of the Raspberry Pi were all completed in a lab before arriving at the site.

3.3 DiVeN Costs and Environmental Impact

Each site required the following components to support the disdrometer: Davis Instruments® tripod (£100, http://www.davisnet.com/product_documents/weather/manuals/07395-299_IM_07716.pdf); IP67-rated box (£25, <http://www.timeguard.com/products/safety/weathersafe-outdoor-power/outdoor-multi-connector-box>); Raspberry Pi 3 Model B (£30, <https://www.raspberrypi.org/products/raspberry-pi-3-model-b/>) and a generic RS-485 to USB converter (£12). Therefore the total cost per site for hardware was £167. 200 m of power/data cable and tools required for the installation cost an additional £270 and £60 respectively. Some sites rely on a 3G dongle to upload data. The dongles themselves were free when purchased with a single-use data allotment. The total cost of hardware and equipment to build DiVeN amounted to £2,500.

The Thies Clima instrument is power rated at a maximum of 750 mA @ 230 v. No typical usage has been measured but should the maximum be continuous, then the annual consumption would be 1,500 kWh per year, or £190 p.a. at average UK electricity costs (valid March 2018). In reality the power consumed is subjectively known to be much less than the maximum rating.

- 5 Most sites use existing networks at their sites for uploading data to the NCAS server, but those with 3G dongles have an ongoing cost of £75 per year for a yearly data plan. There are 8 sites using 3G dongles hence the ongoing annual cost is £600.

The emissions from the first 2,300 mile journey in a diesel van were approximately 966 kg of CO₂ and 1.74 kg of NO_x + PMs (nitrogen oxides + particulate matters). Ongoing power consumption for 13 sites (the Druim nam Bo (Feshie) site is powered off-grid by solar and wind) at the aforementioned maximum rating would be 7,150 kg of CO₂ annually (using
10 the UK average of 0.367 kg kWh⁻¹, valid October 2017). In reality the power consumption is less and the UK average kg kWh⁻¹ is gradually decreasing over time. Computational energy consumed by DiVeN is near-unquantifiable; the data hosting, processing and analysis were carried out on shared systems (National Centre for Atmospheric Science server, JASMIN server), so the fractional consumption is difficult to estimate.

3.4 Data Acquisition and Management

- 15 The disdrometer data is read through a serial port by a Raspberry Pi which executes a Python script to receive and digest the Telegram 4 format data. The Python code performs file management with timestamps taken from the Raspberry Pi internal clock (set over IP) and backs up files to a memory card into a directory specific to the date. Separate programming triggers the uploading of new files in the 'today' directory to an NCAS server every 5 minutes over SFTP. At 01 UTC each day, the Raspberry Pi attempts to upload any remaining files in the directory of the previous day. At 02 UTC each day, the Raspberry
20 Pi attempts to upload files from the directory for 7 days ago as a backup command in the event that no connection could be made at the time. Only new files that do not already exist on the NCAS server are uploaded to avoid duplication. The entire directory of data for a single day is compressed using tar gunzip, 8 days after it is recorded. A support script exists to keep the processing and uploading scripts running and self-regulating. The support script checks that the processing script is running; if not, it will issue a command to start the processing script again. This means that the data acquisition script will be reattempted
25 if an exit error occurs. In the event of a power loss the Raspberry Pi will startup and initiate all of the required scripts itself when power is restored, without user intervention.

Each disdrometer produces 3.2 MB of ASCII .txt files per day but this can be compressed significantly. 10 years of continuous minute-frequency disdrometer data (5.3 million minutes) can be compressed to as small as 400 MB.

3.5 Open Access Website

- 30 Data is uploaded to an NCAS server every 5 minutes. One minute after the upload, plotting scripts are initiated. An additional minute later, a quicklook system indexes the target directories for new images and displays them on the public website. The public website can be accessed here: <https://sci.ncas.ac.uk/diven/>. Data can currently be downloaded from NCAS upon request

to the lead author. At the end of the first DiVeN deployment phase (early 2020) all data collected by DiVeN will be archived into netCDF at the Centre for Environmental Data Analysis (CEDA).

3.6 DiVeN Users

Although the data from DiVeN will be used for radar verification, there are many other uses for the data. Several stakeholders have used DiVeN data. Met Office operational forecasters are able to see live ~~precipitation~~hydrometeor type data and compare with numerical weather prediction forecasts to adjust their guidance. Second, there are some research projects at the University of Leeds being carried out. This includes research on DSD characteristics in bright band and non-bright band precipitation, calibration work with the NCAS X-band polarimetric (NXPoL) radar in Cumbria, England for the Environment Agency (EA) and flood forecasting research with the Water@Leeds project. Other institutions have used DiVeN data also; The University of Dundee and the Scottish Environment Protection Agency (SEPA) are conducting work on snow melt and the University of Reading may use DSD information from the Reading University Atmospheric Observatory (RUAO) disdrometer to study aerosol sedimentation rates. Finally, the wind turbine manufacturer Vestas have used annual DSD data to evaluate models of blade-tip drag to improve turbine efficiency. The applications of disdrometer data are broad and cover many fields. The authors intend that this publication combined with the open accessibility of data will inspire new uses of DiVeN observations.

3.7 Performance of DiVeN in the First Year

Figure 5 shows the uptime of each site in DiVeN in the order that they were installed. Generally the uptime of the network has been good for the period shown, with most sites uploading more than 95% each day. A few sites have not been as good but this was mostly anticipated. In particular the Druim nam Bo site at 900m a.m.s.l. in the Scottish Highlands has poor upload percentages. 3G signal is weak at the site and a signal booster was added in January 2018. Furthermore the site is powered by a small wind turbine and solar panel, which became rimed in ice during the winter (Figure 6). Although these issues were anticipated, the site was still chosen because it can provide cases of solid hydrometeors nearly all year round, in a terrain which is notoriously difficult for radar performance. Radar hydrometeor classification will be particularly difficult at this location and thus the site will provide a ‘wost-case scenario’ for radar HCA verification work.

Holme Moss is a remote site at relatively high altitude and uses satellite broadband which has been somewhat unreliable, however the amount of data stored on the Raspberry Pi may be higher than depicted in Figure 5 which was created based from data successfully uploaded to the NCAS server. Furthermore, the data is being archived on the University of Manchester’s system at Holme Moss and this is known to be a much more complete dataset, which will be transferred to the NCAS servers in the future.

There were several unanticipated downtime periods. Weybourne had to be moved for construction work at the field site and was without power for approximately 1 month in March 2017. In late April 2017, the NCAS server blacklisted all disdrometer IP addresses and these had to be manually whitelisted. This was detected and resolved within 8 days. The 7-day backup upload filled in the majority of the missing data but the 8th day prior to the issue being fixed was never reattempted because of the design of the code discussed in Section 3.4.

The largest unanticipated downtime occurred in September 2017. An issue arose with the disdrometers being unable to record any new data, in the order that they were installed. 2 GB of free space remained on the SD cards, however there was a (previously unknown) limit to the number of files that can be saved to certain card formats irregardless of the space remaining. The issue was fixed by the creation of a new script which merged old files together. The script had to be added to all of the Raspberry Pis in the network. The issue was detected after the first 4 DiVeN disdrometer installations failed sequentially, so the failure of other sites in the network was anticipated and mitigated. This can be seen on Figure 5 as a stepped-failure starting with the Chilbolton 1 instrument in September 2017.

Some further issues occurred which were avoidable. Laurieston was disconnected from power whilst closing the datalogger box after the installation which meant it was offline for the first 2 months until the site could be visited again. Similarly during the Dunkeswell installation in July 2017 the serial data cable was damaged which could not be fixed until November 2017. The Raspberry Pi at Lancaster was not reconnected after the aforementioned file number problem in September 2017.

Although several problems have arisen with the Disdrometer Verification Network in the first 12 months, the network manager and site owners have been, on the whole, quick to respond to these issues which has minimised downtime. DiVeN is in an ideal state for long-term data collection as it has been designed with few potential failure points and with several backup methods in place in the event of a failure.

4 Case Studies

The following sections subjectively analyse the skill of the disdrometer instrument for classifying ~~precipitation~~ hydrometeor type. Three types are discussed here: snow from named winter storm Doris; an intense rainfall event at NFARR Atmospheric Observatory and a graupel shower at the Reading University Atmospheric Observatory. NFARR Atmospheric Observatory instrument data were sourced from Science and Technology Facilities Council et al. (2003) and Agnew (2013).

4.1 Rain-Snow Transition

During the first disdrometer installation trip in February 2017, the Met Office-named winter storm Doris impacted the UK. The disdrometer at Lancaster was installed on 22nd February, and Edinburgh was scheduled for installation on 24th February. Storm Doris was forecast to bring heavy snowfall to the central belt of Scotland on the morning of the 23rd. Therefore a decision was made to leave Lancaster early on the evening of the 22nd, to arrive in Gladhouse Reservoir before the expected snowfall. An opportunity arose to temporarily operate a disdrometer at Gladhouse Reservoir (55.7776, -3.1173). Observations began at 01:00 UTC, by which time light rain had begun precipitating.

The opportunistic observations made during storm Doris provide a unique dataset by which to evaluate the skill of the disdrometer for prescribing hydrometeor type. Several transitions between rain and snow occurred that were also observed by a qualified meteorologist. The following section compares the disdrometer present weather codes and the eyewitness observations taken by the lead author during the event. An important consideration is the fact that the disdrometer was setup in a suboptimal observing environment which had approximately 200° of tall objects in close proximity. Figure 7 shows the instru-

ment operating at Gladhouse Reservoir. There were tall evergreen trees to the east and west, and a two-floor building to the south. Telecoms cables were also overhead and associated poles are visible to the NNE behind the disdrometer in Figure 7. This was unavoidable given the impromptu circumstances of deployment.

Despite the suboptimal observing conditions, the disdrometer performed well at diagnosing the correct present weather code during the storm Doris event. Table 4 and Figure 8 show that the disdrometer correctly output a present weather code of rain initially, followed by an unverified ‘mixed precipitation’ from 01:24 to 01:50. From 01:50 onwards a consistent snowfall PW code was observed, which agrees with visible observations made within 01:50-03:55. At 03:55 the precipitation became light and was described as drizzle by the disdrometer.

From 06:00 onwards the precipitation intensified and the present weather code changed between drizzle and rain. By 06:45 the PW code was switching between only rain and a rain/snow mix. From 07:24 onwards the present weather code was constant snow, which continued with varying intensity until 15:28. The eyewitness observation at 15:39 is of individual ice crystals which the disdrometer perceived as low precipitation rates of 0.293 mm hr^{-1} misclassified as drizzle. Weak precipitation continued until 17:13 where no precipitation is observed by the disdrometer, concluding the IOP.

Table 4 shows that the Thies LPM has good skill with regard to determining the present weather type. Every disdrometer-diagnosed present weather code is in agreement with the eyewitness observations throughout the IOP, with the exception of 15:39. The difference in fall velocity between drizzle particles and individual ice crystals is small and as such the disdrometer struggled to identify the precipitation correctly.

Figures 9 and 10 show the periods of constant ~~precipitation~~-hydrometeor type observed by the disdrometer in Figure 8, normalised for particle count. There are clear differences between rain, snow and rain/snow mix periods. Rain follows the curve shown by Gunn and Kinzer (1949). The rain/snow mix periods in b) and f) retain the Gunn-Kinzer relationship but with additional, larger particles with slower fall velocities. The snow categories in c) and g) are markedly different with broader distributions of particle size and a shifted fall velocity distribution. The drizzle and ice crystal periods however, are very similar. Both are characterised by distributions of particle fall speed and diameter peaking at approximately 1.4 m s^{-1} and 0.375 mm respectively. The distribution similarities of drizzle and pristine ice crystals on Figures 9 and 10 illustrates the difficulty in distinguishing between these two types by fall speed and diameter alone, without additional information. A temperature sensor added to the disdrometer may have aided the PW code classification. The misidentification described here is not a major concern since pristine ice crystal precipitation is a) uncommon in the UK and b) contributes negligible amounts to total rainfall as indicated during this event.

The present weather code quality index shown in Figure 8 demonstrates that the Thies LPM is able to detect when recording conditions are challenging. The PW code quality index decreases, showing a poor quality measurement, during times of weak precipitation rates and in mixed precipitation phases.

The opportunistic data collected in the storm Doris event is unusual in its ~~2~~-number of transitional periods and will be a valuable case by which to compare the performance of ~~radar~~-radar-derived surface hydrometeor classification schemes.

4.2 Intense Convective Rainfall

Storm Doris also brought an interesting event to another site; a high rainfall rate observed by the NFARR Atmospheric Observatory pair of disdrometers (Chilbolton 1 & 2). The event was synoptically characterised by a narrow swath of intense precipitation oriented meridionally. The high intensity precipitation moved west to east across the UK, associated with a cold front originating from the low associated with named winter storm Doris. 30 km NE of NFARR Atmospheric Observatory in Stratfield Mortimer, a private weather station managed by Stephen Burt also observed the intense band of rainfall (personal communication, 20th October 2017). A high-resolution Lambrecht gauge (~~nominal resolution 0.001~~recorded resolution of 0.01 mm) on the site observed a 75.6 mm hr⁻¹ rain rate over 10 seconds at 07:51 UTC. The 1-minute rain rate at 07:51 was 54.6 mm hr⁻¹ and the 5-minute rain rate ending 07:52 was 30.6 mm hr⁻¹. The event was described by a trained observer as “rain quickly became heavy then torrential”.

The event was particularly outstanding from a DiVeN point of view due to the drop count measured by the Thies LPMs situated at NFARR Atmospheric Observatory, Chilbolton, which peaked at around 12,000 drops in a single minute (200 per second) at 07:39 UTC on 23rd February 2017. Both disdrometers observed a similar evolution of drop count over the short 26-minute rainfall event. This does not prove that the instruments are recording accurately; conversely it may be a signal of a systematic issue with the measurement technique used in every Thies LPM.

Figure 11 shows an anomalously large left-tailed DSD from both of the Thies LPMs when compared against the Joss ~~Waldvögel~~Waldvogel RD-80 and Campbell Scientific PWS100 disdrometers. A high concentration of small drop sizes suggests that splashing is occurring, where larger drops breakup on impact with either the instrument itself, or the surroundings. Earlier versions of the Thies LPM did not have shields on top of the sensor, which the manufacturer acknowledged were added because of splashing issues. It is possible that in very high rainfall rates, splashed droplets are still reaching the instrument beam and are being erroneously recorded. The drop velocity distribution (DVD) from the Thies LPM is also in disagreement with the PWS100. The PWS100 uses a similar optical technique to the Thies LPM with the addition of having 4 vertically stacked beams versus 1 on the Thies LPM, which should increase the accuracy of fall velocity measurements. Furthermore, the Thies LPM categorises the highest velocity particles into the smallest diameter particle bins, which is unphysical. Finally, the total drop count per metre is significantly higher for both of the Thies LPMs.

The DVD during the event is very wide. A noteworthy observation from the Stratfield Mortimer observatory is the wind characteristics. Marking the passage of the cold front at 07:45, winds became increasingly gusty and 10-minute wind mean ending 07:40 was 20 knots. ~~The fall speed of hydrometeors measured by the disdrometer may be affected by the wind, in particular~~A strong surface wind is associated with turbulent eddies which have some vertical component. The intermittent vertical wind acts to widen the drop velocity distribution. Furthermore, turbulence breaks up droplets thus skewing the drop size distribution. Finally, winds tangent to the disdrometer as was the case here beam (N-S oriented beam, westerly wind) as was the case here, increase the number of beam-edge hits which reduce the quality of the data.

Figure 12 shows that the two Thies LPMs have good agreement for rain rate from 07:25 to 07:35 where the rain rates are moderate, but that the Thies LPMs overestimate the rainfall during 07:35 to 07:40 where the rain rate is heavy. In total,

Chilbolton 1 and Chilbolton 2 recorded 120% and 149% of the rainfall measured by the PWS100. The JWD is expected to underestimate slightly due to the range of observable diameters (0.3 mm to 5 mm) being smaller than true raindrop sizes, and smaller drop sizes being undetectable in the presence of large droplets due to sensor oscillation.

It appears that in these conditions the hydrometeors were not correctly measured by the Thies LPM. However, the hydrometeor type is still correctly identified despite these shortcomings in rain rate, particle diameter and particle velocity.

4.3 Graupel Shower

Graupel (rimed ice crystals) are important signatures of convection for the UK, where hail is relatively uncommon. The Thies instrument does not have a graupel category because the category does not exist within the WMO Table 4680 which it uses to convey ~~precipitation~~ hydrometeor type. Codes 74, 75, 76 (light / moderate / heavy soft hail / ice grains) are presumed to be equivalent to what is commonly described as graupel.

On the 25th April 2017 a shower containing conical-shaped graupel passed over Reading University ‘between 16:30 and 16:45 UTC’ as observed by Dr Chris Westbrook (personal communication, 25th April 2017). Figure 13 shows the temporal evolution of hydrometeor type identified by the DiVeN instrument during the event. The disdrometer observed only a single minute (16:36) of ‘soft hail / ice grains’ PW code (indicating graupel) during the entire 21 minutes of precipitation detected. Between 16:30 and 16:50 UTC inclusively, the following codes were also observed: 7 minutes of code 68 (moderate / heavy rain and / or drizzle with snow); 12 minutes of codes 61 / 62 (light / moderate rain); 1 minute of code 72 (moderate snow fall). Clearly the instrument struggled to diagnose graupel in this particular event.

Figure 14 shows the particle size and velocity information grouped by hydrometeor type prescribed by the Thies LPM. Throughout the graupel shower the instrument observed a bimodal distribution in both velocity and diameter for all hydrometeor types which is indicative of both rain and graupel precipitating simultaneously. Furthermore in the rain/snow, snow, and graupel periods, a few hydrometeors exist below the Gunn-Kinzer curve which are misidentified as snow. Although the accumulated drop characteristics for the rain and rain/snow minutes are indicative of a rain/graupel mixture, in a single minute only a few particles may fall through the disdrometer beam versus several hundred raindrops. The ratio of rain to graupel may therefore be insufficient for the PW code to change to graupel. No PW code exists in the WMO Table 4680 for a rain/graupel mixture or rain/‘soft hail’ mixture. The false detection of snow hydrometeors may be attributed to graupel particles bouncing off nearby surfaces or the instrument itself, slowing the fall velocity and thus appearing to the disdrometer as a lower density particle such as an ice aggregate.

For future work with DiVeN data it is important to note 1-minute observations of ‘soft hail / ice grain’ PW codes when longer time periods are being analysed. For example, radar hydrometeor classification will be performed with DiVeN data at 5-minute intervals. If in one of the five minutes soft hail or snow grains are observed, this must be highlighted. Graupel likely existed for longer than one minute but it was either not the dominant hydrometeor or the instrument was unable to correctly identify it.

5 Summary

The Disdrometer Verification Network is the largest network of laser precipitation measurements in the UK. Here we have fully described the network and discussed three specific observation cases to subjectively discuss the accuracy of the Thies LPM with a focus on hydrometeor type diagnosis.

- 5 In summary, the instruments are able to correctly identify changes between snow and rain during storm Doris even with the suboptimal observing conditions. Snow is easily detected by the disdrometer and it is also able to accurately signal a mixture of ~~precipitation~~hydrometeor types when transitioning between rain and snow.

Yet, the Thies LPM appears to have difficulty with measuring heavy rainfall events, where droplet breakup may be occurring due to instrument design. Distributions of drop size are skewed, such that small particle counts are significantly enhanced when compared with the Joss Waldvögel RD-80 and the Campbell Scientific PWS100. The ~~precipitation~~hydrometeor type variable
10 was unaffected by the distribution discrepancies in the case studied.

The Thies LPM also struggled to detect graupel in the event studied here. This shortcoming can be somewhat compensated for by flagging individual minutes of present weather codes 74, 75 and 76 within larger datasets but there will be graupel cases that the Thies LPM fails to detect entirely.

- 15 A factor affecting the Thies LPM for hydrometeor classification is that empirical relationships do not account for instrument errors or the design of the instrument which may interfere with the precipitation being measured. The ~~precipitation~~hydrometeor type signatures should be derived using data from the instrument to which they will be applied. Furthermore, by using the present weather code to describe hydrometeor type, the Thies LPM is restricted in its ability to express the true nature of the observations being made, particularly noted in instances of graupel.

- 20 DiVeN offers open-access data in near-real-time at 5 minute updates. 1 minute frequency data is available upon request from the authors or via the Centre for Environmental Data Analysis (CEDA) from 2020. Data has been made publicly accessible in the hope that the Disdrometer Verification Network will be used for research beyond the original scope of the network.

Data availability. Data plots are available in near-real-time here: <https://sci.ncas.ac.uk/diven/>. Original data is available upon request to the corresponding author and will be available through the Centre for Environmental Data Analysis (CEDA) in NetCDF format in 2019.

- 25 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements.

The lead author wishes to thank the following people and institutions for contributing to the creation of the Disdrometer Verification Network
The United Kingdom Meteorological Office for loaning the Thies LPM instruments used in DiVeN, Thies for advice and communication
regarding the instrument, and the National Centre for Atmospheric Science (NCAS) for all other supporting hardware.

Morwenna Cooper (Met Office), Dan Walker (NCAS), James Groves (NCAS) and Darren Lyth (Met Office) for technical advice regarding the data acquisition design of DiVeN.

5 *The contacts at each site hosting a disdrometer for DiVeN: Judith Jeffery (NFARR), Andrew Lomas (University of Reading), Rebecca Carling (Facility for Atmospheric Measurements), Grant Forster (University of East Anglia), David Hooper (NFARR), James Heath (University of Lancaster), Richard Essery (University of Edinburgh), Geoff Monk (Mountain Weather Information Service), Michael Flynn (University of Manchester), Louise Parry (Scottish Environment Protection Agency), Jim Cornfoot (Natural Retreats), Chris Taylor (Natural Retreats), Andrew Black (University of Dundee), Darren Lyth (Met Office), Megan Klaar (University of Leeds), Stephen Mawle (Coverhead Farm)*

Jack Giddings, Ashley Nelis, Scott Duncan and Daniel Page for providing accommodation and sanity during the month-long installation trip.

10 *Philip Rosenberg (NCAS) for advice on statistical tests.*

Also: Stephen Best (Met Office), James Bowles (Met Office), Dave Hazard (NFARR), Darcy Ladd (NFARR), Stephen Burt (University of Reading), Chris Westbrook (University of Reading).

References

- Abel, S., Cotton, R., Barrett, P., and Vance, A.: A comparison of ice water content measurement techniques on the FAAM BAe-146 aircraft, *Atmospheric Measurement Techniques*, 7, 3007–3022, 2014.
- Adolf Thies GmbH & Co. KG: Laser Precipitation Monitor - Instruction for Use, Tech. rep., Adolf Thies GmbH & Co. KG, Hauptstraße 76,
5 37083 Göttingen, Germany, 2011.
- Agnew, J.: Chilbolton Facility for Atmospheric and Radio Research (CFARR) Campbell Scientific PWS100 present weather sensor data, NCAS British Atmospheric Data Centre, <http://catalogue.ceda.ac.uk/uuid/e490cd13d86d832bd2d62f1650d7b265>, 2013.
- Al-Sakka, H., Boumahmoud, A. A., Fradon, B., Frasier, S. J., and Tabary, P.: A new fuzzy logic hydrometeor classification scheme applied to the french X-, C-, and S-band polarimetric radars, *Journal of Applied Meteorology and Climatology*, 52, 2328–2344,
10 <https://doi.org/10.1175/JAMC-D-12-0236.1>, 2013.
- Chandrasekar, V., Bringi, V., Balakrishnan, N., and Zrnić, D.: Error structure of multiparameter radar and surface measurements of rainfall. Part III: Specific differential phase, *Journal of Atmospheric and Oceanic Technology*, 7, 621–629, 1990.
- Chandrasekar, V., Keranen, R., Lim, S., and Moisseev, D.: Recent advances in classification of observations from dual polarization weather radars, *Atmospheric Research*, 119, 97–111, <https://doi.org/10.1016/j.atmosres.2011.08.014>, 2013.
- 15 Ciach, G. J.: Local random errors in tipping-bucket rain gauge measurements, *Journal of Atmospheric and Oceanic Technology*, 20, 752–759, [https://doi.org/10.1175/1520-0426\(2003\)20<752:LREITB>2.0.CO;2](https://doi.org/10.1175/1520-0426(2003)20<752:LREITB>2.0.CO;2), 2003.
- Elmore, K. L., Grams, H. M., Apps, D., and Reeves, H. D.: Verifying Forecast Precipitation Type with mPING, *Weather and Forecasting*, 30, 656–667, <https://doi.org/10.1175/WAF-D-14-00068.1>, 2015.
- Fabry, F.: Radar meteorology: principles and practice, Cambridge University Press, 2015.
- 20 Fairman, J. G., Schultz, D. M., Kirshbaum, D. J., Gray, S. L., and Barrett, A. I.: A radar-based rainfall climatology of Great Britain and Ireland, *Weather*, 70, 153–158, <https://doi.org/10.1002/wea.2486>, 2015.
- Gascón, E., Hewson, T., and Haiden, T.: Improving Predictions of Precipitation Type at the Surface: Description and Verification of Two New Products from the ECMWF Ensemble, *Weather and Forecasting*, 33, 89–108, <https://doi.org/10.1175/WAF-D-17-0114.1>, 2018.
- Green, A.: From Observations to Forecasts – Part 7 . A new meteorological monitoring system for the United Kingdom’s Met Office, *Weather*,
25 65, 272–277, 2010.
- Groisman, P. Y., Legates, D. R., Groisman, P. Y., and Legates, D. R.: The Accuracy of United States Precipitation Data, *Bulletin of the American Meteorological Society*, 75, 215–227, [https://doi.org/10.1175/1520-0477\(1994\)075<0215:TAO USP>2.0.CO;2](https://doi.org/10.1175/1520-0477(1994)075<0215:TAO USP>2.0.CO;2), 1994.
- Gunn, R. and Kinzer, G. D.: The Terminal Velocity of Fall for Water Droplets in Stagnant Air, [https://doi.org/10.1175/1520-0469\(1949\)006<0243:TTVOFF>2.0.CO;2](https://doi.org/10.1175/1520-0469(1949)006<0243:TTVOFF>2.0.CO;2), 1949.
- 30 Hall, M. P. M., Goddard, J. W. F., and Cherry, S. M.: Identification of hydrometeors and other targets by dual-polarization radar, *Radio Science*, 19, 132–140, <https://doi.org/10.1029/RS019i001p00132>, 1984.
- Harrison, D., Driscoll, S. J., and Kitchen, M.: Improving precipitation estimates from weather radar using quality control and correction techniques, *Meteorol. Appl.*, 6, 135–144, <https://doi.org/10.1017/S1350482700001468>, 2000.
- Jaffrain, J., Studzinski, A., and Berne, A.: A network of disdrometers to quantify the small-scale variability of the raindrop size distribution,
35 *Water Resources Research*, 47, 1–8, <https://doi.org/10.1029/2010WR009872>, 2011.
- Jameson, A. R. and Kostinski, A. B.: What is a raindrop size distribution?, *Bulletin of the American Meteorological Society*, 82, 1169–1177, [https://doi.org/10.1175/1520-0477\(2001\)082<1169:WIARSD>2.3.CO;2](https://doi.org/10.1175/1520-0477(2001)082<1169:WIARSD>2.3.CO;2), 2001.

- Jensen, M. P., Petersen, W. A., Bansemer, A., Bharadwaj, N., Carey, L. D., Cecil, D. J., Collis, S. M., Genio, A. D. D., Dolan, B., Gerlach, J., Giangrande, S. E., Heymsfield, A., Heymsfield, G., Kollias, P., Lang, T. J., Nesbitt, S. W., Neumann, A., Poellot, M., Rutledge, S. A., Schwaller, M., Tokay, A., Williams, C. R., Wolff, D. B., Xie, S., and Zipser, E. J.: The Midlatitude Continental Convective Clouds Experiment (MC3E), *Bulletin of the American Meteorological Society*, 97, 1667–1686, <https://doi.org/10.1175/BAMS-D-14-00228.1>, 2016.
- Lim, S., Chandrasekar, V., and Bringi, N.: Hydrometeor Classification System Using Dual-Polarization Radar Measurements: Model Improvements and In Situ Verification, 43, 792–801, <https://doi.org/10.1109/WARSD.2003.1295197>, 2005.
- Liu, H. and Chandrasekar, V.: Classification of hydrometeors based on polarimetric radar measurements: Development of fuzzy logic and neuro-fuzzy systems, and in situ verification, *Journal of Atmospheric and Oceanic Technology*, 17, 140–164, [https://doi.org/10.1175/1520-0426\(2000\)017<0140:COHBOP>2.0.CO;2](https://doi.org/10.1175/1520-0426(2000)017<0140:COHBOP>2.0.CO;2), 2000.
- Locatelli, J. D. and Hobbs, P. V.: Fall speeds and masses of solid precipitation particles, *Journal of Geophysical Research*, 79, 2185–2197, <https://doi.org/10.1029/JC079i015p02185>, 1974.
- Löffler-Mang, M. and Joss, J.: An optical disdrometer for measuring size and velocity of hydrometeors, *Journal of Atmospheric and Oceanic Technology*, 17, 130–139, [https://doi.org/10.1175/1520-0426\(2000\)017<0130:AODFMS>2.0.CO;2](https://doi.org/10.1175/1520-0426(2000)017<0130:AODFMS>2.0.CO;2), 2000.
- Muchan, K., Lewis, M., Hannaford, J., and Parry, S.: The winter storms of 2013/2014 in the UK: hydrological responses and impacts, *Weather*, 70, 55–61, <https://doi.org/10.1002/wea.2469>, 2015.
- Penning-Rowsell, E. and Wilson, T.: Gauging the impact of natural hazards: The pattern and cost of emergency response during flood events, *Transactions of the Institute of British Geographers*, 31, 99–115, <https://doi.org/10.1111/j.1475-5661.2006.00200.x>, 2006.
- Ribaud, J. F., Bousquet, O., Coquillat, S., Al-Sakka, H., Lambert, D., Ducrocq, V., and Fontaine, E.: Evaluation and application of hydrometeor classification algorithm outputs inferred from multi-frequency dual-polarimetric radar observations collected during HyMeX, *Quarterly Journal of the Royal Meteorological Society*, 142, 95–107, <https://doi.org/10.1002/qj.2589>, 2016.
- Science and Technology Facilities Council, Chilbolton Facility for Atmospheric and Radio Research, Natural Environment Research Council, and Wrench, C. L.: Chilbolton Facility for Atmospheric and Radio Research (CFARR) Disdrometer Data, Chilbolton Site, NCAS British Atmospheric Data Centre, <http://catalogue.ceda.ac.uk/uuid/aac5f8246987ea43a68e3396b530d23e>, 2003.
- Seliga, T. and Bringi, V.: Differential reflectivity and differential phase shift: Applications in radar meteorology, *Radio Science*, 13, 271–275, 1978.
- Sheppard, B. E.: Measurement of raindrop size distributions using a small Doppler radar, *Journal of Atmospheric and Oceanic Technology*, 7, 255–268, 1990.
- Smith, P. L.: Sampling Issues in Estimating Radar Variables from Disdrometer Data, *Journal of Atmospheric and Oceanic Technology*, 33, 2305–2313, <https://doi.org/10.1175/JTECH-D-16-0040.1>, 2016.
- Tapiador, F. J., Navarro, A., Moreno, R., Jiménez-Alcázar, A., Marcos, C., Tokay, A., Durán, L., Bodoque, J., Martín, R., Petersen, W., and de Castro, M.: On the Optimal Measuring Area for Pointwise Rainfall Estimation: A Dedicated Experiment with Fourteen Laser Disdrometers, *Journal of Hydrometeorology*, pp. 753–760, <https://doi.org/10.1175/JHM-D-16-0127.1>, 2016.
- Thornes, E.: The impact of weather and climate on transport in the UK, *Process in Physical Geography*, 16, 187–208, 1992.
- WMO: Manual on Codes. Vol. 1, WMO Publ. 306, p. 203 pp., 1988.



Figure 1. A DiVeN Thies LPM located at Weybourne Observatory in Weybourne, East Anglia, UK, which is an Atmospheric Measurement Facility (AMF) site, part of the National Centre for Atmospheric Science (NCAS).

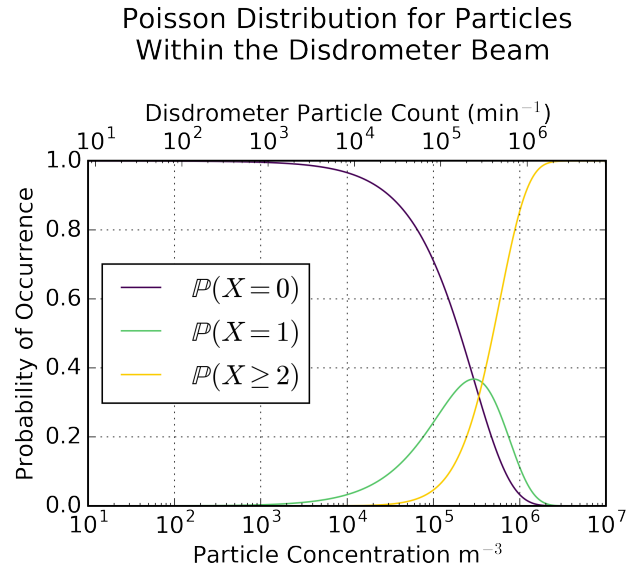


Figure 2. Probability of X number of drops residing in within the disdrometer beam for a given drop concentration. If two or more drops are within the beam simultaneously, data quality can be reduced. More than $12,000 \text{ drops m}^{-3}$ (equivalent to $10,000 \text{ drops min}^{-1}$ recorded by the disdrometer*) are required before the probability of 2 or more drops occurring in the beam simultaneously becomes non-negligible. As such, any events with more than $10,000 \text{ drops observed per minute}$ should be treated as less reliable. *Drops falling through the disdrometer beam assumes a 3 m s^{-1} fall velocity, which from Gunn and Kinzer (1949) is a particle of approximately 0.8 mm diameter, typically the average size observed for a moderate rainfall event. Droplet breakup on the housing of the Thies LPM is not factored into this test.



Figure 3. Instrument locations that make up the Disdrometer Verification Network (DiVeN) as of September 2018. Grey icons are the operational Met Office radars as well as the Met Office research radar at Warden Hill. Map data ©2018 GeoBasis-DE/BKG (©2009), Google, Inst. Geogr. Nacional.

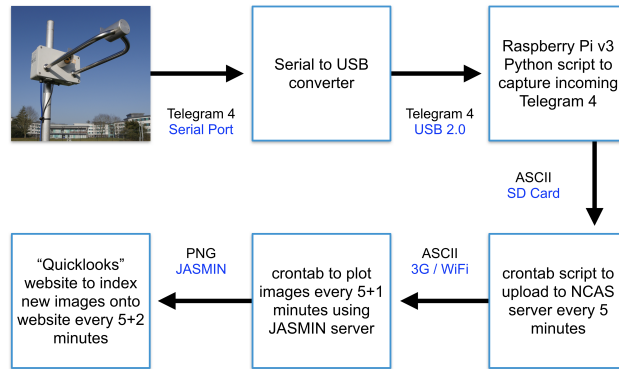


Figure 4. Flow chart of the sequence of data in the Disdrometer Verification Network. The instrument outputs a Telegram 4 format serial ping every minute, which is then captured by a Raspberry Pi (v3) running a Python script. The Python script then saves the file to the built-in SD card as an ASCII .txt. Separate BASH scripts upload the new files every 5 minutes (xx:05, xx:10, xx:15) to an NCAS server, which JASMIN then reads to plot the data (xx:06, xx:11, xx:16). The website indexes for new images at xx:07, xx:12, xx:17 and so on. Thus the time taken for the xx:00 to xx:05 data to reach the website is 2 minutes.

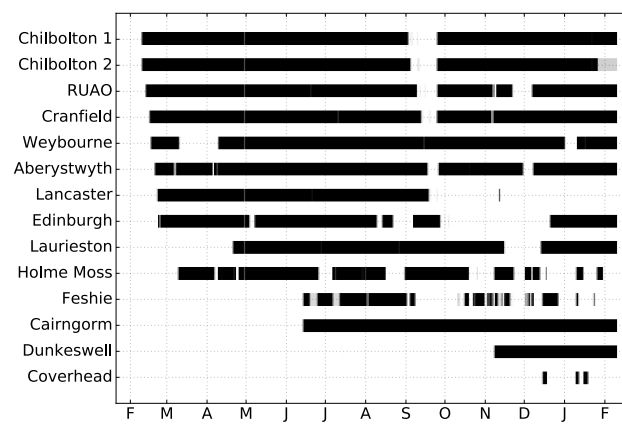


Figure 5. Daily upload performance of DiVeN in the first 365 days of operation. Black indicates 100% upload (1440 files in a day), and white indicates 0% upload.



Figure 6. Disdrometer at Druim nam Bo, Scotland covered in rime in January 2018. The instrument was still receiving power and recording nullified (no beam received by optical diode) data which it interpreted as a 'sensor error' (-1) present weather code.

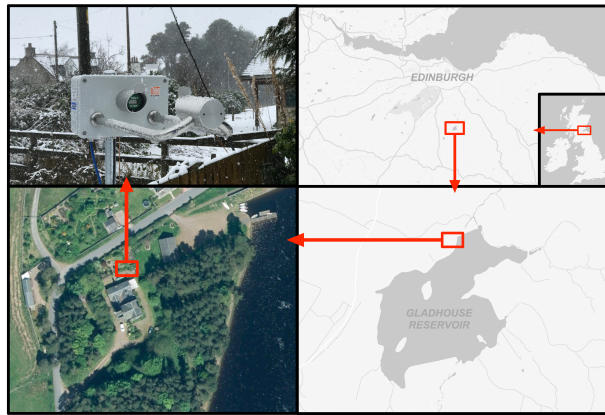


Figure 7. Maps, satellite images and ground images of the disdrometer location and setup for named winter storm Doris at Gladhouse Reservoir House, Scotland. Map data ©2018 GeoBasis-DE/BKE (©2009), Google. Satellite image: copyright © 2012-2016 Apple Inc. All rights reserved.

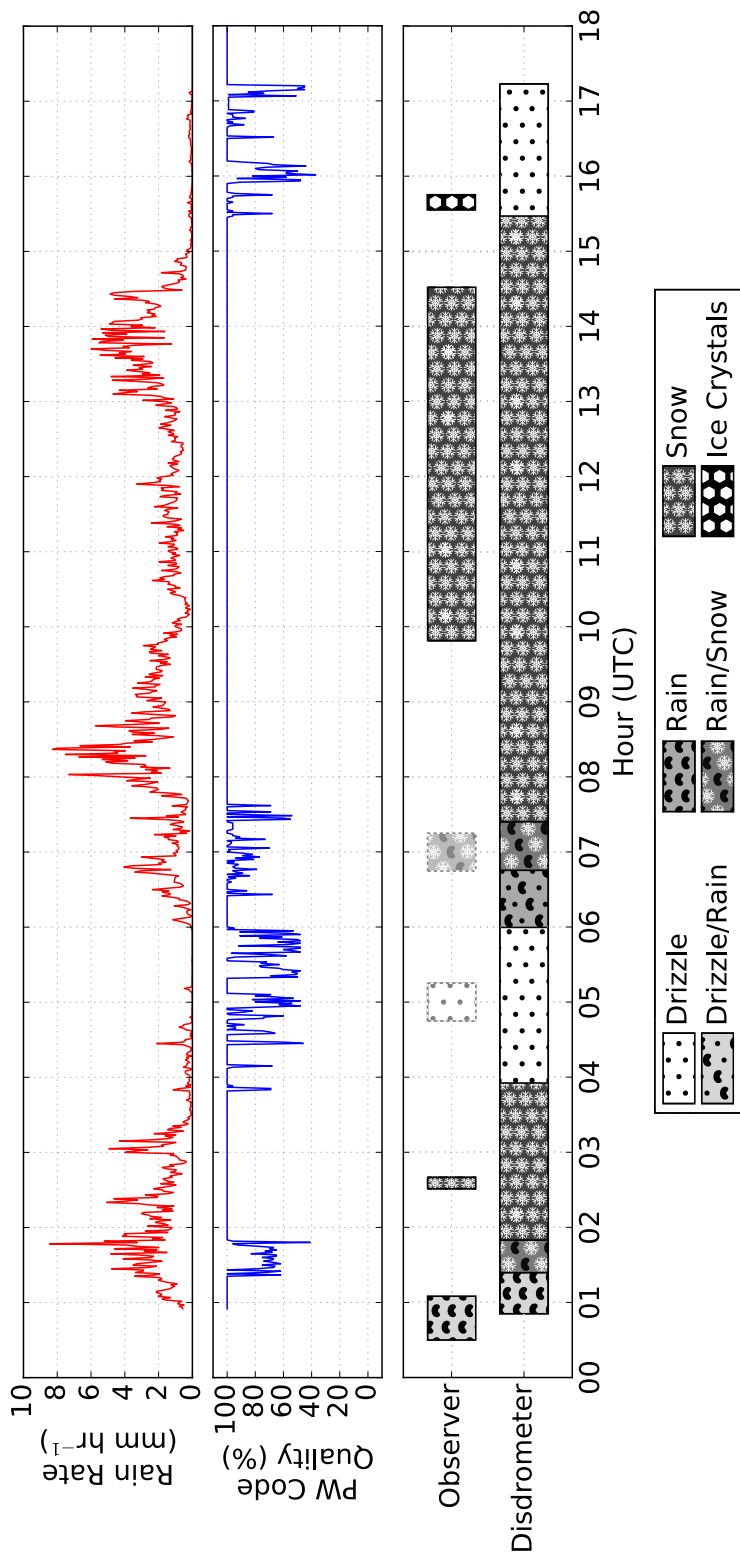


Figure 8. Rain rate, hydrometeor type, and present weather code quality index during the storm Doris event on 23rd February 2017, which occurred over approximately 16 hours at Gladhouse Reservoir, Scotland. Rain rate is liquid equivalent for periods of snow and is recorded by a Thies LPM disdrometer. Hydrometeor type is shown from both the disdrometer and impromptu from a trained meteorologist. The meteorologist observations at 05:00 and 07:00 UTC are approximate due to a lack of accurate time information. The disdrometer misidentified individual ice crystals at 15:39 as drizzle.

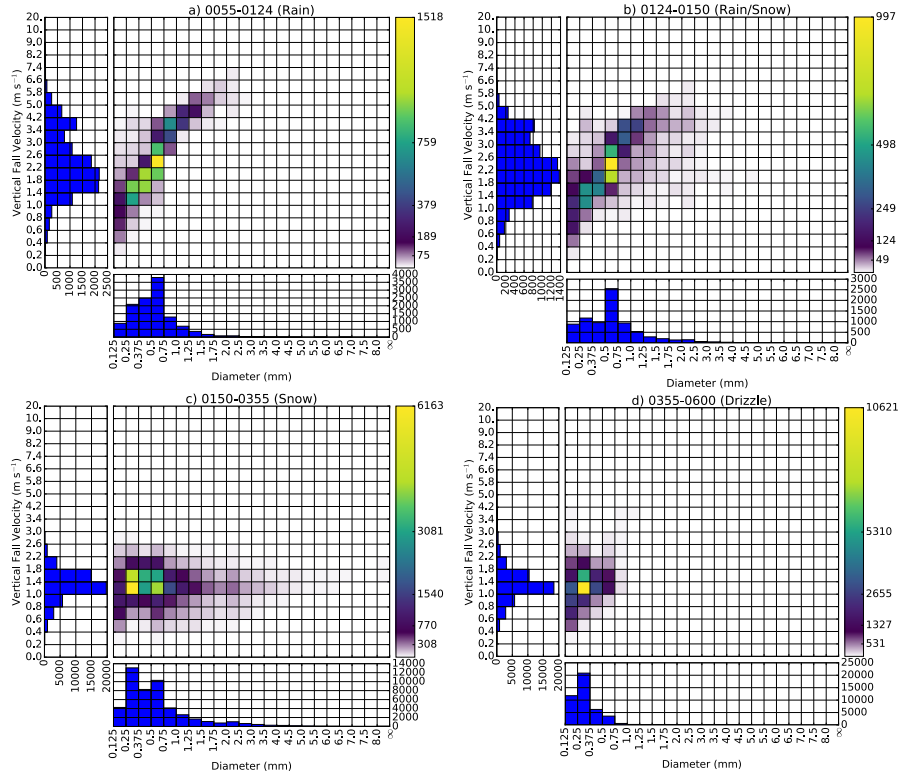


Figure 9. Accumulated particle information for each hydrometeor class period described in Figure 8. The centre grid shows particle counts binned by size and fall velocity. The y-axis histogram shows particle velocity distribution (DVD) and the x-axis histogram shows particle size distribution (DSD) for the time period described. Since the time periods between each subplot are inconsistent in length, the color scale and histograms have been normalised for the total precipitation over each period. The periods are as follows: a) 0055-0124 (Rain) b) 0124-0150 (Rain/Snow) c) 0150-0355 (Snow) and d) 0355-0600 (Drizzle).

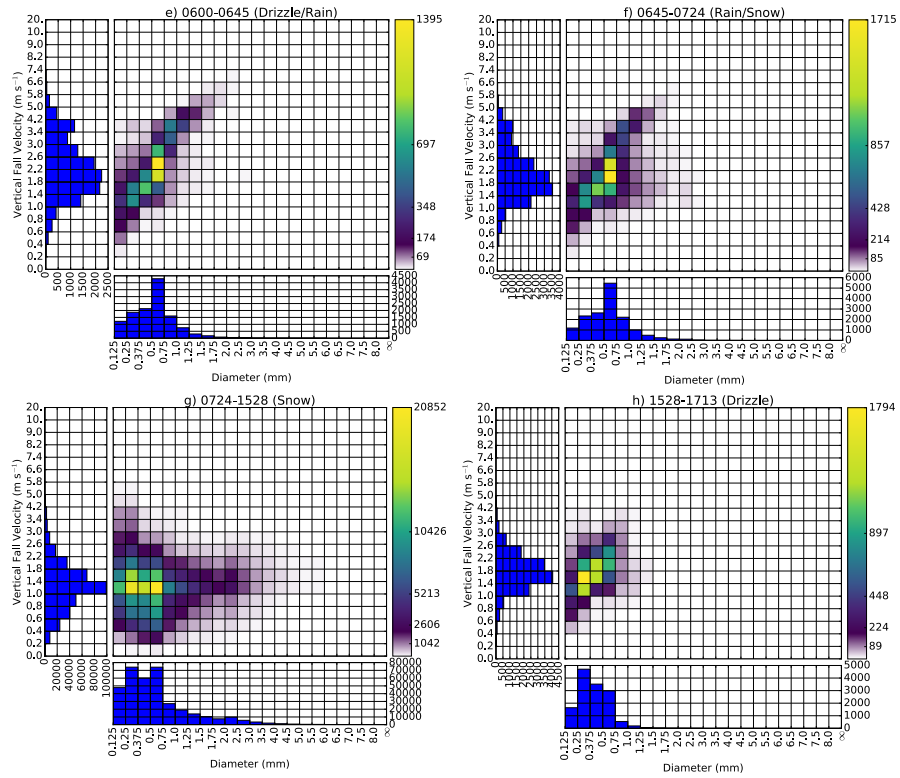


Figure 10. As in Figure 9, but time periods are as follows: e) 0600-0645 (Drizzle/Rain) f) 0645-0724 (Rain/Snow) g) 0724-1528 (Snow) and h) 1528-1713 (Drizzle).

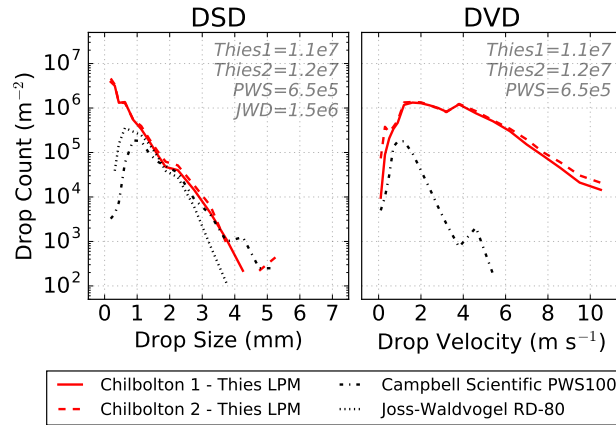


Figure 11. Drop characteristics of a heavy rain event at NFARR Atmospheric Observatory, Chilbolton, England on the 23rd March 2017. Distributions are accumulated from 07:25 to 07:50 UTC inclusively for a 26 minute summation. The left panel shows drop size distribution and the right panel shows drop velocity distribution. The Joss-Waldvogel RD-80 (JWD) does not provide drop velocity information. Each instrument has been normalised for sampling area and bin widths. Total drop count is listed in the top right of each plot. Both of the Thies LPMs have a higher total drop count, as well as significantly higher counts of small and high velocity particles compared with the PWS and JWD. The frame of the Thies LPM may be splashing droplets into the beam leading to increased counts of small, fast moving droplets.

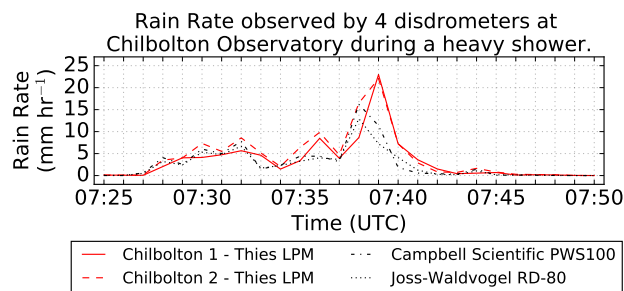


Figure 12. Rain rate measured by 4 instruments during a heavy rain event at NFARR Atmospheric Observatory, Chilbolton, England on the 23rd March 2017. The total accumulated rain depth over the 26 minutes for each instrument is as follows: Chilbolton 1 (1.481 mm); Chilbolton 2 (1.847 mm); PWS100 (1.237 mm); JWD (1.090 mm). Each instrument has been normalised for sampling area and bin widths. Both of the Thies LPMs have a higher total rain rate than the PWS100 and JWD. The difference in rain rate between both of the Thies LPMs and the PWS100 and JWD is greatest during the most intense precipitation which may be evidence of droplets splashing from the instrument housing into the measuring beam.

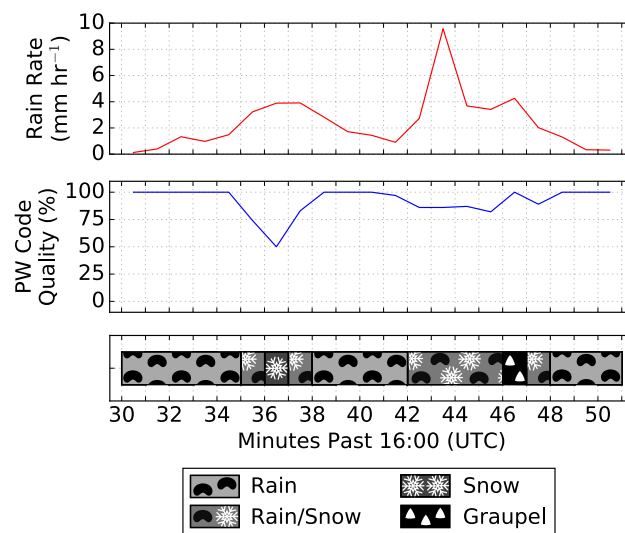


Figure 13. Rain rate, present weather code quality index and hydrometeor type during a graupel shower in Reading, England, on 25th April 2017. The event was recorded by a Thies LPM at the Reading University Atmospheric Observatory. Conical graupel was also observed from a nearby building (approximately 500 m away) by a qualified meteorologist between 16:30 and 16:45 UTC. Rain rate is the liquid equivalent for periods of solid hydrometeors as recorded by a Thies LPM disdrometer. Hydrometeor type is shown based on the present weather code (WMO Table 4680) recorded by the Thies LPM. The instrument struggles to diagnose the graupel and instead outputs a present weather code of snow and mixed rain/snow precipitation.

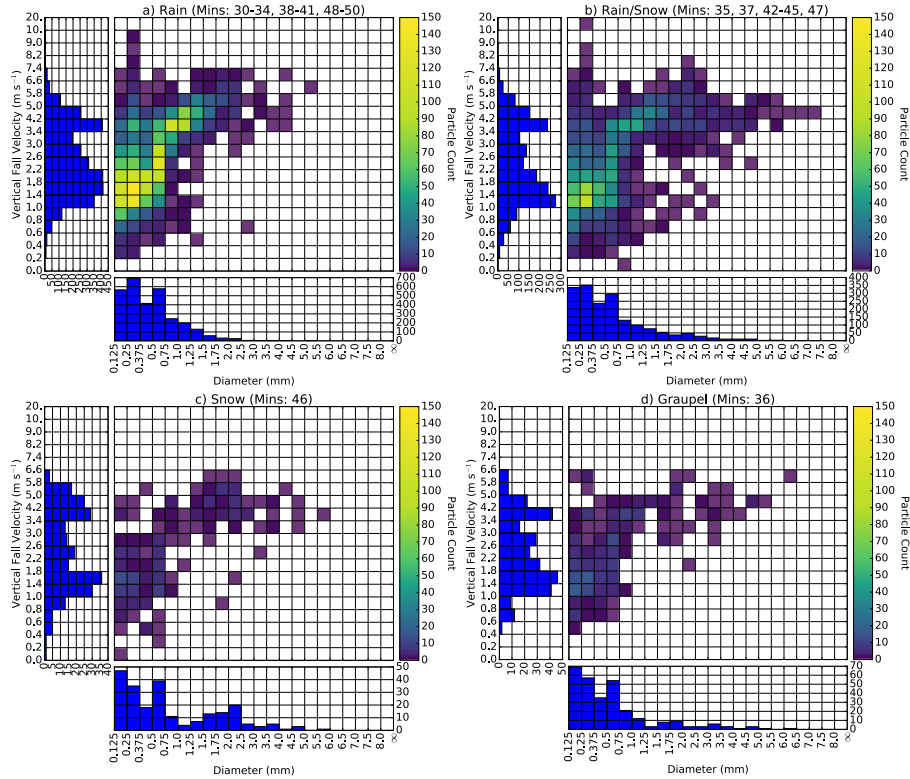


Figure 14. Accumulated particle information for each hydrometeor class period described in Figure 13. The centre grid shows particle counts binned by size and fall velocity. The y-axis histogram shows particle velocity distribution (DVD) and the x-axis histogram shows particle size distribution (DSD) for the time period described. The periods are as follows: a) Rain (12 minutes) b) Rain/Snow (7 minutes) c) Snow (1 minute) and d) Graupel (1 minute). The color scale is identical in all plots despite the different time accumulations in order to highlight the rare particles.

Table 1. Variables output from the Thies Laser Precipitation Monitor (LPM).

Output	Units	Resolution	Range
Particle Diameter	mm	0.125 mm (max)	$\geq 0.125 - > 8$ mm
Particle Velocity	m s^{-1}	0.2 m s^{-1} (max)	$> 0 - > 20 \text{ m s}^{-1}$
Particle Count	Counts	1 Count	0 – 99999
Rainfall Rate	mm hr^{-1}	0.001 mm hr^{-1}	$0.000 - 999.999 \text{ mm hr}^{-1}$
Precipitation Visibility	m	1 m	0 – 99999 m
Radar Reflectivity Factor	dBZ	0.1 dBZ	-9.9 – 99.9 dBZ
PW Code Quality Index	%	1 %	0 – 100 %

Table 2. World Meteorological Organization (WMO) synoptic present weather codes (Table 4680) output by the Thies Laser Precipitation Monitor (LPM)

SYNOP (Tab.4680)	Description
-1	Sensor error
41	Light / moderate unknown precipitation
42	Heavy unknown precipitation
0	No precipitation
51, 52, 53	Light / moderate / heavy drizzle
57	Light drizzle with rain
58	Moderate / heavy drizzle with rain
61, 62, 63	Light / moderate / heavy rain
67	Light rain and / or drizzle with snow
68	Moderate / heavy rain and / or drizzle with snow
71, 72, 73	Light / moderate / heavy snow fall
74, 75, 76	Light / moderate / heavy soft hail / ice grains
77	Snow grains
89	Hail

Table 3. Site location descriptions of [disrometers](#) in the [disdrometer-verification-network](#) [Disdrometer Verification Network](#).

Site Name	Lat/Lon	Altitude (a.m.s.l.)	Install Date	Description
Chilbolton	51.1455,- 1.4396	83 m	10th Feb 2017	NFARR Atmospheric Observatory. 2 instruments, 10 m apart. Land type: flat, agricultural fields for > 500m in all directions. Nearby objects: 25 m diameter radar dish antenna 100 m ESE; 2-floor building 25 m SSW.
RUAO	51.4415, -0.9376	63 m	13th Feb 2017	Reading University Atmospheric Observatory. Land type: open grass in vicinity; campus with lake and trees situated within a wider suburban area. Lake 100 m W-NW, 3-floor building 50 m SSE. Shed 30 m ENE.
Cranfield	52.0744, -0.6252	105 m	15th Feb 2017	Facility for Airborne Atmospheric Measurements. Land type: 2-floor rooftop observatory within a cluster of buildings at a university airport. Nearby objects: stairwell NW, hangar ESE. Above most nearby buildings.
Weybourne	52.9505, 1.1218	8 m	17th Feb 2017	NCAS Atmospheric Measurement Facility. Land type: military base, mostly grass. Sandy beach and ocean 100 m NNE. Nearby objects: small 1-floor building ESE, 4-floor scaffold tower E.
Aberystwyth	52.4248, -4.0045	44 m	20th Feb 2017	NFARR / NERC (Natural Environment Research Council) Mesosphere-Stratosphere-Troposphere (MST) radar site. Land type: agricultural fields in a WSW-ENE valley. Nearby objects: single tree and 1-floor building SSE, hedgerow N-SSE.
Lancaster	54.0138, -2.7749	94 m	22nd Feb 2017	Hazelrigg Weather Station, University of Lancaster. Land type: agricultural fields. Nearby objects: 100 m tall wind turbine 150 m WSW, meteorological mast 10 m NW. Road and trees 30 m E.
Edinburgh	55.9217, -3.1745	105 m	24th Feb 2017	GeoSciences Weather Station, University of Edinburgh. Land type: roof of 6-floor James Clark Maxwell Building. Urban campus W-N-E, with golf course S. Nearby objects: rooftop above all surrounding buildings.
Laurieston	54.9614, -4.0605	67 m	28th Feb 2017	Mountain Weather Information Service. Land type: rural village, undulating agricultural terrain beyond. Nearby objects: 1-floor buildings 10 m SE, trees 30 m S-W
Holme Moss	53.5335, -1.8574	522 m	10th Mar 2017	Holme Moss transmitting station. Land type: hilltop moorland. Nearby objects: 228 m transmitting mast 40 m SW with anchoring cables overhead. Cabin 10 m SW, wire mesh fence NW-N.
Cairngorm	57.1269, -3.6628	781 m	12th Jun 2017	Cairngorm Mountain Ski Resort with Scottish Environment Protection Agency (SEPA) collaboration. Land type: arctic tundra, frequently snow-covered valley, facing NW. Nearby objects: road and power outbuilding uphill (SE) 20 m.
Feshie	57.0063, -3.8550	882 m	13th Jun 2017	Druim nam Bo weather station owned by University of Dundee. Land type: arctic tundra, frequently snow-covered, rounded mountain ridge oriented SW-NE, sloping SW. Nearby objects: weather station 10 m N.
Dunkeswell	50.8603, -3.2398	255 m	14th Jul 2017	Met Office official observatory at Dunkeswell Aerodrome. Land type: flat in all directions. Runway N-E-S with surrounding agricultural fields and forest SW-N. Nearby objects: 1-floor building 20 m NW.
Coverhead	54.2038, -1.9849	316 m	15th Dec 2017	Coverhead Estate with Water@Leeds collaboration. Land type: NW slope of SW-NE valley, agricultural fields. Nearby objects: mounted on a small outhouse facing S. Telegraph pole 10 m NW and trees E-SW.

Table 4. Present Weather code evolution throughout the named winter storm Doris event on 23rd February 2017. All times in UTC.

Time	Disdrometer Present Weather	Time	Qualified Meteorologist Observation
00:55 to 01:24	Rain	00:30 to 01:05	Rain
01:24 to 01:50	Rain or Mixed Precipitation		
01:50 to 03:55	Snow	02:31 to 02:40	Snow
03:55 to 06:00	Light / Moderate Drizzle	Approx. 05:00	Drizzle
06:00 to 06:45	Drizzle or Rain		
06:45 to 07:24	Rain or Mixed Precipitation	Approx. 07:00	Mixed Precipitation
07:24 to 15:28	Moderate / Heavy Snow	09:49 to 14:31	Moderate / Heavy Snow
15:28 to 17:13	Light / Moderate Drizzle	15:39	Pristine Ice Crystals