

We thank the Referee #1 for the time and effort involved in reviewing our manuscript. We appreciate the very constructive and useful input a lot. See below for our point-by-point response.

The manuscript describes two approaches to reduce the effects of averaging and cross-correlation between the different velocity components that typically compromise turbulence measurements from lidars and complicate the comparability of those measurements with in-situ point measurements, e.g. performed by sonic anemometers.

The topic is highly relevant under the aspect of the potential and limitations to derive reliable atmospheric turbulence data from lidar remote sensing and falls clearly into the scope of AMT. The manuscript is clearly structured and gives a thorough description of the theoretical background and the mathematical formulation of the models to simulate the different lidar scanning and analysis methods. It is, however, not always easy to read. The introduction would be strengthened by some discussions on the implications of the performed study on practical applications e.g. for future boundary layer research in general, and for wind energy applications, as e.g. related to the investigation of loads of wind turbines, in particular. The main weak point of the study is the very limited data set used for the comparison between measurements and simulations (only about 5 consecutive hours during one day), representing one single situation of wind conditions. In terms of wind energy, this wind speed is clearly above the rated wind speed of typical wind turbines, with the blades already considerably pitched and thus not so prone to turbulent loads. For corresponding investigations and analyzes it would be highly interesting how the method works around and below rated wind speed, e.g. for 12 and 8 m/s. Investigating more situations might also enlighten further on the large discrepancies (in the same magnitude as discussed improvements due to the new proposed processing methods) between target spectrum and sonic measurements for u and v . As long as this is not sufficiently understood, I would also doubt the significance of many of the presented results.

We agree with the referee's helpful suggestion and have added some short discussion on the implications of improved lidar derived turbulence spectra to the introduction.

The referee considers the very limited data set we use for the comparison between measurements and simulations as the main weak point of our manuscript. We agree that an investigation with more data would have been beneficial. The reason for working with this limited data set lies in the fact that very little data are available where a commercial VAD scanning wind lidar, collocated to a meteorological mast, is scanning continuously at one height level, while saving at least the line-of-sight velocities. Currently, the only option to save line-of-sight velocities acquired by a ZephIR 300 is to stream the data manually to a connected PC. The situation gets further complicated by the fact that in the normal "profiling mode" the lidar focuses to 38m periodically for filtering purposes. So, the only known way to focus at one particular altitude continuously is to switch the unit to "turbine mode". In this way, we acquired some data for the investigation, but their overall quality was lower than the historic data that we eventually selected as the best available data.

This data set shows turbulence spectra that strongly deviate from the shape of spectra derived from the Mann spectral tensor in the low wave number region for both horizontal velocity components. The vertical component fits well. Larsén et al. (2016) are confronted with a similar situation while they investigate spectra based on wind data of complete years for the same location, Høvsøre. The understanding of this behavior is that mesoscale effects are visible in the spectra which are not considered by the turbulence model. We can therefore not necessarily expect to reach a good fit between model spectra and sonic measurements by simply using different or more data. Instead, we based our discussion on relative spectral energy distributions

between the different data processing methods and compared them with the corresponding model predictions. In this way, we did not depend on a fit of the absolute values. This situation is unfortunate but not alarming. In particular, the effects of the two introduced methods are found mainly in the higher wave number region where the fit is at least better.

In particular, the referee raises a concern about the high mean wind speed during the measurements. Such a high mean wind speed is clearly far above average, but for the turbulence spectra it is of no importance if the wind speed is above or below rated.

Applying the method of “squeezing” to data acquired by the DBS scanning wind lidar Windcube is the object of another ongoing investigation. In that case, we have a huge amount of suitable data available and might draw conclusions with respect to different wind directions, measurement heights, atmospheric stability conditions and so on.

Here, we do not intend to investigate specific turbulence situations but want to show that the ideas behind the two novel methods work in practice and lead to the results that can be predicted by the numerical models we present. We also see and point out the limitations of the methods. Thus, we believe that the use of more or different data would not lead to different conclusions and is therefore not essential.

Larsén, X. G., Larsen, S. E., and Petersen, E. L.: Full-Scale Spectrum of Boundary-Layer Winds, *Bound. Lay. Meteorol.*, 159, pp. 349–371, <https://doi.org/10.1007/s10546-016-0129-x>, 2016.

Specific comments:

1) *Title: “Better” in the title immediately associates with “than what”; I would at least think about changing to “Improved”, if not extending the title a bit more to make clearer what the reader can expect.*

The word "Improved" was part of a preliminary title. Eventually, we decided for the word "better" as the simpler of the two synonyms. We actively decided against a more detailed title because both data processing methods are new and as yet unknown. Giving for example their names would, unfortunately, not be sufficient to explain what we did.

2) *P1, L20: the actual manufacturer/distributor should be mentioned here*

The name of the manufacturer "Zephir Ltd. / ZX Lidars" was added.

3) *P2, L14 (and other instances): “however” should usually be separated by comma on both sides*

The missing commas were added.

4) *P2, L24-25: what is a “correlation twice as strong”, please quantify in more detail; in addition is the fact “that the correlation increases when a time shift related to the mean wind is taken into account” presented as surprising, but it is of course not and a very standard method in many measurement applications (e.g. to correct for wind speed and direction dependent time shifts between dislocated sensors, e.g. sonic anemometers and infrared gas analyzers for the determination of latent heat and CO₂ fluxes)*

The increased correlation is of course not surprising, and it was indeed the motivation for the squeezing method. Although, as the referee mentions, retarding signals is used in many different applications, it is new in the field of profiling wind lidar. Bardal and Sætran (2016) give an indication of the partial validity of the assumption of frozen turbulence for wind at scales that are relevant for our work. We added some information about the setup and described the results of Bardal and Sætran (2016) in more detail.

5) P3, Figure 1: unconventional coordinate system, in particular for meteorology, where usually u defines the E-W direction and v the N-S direction

Since u is defined as the wind velocity in the mean wind direction, u can also be aligned with the E-W direction. We agree that the left-handed coordinate system is confusing when the reader expects the one that is usually used in meteorology. We want the coordinate system to be the same as in Sathe and Mann (2012) and other publications so that the model for DBS scanning given there and the one we present here for VAD scanning use the same notation and signs.

6) P4, L14-15: The quantitative results of those other experiments should be shortly presented with the corresponding references; I also miss a reference to one of the basic statements on the issue by Willis and Deardorff, 1976 (i.e. $A_s U/U < 0.5$)

That is true. We included the statement of Willis and Deardorff, 1976 and added the qualitative results of Schlipf et al., 2010.

7) P5, L17: maybe better "in contrast" instead of "by contrast"

We changed the formulation according to the referee's suggestion.

8) Section 2.4.1: would be nice to quantify and present in a table some of the key parameters for the used instrument, e.g. lR , df and $a0$

A reference to Table 1 that gives these values is now added in the text.

9) P6, L18-19: "... we cannot distribute the lost small scale fluctuations on spectral frequencies...", but are you able to quantify the overall amount/importance?

The formulation is now different: "The effect of line-of-sight averaging is considered in the numerical models and the discussion in this study. But none of the presented data processing methods can avoid the line-of-sight averaging effect."

10) P6, L29: insert "," after "composed of"

Thanks, a comma is inserted.

11) P8, Figure 2: some of the labels are by far too small and not or only very difficult to read; please improve

Figure 2 has been improved. We substituted the tiny label "Lidar" by a yellow symbol and updated the caption. All remaining labels are now according to the font size of the text.

12) P7, L12: "This leads to a redistribution of energy among the velocity components u , v , and w ." If it is a pure redistribution this should mean that TKE spectra derived from the measurements should be unaffected, correct? Gives this a tool for a potential quality assurance of the lidar derived variances?

Good idea, but TKE spectra are not unaffected by the cross-contamination since the half cone opening angle is not equal but <45 deg. Thus, we are faced with a higher sensitivity for vertical fluctuations than for horizontal fluctuations. We do not know how much energy will be redistributed and can therefore not estimate if the TKE increases, decreases or if it stays more or less constant by the application of the squeezing method. All three cases might occur depending on the degree of anisotropy of the prevailing wind.

13) P12, Figure 4: please specify in the caption altitude level and average wind speed for the presented example

The caption now contains the information on U , Dc and fs .

14) P12, L4: insert blank after reference Mann et al. (2010)

Done.

15) P13, L4-6: can you quantify/reflect upon the order of magnitude of the uncertainty that is introduced by this assumption

If the assumption was violated, we would need to look at all the particular beam combinations as in e.g. for the pulsed lidar modelling in Sathe and Mann (2012). This would lead to very complicated calculations. As a result, we would see cross-contamination only for resonance frequencies that are multiples of f_s . We added to the text that "It is difficult to assess the magnitude of the error committed by the assumption of continuous measurements, but we assume it is negligible."

16) P14, Equation 23: should it read $\sin 2c$ instead of $\text{sinc} 2$?

Eq. 23 contains the cardinal sine function sinc that not everyone might be familiar with. We therefore inserted an explanation into the text.

17) P17, L18-21 (measurement description): very superficial description here, I suggest to include a few key infos in addition to the Pena et al. reference; what was the measurement frequency of the sonic; is it ensured that the measurements are unaffected by flow distortion/mast effects during the investigated case

We included more information about the measurement setup, and we have now explained why we do not expect flow distortion in the selected measurement data. The measurement frequency of the sonic anemometers was 20 Hz. This information is added to section 5.2.

18) P18, L5: "The data rate is thus for all methods 1 Hz"; does this also include the sonic data? If so, how are the sonic 1 Hz data sampled? I assume the sonics run somewhat between 10 and 50 Hz, so you could create 1 Hz data either by averaging your raw data, or picking one raw value every s. The corresponding selection will of course have an influence on your final spectra.

Good point. The following information is added: "The sonic anemometer measures with a rate of 20 Hz. This high frequency data is down-sampled by the use of the MATLAB function 'resample' to a frequency of 1 Hz. The function includes a low-pass filter to avoid anti-aliasing."

19) P19, Figure 5 (also Figures 6 and 7): I suggest to reconsider your presentation of the results ; in particular the black and blue squares are very hard to distinguish; this makes it very hard to follow the discussion of the results; a quick fix could be to consider in addition to the different colors also different symbols (e.g. square, star, triangle)

We appreciate the insight that some of the results might be difficult to read. For a better distinction of the results presented in the plots, we have replaced the square markers by triangles with different orientations. We also replaced blue lines and markers by cyan colored ones.

20) P19, Figure 5: why is the target model so far away from the sonic measurements; are there any effects of flow distortion visible (connects to comment 17)

Analyzing the definite cause for the discrepancy between model and reference lies unfortunately out of the scope of this study, but we have extended our explanation of it and added a second, better reference: "The extra energy at low wave numbers compared to the spectral tensor model for this site has been observed before and is related to the inhomogeneous

landscape at Høvsøre with its sea to land transition in the main wind direction (Sathe et al., 2015) and mesoscale effects that overlay the expected spectral gap (Larsén et al., 2016)."

21) P21, L16: "... show very good agreement to the model"; I feel this is a very strong statement; I can support this only for $kl > 10-2$, but not for the rest

We changed our statement to: "Overall, spectra calculated from the 2-beam processed measurement data show good agreement to the model." And added the following: "It is important to keep in mind that, due to the poor fit of the measured spectra of the horizontal wind components and the modeled spectra at low wave numbers, we can compare the relations between the different methods but not absolute values."

22) P23, L14-16: the unfortunate mis-representation of the sonic measurements by the target spectrum is again a great concern; how confident can you be in the discussion of improvement caused by your new processing methods, when the discrepancies between the target model and the sonic measurements are of the same magnitude or even larger; Again I would strongly recommend to also look at and present results for different synoptic/wind situations to provide some evidence where this mis-match between target spectrum and measurements originates from.

We are well aware that our statements about effects we see in the spectra have a thin data basis compared to other investigations. And we appreciate getting the feedback that this creates doubt about the overall results. To respond we would like to point out that our analysis is also based on the theoretical considerations we elaborated in sections 2 and 3. Most of the results are as expected and described as thoroughly as possible. Only minor effects cannot be explained satisfactorily, which is then mentioned in the text. The good coherence between what we know about the theory, the model predictions and the measurement results gives us confidence in the points we raise in our discussion.

23) P 24, Figure 7: its puzzling that the sonic measurements and the target model fit very well in the case of w , while the match it is rather poor for u and v ;

An explanation for the better fit of the model spectrum to the measurements in w than in u and v is given in Larsén et al. (2016). We added: "The results of Larsén et al. (2016) show that the spectra for vertical fluctuations are not prone to contributions from the mesoscale spectrum."

24) P26, L6-7; This is a crucial issue of the manuscript and has to be elaborated in more detail (see also my corresponding concern in the general comment section)

See our comment in the general section prior to point 1).

25) Formatting of references is inconsistent a. Journal names abbreviated/not abbreviated b. DOI given or not c. Incomplete, pages missing: e.g. Newman et al., 2016; Pena et al., 2015; Sathe and Mann, 2012;

We thank the referee for mentioning the inconsistency in the list of references. The formatting is consistent now: journal names abbreviated, DOIs given wherever available and pages added wherever applicable.

We thank the Referee #2 a lot for a very useful and constructive review of our manuscript and appreciate the time and effort involved in it. We have provided a point-by-point response below.

Within this manuscript, the authors present a new method to calculate the turbulence spectra from measurements from a CW Doppler lidar using velocity-azimuth display (VAD) scans. The authors use both a modelling and measurement approach, comparing lidar and 'truth' sonic anemometer measurements, to demonstrate that their proposed method provides more accurate turbulence spectra than existing techniques from VAD scans.

The novel subject matter is timely and of great interest to the readership of AMT. However, much of these results relies on only 5 hours of data under a narrow set of conditions, which really has limited the significance of the present study. Additionally, the modeled results are not in good agreement with the observations, and these differences are hardly explained or investigated. This is concerning, given the significant role of the modelling results in this study. With these issues, I recommend the article be reconsidered for acceptance in AMT after major revisions.

Major comments:

a) Figs. 5, 6, 7 and throughout Sect. 6: In these plots (especially 5, 6), there is a large disagreement between the modeled spectra and the observed spectra, particularly at low wavenumbers. This is concerning given that much of the presented results rely on the accuracy of the model, and it appears that the model is not accurately representing real lidar measurements. The only reason given for this difference between the real and modeled spectra is that it is a result of the heterogeneous landscape (p. 20, line 21). Given the importance of the modeled spectra in this study, this justification is insufficient and it was hardly discussed in the cited reference. The authors must investigate these differences herein further to understand their root cause, otherwise the use of the modeled spectra herein is suspect.

b) This manuscript in particular would benefit greatly from a 'Discussion' section between the results and conclusions that would link the results here to possible wider adoption across a variety of locations/seasons/times. This is especially important for this study given the fact that its results are solely from 5 hours of lidar data under high-wind conditions during the daytime in winter. The authors should discuss how the results are expected to vary under different conditions (weaker winds, very stable/unstable, etc), for measurements at different altitudes, circle diameters, half opening angles, or anything else the authors think would be relevant to any user that would try to apply this method elsewhere.

Alternatively, instead of adding a discussion section the authors could expand their study to more time periods under different atmospheric conditions.

The Referee points out that only five hours of data under a narrow set of conditions were used in the experimental results of this study. We agree that more data would, indeed, create a more solid foundation for our findings. The reasons for using such a limited data set are detailed in the answer to Referee #1.

Regarding the fact that there is a large disagreement between the modelled and the observed spectra, we added a second reference (Larsén et al., 2016). They show that spectra based on measurement data of complete years at Høvsøre also show large disagreement in the low wave number band when compared to model spectra. The desired investigation to understand the root cause of such differences lies clearly out of the scope of our study. In this context, the referee states that the model does not accurately represent real lidar measurements. But the strong disagreement between model and observed spectra is already found when the spectral tensor is compared solely to the sonic measurements. No actual filtering is part of this comparison, so one should not conclude from the disagreement that there is an insufficiency of the lidar models. The modelling of the different lidar data processing methods is mostly coherent with the experimental results, and the differences are analyzed in detail in the discussion of the results. We have no reason to assume that the conclusions

we draw would differ if a data set that is closer to the Mann spectral tensor would have been used. In order to make the reader aware of this problem, we emphasize in the text “that, due to the poor fit of the measured spectra of the horizontal wind components and the modeled spectra at low wave numbers, we can compare the relations between the different methods but not absolute values.”.

We understand and share the wish for a more comprehensive study that covers several locations/seasons/times. And we regret that we cannot provide such in this paper. Our aim is to introduce a complete numerical description of a VAD scanning CW lidar for the first time and to extend it to two promising methods of modified data processing. Further, we want to give a detailed description of the cross-contamination effects that are briefly mentioned in previous publications but never fully described. The one set of experimental data we use supports this analysis and helps us to point out the limitations of the new methods and the models.

We agreed with the reviewer’s suggestion to add a section on what we would expect from applying the methods to different conditions and measurement setups. This new section 6.4 discusses implications for varying measurement heights, cone angle, mean wind speeds and atmospheric stability conditions. This new section links our results to a possible wider adoption of cases.

Specific comments:

a) P. 2 line 12: Somewhere around here it would be appropriate to reference Eberhard et al (1989) as one of the first studies where Doppler lidars were used to profile turbulence using VADs.

We added a reference to Eberhard et al. (1989) to the introduction: “The estimation of second order statistics of the turbulence in the wind by means of VAD scanning pulsed Doppler lidar was first demonstrated in Eberhard et al. (1989).”

b) Figure 2: Parts of this figure (especially the subfigure showing the lidar beams) are extremely small and difficult to read. This should be improved, making the figure larger would help. I also suggest adding to the caption describing how the top plot visualizes the lidar beam positions.

We replaced the label “Lidar” by a laser symbol, clarified the caption and increased the overall size of the figure.

c) P. 8 lines 5-13 & Fig. 3: This should be moved to later in the paper, perhaps Sect. 4. At this point, the reader has no context to understand the details of what is being shown as the model has not been described.

Thank you also for this suggestion. We agree that the origin and details of Fig. 3 are difficult to understand here and that an explanation would be beneficial to the reader at a later point. Unfortunately, we see dividing Sect. 2 into two pieces as the worse option. Also moving it as a whole after Sect. 4 would weaken the logical structure of the manuscript: namely, describe the problem in Sect. 2, sketch our approach to tackle it in Sect. 3 and model this approach in Sect. 4. Instead, we added information to contextualize the plots sufficiently so that they can be understood already here.

d) Fig. 3 (and throughout): The units for power spectra in the atmospheric science community are generally m^{-1} , not $rad\ m^{-1}$. These units appear throughout the text, in the table, and figure.

We changed the units as suggested to m^{-1} .

e) Eq. 10 & 11: Be consistent with these equations. Eq. 11 gives the entire variance for v while Eq. 10 only gives the variance contamination for u , but the subscript notation on the left-hand side for both indicates total variance. Also, Eq. 11 does not appear to be derived correctly (and is inconsistent with Eq. 10). Why is the $\frac{1}{2}$ factor in the equation? The logic for how these Eqs are derived is not obvious (should be clarified), but should there also be a term for the covariance ($u'w'$ and $v'w'$ overbars) on the right-hand side?

Eq. 10 also gives the entire variance for u . Since we look at the situation at the resonance wave numbers like in the example in Fig. 2 the contribution of u_{wind} to u_{lidar} is zero. To better clarify

this for the reader, we have added “_{res}” to the subscript notation. A subscript “_{unc}” was added to Eq. 11 to emphasize that the equation is valid only when the inflow is uncorrelated between the two spatially separated points. This occurs at high wave numbers. We corrected the “tan” in eq. 11 to “cot”. Thank you for this correction. We included a derivation of both equations so that the reader gets the logic behind them. The influence of the covariance terms averages out to zero.

f) P. 9 lines 8-16, 20-21: This text should also be moved to Sect. 4 where the readers will have the appropriate context to understand the discussion here. The rest of the text after Eq. 11 and before Sect. 3 can be combined into one paragraph.

Please find our answer in the response to c). We combined the last two paragraphs.

g) Fig. 4: Nice figure. It could be improved if you added a reference vector for the mean wind to show how the field is advected. It would also be beneficial in the lower plot to highlight in a different color which pairs of measurements are used in the two-beam method.


We are happy to get this suggestion and added the \mathbf{U} vector to the figure. We also included a visualization of the beams used in 2-beam processing and mentioned this in the caption and referred to it in the text.

h) Sect 4: Please make sure to explain and define all variables and notation. In particular, I could not find definitions for: e_1 , Φ , and T . The notation of $_z$ was also not described.

We introduced the unit vector \mathbf{e} and the meaning of the half cone opening angle Φ is now repeated in the text. We removed the index “ z ” that was not giving additional clarity in its context.

i) Sect 5.1: Add a sentence here cross-referencing table 1 to summarize the experiment. Please also expand this discussion. The time period is 5 hours, it is unlikely the wind speed was constant that entire time. How much did it vary? How much did the turbulence intensity vary? What was the stability of the boundary-layer? Given the location, I expect near-neutral stability, but it would be good to verify and quantify the stability. How were the resonance values in Table 1 determined? What was the precision of the lidar measurements?

The min/max/std values of U and TI have been added and a reference to Table 1 is now given. We added the formulas for the resonance values given in Table 1 to section 2.5.1. The precision of the lidar is usually better than 1%. This information is added to the text. The stability of the boundary layer during the experiment was neutral, as shown below. z/L is either derived from 10 m or 20 m with two different methods to calculate the momentum flux (2d and 3d) which give very similar results.

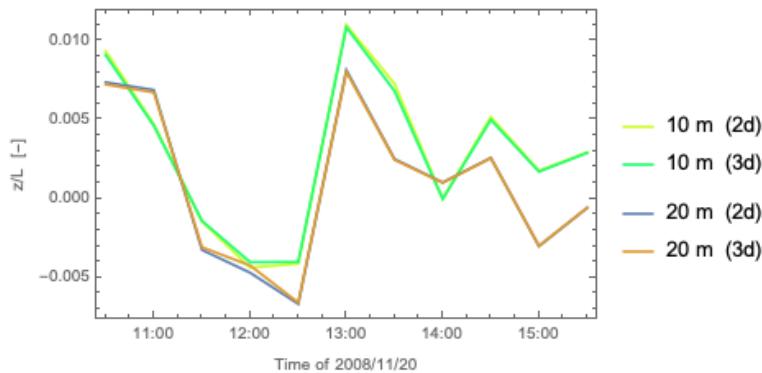

j) P. 19 line 2: Please add a more throughout description of how these spectra are made. Is this an average of the individual 10-min spectra? Were outliers in the spectra removed in making this plot? How much did the actual spectra vary of the time period? The description is insufficient.

Yes, the shown spectra are the averages of all individual spectra based on 10-min intervals. The resulting average spectra are then averaged within 30 wave number bins. Outlier detection in time domain was investigated but eventually not applied because its effect on this data set was negligible. This is already mentioned in subsection 5.2.

k) P. 19 line 8: What is the ‘target spectrum’? Is this simply the modeled spectrum assuming certain characteristics of the flow garnered from the sonic anemometer measurements?

Very good point. The target spectrum is the unfiltered one-dimensional model spectrum based on the spectral tensor we chose to best-fit to the sonic anemometer measurements. We added the equation to derive the u spectrum from the spectral tensor to the end of the model description in section 4 and refer to it here for clarification.

l) Fig. 5: These two plots can be combined as the axes are identical and much of the data overlaps. By combining the plots, the VAD/SMC and two-beam methods can also be compared. Also state in the caption what the vertical dashed lines indicate.

We considered combining the subplots which, indeed, would give a better comparison between circle processing and 2-beam processing. Unfortunately, the plot appears overloaded then. We extended the caption by adding “... The grey vertical dashed lines represent the first and second resonance wave number.”. The same applies to Fig. 7.

m) P. 20 line 25: By this, do you mean that the frozen turbulence hypothesis is not completely valid as the wind field evolves in time as it advects through the measurement volume? If so, please clarify that here.

Thank you for mentioning this point. The passage was unclear and we improved it as follows: “A possible explanation is that the fluctuations of the u - and especially the w -component in the real wind field are not perfectly correlated, i.e. the frozen turbulence hypothesis which the model assumes is slightly violated. The result is a small contribution of w_{wind} on u_{lidar} that appears to a higher extent in the VAD processed spectrum. The reason for the difference is that the correlation is closer to unity in the case of SMC processing.”

n) P. 20 line 34: Could this deviation also be caused by random errors in the lidar measurements resulting in a noise floor above the modeled value (related to last point in i) above)? Based on the model description in Sect. 4, measurements are modelled as precise (without any random error).

To consider a random error in the lidar measurements as a cause for increased energy values in the measurements is reasonable. But for two reasons we do not believe it applies here. First, the effect should then be smaller in the whole circle processing methods than in the two beam approaches because random errors average out along the measurement circle. We don’t see that in the measurements. Second, the effect of random erroneous line-of-sight measurements would lead to even stronger contamination of the w -spectra due to the higher sensitivity. This is also not represented in the results.

o) Fig. 6: These two subplots can be combined (if kept, see comment p), as b) only contains one additional piece of information (red line) that could be easily overlaid on a) for comparison.

We combined both subplots and swapped the color of the “2-beam model” line to cyan in all plots for better distinction.

p) Sect. 6.2.2: This section and Fig. 6 b can be removed. If this method is not even applicable to real CW lidar measurements due to the ambiguity around a 0 Doppler velocity, why even present it as a method?

We added that “We included the model behavior of 2-beam processing for the sake of completeness and to show that the availability of reliable measurement data from the east and west beams would be of hardly any use.”

q) P. 25 line 20: Recommend changing the term from ‘very good’ to ‘reasonable’. There are still non-trivial differences between the modeled and observed spectra in this reviewer’s opinion.

We now describe the forecasting as ‘reasonable’.

Editorial corrections

- a) P. 1 Line 19: Add hyphen to Velocity-azimuth display.*
- b) P. 6 line 30: Reword to: ‘Turbulence with a length scale below...’*
- c) P. 7 line 1: Remove ‘to sense them’*
- d) p.7 line 10: Remove ‘or cross talk’*
- e) P. 13 line 4: ‘is’ should be ‘are’*
- f) Eq. 23: Should be ‘sin’ instead of ‘sinc’.*
- g) P. 18 line 2: Remove ‘used’*

We thank the reviewer for mentioning these errors which we have corrected. “sinc” is not a mistake but the abbreviation for the cardinal sine function that must be used. We now give its definition in the text. Mathematics is singular.

References:

Eberhard, W.L., Cupp, R.E. and Healy, K.R., 1989. Doppler lidar measurement of profiles of turbulence and momentum flux. Journal of Atmospheric and Oceanic Technology, 6(5), pp.809-819.

Larsén, X. G., Larsen, S. E., and Petersen, E. L., 2016. Full-Scale Spectrum of Boundary-Layer Winds. Bound. Lay. Meteorol., 159(2), pp. 349–371.

Better turbulence spectra from VAD scanning wind lidar

Felix Kelberlau¹ and Jakob Mann²

¹NTNU, Department of Energy and Process Engineering, Norwegian University of Science and Technology, 7491 Trondheim, Norway

²DTU Wind Energy, Technical University of Denmark, 4000 Roskilde, Denmark

Correspondence: Felix Kelberlau (felix.kelberlau@ntnu.no), Jakob Mann (jmsq@dtu.dk)

Abstract. Turbulent velocity spectra derived from [vertical azimuth-velocity-azimuth](#) display (VAD) scanning wind lidars deviate from spectra derived from one point measurements due to averaging effects and cross-contamination among the velocity components. This work presents two novel methods for minimizing these effects through advanced raw data processing. The squeezing method is based on the assumption of frozen turbulence and introduces a time delay into the raw data processing in order to reduce cross-contamination. The 2-beam method uses only certain laser beams in the reconstruction of wind vector components to overcome averaging along the measurement circle. Models are developed for conventional VAD scanning and for both new data processing methods to predict the spectra and identify systematic differences between the methods. Numerical modeling and comparison with measurement data were both used to assess the performance of the methods. We found that the squeezing method reduces cross-contamination by eliminating the resonance effect caused by the longitudinal separation of measurement points, and also considerably reduces the averaging along the measurement circle. The 2-beam method eliminates this averaging effect completely. The combined use of the squeezing and 2-beam methods substantially improves the ability of VAD scanning wind lidars to measure in-wind (u) and vertical (w) fluctuations.

1 Introduction

Wind speed measurements are an integral element of wind site assessment. Traditionally such measurements have been based on in situ sampling with anemometers attached to tall meteorological masts that reach up to hub height. Such masts are immobile and expensive to erect. It is therefore favorable to implement remote sensing devices, such as conically scanning profiling lidars, that measure wind velocities at adjustable height levels above the ground remotely.

Pulsed and continuous-wave wind lidars are the two types of profiling lidars that are currently commercially available. The [Velocity azimuth-velocity-azimuth](#) display (VAD) scanning strategy was introduced by [Browning and Wexler \(1968\)](#) [Browning and Wexler \(1968\)](#) and is usually applied for continuous-wave profiling lidars like the ZX 300 (previously ZephIR 300) [-produced by Zephir Ltd. / ZX Lidars](#). Advanced processing of VAD acquired data is the object of investigation here.

Validation studies that compare measurements from meteorological masts and ground based profiling lidars ([e.g., Kindler et al. \(2007\)](#), [Smith et al. \(2006\)](#), [Medley et al. \(2015\)](#) and [Kim et al. \(2016\)](#)) report good agreement for first order statistics, namely the 10-minute mean wind velocities and directions. [But the turbulence](#) ([Kindler et al., 2007; Smith et al., 2006; Medley et al., 2015; Kim et al., 2016](#)) [The estimation of second-order statistics of the turbulence in the wind by means of VAD scanning pulsed Doppler lidar was first](#)

demonstrated by Eberhard et al. (1989). But such turbulence estimates from VAD scanning lidars deviate from classical measurements with cup or sonic anemometers (Peña et al. (2009), Canadillas et al. (2010), see review by Sathe and Mann (2013)).

5 [Sathe et al. \(2011\)](#) ([Sathe and Mann, 2013](#); Peña et al., 2009; Canadillas et al., 2010). [Sathe et al. \(2011\)](#) model the second order statistics of pulsed and continuous-wave profiling lidars. The resulting velocity variances are influenced by the effects that arise from sensing the 3-dimensional wind field by averaging over spatially distributed volumes. In order to better understand the actual behavior of the lidar in comparison to reference measurements, turbulence spectra of the three wind components u , v and w can provide much-needed insight. [Sathe and Mann \(2012\)](#) ([Sathe and Mann \(2012\)](#)) model and analyze turbulence spectra, but only for pulsed lidars that use Doppler beam swing (DBS) scanning. A simplified model for turbulence spectra 10 from VAD scanning wind lidars is presented in [Wagner et al. \(2009\)](#) ([Wagner et al. \(2009\)](#)). However, it does not include the effect of cross-contamination and cannot be used to predict the turbulence spectra of real lidars.

The six-beam method developed by [Sathe et al. \(2015\)](#) ([Sathe et al. \(2015\)](#)) is an alternative to VAD scanning that results in more accurate second order statistics of turbulence. But its application requires a vertical laser beam and a half cone opening angle of 45° , which makes it not usable with commercially available profiling wind lidars.

15 [Newman et al. \(2016\)](#) ([Newman et al. \(2016\)](#)) propose another method to compensate for the contamination by means of autocorrelation functions derived from collocated mast measurements. This method is ~~however, however~~, only applicable when a meteorological mast is available. In comparing and evaluating the ability of different lidar scanning strategies to measure turbulence, [Newman et al. \(2016\)](#) ([Newman et al. \(2016\)](#)) concludes that cross-contamination of the different velocity components is one of the primary disadvantages of current profiling lidars.

20 The research presented here demonstrates two methods aimed at overcoming the effects of cross-contamination and averaging along the measurement circle that are inherent in the standard VAD scanning strategy. Both methods are based on modified line-of-sight velocity data processing and can be applied to currently available lidars without changes in their hardware. The line-of-sight averaging effect remains unresolved.

The first method incorporates Taylor's frozen turbulence hypothesis and introduces a time lag into the wind vector reconstruction process. [Bardal and Sætran \(2016\)](#) ([Bardal and Sætran \(2016\)](#)) measure two-point correlations [of horizontal wind speeds](#) from two meteorological masts that are separated by 79 m in line with the mean wind direction. They find [the correlations to be roughly twice as strong that the cross-correlation coefficient is around 0.8](#) when a temporal lag compensates for the time required for the wind to cover the distance between the two measurement points. [That Without delaying the signal, the cross-correlation coefficient reaches only half of that value. Applied to VAD scanning lidars, that](#) justifies the assumption that 30 when [the processing of line-of-sight measurement](#) data is delayed by the time needed to cross the measurement circle, the lidar measurements will be more realistic. This approach is hereafter called "squeezing" and reduces the cross-contamination effect that currently distorts the shape of turbulence spectra acquired with VAD scanning lidars.

The second method is to use only the radial velocities from lines-of-sight that point into the mean wind direction (downwind) and against it (upwind) to determine the components of the wind that are oriented in-line with the mean wind direction (u) and 35 vertical (w). This eliminates the averaging along the measurement circle.

The aim of the research presented here is to demonstrate whether [one of](#) the two modified data processing algorithms [and/or](#) their combination [lead](#)[leads](#) to improved turbulence measurements from standard VAD wind lidars. Both methods are modelled and applied on the same measurements individually, and their effects are discussed separately.

[This research has several practical applications. The reliable elimination of cross-contamination and averaging along the measurement circle would lead to a reduction of the systematic error of wind lidar measurements that is dependent on the prevailing wind conditions and the measurement height. In particular, estimations of the time scale of turbulence could be done with higher certainty, which would support future boundary layer research by means of profiling wind lidars. In addition, estimating the energy content of the wind components at specific wave numbers with higher certainty could also help to better predict the operational wind loads of wind turbines and other structures.](#)

5 [Section 2 summarizes the VAD scanning process and describes in detail the averaging and cross-contamination effects it implies for the measurement of turbulence. In Sect. 3 the suggested modified data processing methods are described before they are modelled alongside the conventional processing in Sect. 4. The measurements are described in Sect. 5 before the results are compared with the model predictions in Sect. 6. The last](#) Sect. 7 concludes with the most important findings.

10 [Section 2 summarizes the VAD scanning process and describes in detail the averaging and cross-contamination effects it implies for the measurement of turbulence. In Sect. 3 the suggested modified data processing methods are described before they are modelled alongside the conventional processing in Sect. 4. The measurements are described in Sect. 5 before the results are compared with the model predictions in Sect. 6. The last](#) Sect. 7 concludes with the most important findings.

2 Lidar theory

15 2.1 Coordinate system and preliminaries

Figure 1 shows the measurement circle of diameter D_C of a VAD scanning lidar and how it is created by the laser beams that are deflected from the zenith by the half cone opening angle ϕ and rotate around the zenith with continuously changing azimuth angle θ . The beams are focused at a point at distance d_f from the lidar which is located at the origin of a three-dimensional left-handed coordinate system. Five of the laser beams are depicted, four in the cardinal directions and one with an arbitrary 20 azimuth angle. The mean wind direction Θ determined from 10-minute intervals is zero when the wind blows from north to south. The wind vector

$$\mathbf{u} = \begin{pmatrix} u \\ v \\ w \end{pmatrix} \quad (1)$$

is composed of the wind components u , v and w that are aligned with the axes of the coordinate system when $\Theta = 0^\circ$. Reynolds decomposition is used for the description of the wind field so that

25 $\mathbf{u} = \mathbf{U} + \mathbf{u}' \quad (2)$

where \mathbf{u}' are the wind speed fluctuations in all three directions and \mathbf{U} is the mean wind velocity vector.

2.2 Taylor's frozen turbulence hypothesis

The frozen turbulence hypothesis published by [Taylor \(1938\)](#) [Taylor \(1938\)](#) assumes that turbulence is advected by the mean wind velocity U into the mean wind direction Θ . During the transport process the turbulence remains unchanged, i.e., turbu-

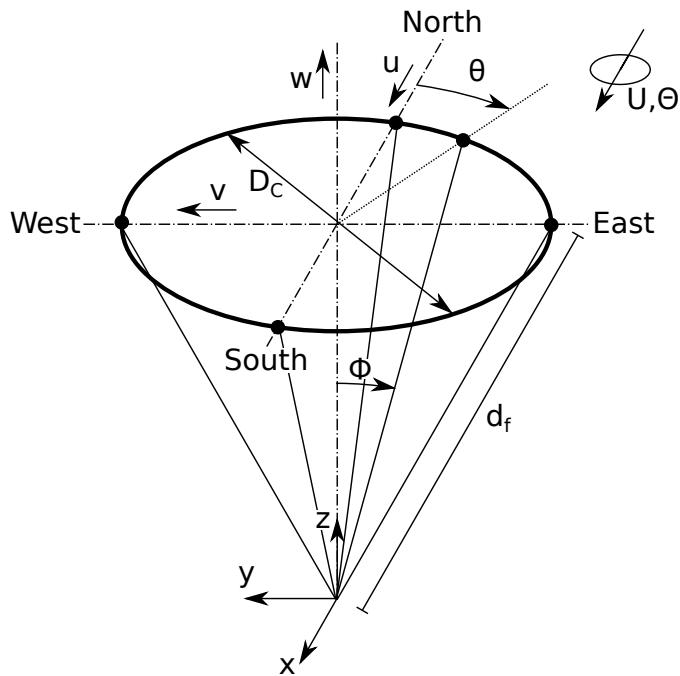


Figure 1. Lidar geometry definitions and coordinate system

lence measured at one point in space gives information about the turbulence found further downwind some time later. That means for a velocity vector field \mathbf{u} when \mathbf{U} is aligned with the x -axis that

$$\mathbf{u}(x, y, z, t) = \mathbf{u}(x - Ut, y, z, 0) \quad (3)$$

The hypothesis is widely used and it is known from experiments that the assumption of frozen turbulence is valid to a high degree for large eddies. For example, [Sehlipf et al. \(2010\)](#) [Schlipf et al. \(2010\)](#) measured the inflow velocities of an operating wind turbine at different distances from the rotor plane in order to test the hypothesis of frozen turbulence. They found it to be valid for large scale wind fluctuations [Other experiments with wave numbers \$k > 1.25 \times 10^{-1} \text{ m}^{-1}\$](#) . [Willis and Deardorff \(1976\)](#) show that the [validity hypothesis lacks validity when](#)

$$\sigma_u/U > 0.5. \quad (4)$$

10 This implies that the validity of the hypothesis depends on the amount of turbulence and that a high degree of validity is expected when the velocity variance is low compared to the mean wind speed.

2.3 VAD measurement principle

Continuous-wave wind lidars continuously emit a focused infrared laser beam into the air and detect the small portion of the radiation that is backscattered by particles along the beam path towards the beam's origin. The velocity of the backscattering

particles relative to the beam direction is then determined by analyzing the Doppler shift between the frequencies of outgoing and incoming radiation. It is assumed that the backscatterers are lightweight enough to move with the instantaneous wind speed u . The measured radial line-of-sight velocities v_r are hence equal to the wind velocity projected onto the beam direction. In order to estimate the three-dimensional wind vector u , a minimum of three independent line-of-sight measurements from 5 different directions must be combined.

When VAD scanning is used, the beam is deflected by a wedge prism by a constant half cone opening angle ϕ from the zenith and rotated around the zenith with steadily changing azimuth angle θ . Many radial velocities v_r are acquired during one full rotation of the prism. For example in the case of the ZX 300 (previously ZephIR 300), $N = 49$ Doppler spectra are calculated and used to determine the same number of radial velocities. All of them are used to reconstruct one wind vector by 10 applying a least squares fit to

$$v_r = |A \cos(\theta - B) + C| \quad (5)$$

where the best fit parameters A , B and C represent the wind data according to

$$\begin{aligned} v_{hor} &= A / \sin(\phi) \\ \Theta &= B \pm 180^\circ \\ v_{ver} &= C / \cos(\phi) \end{aligned} \quad (6)$$

15 The sign of the radial velocity is usually unknown. We are thus faced with a directional ambiguity of $\pm 180^\circ$, but this does not affect the turbulence analysis here. The wind data v_{hor} , Θ and v_{ver} can be translated into wind vectors u easily.

The wind velocity estimations that result from this processing underlie several effects that distinguish them from one-point measurements. These effects can be divided into:

- Averaging
 - 20 along the lines-of-sight
 - along the measurement circle and
- Cross-contamination
 - due to longitudinal separation
 - due to lateral separation

25 2.4 Averaging effects

2.4.1 Line-of-sight averaging

In situ wind speed measurements taken with cup anemometers or ultrasonic anemometers have a small measurement volume that can be considered a point. Lidar measurements, by in contrast, sense wind velocities along an extended stretch of the

line-of-sight of the laser beam. In the case of continuous-wave lidars, the laser beam leaves the lidar optics with a diameter that corresponds to its effective aperture size a_0 and is focused onto a focus point. The distance between the lidar optics and the focus point is the focal distance d_f . The signal of the backscattered radiation though originates from anywhere along the illuminated beam, according to a distribution function that has its maximum at the focus point and is proportional to the 5 intensity of the laser light along the beam (Sonnenchein and Horrigan, 1971).

A definite range gate, such as for pulsed lidars, is therefore not applicable to continuous-wave lidars. Instead, the Rayleigh length l_R is a measure of the distance between the focus point and the point at which the cross section of the beam has twice the area of the cross section at the focus point. According to [Harris et al. \(2006\)](#)[Harris et al. \(2006\)](#), it is given by

$$l_R = \frac{\lambda d_f^2}{\pi a_0^2} \quad (7)$$

10 where λ is the laser wavelength and a_0 is the effective aperture diameter. The Rayleigh length is quadratically proportional to the focal distance d_f that increases linearly with the selected measurement height level. The degree of line-of-sight averaging is thus strongly dependent on the measurement height level and is higher for larger heights. [The values of \$l_R\$, \$a_0\$ and \$d_f\$ for the lidar used in our experiments are given in Table 1.](#)

15 The intensity of backscattered radiation is a function of the distance s from the focus point along the beam. It is sufficiently well approximated by a Lorentzian function,

$$F(s) = \frac{l_R/\pi}{s^2 + l_R^2} \quad (8)$$

where s is the distance from the focus position (Mikkelsen, 2009).

All Doppler spectra that are retrieved during the radial velocity acquisition time are averaged, and the focus point sweeps over a considerable arc of the measurement circle during this time. This arc length l_A is

$$20 \quad l_A = \frac{D_C \pi}{N} \quad (9)$$

where N is the number of line-of-sight measurements v_r taken during one rotation. In experimental data, the arc averaging effect is contained in the radial velocities. In the models here, we account for this by averaging along the measurement circle.

25 The Doppler spectra of each line-of-sight measurement resemble the probability density function of the radial wind velocities along the line-of-sight (Branlard et al., 2013). But by determining one single velocity value for each line-of-sight measurement, the turbulence information they contain is filtered out.

The additional temporal averaging along the lines-of-sight is very low, as one measurement takes only $\frac{1}{N}$ s. The effect of line-of-sight averaging is very strong for high wave numbers but has some effect on long turbulent structures as well. The effect of line-of-sight averaging is considered in [this study, although we cannot distribute the lost small scale fluctuations on spectral frequencies by any the numerical models and the discussion in this study. But none](#) of the presented data processing methods 30 [can avoid the line-of-sight averaging effect.](#)

2.4.2 Measurement circle averaging

As described in Sect. 2.3 lidars use all measurement data of at least one full rotation of the prism to reconstruct one wind vector. The resulting system of equations is overdetermined, and in order to find a solution a quadratic best fit is applied. The more lines-of-sight velocities that are used to reconstruct a wind vector, the stronger the averaging and thereby the larger the loss of turbulent kinetic energy in the measurement data. The residual of the best fit is a measure of the degree of this form of averaging but is usually not used in the processing.

The diameter D_C of the measurement circle is

$$D_C = 2h \tan \phi \quad (10)$$

with h being the measurement height and ϕ the half cone opening angle. The spatial separation between the points that one reconstructed wind vector is composed of, thus linearly increases with measurement height. The larger the cone diameter, the stronger the circle averaging. Turbulence with ~~length-scales~~ a length scale below the diameter of the averaging circle is affected the most.

In addition to the spatial separation of the measurement points along the measurement circle, the acquisition time ~~to-sense them~~ must be considered. The mean wind motion carries the air while it is probed, which might further increase the separation of measurement points in the mean wind direction. The ZephIR 300 measures one full rotation in one second, and the distance the air moves within this time is usually small compared to D_C . The effect of temporal averaging is therefore often small compared to the spatial averaging. One example for the path of measurements that is averaged over is given in Fig. 4a. The circle diameter represents the spatial averaging and the shift along-wind with the speed U represents the temporal averaging.

2.5 Cross-contamination

2.5.1 Cross-contamination due to longitudinal separation

Another cause for differences in the shape of turbulence spectra from one point measurements and their counterparts from VAD scanning lidars is cross-contamination ~~or cross talk~~ of different velocity components. VAD scanning lidars combine measurements from spatially separated locations where differing velocities may prevail as if they were collected at one point. This leads to a redistribution of turbulent energy among the velocity components u , v and w . ~~Lidar-derived~~ Lidar-derived spectra of one of the components can at certain wave numbers show lower energy values than the original wind spectrum of that component but may also show too high values due to a contribution from a different velocity component. To better understand cross-contamination we divide the effect into two different types of separations. First we look into longitudinal separations, i.e., separation along the mean wind direction. Fluctuations at two points separated in line with the wind are highly correlated. If the assumption of frozen turbulence is correct, the coherence would be 1 for all separation lengths and all wave numbers. One example of cross-contamination of correlated fluctuations between two longitudinally separated points is visualized in Fig. 2. ~~It demonstrates a case with isotropic turbulence i.e. The chosen wavelength of the wind fluctuations equals twice the separation distance. This can be called the first resonance wavelength. The resonance wavelengths are given~~

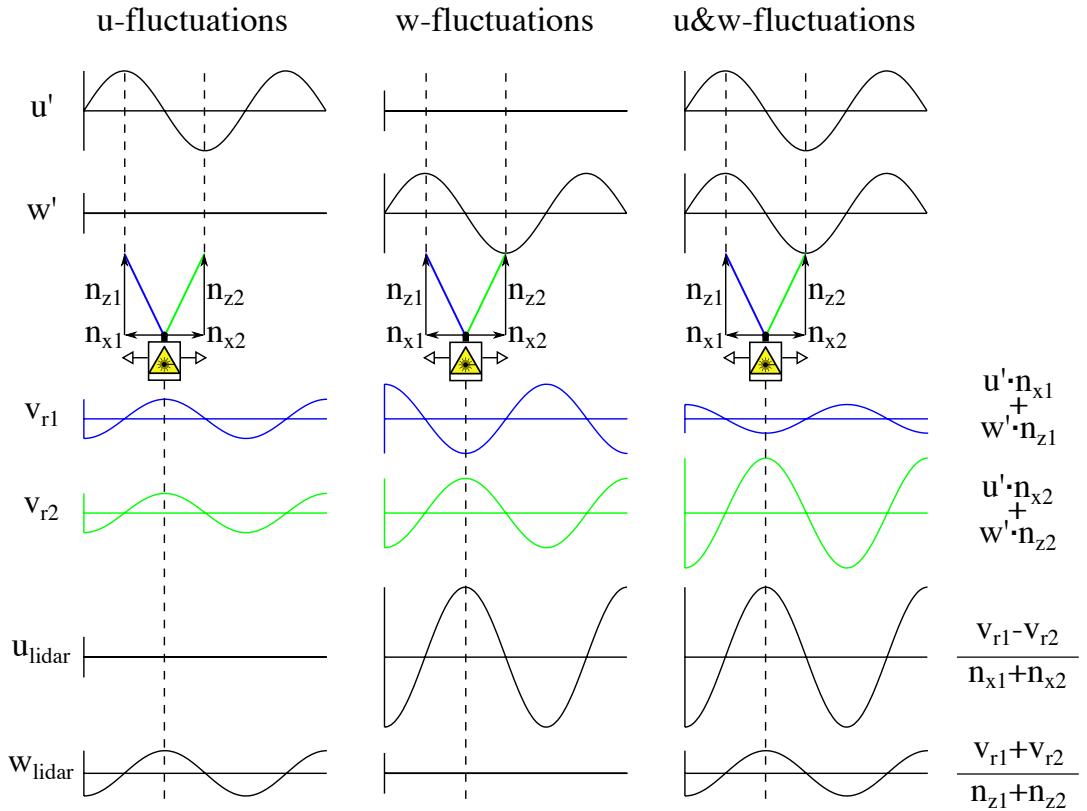


Figure 2. Visualization of cross-contamination caused by longitudinal spacing of measurement points 1 and 2. The wavelength of u' and w' equals twice the separation distance of the focus points of the lidar (indicated by box with yellow symbol). The resulting measurement values of the u -component are contaminated by fluctuations in w -direction and vice versa.

by

$$\lambda_{res,n} = \frac{2D_C}{2n-1}. \quad (11)$$

The corresponding resonance wave numbers are

$$k_{res,n} = \frac{(2n-1)\pi}{D_C} \quad (12)$$

5 where $n=1,2$, arbitrary but identical amplitudes for fluctuations in all orientations 3... The resulting values for the first two resonance points are given in Table 1.

The two beam directions in line with and against the mean wind direction can be used to determine u_{lidar} and w_{lidar} by using the formulas on the right hand side of the figure. This example looks at these two lines-of-sight. The v -component can be ignored because transverse fluctuations are not detected by the upstream and downstream beams. The wavelength of the

wind fluctuations is chosen to equal twice the separation distance. This can be called the first resonance wave number. example demonstrates a case with isotropic turbulence, i.e., arbitrary but identical amplitudes for fluctuations in all orientations. Averaging along the lines-of-sight is ignored here for simplicity. The first column of graphs in the figure isolates the u -fluctuations u' and shows the resulting lidar measured signal for the two radial velocities in upwind and downwind direction, i.e., v_{r1} and 5 v_{r2} . When these two signals are combined in the usual way, the reconstructed wind speed components u'_{lidar} and w'_{lidar} differ strongly from the real inflow conditions u' and w' . The lidar is blind to wind speed fluctuations in u -direction and instead attributes the fluctuations to some extent to the estimation of w'_{lidar} . The same is done for w' in the second column, and the resulting effect is the reverse. The vertical fluctuations w' are interpreted solely as amplified fluctuations of u'_{lidar} .

The last column combines the two previous cases and shows the resulting distribution of amplitudes which depends on the 10 half cone opening angle ϕ . When $\phi < 45^\circ$ the lidar is more sensitive to vertical variations than to horizontal ones, and the contamination of u' caused by w' is more severe than vice versa.

In a more realistic situation, turbulence is non-isotropic and the amplitude of w' at this first resonance wave number is often considerably lower than the amplitude of u' which leads to a different distribution of contamination according to which can be estimated as follows. We use equations 31 and 33 to define the lidar-derived variance in u -direction

$$15 \quad \sigma_{u,lidar}^2 = \cot \left\langle \left(\frac{\Delta v}{-2 \sin \phi} \right)^2 \phi \sigma_w^2 . 86 \sigma_w^2 \right\rangle. \quad (13)$$

In general, the differences of the line-of-sight velocities aligned with the mean wind Δv contain contributions from wind fluctuations in u and w -direction Δv_u and Δv_w respectively. Here we look at the resonance case where $\Delta v_u = 0$ and thus $\Delta v = \Delta v_w$. We get

$$\sigma_{u,lidar,res}^2 = \left\langle \left(\frac{\Delta v_w}{-2 \sin \phi} \right)^2 \right\rangle = \left\langle \left(\frac{2w' \cos \phi}{-2 \sin \phi} \right)^2 \right\rangle = \cot^2 \phi \sigma_{w,res}^2 \approx 2.86 \sigma_{w,res}^2 \quad (14)$$

20 when $\phi = 30.6^\circ$ as for the lidar we used in this study. The subscript res indicates that the equation is only valid for inflow fluctuations at resonance, as in the example given before.

In Sect. 4 we develop a model to predict lidar derived spectra. This model was used to create the plots shown in Fig. 3a. They show the result of cross-contamination in the spectrum of the Fig. 3a shows the modelled spectra of the wind components, u_{wind} and w_{wind} , as solid black and red lines. The parameters of the underlying spectral tensor are given 25 in Table 1. They were chosen to best represent the wind conditions found during the experiment presented in Sect. 6. The model was used to estimate the u -component when it is determined by of the wind from two lidar beams that point in the upwind and downwind directions. The same spectral tensor was used here and in Sect. 6 (see table 1 for the parameters). Here again Also here, we did not include line-of-sight averaging to isolate the effect of cross-contamination. The principle of the setup is the same as explained for Fig. 2 but now we see results for all inflow wave numbers and use anisotropic turbulence. 30 The resulting lidar-derived spectrum $u_{lidar,sum}$ of the u -component of the wind is the sum of the lidar's interpretation of the wind components $u_{lidar,u}$ and $u_{lidar,w}$. We see that the lidar estimated spectrum of $u_{lidar,sum}$ lies a bit below the target

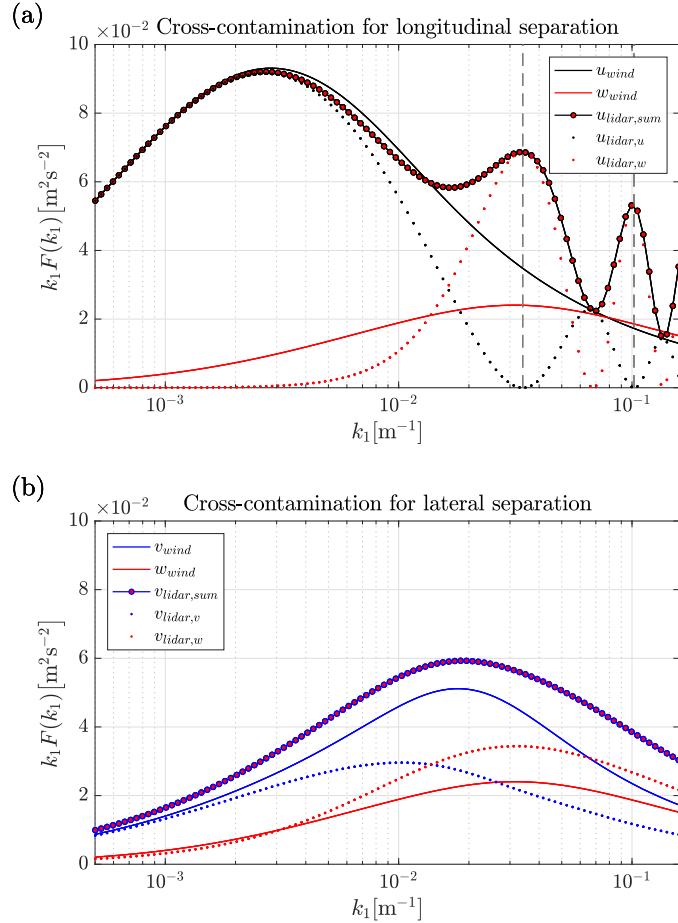


Figure 3. Modelled cross-contamination effect inherent in (a) the u -spectrum from two longitudinally separated points with $\Delta x = D_C$ and (b) the v -spectrum from two laterally separated points with $\Delta y = D_C$. The solid lines are the spectra of the involved wind components. The dotted lines show the contribution of these wind components to the lidar spectra (circle markers). Averaging along the lines-of-sight is excluded.

spectrum of u_{wind} for most wave numbers but not at the first and second resonance points that are marked with grey dashed vertical lines. There it exceeds the target spectrum. The reason becomes apparent when we look at the components $u_{lidar,u}$ and $u_{lidar,w}$ that $u_{lidar,sum}$ is composed of. We find that the lidar sees u_{wind} nearly to its full extend for very low wave numbers but when we come close to the resonance points $u_{lidar,u}$ drops to zero. The contribution of the vertical wind $u_{lidar,w}$ shows a mirrored behavior and is amplified because according to Eq. 14 since $\phi < 45^\circ$.

2.5.2 Cross-contamination due to lateral separation

When the lines-of-sight under consideration are not longitudinally but laterally separated, they do not face resonance but instead a second form of cross-contamination. The strength of the contamination depends then on the coherence of the turbulence for

the given lateral separation. When the fluctuations at the two selected focus points are very coherent i.e., their correlation is close to unity, we can expect that the ~~lidar-derived lidar-derived~~ wind speed estimates are correct and no cross-contamination occurs. This can be observed at very low wave numbers where a high degree of coherence is expected. The other extreme is found at the other end of the spectrum where small fluctuations measured at both focus points are uncorrelated. The ~~lidar~~
5 ~~derived lidar-derived~~ spectrum is there a linear combination of the variances of the involved components. ~~For the lidar we use here v and w according to~~

$$\sigma_{v,lidar}^2 = \left\langle \left(\frac{\Delta v}{-2 \sin \phi} \right)^2 \right\rangle = \left\langle \left(\frac{\Delta v_v}{-2 \sin \phi} \right)^2 \right\rangle + \left\langle \left(\frac{\Delta v_w}{-2 \sin \phi} \right)^2 \right\rangle. \quad (15)$$

~~In the case of fully uncorrelated fluctuations we know that $\Delta v_v = -v' \sin \phi$ and $\Delta v_w = w' \cos \phi$ and the variance $\sigma_{v,lidar,unc}^2$ of the lidar-derived v -velocity is~~

$$10 \quad \sigma_{v,lidar,unc}^2 = \left\langle \left(\frac{-v' \sin \phi}{-2 \sin \phi} \right)^2 \right\rangle + \left\langle \left(\frac{w' \cos \phi}{-2 \sin \phi} \right)^2 \right\rangle = \frac{1}{2} (\sigma_{v,unc}^2 + \sigma_{w,unc}^2 \cot^2 \phi) \approx 0.5 \sigma_{v,unc}^2 + 1.43 \sigma_{w,unc}^2 \quad (16)$$

~~for the lidar with a half cone opening angle of $\phi = 30.6^\circ$ the variance $\sigma_{v,lidar}^2$ of the lidar-derived v -velocity is then composed of the variances σ_v^2 and σ_w^2 of the wind according to:~~

$$\sigma_{v,lidar}^2 = \frac{1}{2} (\sigma_v^2 + \sigma_w^2 \tan^2 \phi) \approx 0.5 \sigma_v^2 + 1.43 \sigma_w^2$$

~~These two situations and all cases in between are shown in Fig. 3b. The difference to the plots in Fig. 3a is that the two beams that point into and against the v -direction are used here to estimate the v -spectrum $v_{lidar,sum}$. The target spectrum of the v -component of the wind v_{wind} is given as well as the w -spectrum w_{wind} that presumably contaminates the signal. From the $v_{lidar,v}$ and $v_{lidar,w}$ curves it can be seen that at very low wave numbers hardly any contamination occurs but mainly because the w -component w_{wind} itself contains a low energy density at low wave numbers. As it increases for higher wave numbers, the contamination also gets more severe. In this example w_{wind} dominates the lidar spectrum $v_{lidar,sum}$ for all wave numbers above approximately $k_1 = 1.4 \times 10^{-2} \text{ rad m}^{-1}$ $k_1 = 1.4 \times 10^{-2} \text{ m}^{-1}$. The result is that the lidar overestimates the v -variances for all wave numbers. Such an effect is also reported by Wyngaard (1968) Wyngaard (1968). Thus, it is essential for accurate turbulence measurements to minimize spatial separation.~~

VAD scanning along the whole measurement circle is more complex than using only two beams. Examining the two beams aligned with ~~or perpendicular to~~ the mean wind direction is not sufficient to fully understand the effect of cross-contamination.
25 For circle scans, all three wind speed components are involved in contaminating all the beams that do not point in the four cardinal directions. We refer to the model presented in Sect. 4.1 and especially Eqs. (24), (25) and (26) of the spectral weighting functions therein to better understand which components influence another.

The lidar can also be configured to perform a so-called three-second scan, in which one measurement cycle is built from data from three full rotations. This limits the cross-contamination but comes at the cost of much stronger averaging along the

measurement circle, especially in strong wind cases, and three times slower sampling rate. The ability to measure turbulence with this approach is so weak that it is not further investigated in this paper.

Instead, the next chapter suggests two methods that can be used to reduce both averaging and cross-contamination.

3 Modified data processing

5 3.1 Squeezed measurement circles

In conventional VAD data processing, each measurement cycle consists of the radial velocities that are acquired during one full rotation of the prism. The data used in the reconstruction of one wind vector originates thus from an air volume with the shape of a cone with a diameter of D_C at the height of focus. This results in the above mentioned cross-contamination effects.

One way to eliminate the cross-contamination due to longitudinal separation and mitigate the averaging along the measurement circle lies in making use of Taylor's frozen turbulence hypothesis. As mentioned in Sect. 2.2, the hypothesis assumes that turbulent structures are transported by the mean wind motion without changing. This implies that all turbulent structures that enter the measurement cone at one time are identical after some time t when they leave the cone. The time it takes to cross the measurement circle can be estimated for all azimuth directions θ by

$$15 \quad t(\theta) = \cos \theta \frac{D_C}{U} \quad (17)$$

where U is the mean wind velocity calculated from conventional VAD processing.

The basic idea here is to introduce a time lag $\tau = t$ into the data processing so that each air package that is involved in the reconstruction of one wind vector is scanned twice: once when it enters and again when it leaves the measurement cone. The composition of the measurement circles is shown in Fig. 4 from a coordinate system that is moving with the mean wind U . In this example $D_C = 92.3\text{ m}$ and $U = 19.5\text{ ms}^{-1}$. With conventional VAD data processing, the measurement circle is made up of all N consecutive measurements from one cycle (red segment). By contrast, the lower part of Fig. 4 illustrates the introduction of the time delay τ , in which line-of-sight measurements from a total of $M = 6$ different measurement cycles are combined to estimate one wind vector (green segments). In other words, with conventional data processing, a measurement cycle is composed of volumes which are widely spatially distributed. The proposed new method picks measurement data taken from what we term a squeezed measurement circle (SMC).

25 A restriction that comes with the idea of squeezing is that the circle sample rate f_S must be high enough to be able to select measurements that were acquired with a time difference reasonably close to τ . That drastically limits the amount of measurement heights that should be selected, especially in strong wind cases. For the measurements analyzed in this paper, the lidar scanned continuously at only one height level, which in general makes sense to measure turbulence effectively.

3.2 2-beam method

30 The conventional method of averaging data from all available lines-of-sight to reconstruct 3-dimensional wind vectors leads to strong averaging along the measurement circle. The method is known to deliver reliable values for the mean wind speed and

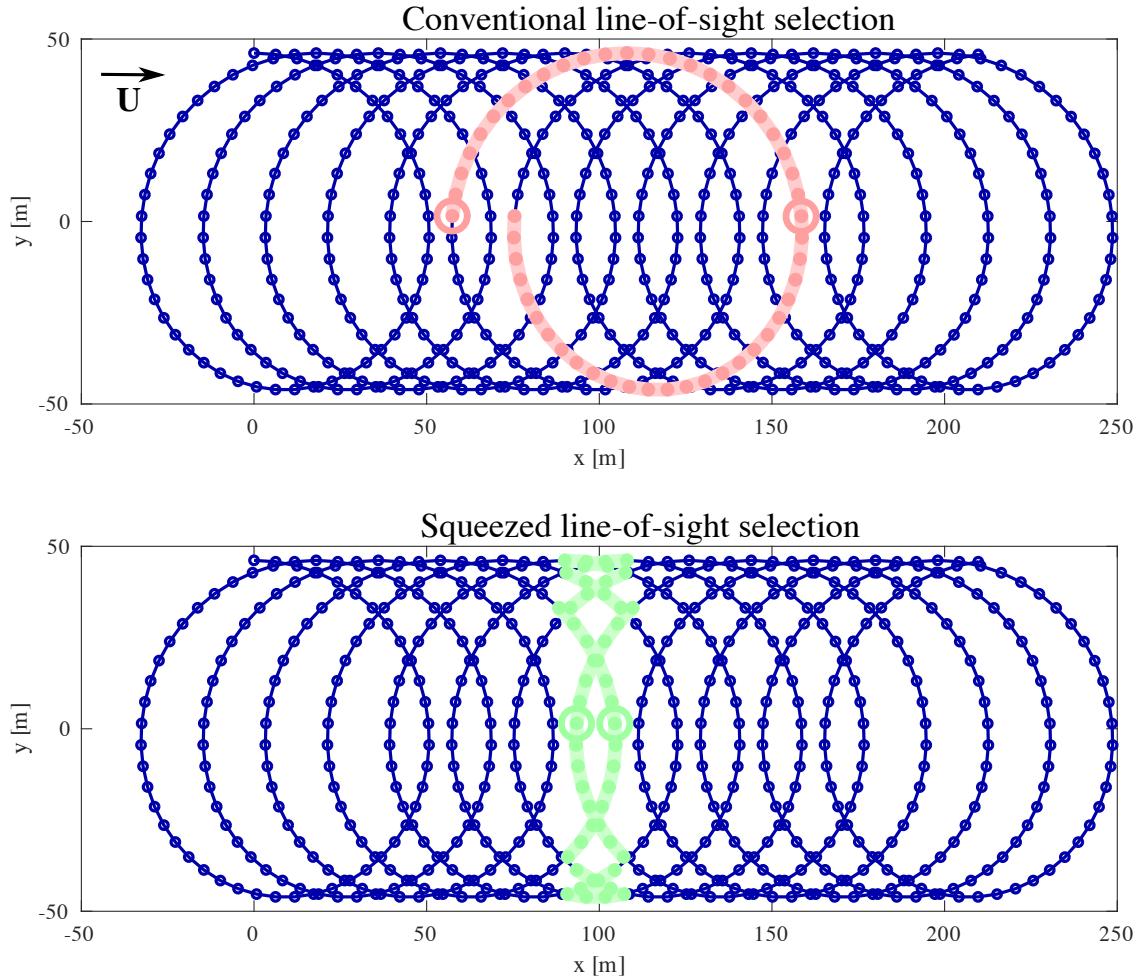


Figure 4. Selection of line-of-sight measurements for the reconstruction of one wind vector for when (top, [in red](#)) conventional VAD processing and (bottom, [in green](#)) the method of squeezed measurement circles is applied. [Within the red and green segments, small red and green rings indicate the particular beams selected for 2-beam processing. In this example, \$U = 19.5 \text{ m s}^{-1}\$, \$D_C = 92.3 \text{ m}\$ and \$f_S = 1 \text{ Hz}\$.](#)

direction. The directional information allows it to determine the two beams that lie in the upstream and downstream directions. [Within the red and green segments of Fig. 4, small red and green rings indicate these particular beams.](#) These two beams can in a second processing step be used to estimate the u - and w -components of the wind vectors for turbulence estimations. The resulting values are then not averaged along the measurement circle. This is comparable to the DBS method in cases where 5 the mean wind blows in line with two of the lines-of-sight. But an advantage of the 2-beam method over the DBS strategy is

that the relative angle between the mean wind and the two beams is kept constant in any prevailing wind direction. This is an advantage since beams pointing upwind and downwind are immune to contamination by the cross wind component v .

When the 2-beam method is combined with the idea of squeezing, then measurements of the u - and w -components are taken at virtually one focus point following the flow. Only the line-of-sight averaging and some minor longitudinal separation 5 between the different locations along the two beams remain.

That is unfortunately not true when estimating the v -component of turbulence. Instead, several problems occur. Intuitively, one would choose a beam direction perpendicular to the mean wind direction in order to estimate the v -component of the wind. But the radial velocities in this line-of-sight direction are often close to zero, and such estimates from continuous-wave lidars are usually not reliable (Mann et al. (2010), Dellwik et al. (2010)) (Mann et al., 2010; Dellwik et al., 2010). The transverse v -10 component must therefore be estimated either by VAD/SMC processing or by selecting a different third beam direction. In the latter case the results would then be influenced by contamination not only from w but also from the u -component. This lies outside the scope of this study. Therefore no v -data from measurements are processed with the 2-beam method.

Like conventional VAD processing, the SMC method and 2-beam method require a wind field that is statistically homogeneous in the horizontal directions to yield correct results.

15 4 Description of the model

The mathematics of deducing the lidar-measured spectrum from the second-order statistics of turbulence is very convoluted. Therefore, we make the assumption that the measurements are done much faster than it takes the air to move from one side of the scanning circle to the other, i.e., we assume that $\frac{1}{f_s} \ll t \ll \tau$. Effectively, the scanning circle is measured continuously. It is difficult to assess the magnitude of the error committed by the assumption of continuous measurements, but we assume it 20 is negligible.

4.1 VAD and SMC

In order to model spectra obtained from conventionally VAD processed lidar data we closely follow Sathe et al. (2011). They use the geometry of the lidar scan and its along beam weighting function together with information on the spatial structure of surface-layer turbulence (Mann, 1994). The focus point of the lidar is at a distance d_f away in the direction given by 25 the unit vector

$$\mathbf{n}(\theta) = (-\cos\theta \sin\phi, -\sin\theta \sin\phi, \cos\phi) \quad (18)$$

where θ is the azimuth angle and ϕ is the half cone opening angle. The line-of-sight or radial wind speed that the lidar is measuring is modelled as

$$v_r(\theta, x) = \int_{-\infty}^{\infty} \varphi(s) \mathbf{n}(\theta) \cdot \mathbf{u}((s + d_f) \mathbf{n}(\theta) + x \mathbf{e}_1) ds . \quad (19)$$

where φ is the spatial weighing function of the continuous-wave lidar that we assume to be a Lorentzian function with the Rayleigh length l_R . \mathbf{u} is the three-dimensional velocity field suppressing the time argument since we are assuming Taylor's hypothesis. The integration variable s is the distance along the beam from the focus point. The dot product assures that we get the line-of-sight velocity. We use x , the coordinate aligned with the mean wind vector, instead of time. [e₁ is the unit vector aligned with x.](#)

5

The w -, u -, and v -components of the velocity are calculated by the first three Fourier coefficients of v_r as a function of θ , i.e w is calculated from

$$A(x) = \frac{1}{2\pi} \int_0^{2\pi} v_r(\theta, x) d\theta \quad (20)$$

In Sathe et al. (2011) variances are calculated for a conically scanning continuous-wave lidar and it is trivial to extend that to spectra. Spectra were in fact calculated in Sathe and Mann (2012) but only for a pulsed system. In Sathe et al. (2011) the variances for a conically scanning continuous-wave system, e.g., a ZephIR 300 (Smith et al., 2006; Kindler et al., 2007), were given by

$$\left\langle w_z^2 \right\rangle \cos^2 \phi = \int \Phi_{ij}(\mathbf{k}) \alpha_i(\mathbf{k}) \alpha_j^*(\mathbf{k}) d\mathbf{k} \quad (21)$$

$$\left\langle u_z^2 \right\rangle \sin^2 \phi = \int \Phi_{ij}(\mathbf{k}) \beta_i(\mathbf{k}) \beta_j^*(\mathbf{k}) d\mathbf{k} \quad (22)$$

$$15 \quad \left\langle v_z^2 \right\rangle \sin^2 \phi = \int \Phi_{ij}(\mathbf{k}) \gamma_i(\mathbf{k}) \gamma_j^*(\mathbf{k}) d\mathbf{k} \quad (23)$$

where $*$ means complex conjugation. The spectral weighting functions α , β and γ are

$$\alpha_i(\mathbf{k}) = \frac{1}{2\pi} \int_0^{2\pi} n_i(\theta) e^{i d_f \mathbf{k} \cdot \mathbf{n}(\theta)} e^{-l |\mathbf{k} \cdot \mathbf{n}(\theta)|} d\theta \quad (24)$$

$$\beta_i(\mathbf{k}) = \frac{1}{\pi} \int_0^{2\pi} \cos \theta n_i(\theta) e^{i d_f \mathbf{k} \cdot \mathbf{n}(\theta)} e^{-l |\mathbf{k} \cdot \mathbf{n}(\theta)|} d\theta \quad (25)$$

$$\gamma_i(\mathbf{k}) = \frac{1}{\pi} \int_0^{2\pi} \sin \theta n_i(\theta) e^{i d_f \mathbf{k} \cdot \mathbf{n}(\theta)} e^{-l |\mathbf{k} \cdot \mathbf{n}(\theta)|} d\theta . \quad (26)$$

20 The spectra measured by the conically scanning lidar will be

$$\cos^2 \phi F_w^Z(k_1) = \hat{T}_f(k_1) \iint_{-\infty}^{\infty} \Phi_{ij}(\mathbf{k}) \alpha_i(\mathbf{k}) \alpha_j^*(\mathbf{k}) dk_2 dk_3 \quad (27)$$

and likewise for the u - and v -components. The function

$$\hat{T}_f(k_1) = \text{sinc}^2 \left(\frac{k_1 L_f}{2} \right) \quad (28)$$

where $\text{sinc } x = \frac{\sin x}{x}$ is multiplied to the integral to account for the finite time of circle scanning before a velocity estimate is obtained. L_f is the mean wind speed multiplied with this finite time (see Sathe et al. (2011) for details).

To apply the method of squeezing and model the spectra we get from SMC processing, we now substitute Eq. (19) with

$$\tilde{v}_r(\theta, x) = \int_{-\infty}^{\infty} \varphi(s) \mathbf{n}(\theta) \cdot \mathbf{u}((s + d_f) \mathbf{n}(\theta) + (x - d_f n_1(\theta)) \mathbf{e}_1) ds . \quad (29)$$

5 Following the exact same steps as in Sathe et al. (2011) but using Eq. (29) instead of (19) we arrive at Eqs. (21) – (23) but with the complex exponential in (24) – (26) exchanged with

$$e^{id_f(\mathbf{k} \cdot \mathbf{n}(\theta) - k_1 n_1(\theta))} \quad (30)$$

4.2 2-beam method

Only the up- and downwind beams to determine the u and w components of the wind vector could introduce less averaging
10 than using the whole circle.

When the mean wind is blowing from the north, the unit vectors in the up- and downwind directions are called \mathbf{n}^u and \mathbf{n}^d , respectively. Their unit vectors are

$$\mathbf{n}^u = (-\sin \phi, 0, \cos \phi) \quad (31)$$

and with the opposite sign on the first component for \mathbf{n}^d .

15 Parallel to Eq. (19) the line-of-sight velocity measured by the upwind beam is assumed to be

$$v^u(x) = \int_{-\infty}^{\infty} \varphi(s) \mathbf{n}^u \cdot \mathbf{u}(s \mathbf{n}^u + d_f \mathbf{n}^u + x \mathbf{e}_1) ds \quad (32)$$

The u -component estimated by the lidar is normally

$$u_{\text{lidar}} = \frac{\Delta v}{n_1^u - n_1^d} \quad (33)$$

where

$$\begin{aligned} 20 \quad \Delta v &= v^u(x) - v^d(x) \\ &= \int_{-\infty}^{\infty} \varphi(s) [\mathbf{n}^u \cdot \mathbf{u}((s + d_f) \mathbf{n}^u + x \mathbf{e}_1) \\ &\quad - \mathbf{n}^d \cdot \mathbf{u}((s + d_f) \mathbf{n}^d + x)] ds \end{aligned} \quad (34)$$

The correlation function of Δv is

$$\begin{aligned}
R_{\Delta v}(r) &= \langle \Delta v(x) \Delta v(x+r) \rangle \\
&= \iint_{-\infty}^{\infty} \varphi(s) \varphi(s') \times \\
&\quad \times \left\langle \left[\mathbf{n}^u \cdot \mathbf{u}((s+d_f)\mathbf{n}^u + x\mathbf{e}_1) \right. \right. \\
&\quad \left. \left. - \mathbf{n}^d \cdot \mathbf{u}((s+d_f)\mathbf{n}^d + x\mathbf{e}_1) \right] \right. \\
&\quad \times \left[\mathbf{n}^u \cdot \mathbf{u}((s'+d_f)\mathbf{n}^u + (x+r)\mathbf{e}_1) \right. \\
&\quad \left. \left. - \mathbf{n}^d \cdot \mathbf{u}((s'+d_f)\mathbf{n}^d + (x+r)\mathbf{e}_1) \right] \right\rangle ds ds' . \tag{35}
\end{aligned}$$

Expanding the product inside the ensemble average ($\langle \rangle$) and using the definition of the correlation tensor of the velocity field, $R_{ij}(\mathbf{r}) \equiv \langle u_i(\mathbf{x}) u_j(\mathbf{x}+\mathbf{r}) \rangle$ one gets

$$\begin{aligned}
10 \quad R_{\Delta v}(r) &= \iint_{-\infty}^{\infty} \varphi(s) \varphi(s') \times \\
&\quad \left\{ n_i^u n_j^u R_{ij}((-s+s')\mathbf{n}^u + r\mathbf{e}_1) \right. \\
&\quad + n_i^d n_j^d R_{ij}((-s+s')\mathbf{n}^d + r\mathbf{e}_1) \\
&\quad - n_i^u n_j^d R_{ij}(s' \mathbf{n}^d - s \mathbf{n}^u + d_f(\mathbf{n}^d - \mathbf{n}^u) + r\mathbf{e}_1) \\
&\quad \left. - n_i^d n_j^u R_{ij}(s' \mathbf{n}^u - s \mathbf{n}^d + d_f(\mathbf{n}^u - \mathbf{n}^d) + r\mathbf{e}_1) \right\} ds ds' \tag{36}
\end{aligned}$$

15 Now we use the relation between the velocity covariance tensor and the spectral velocity tensor

$$R_{ij}(\mathbf{r}) = \int \Phi_{ij}(\mathbf{k}) \exp(i\mathbf{k} \cdot \mathbf{r}) d\mathbf{k} \tag{37}$$

where $\int d\mathbf{k} \equiv \iiint_{-\infty}^{\infty} dk_1 dk_2 dk_3$, to express the auto-covariance function as

$$\begin{aligned}
R_{\Delta v}(r) &= \iint_{-\infty}^{\infty} \varphi(s) \varphi(s') \times \\
&\quad \left\{ n_i^u n_j^u \int \Phi_{ij}(\mathbf{k}) \exp(i\mathbf{k} \cdot ((-s+s')\mathbf{n}^u + r\mathbf{e}_1)) d\mathbf{k} \right. \\
20 \quad &\quad + n_i^d n_j^d \int \Phi_{ij}(\mathbf{k}) \exp(i\mathbf{k} \cdot ((-s+s')\mathbf{n}^d + r\mathbf{e}_1)) d\mathbf{k} \\
&\quad - n_i^u n_j^d \int \Phi_{ij}(\mathbf{k}) \exp(i\mathbf{k} \cdot (s' \mathbf{n}^d - s \mathbf{n}^u + d_f(\mathbf{n}^d - \mathbf{n}^u) + r\mathbf{e}_1)) d\mathbf{k} \\
&\quad \left. - n_i^d n_j^u \int \Phi_{ij}(\mathbf{k}) \exp(i\mathbf{k} \cdot (s' \mathbf{n}^u - s \mathbf{n}^d + d_f(\mathbf{n}^u - \mathbf{n}^d) + r\mathbf{e}_1)) d\mathbf{k} \right\} ds ds' \tag{38}
\end{aligned}$$

By interchanging the order of integration of \mathbf{k} and the s 's we can cast the expression in terms of the Fourier transform of φ which in the case of a Lorentzian is $\hat{\varphi}(k) = \exp(-l_R|k|)$. Thereafter, we Fourier transform $R_{\Delta v}$ with respect to r to get the 25 spectrum $F_{\Delta v}(k_1)$. After that process the first term in (38) becomes

$$n_i^u n_j^u \int \Phi_{ij}(\mathbf{k}) \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^u) \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^u) dk_2 dk_3$$

and upon rearrangement we finally obtain

$$F_{\Delta v,n}(k_1) = \int \Phi_{ij}(\mathbf{k}) \left\{ n_i^u n_j^u |\hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^u)|^2 + n_i^d n_j^d |\hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^d)|^2 - 2n_i^u n_j^d \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^u) \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^d) \right. \\ \left. \times \cos(d_f \mathbf{k} \cdot (\mathbf{n}^d - \mathbf{n}^u)) \right\} dk_2 dk_3. \quad (39)$$

5 The derivation of the “squeezed” spectrum is parallel to the normal spectrum. The only difference lies in the definition of Δv . Now we define it as

$$\Delta v_s(x) = v^u(x - n_1^u d_f) - v^d(x - n_1^d d_f) \quad (40)$$

Using the exact same steps that led to (39), we see that the cosine term in that equation has to be substituted with one and we get

$$10 \quad F_{\Delta v,s}(k_1) = \int \Phi_{ij}(\mathbf{k}) \left\{ n_i^u n_j^u |\hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^u)|^2 + n_i^d n_j^d |\hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^d)|^2 - 2n_i^u n_j^d \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^u) \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}^d) \right\} dk_2 dk_3. \quad (41)$$

To obtain the spectrum of u , $F_{\Delta v,(s)}$ simply has to be divided by $(n_1^u - n_1^d)^2$ according to (33).

When obtaining the spectrum of v , we simply exchange the unit vectors of the up- and downwind beams \mathbf{n}^u and \mathbf{n}^d in all equations by the values of the west- and eastbound beams \mathbf{n}^w and \mathbf{n}^e . In order to obtain the spectrum of w , Δv defined 15 in Eq. (34) has to be replaced by the sum of both radial velocities $v^u(x) + v^d(x)$ and $F_{\Delta v,(s)}$ must eventually be divided by $(n_3^u + n_3^d)^2$.

To compare the different methods to calculate spectra from a lidar Eqs. (39) and (41) have to be evaluated with a model for the spectral tensor. We chose the spectral tensor from Mann (1994) and select the model parameters so that the model spectra resemble the spectra from available sonic measurements. The selected parameters are: $L = 65$ m, $\Gamma = 4$ and $\alpha \epsilon^{2/3} = 0.023$ m $^{4/3}$ s $^{-2}$

20 The model. The unfiltered u target model spectrum that we will later compare the model results against is given by

$$F_u(k_1) = \int \Phi_{11}(\mathbf{k}) dk_2 dk_3 \quad (42)$$

and respectively for the second and third wind component. The model was tested by comparing the theoretical spectra with results from processing computer generated wind field turbulence data (Mann, 1998) and was found to predict all four data processing methods i.e., VAD, SMC, 2-beam and squeezed 2-beam accurately for all 3 wind speed components.

5 Description of the measurements

5.1 Test site and instrumentation

The test data were collected at the Danish National Test Center for Large Wind Turbines at Høvsøre. The test site is located in West Jutland, Denmark just 1.7 km east of the North Sea. Apart from the dunes along the coastline, the terrain is nearly flat.

5 A detailed description is given in Peña et al. (2016).

The Høvsøre meteorological mast is located to the south of a row of five wind turbines. The reference data were acquired with a Metek USA-1 sonic anemometers that are attached to a meteorological mast anemometer that is mounted at 80.5 m height above the ground. It is attached to a 4.3 m long boom pointing north. Mast effects can be observed when the wind is blowing from the south. Turbine wake effects influence the measurement signal when the wind blows from the north. For the 10 data set in this study, the inflow is undisturbed. A detailed description of the test site is given in Peña et al. (2016).

Collocated with the meteorological mast, the lidar measurements were taken by a Qinetiq lidar that was configured to continuously scan at 78 m above the ground. The lidar is comparable to the current ZX 300 (previously ZephIR 300) but the effective aperture size is slightly lower which results in a longer Rayleigh length and thus greater line-of-sight averaging. The lidar was equipped with an opto-acoustic modulator that makes it possible to detect the direction of the radial velocities. Line-of-sight velocities calculated from the centroid of the Doppler spectra are used in the data processing. The precision of these 15 lidar measurements is not exactly known but is in general better than 1% (Pedersen et al., 2012).

Measurement data of 32 subsequent 10-minute intervals are used. The data were acquired on 20.11.2008 between 10:30 and 15:50 local time.

The mean wind velocity measured by the sonic anemometer during this period was 19.5 m s^{-1} from northwest, and the 20 mean turbulence intensity was varied from 14.2 m s^{-1} to 22.6 m s^{-1} with an average of 19.5 m s^{-1} and a standard deviation of 2.0 m s^{-1} . The turbulence intensity varied from 4.7% to 14.0%, with a mean of 8.8% and standard deviation of 2.0%. The wind blew from the northwest and the atmospheric stability was neutral. Table 1 summarizes the most important information about the experimental setup.

5.2 Data processing

25 The time series of all 10-minute intervals derived from all processing methods are used to compute turbulence spectra. The measurement rate for the used lidar is 1 Hz. Although it would have been possible in the 2-beam processing to calculate measurement values with a rate of 2 Hz by using every newly retrieved radial velocity together with its predecessor, it was decided to use only independent measurements acquired every full second. The data sonic anemometer measures with a rate of 20 Hz. This high frequency data is down-sampled by the use of the MATLAB function ‘resample’ to a frequency of 1 Hz. The 30 function includes a low-pass filter to avoid anti-aliasing. The data rate is thus for all methods 1 Hz. The analyzed frequency range from $\frac{1}{600}$ Hz to $\frac{1}{2}$ Hz equals the wave number range from roughly $5.4 \times 10^{-4} \text{ m}^{-1}$ to $1.6 \times 10^{-1} \text{ m}^{-1}$. The spectra are then averaged for all intervals and the results are then binned into 30 logarithmically spaced wave number intervals spread across the wave number axis to avoid high density of values and maintain readability towards higher wave numbers.

Description	Abbr.	Value	Unit
Measurement height	h	78	[m]
Half cone angle	ϕ	30.6	[deg]
Cone diameter	\mathcal{D}_C	92.3	[m]
Focus distance	d_f	90.6	[m]
Prism rotation	f_s	1	[Hz]
Measurements per cycle	N	50	[1]
Laser wave length	λ	1550	[nm]
Effec. aperture diam.	a_0	24	[mm]
Mean wind speed	U_{mean}	19.5	[m s ⁻¹]
1. Resonance	λ_{res1}	184.5	[m]
	k_{res1}	0.034	[rad m ⁻¹ m ⁻¹]
2. Resonance	λ_{res2}	61.5	[m]
	k_{res2}	0.102	[rad m ⁻¹ m ⁻¹]
No. of cycles to cover τ	M	0-5	[1]
Rayleigh length	l_R	7.03	[m]
Full width half maximum	$2l_R$	14.07	[m]

Table 1. Key specifications of the lidar used in the measurements

The effects of de-trending (Hansen and Larsen, 2005) and spike removal (Hojstrup, 1993) on the spectra were both negligible for this dataset, so neither was applied here.

6 Discussion of the results

6.1 u-spectra

5 Figure 5 shows the spectra of the u -fluctuations for all processing methods from measurement data (square-triangle markers) and the corresponding model predictions (solid lines). We will first discuss the results from processing the whole measurement circle shown in Fig. 5a, followed by the discussion of the results of the 2-beam method, shown in Fig. 5b.

6.1.1 Circle processing

To begin with, the model predictions of conventional VAD processing and the new SMC method are compared against each 10 other and with regard to the true u target spectrum—model spectrum acquired from the spectral tensor according to Eq. 42. The model prediction of the conventionally processed VAD lidar data shows some attenuation of the spectral energy even for very low wave numbers. This can be partly explained by the infinitely long tails of the line-of-sight averaging function given in Eq. (8). That means that even very large eddies are slightly weakened by the underlying Lorentzian function.

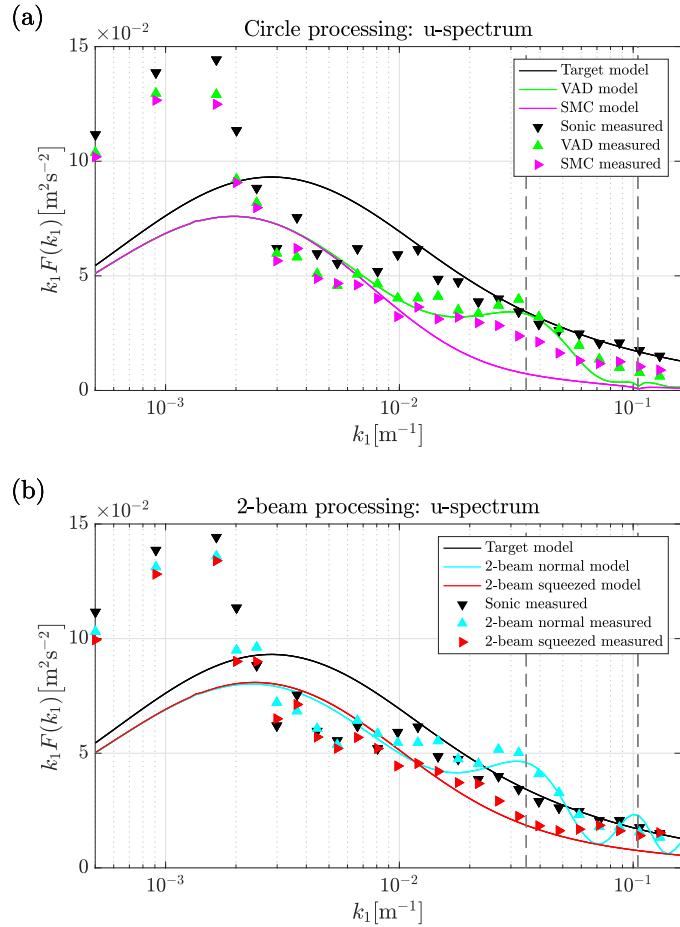


Figure 5. Modelled (solid lines) and measured (square-triangle markers) u -spectra from data processing where (a) all radial measurements are used and (b) only two beams are used. Colors correspond to processing method. The grey vertical dashed lines represent the first and second resonance wave number.

Averaging along the measurement circle might also have some small additional impact on large scale turbulence. Both averaging effects get more and more severe for increasing wave numbers until the measured spectral energy reaches values close to zero at roughly $k_T = 10^{-1} \text{ rad m}^{-1}$ $k_1 = 10^{-1} \text{ m}^{-1}$ and above. The tendency of increasing attenuation with regard to the target spectrum is interrupted around the first resonance frequency that is indicated by a vertical grey dashed line at $k_T = 3.4 \times 10^{-2} \text{ rad m}^{-1}$ $k_1 = 3.4 \times 10^{-2} \text{ m}^{-1}$. Here the energy density increases and reaches coincidentally roughly the value of the target spectrum. This behavior is as expected an effect of the cross-contamination with energy from both the w -spectrum and to a small extend also from v . A resonance effect at the second resonance frequency is hardly pronounced since the energy is nearly fully consumed by the line-of-sight averaging.

The SMC model spectrum predicts a similar shape but without the cross-contamination effect from longitudinal separation. Thus, we find no resonance in the computations. The total variance of the u -fluctuations $\sigma^2(u')$ is lower here since less additional energy from the w component is contained in the u_{SMC} signal. The signal is still contaminated by contributions from other components because the lateral separation cannot be reduced by squeezing. But the averaging along the measurement 5 circle is so strong that for example for wave numbers above around $k_T = 10^{-2} \text{ rad m}^{-1}$ $k_1 = 10^{-2} \text{ m}^{-1}$ less than half of the energy of the target spectrum is expected to be detected by the lidar.

First, when the model is compared with the measurement data, the chosen spectral tensor does not fit the actual wind conditions ~~very well~~ in the wave number range below $k_T = 10^{-2} \text{ rad m}^{-1}$. This $k_1 = 10^{-2} \text{ m}^{-1}$. ~~The extra energy at low wave numbers compared to the spectral tensor model for this site has been observed before and is related to the inhomogeneous landscape at Høvsøre with its sea to land transition in the main wind direction (Sathe et al., 2015) and mesoscale effects that overlay the expected spectral gap (Larsén et al., 2016). Luckily, this~~ does not severely impede the analysis since the most interesting effects are expected at higher wave numbers and tendencies can still be determined from the relative distances between the markers and lines without matching the absolute values. ~~The extra energy at low wave numbers compared to the spectral tensor model for this site and wind direction has been observed before and is related to inhomogeneous landscape (Sathe et al., 2015).~~ Next, the comparison of data from sonic measurements and VAD as well as SMC processed lidar data shows in the very low wave number range at $k_T < 3 \times 10^{-3} \text{ rad m}^{-1}$ $k_1 < 3 \times 10^{-3} \text{ m}^{-1}$ that VAD and SMC processing produce similar results with a slight tendency towards lower energy densities in the SMC measured spectrum that is not found in the model computations. A possible explanation is that the fluctuations of the u - and especially the w -component in the real wind field are not perfectly correlated, i.e. the frozen turbulence hypothesis which the model assumes is slightly violated. The 10 result is a small contribution of w_{wind} on u_{lidar} that appears only to a greater extent in the VAD processed spectrum ~~because it is compensated for by the~~. The reason for the difference is that the correlation is closer to unity in the case of SMC processing.

Apart from some exceptions (e.g., at $k_T = 3 \times 10^{-3} \text{ rad m}^{-1}$ $k_1 = 3 \times 10^{-3} \text{ m}^{-1}$), a relatively increasing averaging effect towards higher wave numbers is found for the lowest wave numbers as expected. In the wave number range $k_1 = 10^{-2} \text{ rad m}^{-1}$ to $6 \times 10^{-2} \text{ rad m}^{-1}$ sonic spectrum and the VAD spectrum follow the corresponding modelled spectra nicely through the first resonance point. That 20 shows that the cross-contamination caused by longitudinal separation is present in the measurements and is properly modelled.

The spectrum derived from SMC processed data shows a clear tendency towards its modelled spectrum but does not completely reach it. It does not show the resonance effect seen for VAD processing, but the overall energy level is higher than predicted for $k_T > 10^{-2} \text{ rad m}^{-1}$ $k_1 > 10^{-2} \text{ m}^{-1}$. It is not possible to determine what causes this deviation. One possible reason is that the model assumes a perfect delay of the measurement timing. In reality this is not possible due to only discrete 30 acquisition times being available. Also the air packages are in reality not always advected with the exact mean wind speed and direction. Both imperfections justify that the behavior of real SMC processing lies in between the modelled SMC and VAD processing.

For $k_T > 7 \times 10^{-2} \text{ rad m}^{-1}$ $k_1 > 7 \times 10^{-2} \text{ m}^{-1}$ VAD and SMC processed data are nearly identical. As shown in e.g., Schlipf et al. (2010), the assumption of frozen turbulence is not valid for high wave numbers. In this region, 35 fluctuations separated by the distances between the relevant focus points are uncorrelated and the squeezing has no effect. The

lack of coherence also explains that the values are higher than predicted because the u -spectrum is highly contaminated by w - and v -fluctuations.

6.1.2 2-beam processing

The plotted model spectrum for the conventional 2-beam processing method shows a significantly lower averaging effect compared to whole circle processing methods at all wave numbers except in the very low wave number region, where the methods are expected to perform similarly well.

With the 2-beam method it is expected that fluctuations with the highest wave numbers analyzed are to some extent included in the spectrum, while they were close to zero when circle processing was applied. The normal 2-beam processing in the model is prone to cross-contamination at both resonance points (vertical dashed lines). This situation is explained in detail in Sect. 2.5. In contrast, the method of squeezing applied to the 2-beam processing shows as expected no cross-contamination in the model calculations.

Overall, spectra calculated from the 2-beam processed measurement data show ~~very~~ good agreement to the model. It is important to keep in mind that, due to the poor fit of the measured spectra of the horizontal wind components and the modeled spectra at low wave numbers, we can compare the relations between the different methods but not absolute values. At low wave numbers, the measured spectra are on average closer to the target spectrum than in the case of circle processing. The slightly lower energy content of "squeezed" measurements that we observed and explained for circle processing is found here as well. Also, when it comes to deviations from the modelled behavior like for example the higher energy density at some wave numbers (e.g., $k_T = 3 \times 10^{-3} \text{ rad m}^{-1}$ $k_L = 3 \times 10^{-3} \text{ m}^{-1}$), we find similar tendencies as in circle processing, and the reason is likewise unclear.

The strong cross-contamination at the first resonance frequency is clearly represented in the normal 2-beam processing and can be completely avoided by squeezing the two focus points to virtually one point. It is worth mentioning that the squeezing procedure works more like expected when applied to the 2-beam method than when applied to the circle processing. This can be explained by the error caused by not having continuous but only discrete delaying times τ available. The relative impact of this error is lower in the case of the 2-beam method because then the maximum separation distance D_C must be compensated for. In circle processing mode, the shorter separations where the relative error is larger also contribute to the result.

At $k_T > 7 \times 10^{-2} \text{ rad m}^{-1}$ $k_L > 7 \times 10^{-2} \text{ m}^{-1}$ the two processing methods result in nearly identical values again, and we assume the lack of coherence of short eddies to be the cause also here.

6.2 v-spectra

Figure 6 shows the spectra of the v -fluctuations for all available data processing methods from both measurement data (~~square~~ triangle markers) and the corresponding model predictions (solid lines). Also here, we first discuss the results from processing the whole measurement circle shown in Fig. 6a, followed by the discussion of the results of the 2-beam method shown in Fig. 6b.

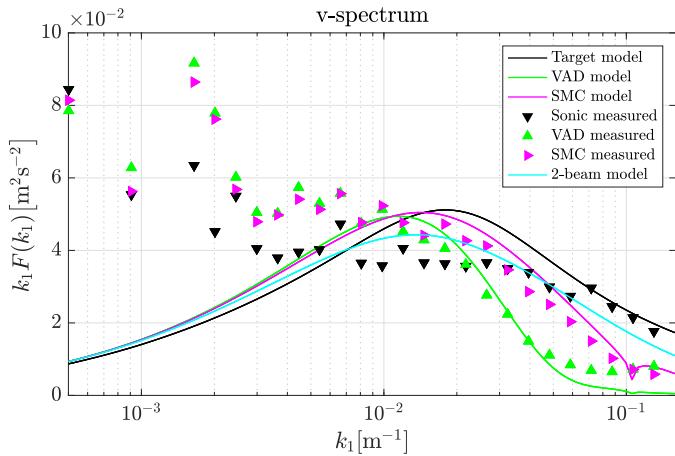


Figure 6. Modelled (solid lines) and measured (marker symbols) v -spectra from all data processing where (a) all radial measurements are used and (b) only two beams are used methods. Colors correspond to processing method.

6.2.1 Circle processing

The modelled spectra of conventionally VAD processed lidar measurements predict energy densities that slightly exceed the target spectrum for very long fluctuations with $k_T < 1.3 \times 10^{-2} \text{ rad m}^{-1} k_1 < 1.3 \times 10^{-2} \text{ m}^{-1}$. This behavior can be explained by uncorrelated w -fluctuations between the eastern and western sides of the measurement circle that contaminate the v -signal.

5 This contamination is slightly stronger than averaging that is very weak at low wave numbers.

By contrast, fluctuations shorter than approximately $k_T = 1.3 \times 10^{-2} \text{ rad m}^{-1} k_1 = 1.3 \times 10^{-2} \text{ m}^{-1}$ appear damped in the spectrum, and fluctuations with higher wave numbers $k_T > 10^{-1} \text{ rad m}^{-1} k_1 > 10^{-1} \text{ m}^{-1}$ are not even present in the v -spectrum due to the strong averaging. Unlike the u -spectrum, the v -spectrum does not have characteristic behavior around the first resonance wave number. This is not surprising because the lines-of-sight that are the most important for the detection 10 of v -fluctuations lie, according to Eq. (26), orthogonal to the mean wind direction in which turbulence is advected. So, no resonance occurs.

When the model spectrum for SMC processing is analyzed, we find a higher variance for all wave numbers above approximately $k_T = 1.3 \times 10^{-2} \text{ rad m}^{-1} k_1 = 1.3 \times 10^{-2} \text{ m}^{-1}$. Reduced averaging along the measurement circle is the reason for the higher energy in the SMC spectrum. It is caused by the following: The process of squeezing reduces the longitudinal separation 15 of the focus points ideally to zero while the lateral separation remains unchanged. We know that the lines-of-sight perpendicular to the mean wind direction on both sides of the measurement circle are the most important for the determination of v_{lidar} . Let us assume these are the easterly and westerly beams. The exact east- and westbound beams are not affected by the process of squeezing. But for example the north-east and the south-east beam (respectively the north-west and north-east on the other side) see different turbulent structures in conventional VAD processing. With SMC processing, these two beams see the same 20 structure. In the subsequent calculation of the v component all lines-of-sight are combined and the pairs of radial velocities

that lie in line with the mean wind contribute with the average of their amplitudes. This average of amplitudes is lower than the common amplitude measured by the beam pairs under SMC processing. More simply, there is less averaging along the measurement circle when SMC is applied. As a result, the spectrum of SMC shows higher energy densities for all wave numbers where uncorrelated fluctuations dominate.

5 Now we compare the measurements with the model. Unfortunately, ~~the similar to the u -fluctuations, the~~ target spectrum does not represent the sonic measured values properly, especially for low wave numbers. We will therefore concentrate on the tendencies and proportions between the spectra from different methods. While the model predicts the behavior at the lowest wave numbers more or less satisfactorily, we are faced with two outliers at $k_1 = 1.65 \times 10^{-3} \text{ rad m}^{-1}$ and $k_1 = 2 \times 10^{-3} \text{ rad m}^{-1}$ $k_1 = 1.65 \times 10^{-3} \text{ m}^{-1}$ and $k_1 = 2 \times 10^{-3} \text{ m}^{-1}$ where both the VAD and SMC processing lead to excessive energy estimations.

10 The reason is unclear and not further investigated. At all other wave numbers, the agreement of model and measurements is very satisfactory. In particular, the differences between the two methods are found in the measurements, as predicted. The good agreement between model spectra and measurement spectra at wave numbers above approximately $k_1 = 2 \times 10^{-2} \text{ rad m}^{-1}$ $k_1 = 2 \times 10^{-2} \text{ m}^{-1}$ might be surprising with regard to the poor agreement of sonic measurements and target spectrum. The reason is that the shape of the lidar v -spectra is mainly determined by the cross-contamination from the w -component which,

15 as we describe in 6.3, agrees better with its model representation.

The identity of VAD and SMC derived measurement spectra that we saw for u -fluctuations for $k_1 > 7 \times 10^{-2} \text{ rad m}^{-1}$ $k_1 > 7 \times 10^{-2} \text{ m}^{-1}$ is found here at $k_1 > 10^{-1} \text{ rad m}^{-1}$ $k_1 > 10^{-1} \text{ m}^{-1}$. The reason is obvious when we look at the relevant longitudinal separation distances. They are much shorter when processing v -fluctuations than u -fluctuations, and the assumption of frozen turbulence is more valid for short separation distances. Therefore squeezing can maintain its effect into a

20 somewhat higher wave number region.

6.2.2 2-beam processing

When the 2-beam method is applied, i.e., using only the east and west beam to derive the v -component of the wind vector, the method of squeezing has no effect. In ~~both cases, we get the same model behavior shown in Fig. 6b. In~~ comparison with the whole circle processing, the 2-beam method is characterized by lower energy estimates at low wave numbers and higher energy estimates at higher wave numbers ~~-(see Fig. 6)~~. One reason for the first is assumed to be the lower coherence of v -fluctuations separated by the full distance D_C . That implies that 2-beam processing gets a somewhat lower contribution of v_{wind} to v_{lidar} . A second reason is that there is not cross-contamination from u on v occurring for the 2-beam processing. The higher energy content at high wave numbers results from the absence of averaging along the measurement circle.

The model cannot be compared with measurements because the line-of-sight velocities of the east and west beams were erroneous. The absolute values we measured are unrealistically biased towards non-zero values. This effect has been previously reported ~~(Mann et al. (2010) and Dellwik et al. (2010))~~ ~~(Mann et al., 2010; Dellwik et al., 2010)~~. We included the model behavior of 2-beam processing for the sake of completeness and to show that the availability of reliable measurement data for the east and west beams would be of hardly any use.

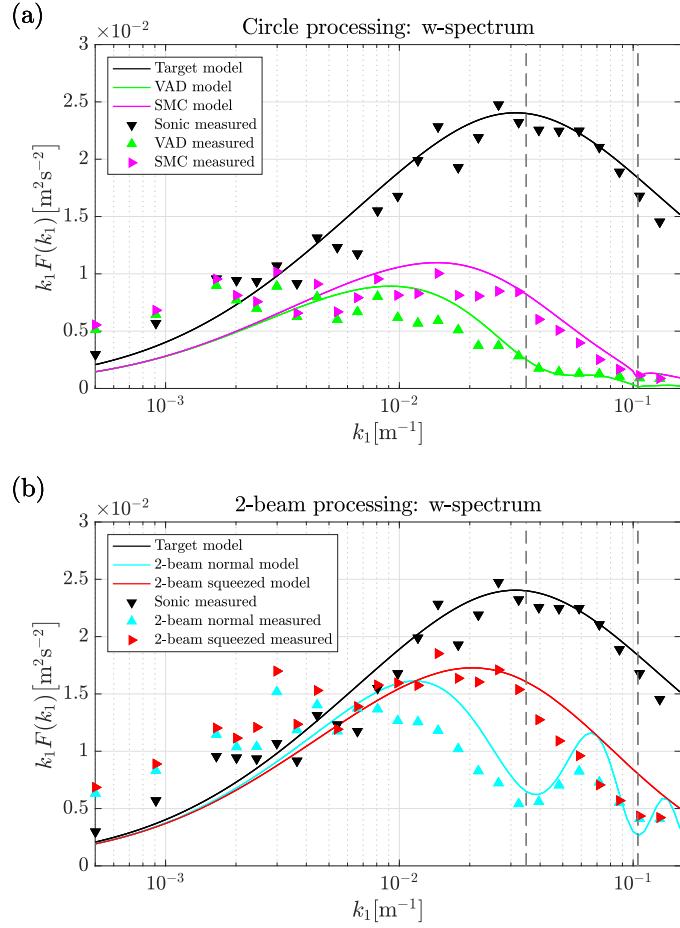


Figure 7. Modelled (solid lines) and measured (square-triangle markers) w -spectra from data processing where (a) all radial measurements are used and (b) only two beams are used. Colors correspond to processing method. [The grey vertical dashed lines represent the first and second resonance wave number.](#)

6.3 w -spectra

Figure 7 shows the spectra of the w -fluctuations for all processing methods from both measurement data and the corresponding model predictions. Again, we discuss the results from processing the whole measurement circle first and then the results of the 2-beam method.

5 6.3.1 Circle processing

To begin with, we compare the model predictions of conventional VAD processing and the new SMC method against one another and with regards to the w target spectrum. The results of the actual measurements follow. The model prediction of the conventionally processed VAD lidar data shows some attenuation of the spectral energy even for very low wave num-

bers. The reason is mainly the infinitely long tails of the line-of-sight averaging function and to a lesser extent the averaging along the measurement circle. Both averaging effects become quickly stronger for increasing wave numbers. The spectrum from VAD processed data is expected to drop at the first resonance point marked with a grey dashed vertical line in Fig. 7. This drop is minor due to the overall low energy level present in the spectrum. The spectrum reaches a value near its final 5 minimum with variance values close to zero already at around $k_1 = 5 \times 10^{-2} \text{ rad m}^{-1}$ just after crossing the first resonance point. w -fluctuations with higher wave numbers are not detectable with conventional VAD processing. According to the model, the SMC processing improves the situation slightly by removing the longitudinal separation that makes lidar blind to w -fluctuations at the resonance points with VAD processing. Squeezing the measurements also helps improve the measurements well above and below the resonance wave number. But still, due to the remaining averaging effects, 10 only a minor fraction of the energy in the vertical wind can be detected with both methods at wave numbers above roughly $k_1 = 10^{-2} \text{ rad m}^{-1}$.

15 ~~The~~ Unlike for the u and v -component, the fit between target spectrum and measurement data is good for the w -component also in the low wave number region. The results of Larsén et al. (2016) show that the spectra for vertical fluctuations are not prone to contributions from the mesoscale spectrum. The measurement data overall support these model predictions and show that the process of squeezing functions well over the entire frequency range in this study. In detail, we only find some mismatch 20 for very low wave numbers where $k_1 < 10^{-3} \text{ rad m}^{-1}$. The measured spectra lie above the target spectrum here although we expected some attenuation. The discrepancy is caused by the real u -wind spectrum being much higher than the underlying target spectrum, see Fig. 5. We already found that large scale u -fluctuations are also not perfectly correlated and thus contaminate the measured lidar spectra, which is not considered in the model. At higher wave numbers we find ~~very good~~ reasonable forecasting of measured w -spectra by the model.

6.3.2 2-beam processing

The modelled 2-beam spectra in Fig. 7b lie considerably closer to the target w -spectrum for all wave numbers. That can be explained by the absence of circle averaging. The strong influence of resonance visible at the two first resonance wave numbers underlines the importance of squeezing when striving for more realistic spectra from lidar measurements.

25 At low wave numbers with $k_1 < 10^{-2} \text{ rad m}^{-1}$ the measured spectra contain higher energy densities than modelled. A similar but less pronounced effect was found in circle processing only at the lowest wave numbers. The explanation we gave there must therefore be supplemented by mentioning that the assumed decorrelation is stronger for the maximal separations that are involved in the 2-beam method. The further comparison of spectra from experiment and model show that the process of squeezing also leads to the expected effect in the case of using only two beams to determine 30 the w component of the wind vector. As in the case of u -fluctuations, this statement must be limited to wave numbers $k_1 < 7 \times 10^{-2} \text{ rad m}^{-1}$.

6.4 ~~Extended discussion~~

The results discussed here are extracted from a single data set that covers one measurement height and a narrow band of mean wind speeds, turbulence conditions and inflow directions at a single location. All of these factors influence the results that should be investigated in further studies.

Changing the measurement height has the strongest influence on the lidar-derived spectra. For example, increasing the measurement height would, first, make the averaging along the measurement circle more severe due to the increased measurement circle diameter. Second, the resonance wave numbers are then shifted towards lower values, which leads to different cross-contamination due to lateral separation. Third, the cross-contamination due to lateral separation becomes even more severe due to the longer separation distances of opposite line-of-sight beams. Fourth, a further increase of the focus distance leads to even stronger line-of-sight averaging. Fifth, the time lag that is introduced for squeezing must be longer, and the frozen turbulence hypothesis loses some more of its validity. Changing the half cone opening angle to a smaller value would on the one hand reduce the first three of the aforementioned effects effectively, but on the other hand it would lead to much stronger cross-contamination due to the increased sensitivity for w -fluctuations according to Eqs. 14 and 16. Lidar measurements at lower mean wind speeds give the turbulence more time to evolve while crossing the measurement circle, which might lead to a deviation from the predicted spectra at somewhat lower wave numbers than observed in our results. The numerical models will work for all turbulence intensities, and the shape of the spectra is mainly determined by the degree of anisotropy and the turbulence length scale. Atmospheric stability conditions other than neutral would not change the way the lidar measures. But a modified spectral tensor model like the one presented in Chougule et al. (2017) could be used to better compare model values with experimental results.

7 Conclusions

This paper presents two advanced data processing methods for improving turbulence spectrum estimations with VAD scanning wind lidars, with an aim to reduce cross-contamination and averaging effects. The models of these approaches, developed in Sect. 4, are supported by the comparison with experimental data. Discrepancies can be explained for the most part by the limitations of the frozen turbulence hypothesis that underlies the model calculations yet has slightly reduced validity in real measurements. Also the fact that the spectra in the experiment do not agree very well with the spectral tensor model is a cause of differences.

We found that the method of squeezing eliminates the resonance effect caused by the longitudinal separation of combined measurement points successfully. It also considerably reduces the averaging along the measurement circle.

The method of using only two beams for the estimation of the u and w components of the wind vector eliminates the averaging along the measurement circle completely. When it is combined with the method of squeezing, the measurements deviate from the sonic measurements mainly due to line-of-sight averaging. This combination of both methods substantially improves the measurability of the w -spectrum, which is hardly measurable with current VAD processing.

Accurate measurements of the v -spectrum remain difficult, even with the approaches described here. The 2-beam method is not applicable to current continuous-wave lidars which in most cases are homodyne. Whether the use of squeezed measurement

circles always leads to systematically better results is unclear, because the resulting spectra are dominated by contamination from w-fluctuations of the wind.

In conventionally processed lidar data, cross-contamination compensates for averaging effects, meaning that in general, total variance might be close to target values, but for the wrong reasons. For systematically better turbulence measurements from 5 VAD scanning lidars, the findings presented here should be included in raw data processing. Both approaches presented here can be applied to any existing VAD scanning continuous-wave profiling lidar unit.

Code and data availability. Inquiries about and requests for access to data and source codes used for the analysis in this study should be directed to the authors.

Competing interests. The authors declare no competing interests.

10 *Acknowledgements.* This research project was supported by Energy and Sensor Systems (ENERSENSE) at the Norwegian University of Science and Technology.

References

Bardal, L. M. and Sætran, L. R.: Spatial correlation of atmospheric wind at scales relevant for large scale wind turbines, *J. Phys. Conf. Ser.*, 753, 32 – 33, <https://doi.org/10.1088/1742-6596/753/3/032033>, 2016.

Branlard, E., Pedersen, A. T., Mann, J., Angelou, N., Fischer, A., Mikkelsen, T., Harris, M., Slinger, C., and Montes, B.: Retrieving wind statistics from average spectrum of continuous-wave lidar, *Atmos. Meas. Tech.*, 6, 1673–1683, <https://doi.org/10.5194/amt-6-1673-2013>, 2013.

Browning, K. A. and Wexler, R.: The Determination of Kinematic Properties of a Wind Field Using Doppler Radar, *J. Appl. Meteorol. Clim.*, 7, 105–113, [https://doi.org/10.1175/1520-0450\(1968\)007<0105:TOKPO>2.0.CO;2](https://doi.org/10.1175/1520-0450(1968)007<0105:TOKPO>2.0.CO;2), 1968.

Canadillas, B., Bégué, A., and Neumann, T.: Comparison of turbulence spectra derived from LiDAR and sonic measurements at the offshore platform FINO1, 10th German Wind Energy Conference (DEWEK 2010), 2010.

Chougule, A., Mann, J., Kelly, M., and Larsen, G.: Modeling Atmospheric Turbulence via Rapid Distortion Theory: Spectral Tensor of Velocity and Buoyancy, *Journal of the Atmospheric Sciences*, 74, 949–974, <https://doi.org/10.1175/JAS-D-16-0215.1>, 2017.

Dellwik, E., Mann, J., and Bingöl, F.: Flow tilt angles near forest edges – Part 2: Lidar anemometry, *Biogeosciences*, 7, 1759–1768, <https://doi.org/10.5194/bg-7-1759-2010>, 2010.

Eberhard, W. L., Cupp, R. E., and Healy, K. R.: Doppler Lidar Measurement of Profiles of Turbulence and Momentum Flux, *J. Atmos. Ocean. Technol.*, 6, 809–819, [https://doi.org/10.1175/1520-0426\(1989\)006<0809:DLMPO>2.0.CO;2](https://doi.org/10.1175/1520-0426(1989)006<0809:DLMPO>2.0.CO;2), 1989.

Hansen, K. S. and Larsen, G. C.: Characterising Turbulence Intensity for Fatigue Load Analysis of Wind Turbines, *Wind Eng.*, 29, 319–329, <https://doi.org/10.1260/030952405774857897>, 2005.

Harris, M., Hand, M., and Wright, A.: Lidar for Turbine Control, *Tech. Rep. NREL/TP-500-39154*, National Renewable Energy Laboratory, 2006.

Hojstrup, J.: A statistical data screening procedure, *Meas. Sci. Technol.*, 4, 153–157, 1993.

Kim, D., Kim, T., Oh, G., Huh, J., and Ko, K.: A comparison of ground-based LiDAR and met mast wind measurements for wind resource assessment over various terrain conditions, *J. Wind Eng. Ind. Aerodyn.*, 158, 109 – 121, <https://doi.org/10.1016/j.jweia.2016.09.011>, 2016.

Kindler, D., Oldroyd, A., Macaskill, A., and Finch, D.: An eight month test campaign of the Qinetiq ZephIR system: Preliminary results, *Meteorol. Z.*, 16, 479–489, <https://doi.org/10.1127/0941-2948/2007/0226>, 2007.

Larsén, X. G., Larsen, S. E., and Petersen, E. L.: Full-Scale Spectrum of Boundary-Layer Winds, *Bound. Lay. Meteorol.*, 159, 349–371, <https://doi.org/10.1007/s10546-016-0129-x>, 2016.

Mann, J.: The spatial structure of neutral atmospheric surface-layer turbulence, *J. Fluid Mech.*, 273, 141–168, <https://doi.org/10.1017/S0022112094001886>, 1994.

Mann, J.: Wind Field Simulation, *Probab. Eng. Mech.*, 13, 269–282, [https://doi.org/10.1016/S0266-8920\(97\)00036-2](https://doi.org/10.1016/S0266-8920(97)00036-2), 1998.

Mann, J., Peña, A., Bingöl, F., Wagner, R., and Courtney, M. S.: Lidar scanning of momentum flux in and above the surface layer, *J. Atmos. Oceanic Technol.*, 27, 959–976, <https://doi.org/10.1175/2010JTECHA1389.1>, 2010.

Medley, J., Wylie, S., Slinger, C., Harris, M., des Roziers, E. B., Pitter, M., and Mangat, M.: Classification of ZephIR 300 Lidar at the UK Remote Sensor Test Site, *EWEA Resource Assessment 2015*, 2015.

Mikkelsen, T. K.: On mean wind and turbulence profile measurements from ground-based wind lidars: limitations in time and space resolution with continuous wave and pulsed lidar systems, *European Wind Energy Conference and Exhibition 2009*, 6, 4123–4132, 2009.

5 Newman, J. F., Klein, P. M., Wharton, S., Sathe, A., Bonin, T. A., Chilson, P. B., and Muschinski, A.: Evaluation of three lidar scanning strategies for turbulence measurements, *Atmos. Meas. Tech.*, pp. 1993–2013, <https://doi.org/10.5194/amt-9-1993-2016>, 2016.

10 Peña, A., Hasager, C. B., Gryning, S.-E., Courtney, M., Antoniou, I., and Mikkelsen, T.: Offshore Wind Profiling Using Light Detection and Ranging Measurements, *Wind Energy*, 12, 105–124, <https://doi.org/10.1002/we.283>, 2009.

15 Peña, A., Floors, R., Sathe, A., Gryning, S.-E., Wagner, R., Courtney, M. S., Larsen, X. G., Hahmann, A. N., and Hasager, C. B.: Ten Years of Boundary-Layer and Wind-Power Meteorology at Høvsøre, Denmark, *Bound.-Lay. Meteorol.*, 158, 1–26, <https://doi.org/10.1007/s10546-015-0079-8>, 2016.

20 Pedersen, A. T., Montes, B. F., Pedersen, J. E., Harris, M., and Mikkelsen, T.: Demonstration of short- range wind lidar in a high-performance wind tunnel, in: Poster presented at EWEA 2012 - European Wind Energy Conference & Exhibition, Copenhagen, Denmark., 2012.

25 Sathe, A. and Mann, J.: Measurement of turbulence spectra using scanning pulsed wind lidars, *J. Geophys. Res.-Atmos.*, 117, D01201, <https://doi.org/10.1029/2011JD016786>, 2012.

30 Sathe, A. and Mann, J.: A review of turbulence measurements using ground-based wind lidars., *Atmos. Meas. Tech.*, 6, 3147–3167, <https://doi.org/10.5194/amt-6-3147-2013>, 2013.

35 Sathe, A., Mann, J., Gottschall, J., and Courtney, M. S.: Can wind lidars measure turbulence?, *J. Atmos. Ocean. Tech.*, 28, 1175–1190, <https://doi.org/10.1175/JTECH-D-10-05004.1>, 2011.

40 Sathe, A., Mann, J., Vasiljevic, N., and Lea, G.: A six-beam method to measure turbulence statistics using ground-based wind lidars, *Atmos. Meas. Tech.*, 8, 729–740, <https://doi.org/10.5194/amt-8-729-2015>, 2015.

45 Schlipf, D., Trabucchi, D., Bischoff, O., Hofsäß, M., Mann, J., Mikkelsen, T., Rettenmeier, A., Trujillo, J. J., and Kühn, M.: Testing of frozen turbulence hypothesis for wind turbine applications with a scanning LIDAR system, *ISARS 2010 : 28-30 June, Paris*, 2010, <https://doi.org/10.18419/opus-3915>, 2010.

50 Smith, D. A., Harris, M., Coffey, A. S., Mikkelsen, T., Jørgensen, H. E., Mann, J., and Danielian, R.: Wind lidar evaluation at the Danish wind test site Høvsøre, *Wind Energy*, 9, 87–93, <https://doi.org/10.1002/we.193>, 2006.

55 Sonnenschein, C. M. and Horrigan, F. A.: Signal-to-Noise Relationships for Coaxial Systems that Heterodyne Backscatter from the Atmosphere, *Appl. Optics*, 10, 1600, <https://doi.org/10.1364/AO.10.001600>, 1971.

60 Taylor, G. I.: The Spectrum of Turbulence, *P. Roy. Soc. A-Math. Phy.*, 164, 476–490, <https://doi.org/10.1098/rspa.1938.0032>, 1938.

65 Wagner, R., Mikkelsen, T., and Courtney, M.: Investigation of turbulence measurements with a continuous wave, conically scanning LiDAR, *Risø-R-1682(EN)*, 2009.

70 Willis, G. E. and Deardorff, J.: On the use of Taylor's translation hypothesis for diffusion in the mixed layer, *Q. J. Roy. Meteor. Soc.*, 102, 817–822, <https://doi.org/10.1002/qj.49710243411>, 1976.

75 Wyngaard, J. C.: Measurement of small-scale turbulence structure with hot wires, *J. Phys. E: Sci. Instrum.*, 1, 1105–1108, <https://doi.org/10.1088/0022-3735/1/11/310>, 1968.