

Dear Jose,

Thank you for your feedback. We respectfully disagree with your assessment that major revisions were not performed on the manuscript. At the suggestion of the reviewers, our revisions had included a major reorganization of the text and significant additions to the analysis by adding new plots that show the differences between the virtual towers in Figures 6, 7, and 8. Additionally, care had been taken to eliminate vague and qualitative statements.

However, to address your concerns we took additional care to further improve the manuscript and implemented another round of major revisions (please see the latexdiff below for details). While some qualitative statements may remain, they are due to the lack of a true reference measurement. Such reference data would be necessary to fully validate the VTs qualitatively. This is now explicitly discussed in the new version of the manuscript. Additionally, to avoid any further confusion, the term “homogeneous” has been replaced with “Quasi-2D” when referencing some of the presented case studies, and we describe in detail the criteria applied when selecting these Quasi-2D cases.

Other minor changes include making unit formatting consistent, naming the meteorological towers consistently, and adding the DOIs for each dataset.

We hope you will find the new version to be much improved and meeting the standards for publication in AMT, or at least for sharing it one more time with the reviewers.

Best regards,

Tyler, Petra, Norman, Robert

# Analysis of Flow in Complex Terrain Using Multi-Doppler Lidar Retrievals

Tyler Bell<sup>1,2</sup>, Petra Klein<sup>1,2</sup>, Norman Wildmann<sup>2</sup>, and Robert Menke<sup>3</sup>

<sup>1</sup>School of Meteorology, University of Oklahoma, Norman, OK, USA

<sup>2</sup>Cooperative Institute for Mesoscale Meteorological Studies, University of Oklahoma, Norman, OK, USA

<sup>3</sup>Deutsches Zentrum für Luft- und Raumfahrt e.V., Münchener Str. 20, 82234 Weßling, Germany

<sup>4</sup>Technical University of Denmark - DTU Wind Energy, Fredriksborgvej 399, Building 118, 4000 Roskilde, Denmark

**Correspondence:** Tyler Bell (tyler.bell@ou.edu)

**Abstract.** The Perdigão Field Experiment set out to study atmospheric flows in complex terrain and to collect a high-quality dataset for the validation of meso- and micro-scale models. An Intensive Observation Period (IOP) was conducted from May 1, 2017 through June 15, 2017 where a multitude of meteorological instruments were deployed in a study area with the unique feature of two nearly parallel, 5 km long ridges separated by a 1.4 km wide valley perpendicular to the prevalent wind directions in the region. An essential part of the instrumentation were scanning Doppler lidars (DL) strategically placed to capture flow features above the ridges and in the valley. The arrangement of DLs presented an opportunity to create virtual towers where range height indicator (RHI) scans of individual instruments intersected. By combining DLs it is possible to retrieve multiple snapshots of the wind field in the form of a virtual tower. In total, four virtual towers distributed along the valley are retrieved every 15 minutes. The virtual towers typically cover heights from 50 m to 600 m above the valley floor. The Perdigão project also included a network of meteorological towers of different heights with wind measurements at an exceptionally high density (55 towers with 195 sonic anemometers) that are critical for studying turbulent exchange processes but provide only limited information about the complex interactions between the flow inside the valley and higher up across the ridges. The virtual towers extend the range of traditional in-situ observations and can fill in low altitude areas where traditional lidar processing techniques may have trouble retrieving accurate wind speeds due to the high spatial flow variability and prevalence of significant vertical motions in complex terrain. Along with the wind speed and direction, uncertainties of the virtual tower retrieval were analyzed. A case study of a nighttime stable boundary-layer flow with wave features in the valley is presented to illustrate the usefulness of the virtual towers in analyzing the spatially complex flow over the ridges during the Perdigão campaign.

## 1 Introduction

Scanning Doppler lidar (DL) systems have proven to be useful in many different sectors of atmospheric study. They have been used for boundary layer meteorology (Klein et al., 2015; Fernando et al., 2015), wind energy research (Banta et al., 2015; Newman et al., 2016; Choukulkar et al., 2017), and other various fields of study (Sathe and Mann, 2013; Bonin et al., 2017). DLs measure the radial velocity along a beam in a high spatial and temporal resolution. Different scanning strategies

can give different insights into the flow field surrounding the DLs. For example, a plan position indicator (PPI) scan gives a representation of the spatial variability in the horizontal by scanning at a fixed elevation and only moving in azimuth, while a range height indicator (RHI) scan essentially gives a cross section of the flow by staying at a fixed azimuth, but changing elevation.

5 By applying assumptions to the flow, one can use these different scan strategies to derive the two-dimensional (2D) and three-dimensional (3D) wind from a single DL. The simplest techniques to derive the wind speed and direction are the velocity azimuth display (VAD) technique (Browning and Wexler, 1968) and the Doppler beam swinging (DBS) technique (Strauch et al., 1984). However, these techniques make the assumption that the wind is horizontally homogeneous in order to retrieve the wind speed and direction; this is often not the case in boundary layer meteorology and can introduce errors into the wind estimates.

10 One area where the assumption of horizontal homogeneity is likely invalid is in the study of complex terrain, where different beams of a scan pattern may sample different flow features. While in flat homogeneous terrain the accuracy of wind speed measurements with conically scanning DLs was found to be within a few percent, in complex terrain errors as large as 10 % are not uncommon (Bingöl et al., 2009; Bradley et al., 2015). Correction techniques such as Leosphere's Flow Complexity Recognition (FCR) algorithm ~~try to correct~~ focus on correcting errors introduced by terrain by using simple flow models (~~see <https://www.ieawindtask32.org/wp-content/uploads/2017/11/GM2017-Leosphere-Windeube-FCR-measurements.pdf>~~) ~~(see Leosphere)~~. Other

15 techniques using a single DL have been developed to limit ~~this assumption~~ the assumption of horizontal homogeneity. (Waldteufel and Corbin, 1979; Wang et al., 2015).

~~While retrieving the 3D wind field from a single DL requires some potentially invalid assumptions, this can potentially be solved by~~ In complex terrain, retrievals using multiple DLs with beams that intersect in the same volume of air may be

20 needed to accurately measure the 3D wind field. By combining multiple different radial wind vectors, one can solve the 3D transformation matrix to get the 3D wind vector without applying any assumptions to the flow. There are multiple ways that this can be done. For example, co-planar RHI scans were used in the Terrain-induced Rotor Experiment to study rotors caused by mountains (Hill et al., 2010), multi-Doppler scan strategies were used in the Perdigão 2015 and 2017 experiments to measure wind turbine wake deficits in highly complex terrain (Barthelmie et al., 2018; Menke et al., 2018b; Wildmann et al., 2018a, b),

25 and virtual towers were used in the Joint Urban Experiment in 2003 (Calhoun et al., 2006).

Multi-Doppler measurements can augment more traditional observation strategies and are highly adaptable to an experiment's science objectives, but they are not perfect. Though some precision is lost due to volumetric averaging, the results are ~~still quite accurate~~ (Damian et al., 2014; Debnath et al., 2017) generally accurate to within  $0.2 \text{ m s}^{-1}$  (Damian et al., 2014; Pauscher et al., 2017). Higher levels of uncertainty have been found with more complicated scan strategies (Choukulkar et al., 2017). For multi-

30 Doppler retrievals, the magnitude of uncertainty was directly related to the ability to precisely coordinate scans (Wildmann et al., 2018b). Additionally, higher levels of uncertainty are present during unstable conditions (Newman et al., 2016).

This study ~~looks to answer~~ assesses how well traditional methods and 2D and 3D multi-Doppler measurements perform in a complex setting ~~and provide an analysis of uncertainties that the terrain introduces~~ a analysis of terrain induced uncertainties to both multi-Doppler measurements and ~~more traditional single-Doppler~~ traditional single Doppler wind estimation tech-

**Table 1.** Characteristics of the RHI scans performed by each DL used in this study and the virtual towers they were used for.

Lidar ID	Lidar Number	Azimuth	Min. Elevation	Max Elevation	Update Time	Elevation ASL	Virtual Towers
OU CLAMPS	131	318 °	7.5 °	175 °	15 min	297 m	1,2,3,4
DLR #1	172	236.1 °	-7.4 °	45.1 °	~30 s	454 m	3
DLR #2	109	236.4 °	8.5 °	122 °	~30 s	316 m	3
WS2	102	54.7 °	-18.8 °	15.7 °	<del>~30</del> <u>24</u> s	474 m	2
WS5	105	52.3 °	-12.8 °	21.7 °	<del>~30</del> <u>24</u> s	476 m	4
WS6	106	42.2 °	-16.8 °	17.7 °	<del>~30</del> <u>24</u> s	473 m	1


5 niques. One challenge was however the fact that all of the techniques applied have limitations and a true reference data set for quantifying the measurement errors did not exist. This is further addressed in Section 4.1.

## 2 The Experiment

The data presented in this study were collected during the Perdigão Field Campaign during the Spring and early summer of 2017, which is one of multiple experiments conducted in order to build the New European Wind Atlas (NEWA) (Mann et al., 2017). As wind energy becomes more popular, the need for models to accurately predict energy output from wind resources becomes increasingly important. ~~The goal of NEWA is to provide~~ NEWA provides a standard dataset of wind energy resources for Europe through the creation of new and improved meso- and micro-scale models and modeling techniques. One important aspect of developing these modeling techniques is verifying their accuracy against ~~a high-quality dataset~~ high quality datasets. Therefore, one of the main goals in the creation of the NEWA is developing new modeling methodologies which have been tested against observations from various measurement campaigns conducted in different landscapes and climates.

15 To validate numerical models, detailed measurements of the flow at multiple scales are required (Banta et al., 2013; Fernando et al., 2015). To this day, data collected from the Askervein Hill project in 1982 (Taylor and Teunissen, 1987) are still a standard dataset to validate models and to test how they handle flow over complex terrain. Some of the experiments taking place under the NEWA are meant to augment the measurements from Askervein while adding another layer of complexity with observation campaigns focusing on flow phenomena that current modeling techniques are known to have difficulties with (e.g. vegetation  
20 canopies, steep slopes, double ridge configuration).

The Perdigão Experiment is one of the measurement campaigns that took place for NEWA (Mann et al., 2017). Perdigão is a small municipality located in central Portugal that sits adjacent to two parallel ridges of nearly equal height with steep slopes separated by a valley called Vale de Cobreão. The ridge axes extend northwest to southeast and are approximately 1.4 km apart (Figure 1). Previous wind-tunnel and numerical studies (e.g. Lee et al., 1987; Grubišić and Stiperski, 2009; Rapp and Manhart, 2011) have often focused on the flow over sinusoidal hills. Two parallel ridges is the best approximation in nature to study flow over periodic, sinusoidal type terrain.

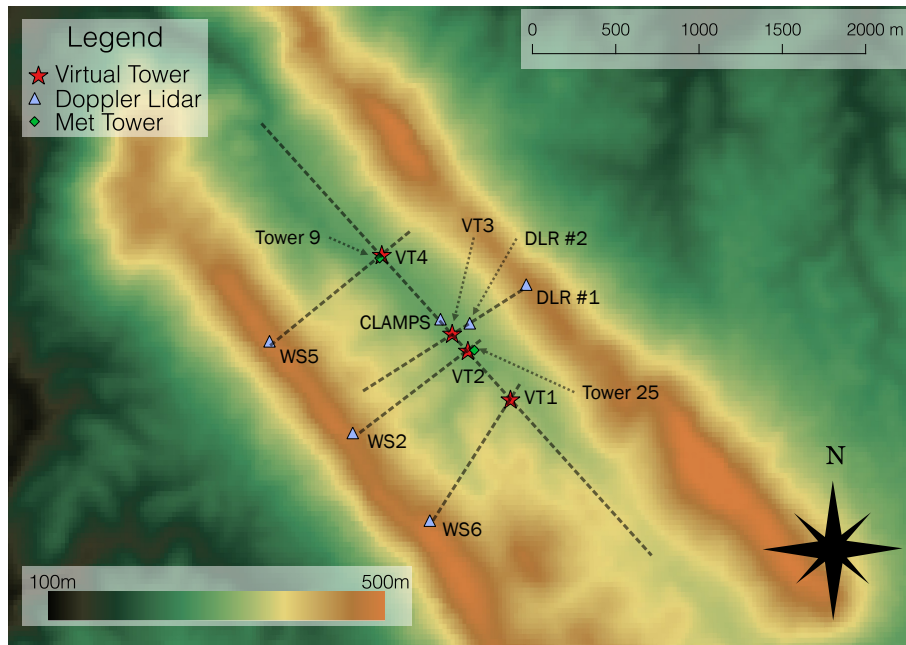

**Figure 1.** Map of DLs, meteorological towers, and virtual towers at the Perdigão site. The color fill corresponds to the height of the terrain above sea-level, red stars are virtual tower locations, blue triangles are DL locations, and green diamonds are instrumented meteorological towers. Tower 9 [NW\\_07](#) is a 60 m tower and Tower 25 [SE\\_09](#) is a 100 m tower. CLAMPS was located at the Orange Grove site.

Additionally, there is a single 2 MW wind turbine located on the southwest ridge. Wind resources are significantly affected by terrain and land cover. For example, winds at hub height are much higher at the top of a hill than they are on the lee side of the hill. The flow on the lee side of the hill, depends largely on the stability conditions, wind speeds, etc. These conditions are important when determining sites where wind turbines will consistently be able to produce energy.

Leading up to the Intense Observation Period (IOP) in the Spring of 2017, a meteorological tower had been operating on the SW ridge for a few years. This was used to construct a climatology of the wind directions over the ridge. According to the climatology, winds often were found to be directed perpendicular to the two ridges (Vasiljević et al., 2017). This provided a good opportunity to study the flow in a double-ridge setting. To gather the desired observations, a multi-national group of scientists from Europe and the United States converged in Perdigão to measure complex flow at unprecedented spatio-temporal scales. A combination of meteorological towers, DLs, radiometers, and other remote and in-situ platforms were dispersed throughout the valley (see Fernando et al., 2019).

## 2.1 Virtual Towers

For this study, multiple different DL configurations were jointly analyzed to retrieve the 3D wind vector in the valley. In total, 6 DLs from 3 different institutions were combined to retrieve virtual towers multiple times per hour. Figure 1 shows the location of the DLs considered in this study. Details about the scanning strategies for each DL can be found in Table 1.

The University of Oklahoma (OU) deployed the Collaborative Lower Atmospheric Mobile Profiling System (~~CLAMPS~~ Wagner et al., 2019) at the Orange Grove site, which is located inside the valley and served as central observation hub with a multitude of in-situ and profiling instruments during the IOP (see Fig. 5 in Fernando et al., 2019). CLAMPS includes a Halo Photonics Scanning DL that performed both cross- (NE to SW) and along-valley (NW to SE) RHI scans every 15 minutes. In addition, a 70 degree PPI scan was performed every 15 minutes preceding the RHIs. The remainder of the time, the DL was in stare mode to get vertical velocity statistics. During Perdigião, the CLAMPS DL was configured such that the first usable range gate was 75 m. CLAMPS also utilizes an Atmospheric Emitted Radiance Interferometer (AERI, Knuteson et al., 2004a, b) and a HATPRO Microwave Radiometer (Rose et al., 2005) for boundary layer temperature and humidity profiling (Wagner et al., 2019).

The University of Colorado (CU) operated a Leosphere V1 Windcube Profiling DL at the Orange Grove site, co-located with the ~~OU~~ CLAMPS DL. The CU DL measures the wind speed and direction using the DBS technique (see Rhodes and Lundquist, 2013).

The German Aerospace Center (DLR) contributed three Leosphere Windcube 200S scanning DLs upgraded with the Technical University of Denmark's (DTU) WindScanner software. Two of these DLs performed continuous RHI scans in the cross-valley direction, which resulted in an RHI approximately every 30 seconds. One of these DLs was located up on top of the NE ridge (DLR #1) and performed RHI scans to the SW, capturing one horizontal component of the wind. The other DL (DLR #2) was located on the slope of the NE ridge and performed RHIs to the SW as well.

In addition to the DLR DLs, DTU operated eight DLs of the same kind on top of the ridges. Six of these were configured to do co-planar scans inside the valley so the horizontal wind in the plane and the vertical velocity could be retrieved. These DLs also operated in a continuous scan mode and produced a new RHI every ~~30~~ 24 seconds.

The RHIs from DLR #1 and DLR #2 overlapped in a co-planar fashion, so by combining these DLs with the ~~OU~~ CLAMPS DL scans, it is possible to retrieve the three-dimensional wind field in the form of a virtual tower where the three planes intersect. Due to its positioning, DLR #2 was able to capture more of the vertical component of the wind in the location of the virtual tower, which allowed the retrieval of the three-dimensional wind vector.

Regarding the DTU DLs, only the DLs from each co-planar cross section that reached deeper into the valley were used. This resulted in 3 possible 2D horizontal wind retrievals using WS2, WS5, and WS6. The 2D retrievals assume there is no vertical velocity, and thus only provide the along- and cross-valley wind components.

In total, four virtual towers distributed along the valley are retrieved every 15 minutes when the CLAMPS DL performed its along-valley RHI. The virtual towers typically cover heights from ~~50m to 600m~~ 50 m to 600 m above the valley floor depending on the minimum and maximum height of RHI intersection. ~~None of the DLs used in the retrievals scanned in a coordinated fashion. However, overlapping sampling volumes provide an opportunity for testing~~ It should be noted, that different to previous virtual tower retrievals (Calhoun et al., 2006; Hill et al., 2010; Damian et al., 2014; Pauscher et al., 2016; Debnath et al., 2017) the DL data used in our study were not collected using coordinated scans that were specifically programmed for 2D and 3D wind retrievals. Instead, our objective was to test the quality of virtual tower retrievals in complex flows using data from uncoordinated scans with overlapping sampling volumes.

## 5 3 Methods

~~Data from~~ When combining data from the uncoordinated DL scans in the virtual tower retrievals several analysis steps were necessary. First, data from each DL were ~~first~~ converted to a common coordinate system. Once the XY location of the RHI intersection (i.e. the virtual tower) was determined, minimum and maximum heights were manually determined for each of the virtual towers. ~~The A~~ vertical spacing of ~~the virtual tower points is~~ 10 m. ~~This spacing was selected~~ was selected for the virtual towers to insure that ~~each tower point we~~ had unique DL range gates to derive the 3D/2D winds for each height. Using the location of these points, the azimuth ( $\hat{\theta}_i$ ) and elevation ( $\hat{\phi}_i$ ), relative to each DL, was calculated and used to linearly interpolate the radial velocity from each DL to a new radial velocity at the point of the tower ( $\hat{V}_{ri}$ ). We evaluated the difference of cubic spline interpolation to linear interpolation and found that differences of less than  $0.1 \text{ ms}^{-1} \text{ m s}^{-1}$  occur, which is well within the uncertainty we set for the DL radial wind speed measurement. Since neither cubic ~~splines nor linearity~~ spline nor linear interpolation can be assumed ~~for to be a true representation of~~ the atmospheric flow field, we decided ~~for to apply~~ the simpler, computationally more efficient method of linear interpolation. ~~From there, retrieving the 3D/2D wind vector is as simple as solving the 3D transformation matrix for the radial velocity vector to get~~

$$\begin{bmatrix} u \\ v \\ w \end{bmatrix} = \begin{bmatrix} \sin \theta_1 \cos \phi_1 & \cos \theta_1 \cos \phi_1 & \sin \phi_1 \\ \sin \theta_2 \cos \phi_2 & \cos \theta_2 \cos \phi_2 & \sin \phi_2 \\ \sin \theta_3 \cos \phi_3 & \cos \theta_3 \cos \phi_3 & \sin \phi_3 \end{bmatrix}^{-1} \begin{bmatrix} \hat{V}_{r1} \\ \hat{V}_{r2} \\ \hat{V}_{r3} \end{bmatrix} \quad (1)$$

where  $u$  is the velocity in the east-west direction,  $v$  is the velocity in the north-south direction,  $w$  is the vertical velocity,  $V_{ri}$  is the interpolated radial velocity from the DL,  $\phi_i$  ~~is are~~ the elevation, and  $\theta_i$  ~~is the azimuth angle are~~ the azimuth angles.

Temporal resolution of the virtual towers is limited to the time resolution of the CLAMPS RHI. Since the scans were not coordinated to sample the same volume of space simultaneously, a time window needed to be determined. Choukulkar et al. (2017) used a time window of 15 s when comparing uncoordinated multi-Doppler retrievals to a sonic anemometer and found reasonable agreement. For this study, all the time periods considered ~~take took~~ place overnight, which generally had more steady flow due to the lack of turbulent mixing. Therefore, a time window of 60 s ~~was is~~ used. While most of the data fell ~~well~~ within this window, there ~~were are~~ time periods late in the IOP where retrievals ~~were are~~ not possible due to the CLAMPS RHI starting too late to be captured in the 60 s window.

### 3.1 Uncertainty Analysis


Possible uncertainties contained in the retrieval ~~were are~~ analyzed using an idealized scheme derived from the methods discussed in Hill et al. (2010):

$$\epsilon_{u_i} = \left[ \sum_{j=1}^N \left( \frac{\partial u_i}{\partial r_j} \right)^2 (\epsilon_{r_i})^2 \right]^{1/2} ; i = 1, 2, 3 \quad (2)$$

5 where  $\epsilon_{r_i}$  is the possible random error associated with each DL line-of-sight wind speed measurement,  $u_i$  is the Cartesian velocity component of the wind, and  $r_j$  is the radial velocity vector for each DL. This results in a formula for the error for each velocity component given a combination of the various azimuths, elevations, and ranges for each lidar. For this study, it ~~was~~ is assumed that  $\epsilon_{r_i}$  ~~was is~~ 0.2 m s<sup>-1</sup> based on prior experience with the systems used (Kigle, 2017; Wildmann et al., 2018a). ~~Results are shown in Figure 2. This analysis was done in Using~~ a coordinate system that was aligned with the valley ~~-~~

10 ~~Note of the Perdigao site and choosing parameters representative of the scan configurations of the various DLs used, we computed the uncertainty of the retrieved along-valley, across-valley, and vertical velocity components (Figure 2). The results clearly show~~ that with increasing height ~~(i.e. as beams are scanning at a more vertical position)~~, as the DL beams point increasingly vertical, uncertainties in the horizontal wind components get larger and uncertainties in the vertical velocity get smaller. ~~Also note-It can further be noted~~ that the errors in the horizontal wind components in the cross-valley direction are

15 much larger in the 3D retrieval. This is due to the proximity of VT3 to the ~~OU-CLAMPS~~ DL; gates at much higher elevation angles must be used, meaning less of the horizontal component of the wind in the along valley direction is contained in the ~~radial-velocity~~ measured radial velocities.

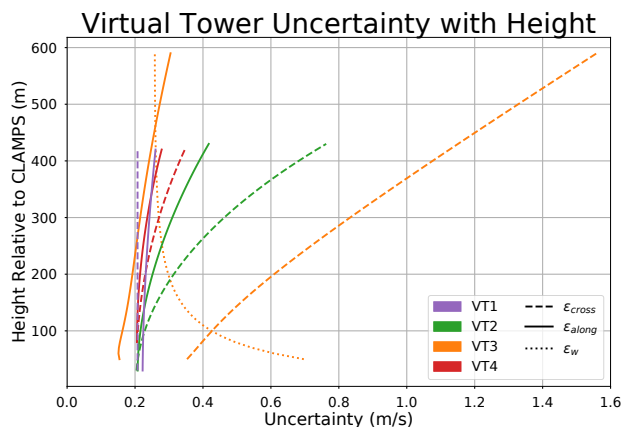


**Figure 2.** Uncertainty from the various virtual towers. Solid lines are uncertainty in along-valley direction, dashed lines are uncertainty in the cross-valley direction, and dotted lines are uncertainty in w. The color corresponds to the virtual tower (see Figure 1). Note that most of the uncertainty is contained in the along valley direction since the CLAMPS DL was scanning at a high elevation angle (elevations used ranged from 21° to 77°). Additionally, the further away the virtual tower was from CLAMPS (i.e., the lower the elevation angle had to be), the lower the uncertainty.

### 3.2 Impact of Terrain on 2D towers

5 Since ~~multiple virtual towers were only able to retrieve we had only one site where all three components of the wind vector could be retrieved but had multiple 2D virtual tower sites where~~ the horizontal wind vectors were retrieved assuming that the vertical wind velocity is negligible, it is important to quantify the ~~amount of error this may cause given they were in errors~~



introduced in the 2D retrievals. This is particularly important in complex terrain where large vertical velocities were are often present. To do this, a theoretical idealized setup was constructed (Figure 3). DL1 and DL2 are fixed in place, but DL3 is allowed to move in range away from the tower, thereby decreasing the elevation angle required to observe the same point. This setup is meant to mimic the DL placements for the 3D tower (see VT3 in Figure 1). For assessing the errors introduced by neglecting the vertical wind velocity in the 2D uncertainty calculations, virtual towers only DL1 and DL3 were used are then used wind retrievals.

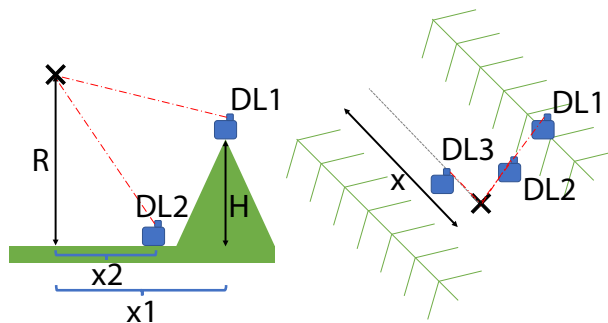


**Figure 3.** Idealized setup to examine the errors associated with neglecting the vertical velocity and only producing 2D virtual towers. The setup is meant to closely mimic the positions of the CLAMPS DL, DLR #1, and DLR #2 used in the 3D virtual tower. DL3 is varied along x to simulate different elevation angles.

One can then set a Next, we selected different 3D wind speed and direction speeds and directions at the intersection of all the DL beams and calculate calculated the radial velocities that are observed by each DL by rearranging Equation 1. By only using the radial velocities from DL3 and DL1, a 2D retrieval similar to the 2D retrievals done for the real virtual towers can be simulated (with one DL on top of the ridge and with the CLAMPS system inside the valley). However, these radial velocities will contain some component of vertical motion that will violate for fully 3D flow fields, the assumptions used for the 2D towers therefor causing errors. In order to study the effect of the strong vertical velocities observed by the retrievals are violated and contributions of the vertical stare from the CLAMPS DL, multiple vertical velocities were used to motions to the the radial velocities will be falsely projected into horizontal motions causing errors in the along and across valley wind components. Multiple vertical velocities were selected that mimic the range of vertical velocities observed by the vertical stare from CLAMPS the observed vertical stare data collected with the CLAMPS DL throughout the IOP, which allows us to get quasi-realistic assessments of the errors inherent in the 2-D virtual tower retrievals.

Figure 4 shows expected errors in horizontal wind speed and direction that arise if the vertical component of the wind is assumed to be zero. The dashed vertical lines shown in Figure 4 indicate the errors that can be expected for the various virtual towers at the Perdiagao site given the location of the different DLs employed in the retrievals. It becomes immediately apparent that not accounting for vertical velocities can introduce large errors in wind direction estimation at ridge height. Vertical velocities as large as  $2 \text{ m s}^{-1}$  were often observed in the vertical stare CLAMPS DL vertical stares, which can cause

errors in wind direction estimation to be near 40 degrees if the retrievals only use two DLs. Due to the close proximity to CLAMPS, VT3 would have been the most erroneous 2D retrieval. However, it was possible to retrieve the 3D winds from this location.

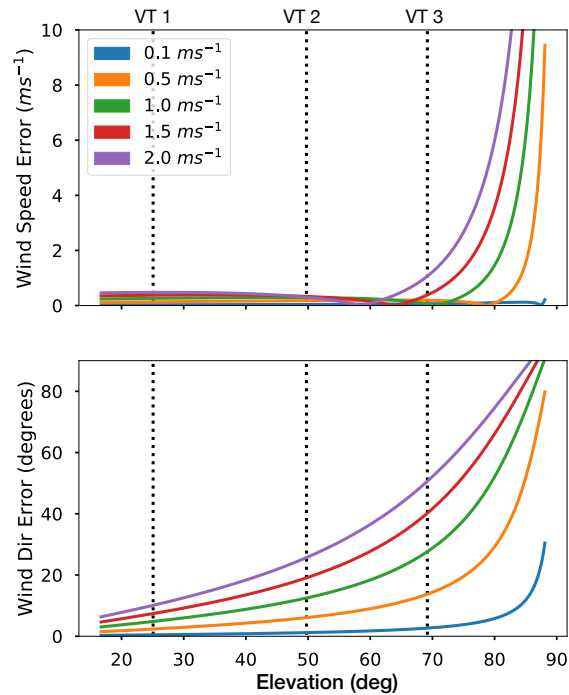

**Figure 4.** Wind speed and direction errors associated with neglecting the vertical velocity in 2D virtual towers. Results are for  $R=300\text{m}$  and  $H=200$  as depicted in Figure 3. These values were chosen to mimic virtual tower measurements slightly above ridge height. The line colors correspond to different vertical velocities examined. The vertical lines correspond to the elevation for VT1, VT2, and VT3 for the given  $R$  and  $H$ , thus these are the expected error for this point in space for these VTs. Note that as vertical velocity increases, error in wind direction estimation increases even at relatively low elevation angles.

## 10 4 Results

### 4.1 Selected Case Studies

~~To help~~ As mentioned in Section 1, one of the challenges of our study was the fact that none of the data sets available was free of limitations and all DL retrieval methods applied introduced measurement errors. In addition to the systematic uncertainty analyses presented in the previous section, we decided to illustrate the strengths and weakness of the retrieval methods, data from a few different cases selected different retrieval methods by selecting cases from the Perdigão IOP were analyzed. The selected cases were subjectively identified based on the analysis of DL scans and stability profiles. Additionally,

data availability was taken into account. For the following analysis, three cases were considered: one with flow horizontally homogeneous along the length of the valley with ~~with flow patterns of increasing complexity~~. Given the topography of the site, we assumed that the flow can be considered quasi-2D for wind directions perpendicular to the valley, i.e. under such conditions the flow variability along the valley is expected to be small. Note that there can still be a component of the wind directed in the  
10 along valley direction; the distinction is that this component does not vary along the length of the valley contained inside the study domain (i.e. between WS5 and WS6). To insure the flow was quasi-2D, the along valley RHI scans from the CLAMPS DL were visually inspected to ensure any along valley component of the wind was did not vary in the study domain.


We focused the analysis on three cases: first we selected a case with quasi-2D flow and small vertical velocities, ~~one with flow horizontally homogeneous along the length of the valley~~ next we chose a quasi-2D flow case with large vertical velocities, and ~~one case with heterogeneous flow~~ last we selected a fully 3D case with complex flow interactions that are associated with strong variability of the flow along the valley ~~and complex flow interactions~~. The selected days from the Perdigão IOP were subjectively identified based on the analysis of DL scans and stability profiles. Additionally, data availability was taken into account.

By looking at cases that are more horizontally homogeneous ~~For the first case, we would expect that the VTs and single Doppler retrievals agree well, even though the sites vary~~ along the valley, ~~it was possible to put more trust into the single-Doppler wind retrieval methods and allowed more robust comparisons between the virtual tower retrievals. Finding cases with different amounts of vertical motion~~. We argue that in this case, the observed differences between the retrieval methods are primarily caused by measurement errors and uncertainties in the retrieval methods and less by flow variability, i.e. the comparison allows us to assess the measurement errors introduced by different retrieval approaches. The second case, with stronger vertical motions while still being ~~quasi-horizontally-homogeneous made it possible~~ quasi-2D allowed us to analyze the amount of error vertical motion ~~introduced-introduces~~ into the 2D retrievals for a realistic scenario. The observed differences can then also be compared with the results from the systematic study described in Section 3.2 for cross-validation. Once the virtual tower uncertainties were are well characterized, it was is then possible to find a highly complex case to illustrate how the virtual towers can be used to understand ~~complex flow phenomena~~ flow phenomena for a highly complex case.

#### 30 4.1.1 Quasi-homogeneous Quasi-2D Flow With Limited Vertical Motion

~~We~~ For our simplest case, we selected a day with wind speeds that exceeded 7-10  $\text{ms}^{-1}$   $\text{ms}^{-1}$  at or above ridge height with wind directions perpendicular to the ridge axis to minimize. This minimizes the spatial variability of the flow along the length of the valley. Additionally, we target a time period during which the observed vertical velocities were largely less than 0.5  $\text{ms}^{-1}$   $\text{ms}^{-1}$  by examining the vertical stare from the CLAMPS DL. June 12, 2017 from 0-6 UTC fit these criteria well.

During this period, a short wave trough was off the coast of Portugal. Winds at 500 mb were approximately 10  $\text{ms}^{-1}$   $\text{ms}^{-1}$  from the SW. No discernible mesoscale surface features were present as a result of the trough. However, there are a number of mesoscale circulations that dominate the flow around Perdigão (Fernando et al., 2019). Thermal flows from the Serra de Estrela  
5 to the North often compete against synoptic scale flows. This can introduce unique layering of wind speeds and direction near the ground. Winds during this period were 5-10  $\text{ms}^{-1}$   $\text{ms}^{-1}$  throughout the night (Figure 5a) and were out of the northeast

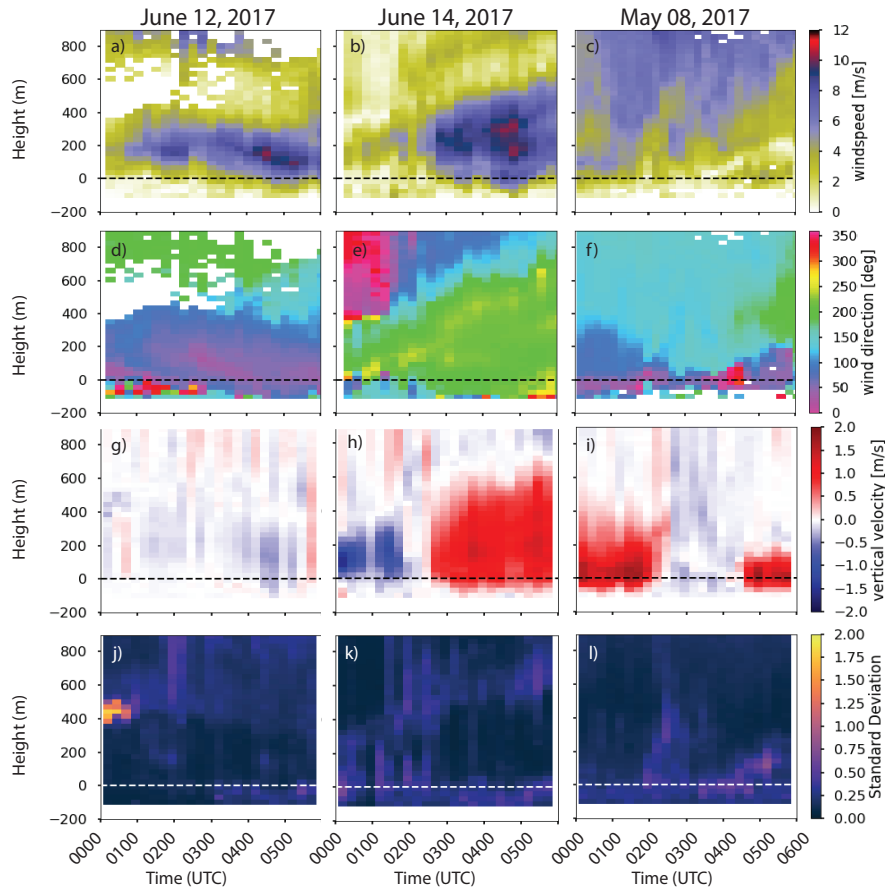


**Figure 5.** Time-height plots of three nights observed by the CLAMPS system. The top row (a-c) is wind speed derived from the 70 degree VAD scan, second row (d-f) are the wind directions from the VAD, the third row (g-i) are 15-minute averages of vertical velocity derived from the CLAMPS vertical stare data, and the bottom row (j-l) is the standard deviation from the averages. The left column shows data from May 8, 2017, the middle column data from June 12, 2017, and the right column for June 14, 2017. The height axis is relative to the base of the wind turbine on the southwest ridge, which is a proxy for ridge height.

(Figure 5d). A strong temperature inversion was present in the valley. Additionally, there was very little vertical motion and turbulence (Figure 5g and 5j). ~~To insure the flow was largely horizontally homogeneous despite the thermal flows and complex thermodynamics, RHI scans were all visually inspected.~~

~~Using this~~ By starting with a relatively simple case, it is possible to directly compare the retrieval methods with minimal violations to the underlying assumptions. Unfortunately, VT4 and VT1 did not meet the retrieval criteria because the **CLMAPS CLAMPS** DL became slightly out of sync with WS5 and WS6 and the time difference between scans did not meet the retrieval criteria. However, for this application, having VT2 and VT3 will suffice since they are the closest to each other spatially ([Figure 1](#)). Differences between all the various systems compared to VT3 are shown in Figure 6 with the various uncertainties


propagated through the difference. The CLAMPS vertical stare indicates that VT3 is over estimating the vertical velocity by approximately  $0.5 \text{ ms}^{-1}$  from -40 m to 180 m (Figure 6c and 6f). In this layer, there are biases in the VT3 wind speed and direction as well (Figure 6 and 6e) while the other instruments fall within their respective levels of uncertainty. The wind speed of VT3 is biased by approximately 10 degrees while the wind speed is biased by approximately  $0.5 \text{ ms}^{-1}$ . Where the VT3 vertical velocities agree with the CLAMPS vertical velocities above 180 m, the wind speeds and direction are within the degree of uncertainty in the retrievals.

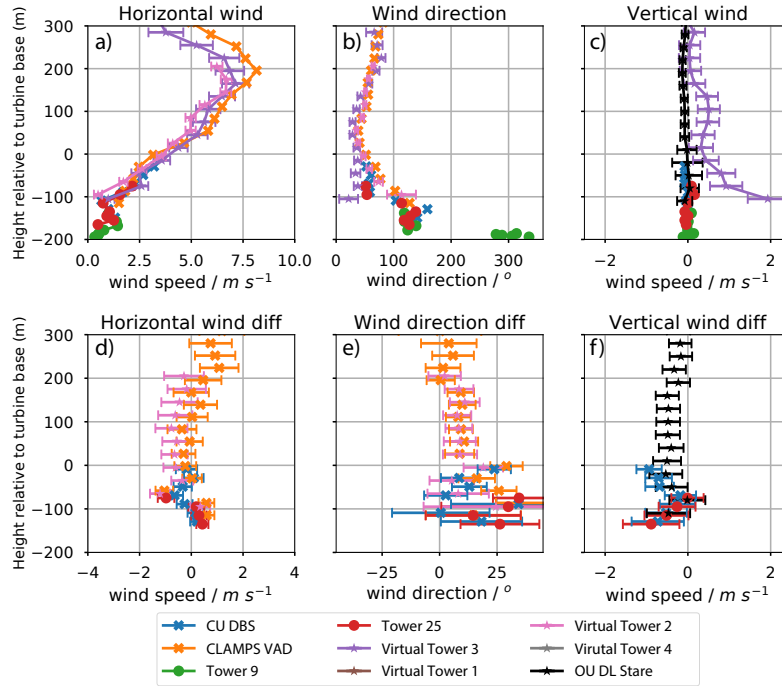

**Figure 6.** Profiles of horizontal wind speed (a), wind direction (b), and vertical velocity (c) of the CU DBS (blue), CLAMPS VAD (orange), VT2 (pink, 2D), VT3 (purple, 3D), [FRSE09-Tower 25](#) (red), and [FRNW07-Tower 9](#) (green) from June 12, 2017 at 2:55 UTC (discussed in Section 4.1.1). Additionally, profiles of the difference relative to VT3 are shown (d-f). VT4 and VT1 are not available for this time period due to DL malfunction and not meeting retrieval criteria, respectively. Note the height axis is relative to the base of the wind turbine, which is a proxy for the height of the ridge. Additionally, the error bars on the [OU-CLAMPS DL Stare](#) profile (f) are the standard deviation of the vertical velocities observed between 1 minute before and 1 minute after the virtual tower time. Uncertainty is propagated through the difference, hence the appearance of errorbars on [FRNW07-Tower 9](#), [FRSE09-Tower 25](#), and the CLAMPS VAD in d-f.

#### 4.1.2 [Quasi-homogeneous-Quasi-2D](#) Flow With Strong Vertical Motion


Similar to the previous case, we again targeted a time period with wind speeds that exceeded 7-10  $\text{ms}^{-1}$  at or above ridge height and wind directions that are perpendicular to the ridge axes, during which the flow along the ridges can be assumed to be more [horizontally homogeneous along the length of the ridges](#) quasi-2D. As with the previous case, RHIs from all the DLs

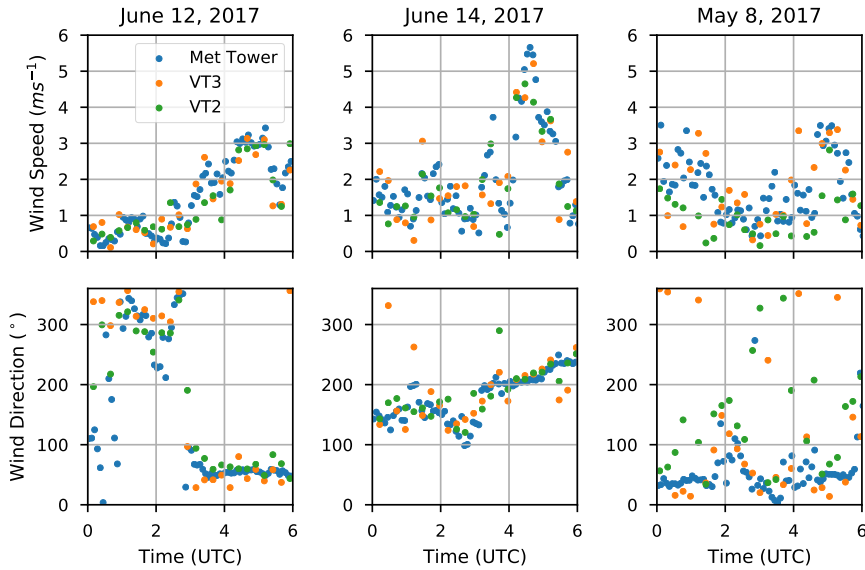

**Figure 7.** Time series of wind speeds (a-c) and wind directions (d-f) from VT3 (orange points), VT2 (green points), and the 5 minute averaged data from [TRSE09-Tower 25](#) (blue points) at 100 m for the three selected cases.

were inspected to ensure this was the case. However, this time we selected a time period with [relatively](#) strong vertical motions greater than  $1 \text{ m s}^{-1}$ . This allowed instantaneous double- and triple-Doppler virtual tower measurements to be [more easily compared-contrasted](#) to single-Doppler measurements (such as VADs). Additionally, the error analysis from Section 3.2 could be validated using the 3D tower. During the overnight hours of June 14, 2017, the shortwave trough mentioned in Section 4.1.1 had moved over the area. The valley was neutrally stratified through the night. Winds after 3 UTC increased to approximately  $10 \text{ m s}^{-1}$  from the southwest (Figure 5b and 5e) and a persistent wave formed, causing large and steady vertical velocities over the CLAMPS site (Figure 5h and 5k).

For this case, consistent differences between the 2D and 3D retrievals can be noted where there are vertical velocities present [in the profile](#). Based on Figure 4, one would expect there to be approximately a 10- to 20-degree difference in wind direction between the fully resolved 3D tower (VT3) and the 2D tower (VT2) at 100 m above ridge height, where the vertical velocity was approximately  $1 \text{ m s}^{-1}$  (Figure 5h and 8c). Figure 8e shows that the wind direction from VT2 differ by 10- to 15-degrees from the wind direction at the CLAMPS VAD and VT3, which lends credit to the previously discussed idealized model and provides a simple way to estimate the uncertainty in the 2D towers due to the vertical motion. There are also slight differences in wind speed present. While VT3 and the CLAMPS VAD agree within the range of uncertainty at ridge height and above, VT2 is consistently indicating  $1 \text{ m s}^{-1}$  higher wind speeds (Figure 8a and 8d), which agrees well with the expected offset in Figure 4. Again, the time series of VT3 and VT2 fall within the range of wind speeds observed by the tower, even capturing the wind speed increase that occurred around 4 UTC (Figure 7c and f).

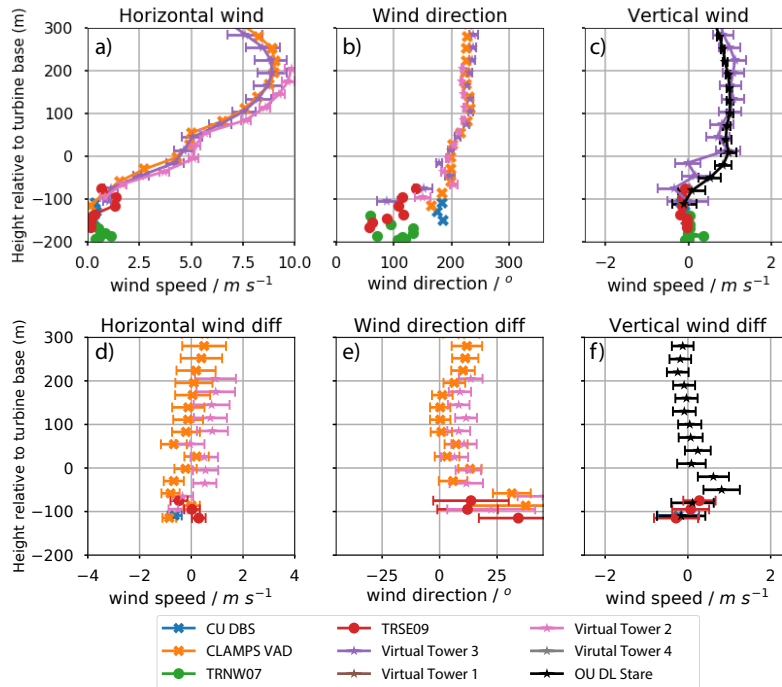

**Figure 8.** Same as Figure 6, but for June 14 at 2:58 UTC when higher vertical velocities were observed.


### 10 4.1.3 Spatially Complex Case

While the two previous cases were selected with the intent of assessing the retrieval methods, ~~the last~~ by limiting the analysis to quasi-2D flows, the final case was chosen to illustrate how useful the virtual towers can be for measuring the spatial variability of features along the valley. A moderately complex case, May 8th 2017, was selected. During this time, there was a low pressure system off the coast of the Iberian Peninsula and a ridge over Perdigão. Aloft, winds over the IOP site were from the southwest at ~~15~~  $15 \text{ m s}^{-1}$  around 500 mb.

The complexity of the flow for May 7-8th is shown in Figure 5. Generally, winds are from the northeast during the night of the 7th. On the 8th, winds veered through the night and were less than ~~3~~  $3 \text{ m s}^{-1}$  at ridge height (Figure 5c and 5f). Wind directions ~~are quite variable~~ vary widely since the mean wind is interacting with various slope flows occurring inside the valley. Numerous periods of strong vertical motion were observed over the CLAMPS site due to waves forming as a result of the terrain. On the 8th, a unique, double wave feature was observed along with a re-circulation within the valley. This occurred ~~during the period of relatively low wind speeds around 05 UTC~~ (Figure 5c). The double wave feature did not appear often ~~during the rest of the IOP and lends itself well as a good test for the virtual tower retrievals, especially the 3D virtual tower,~~ given its complex evolution over time and space.

As mentioned previously, the traditional DL technique for retrieving the wind speed and direction with a single DL is the VAD or the DBS technique. However, in the overnight hours of the Perdigão campaign, the assumption of horizontal

10 homogeneity is often violated due to flow phenomena created by the terrain. This is expected to be particularly prominent at the lowest levels of the VAD or DBS profiles near the surface. We will now examine data from May 8 (Section 4.1.3) to assess the virtual towers in weak, highly variable flow. Using the spatially distributed virtual towers can be helpful to study these type of flows.

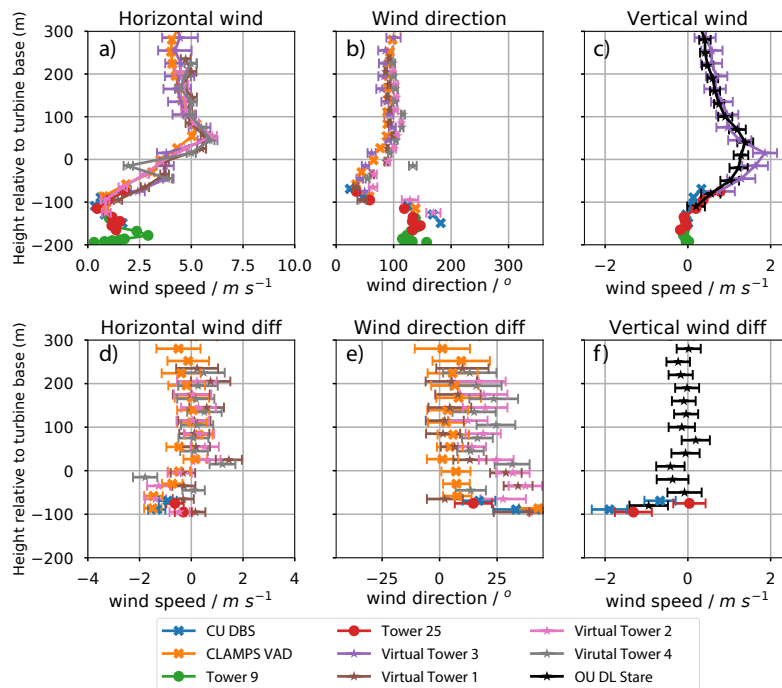


**Figure 9.** Similar to Figure 6, only with VT1 (brown) and VT4 (grey) included. Profiles are from May 8 at 00:32 UTC. In general, the methods agree well above the ridge (generally greater than 100 m), but results begin to get noisy 100 m below ridge height. For the sake of readability, only every 3rd point has been plotted for the virtual towers.

Figure 9 illustrates how single DL retrievals can break down in complex terrain. A few things become apparent from the comparison. In general, the CLAMPS VAD falls within the uncertainty of the VTs in wind speed and direction greater than 100 m above the ridge. Looking closer at VT retrievals above ridge height, there seems to be a consistent offset in wind direction between VT3 and each of the other 2D towers (Figure 9e), which can be explained by the vertical velocities, as discussed in the previous section. This offset gets larger as the profile approaches ridge height where the vertical velocities are larger.

Around 100 m below ridge height, the different techniques start to diverge. Wind speeds stay relatively consistent between each technique below ridge height, but the directions are highly variable. In particular, the wind directions from the CU DBS scan differ greatly from VT3. The CLAMPS VAD tends to agree slightly more, but still significantly differs from the collocated VT3 just below ridge height.



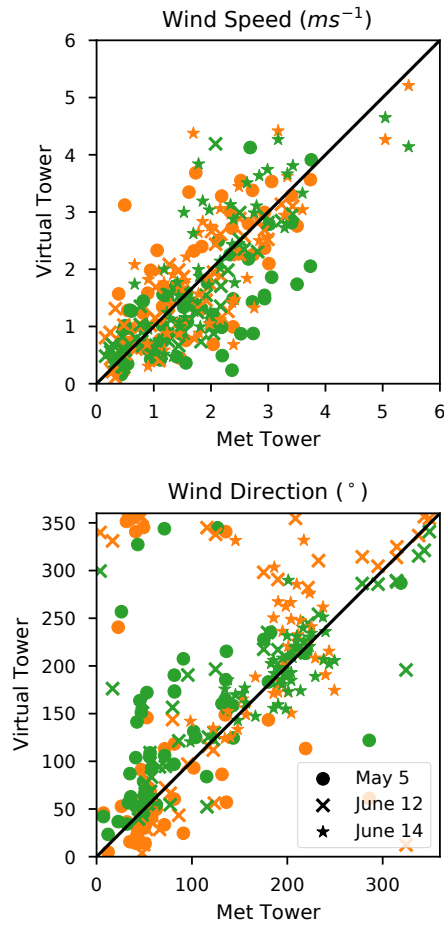

**Figure 10.** Scatter plots of the wind speeds (top) and direction (bottom) from VT2 (green) and VT3 (orange) vs the 5 minute averages of wind speed and direction from [TRSE09: Tower 25](#).


The vertical velocities from VT3 and the CLAMPS DL vertical stare also agree within the uncertainty VT3 above ridge height. Around the same level as the wind speeds and directions, the stare and the 3D virtual tower start to diverge. The differences could be due to each measurement representing a different time. The tower data are 5 minute averages, while the CLAMPS DL stare data and the CLAMPS/DLR virtual tower are instantaneous measurements at slightly different locations, so some differences are to be expected.

Breakdowns in the single Doppler DL retrievals can be observed by closely examining Figures 6 and 8, assuming VT3 is taken to be the most accurate representation of the wind speed and direction. Similar to the highly complex case, there is relatively good agreement well above ridge height, where the flow is less affected by the terrain. Inside the valley however, the

10 flow is less horizontally homogeneous due to the complexity of the valley floor. This causes there to be differences between the virtual towers and the single Doppler retrievals (for example, below -100 m in Figure 8).


In summary, Figure 9 shows how all the towers (both virtual and real) compare to one other. In general, the wind speed all line up nicely. There are differences in the wind direction though. The differences can likely be attributed to the error associated with the 3D towers discussed in Sections 3.2 and 4.1, though they could also be due to the complex flow field as well. As vertical velocities become larger at and slightly below ridge height, the spread in wind direction gets slightly larger. Additionally, the spread is approximately what would be expected from Figure 4. However, there is still noticeable spread in the lowest levels that is likely due to heterogeneity of the terrain. Additionally, Figure 7 shows that VT3 agrees well throughout the night, however VT2 contains a larger spread in wind directions. To determine if these are real, the flow needs to be examined in a spatial sense. Taking into consideration all the sources of uncertainty in the towers, it is possible to examine the flow in and around the valley at a high level of detail. Overall, the virtual towers perform reasonably well during each case study (Figure 10). A slight positive bias in wind direction was present in VT2 since it suffers from the errors described in previous sections.

## 4.2 Spatial Analysis

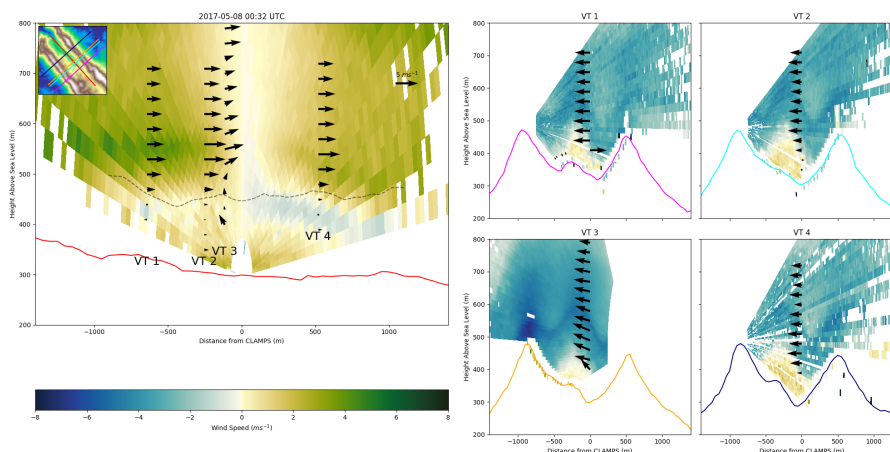

**Figure 11.** Left: Along-valley cross section of the flow for May 8th at 00:32 UTC. The color fill is the radial velocity projected into the horizontal from the  $\Theta$ -CLAMPS RHI used to create the virtual towers. Positive values indicate flow in the +X direction, which is directed to the NW. The overlaid vectors are the components of the virtual towers projected into the plane of the RHI scan, the inset plot shows how the terrain cross sections are oriented and where they are located, and the grey dashed line is the height of the SW ridge. Right: Similar to the along-valley plot on the left, only in the cross valley sense. +X here points to the NE. The color of the line matches the cross section indicated in the terrain inset. This plot corresponds to the profiles shown in Figure 9.

One of the main reasons Vale do Cobrão was chosen for the experiment was the quasi-two-dimensional nature of the ridges; they were thought to be the best way to represent a series of periodic rolling hills and that flow perpendicular to the ridges could also be considered quasi-2D. While this during some nights, periods with lower wind speeds tend to have more spatial

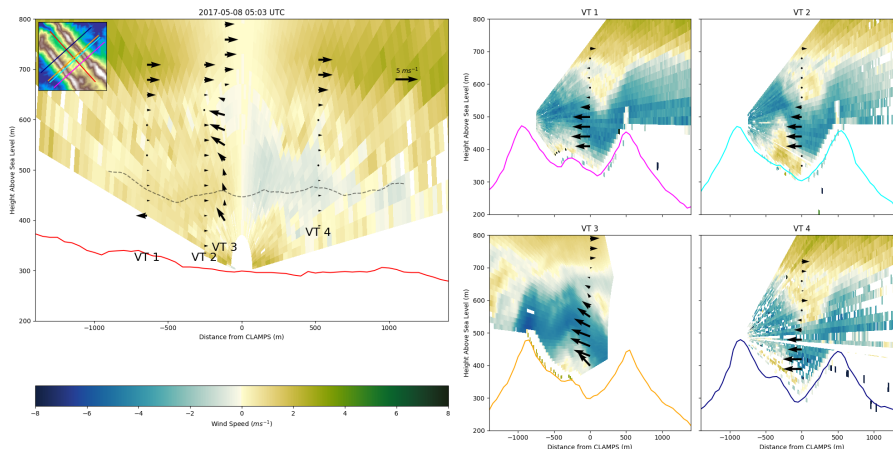

**Figure 12.** Same as Figure 11, but for 5:03 UTC. Note the different structure of the wave and the shear layers in the cross valley winds. Also note the different strengths of the recirculations.

10 heterogeneity. In order to visualize this heterogeneity, it is best to think of wind components in the cross-valley and along-valley sense.

Analysis of the virtual towers coupled with the cross-valley RHIs from the DLR and DTU DLs often shows that the flow can not be considered entirely 2D, especially at lower wind speeds. In Figure 11, cross valley flow is approximately  $-4 \text{ ms}^{-1}$ . No clear jet is present in the RHI or virtual towers, but there is a large recirculation in the valley. During this time period, flow  
 15 was strong enough that the circulation was present in all the cross sections of the valley. However, the size and strength of the recirculation varied due to the topography of the valley floor. Where the recirculation is strongest, cross valley wind speeds are slightly reduced in the virtual tower (VT2 and VT4). This is especially prominent in the lowest levels of the virtual towers near the circulation. This also appears in some of the levels well above the valley, which is significant because it implies that the recirculation is correlated with changes in the flow well away from the feature itself. This recirculation could be a rotor or  
 20 hydraulic jump type feature as observed in Neiman et al. (1988).

Looking at the along-valley component of the flow, winds are very calm and near zero within the valley. There does appear to be a weak jet just above the ridge at 550 m. There is evidence of a wind speed max near the surface, which indicates there is a downslope flow. This feature was often observed overnight in the along valley RHI from CLAMPS. Though the virtual towers do not extend far enough into the valley to capture this flow, the meteorological towers are able to capture the near surface speed max associated with it (Figure 9). This persistent flow adds to the three-dimensionality of the flows present in  
 5 the valley.

Analysis of a different time period during the night of May 8th further shows the complexity of the flows in the terrain. During this night, winds veered rather quickly aloft and weakened closer to the surface (Figure 5). An interesting transition occurs and a unique double wave forms within the valley along with a shear layer (Figure 12). Like the previous case, there is little along-valley component of the wind below the ridge. There is still a speed max in the down-valley flow in the lowest

10 20-30 m of the ~~OU-CLAMPS~~ RHI scan, which is indicative of the aforementioned downslope flow. The recirculation is also still present inside the valley and has a highly complex structure that differs based on the cross section of the valley. The recirculation looks to be largest in the VT2 cross section, similar to the previous case. This again appears to slow wind speeds upstream of the recirculation.

## 5 Conclusions

15 Multi-Doppler analyses are a useful tool for understanding and quantifying wind characteristics in complex terrain. Though the scans used for the virtual towers were uncoordinated, they can be useful for diagnosing flow conditions in and above the valley. The virtual towers help fill the gap in wind speed measurements inside the valley above the height of the physical towers (100 m) and where more traditional DL scanning strategies may not be fully valid given the complexity of the site and in particular for this experiment provide nicely distributed measurements along the valley at heights which are not captured by any other  
20 instrument.

Though the virtual towers are well suited to study the complex flows observed during the IOP, they are not without limitations. The uncertainty in the radial velocities needed to be propagated through the retrieval. Due to the positioning of the DLs used for the virtual towers, this meant that uncertainty in the horizontal wind retrieval was larger with increased height. However, vertical velocity retrievals on the single 3D virtual tower became more certain with height as a larger component  
25 of the vertical velocity was observed in the radial velocities at the higher elevation angles. Additionally, the 2D virtual towers made the assumption that there was no vertical velocity, which is often violated in this terrain. Due to this, they are prone to errors, particularly in wind direction. For example, with vertical velocities of  $1 \text{ ms}^{-1}$ , errors of 20 degrees were observed near ridge height. It was shown that these errors can be estimated and accounted for in an analysis.

There are some uncertainties in the virtual towers that can not be accounted for. Since the scans were uncoordinated, the  
30 beams very rarely were observing the same point at the same time. For this reason, cases with less steady flow may have more errors. The cases chosen for this study were more steady and quasi-2D than many nights during the campaign, which made them ideal for testing the different profiling techniques. Other differences may be caused by flow inhomogeneities that may occur along the valley. Though we tried to minimize this through careful case selection, the flow was still complex and the assumption of ~~horizontal homogeneity along the valley~~ quasi-2D during the cases presented in Section 4.1.1 and 4.1.2 may not be fully fulfilled. Additionally, making direct comparisons between the different methodologies was made difficult by the lack of a true reference measurement.

5 In terms of wind direction, despite the uncertainties in the 2D retrievals, the virtual towers agree better with the meteorological towers situated inside the valley than the VAD/DBS scans at those levels. However in the analyzed cases wind speeds at these levels were quite small, so a more detailed inter-comparison between all the different methods of wind estimation is needed. This could be done with a DL simulator that is able to use fine-scale model output from the valley to mimic DL radial velocities and noise. These could then be fed into the virtual tower retrieval and compared directly to the model output.

10 Combining various types of profiler data with meteorological towers on the ridge allows wind speeds to be sampled as cross-  
valley flow enters, goes through, and exits the valley and give a more complete picture of the spatial evolution of features in  
complex terrain. They also allow a more comprehensive validation dataset for numerical models in the future. While simulated  
RHI scans from numerical models can be compared to the observed RHIs, only the combination of multiple DLs allows  
the retrieval of the 3D wind vector. These data could one day be fed into a model-based wind retrieval using advanced data  
15 assimilation methods to estimate the full 3D wind field in and around the valley to gain more insight into the governing physics  
of the flow to gain more insight into the governing physics of the flow.

*Data availability.* Data of all instruments that were used in this study is stored on three mirrored servers owned by DTU, University of Porto  
and the NCAR Earth Observing Laboratory (EOL) respectively. The data is publicly available through dedicated web portals of the University  
of Porto (<https://perdigao.fe.up.pt>) and EOL ([http://data.eol.ucar.edu/master\\_list/?project=PERDIGAO](http://data.eol.ucar.edu/master_list/?project=PERDIGAO)). For this study, the datasets used are  
5 the CLAMPS DL data (Klein and Bell, 2017), DTU DL Data (Menke et al., 2018a), and the NCAR 5-minute tower data (UCAR/NCAR -  
Earth Observing Laboratory, 2019).

*Acknowledgements.* We would like to thank José Palma and José Carlos Matos for their work to make this experiment a success. We would  
also like to thank Matt Carney and Edward Creegan for their hard work in getting CLAMPS running in Perdigoão despite many initial  
challenges and we thank the entire Perdigoão team for their collaborative spirit before, during, and after the campaign. Lastly, we appreciate  
10 the hospitality of the people in the municipality of Alvaiade. This research was funded by NSF grant AGS 1565539.

## References

- Banta, R. M., Pichugina, Y. L., Kelley, N. D., Hardesty, R. M., and Brewer, W. A.: Wind Energy Meteorology: Insight into Wind Properties in the Turbine-Rotor Layer of the Atmosphere from High-Resolution Doppler Lidar, *Bulletin of the American Meteorological Society*, 94, 883–902, <https://doi.org/10.1175/BAMS-D-11-00057.1>, 2013.
- 15 Banta, R. M., Pichugina, Y. L., Brewer, W. A., Lundquist, J. K., Kelley, N. D., Sandberg, S. P., II, R. J. A., Hardesty, R. M., and Weickmann, A. M.: 3D Volumetric Analysis of Wind Turbine Wake Properties in the Atmosphere Using High-Resolution Doppler Lidar, *Journal of Atmospheric and Oceanic Technology*, 32, 904–914, <https://doi.org/10.1175/JTECH-D-14-00078.1>, 2015.
- Barthelmie, R., Pryor, S., Wildmann, N., and Menke, R.: Wind turbine wake characterization in complex terrain via integrated Doppler lidar data from the Perdigo experiment, *Journal of Physics: Conference Series*, 1037, 052 022, 2018.
- 20 Bingöl, F., Mann, J., and Foussekis, D.: Conically scanning lidar error in complex terrain, *Meteorologische Zeitschrift*, 18, 189–195, <https://doi.org/10.1127/0941-2948/2009/0368>, 2009.
- Bonin, T. A., Choukulkar, A., Brewer, W. A., Sandberg, S. P., Weickmann, A. M., Pichugina, Y. L., Banta, R. M., Oncley, S. P., and Wolfe, D. E.: Evaluation of turbulence measurement techniques from a single Doppler lidar, *Atmospheric Measurement Techniques*, 10, 3021–3039, 2017.
- 25 Bradley, S., Strehz, A., and Emeis, S.: Remote sensing winds in complex terrain? a review, *Meteorologische Zeitschrift*, 24, 547–555, <https://doi.org/10.1127/metz/2015/0640>, 2015.
- Browning, K. A. and Wexler, R.: The Determination of Kinematic Properties of a Wind Field Using Doppler Radar, *Journal of Applied Meteorology*, 7, 105–113, [https://doi.org/10.1175/1520-0450\(1968\)007<0105:TDOKPO>2.0.CO;2](https://doi.org/10.1175/1520-0450(1968)007<0105:TDOKPO>2.0.CO;2), 1968.
- Calhoun, R., Heap, R., Princevac, M., Newsom, R., Fernando, H., and Ligon, D.: Virtual Towers Using Coherent Doppler Lidar during the Joint Urban 2003 Dispersion Experiment, *Journal of Applied Meteorology and Climatology*, 45, 1116–1126, <https://doi.org/10.1175/JAM2391.1>, 2006.
- 30 Choukulkar, A., Brewer, W. A., Sandberg, S. P., Weickmann, A., Bonin, T. A., Hardesty, R. M., Lundquist, J. K., Delgado, R., Iungo, G. V., Ashton, R., Debnath, M., Bianco, L., Wilczak, J. M., Oncley, S., and Wolfe, D.: Evaluation of single and multiple Doppler lidar techniques to measure complex flow during the XPIA field campaign, *Atmospheric Measurement Techniques*, 10, 247–264, <https://doi.org/10.5194/amt-10-247-2017>, <https://www.atmos-meas-tech.net/10/247/2017/>, 2017.
- 35 Damian, T., Wieser, A., Träumner, K., Corsmeier, U., and Kottmeier, C.: Nocturnal Low-level Jet Evolution in a Broad Valley Observed by Dual Doppler Lidar, *Meteorologische Zeitschrift*, 23, 305–313, <https://doi.org/DOI.10.1127/0941-2948/2014/0543>, 2014.
- Debnath, M., Iungo, G. V., Brewer, W. A., Choukulkar, A., Delgado, R., Gunter, S., Lundquist, J. K., Schroeder, J. L., Wilczak, J. M., and Wolfe, D.: Assessment of virtual towers performed with scanning wind lidars and Ka-band radars during the XPIA experiment, *Atmospheric Measurement Techniques*, 10, 1215–1227, <https://doi.org/10.5194/amt-10-1215-2017>, <https://www.atmos-meas-tech.net/10/1215/2017/>, 2017.
- 5 Fernando, H. J. S., Pardyjak, E. R., Sabatino, S. D., Chow, F. K., Wekker, S. F. J. D., Hoch, S. W., Hacker, J., Pace, J. C., Pratt, T., Pu, Z., Steenburgh, W. J., Whiteman, C. D., Wang, Y., Zajic, D., Balsley, B., Dimitrova, R., Emmitt, G. D., Higgins, C. W., Hunt, J. C. R., Knivel, J. C., Lawrence, D., Liu, Y., Nadeau, D. F., Kit, E., Blomquist, B. W., Conry, P., Coppersmith, R. S., Creegan, E., Felton, M., Grachev, A., Gunawardena, N., Hang, C., Hocut, C. M., Huynh, G., Jeglum, M. E., Jensen, D., Kulandaivelu, V., Lehner, M., Leo, L. S.,
- 10 Liberzon, D., Massey, J. D., McEnerney, K., Pal, S., Price, T., Sghiatti, M., Silver, Z., Thompson, M., Zhang, H., and Zsedrovits, T.:

- The MATERHORN: Unraveling the Intricacies of Mountain Weather, *Bulletin of the American Meteorological Society*, 96, 1945–1967, <https://doi.org/10.1175/BAMS-D-13-00131.1>, 2015.
- 15 Fernando, H. J. S., Mann, J., Palma, J. M. L. M., Lundquist, J. K., Barthelmie, R. J., Belo-Pereira, M., Brown, W. O. J., Chow, F. K., Gerz, T., Hocut, C. M., Klein, P. M., Leo, L. S., Matos, J. C., Oncley, S. P., Pryor, S. C., Bariteau, L., Bell, T. M., Bodini, N., Carney, M. B., Courtney, M. S., Creegan, E. D., Dimitrova, R., Gomes, S., Hagen, M., Hyde, J. O., Kigle, S., Krishnamurthy, R., Lopes, J. C., Mazzaro, L., Neher, J. M. T., Menke, R., Murphy, P., Oswald, L., Otarola-Bustos, S., Pattantyus, A. K., Rodrigues, C. V., Schady, A., Sirin, N., Spuler, S., Svensson, E., Tomaszewski, J., Turner, D. D., van Veen, L., Vasiljević, N., Vassallo, D., Voss, S., Wildmann, N., and Wang, Y.: The Perdigão: Peering into Microscale Details of Mountain Winds, *Bulletin of the American Meteorological Society*, 100, 799–819, <https://doi.org/10.1175/BAMS-D-17-0227.1>, 2019.
- 20 Grubišić, V. and Stiperski, I.: Lee-Wave Resonances over Double Bell-Shaped Obstacles, *Journal of the Atmospheric Sciences*, 66, 1205–1228, 2009.
- Hill, M., Calhoun, R., Fernando, H. J. S., Wieser, A., Dörnbrack, A., Weissmann, M., Mayr, G., and Newsom, R.: Coplanar Doppler Lidar Retrieval of Rotors from T-REX, *Journal of the Atmospheric Sciences*, 67, 713–729, <https://doi.org/10.1175/2009JAS3016.1>, 2010.
- Kigle, S.: Wake Identification and Characterization of a Full Scale Wind Energy Converter in Complex Terrain with Scanning Doppler Wind Lidar Systems, Master’s thesis, Ludwig Maximilians Universität München, 2017.
- 25 Klein, P., Bonin, T. A., F., J., Turner, D. D., Chilson, P. B., Wainwright, C. E., Blumberg, W. G., Mishra, S., Carney, M., Jacobsen, E. P., Wharton, S., and Newsom, R. K.: LABEL: A Multi-Institutional, Student-Led, Atmospheric Boundary Layer Experiment, *Bulletin of the American Meteorological Society*, 96, 1743–1764, <https://doi.org/10.1175/BAMS-D-13-00267.1>, 2015.
- Klein, P. M. and Bell, T. M.: CLAMPS Scanning Doppler Lidar Data, UCAR/NCAR - Earth Observing Laboratory, <https://doi.org/10.5065/D6HD7TDP>, 2017.
- 30 Knuteson, R. O., Revercomb, H. E., Best, F. A., Ciganovich, N. C., Dedecker, R. G., Dirks, T. P., Ellington, S. C., Feltz, W. F., Garcia, R. K., Howell, H. B., Smith, W. L., Short, J. F., and Tobin, D. C.: Atmospheric Emitted Radiance Interferometer. Part I: Instrument Design, *Journal of Atmospheric and Oceanic Technology*, 21, 1763–1776, <https://doi.org/10.1175/JTECH-1662.1>, 2004a.
- 35 Knuteson, R. O., Revercomb, H. E., Best, F. A., Ciganovich, N. C., Dedecker, R. G., Dirks, T. P., Ellington, S. C., Feltz, W. F., Garcia, R. K., Howell, H. B., Smith, W. L., Short, J. F., and Tobin, D. C.: Atmospheric Emitted Radiance Interferometer. Part II: Instrument Performance, *Journal of Atmospheric and Oceanic Technology*, 21, 1777–1789, <https://doi.org/10.1175/JTECH-1663.1>, 2004b.
- Lee, J. T., Lawson, R. E., and Marsh, G. L.: Flow visualization experiments on stably stratified flow over ridges and valleys, *Meteorology and Atmospheric Physics*, 37, 183–194, 1987.
- Leosphere: Windcube FCR measurements, <https://www.ieawindtask32.org/wp-content/uploads/2017/11/GM2017-Leosphere-Windcube-FCR-measurements.pdf>.
- 5 Mann, J., Angelou, N., Arnqvist, J., Callies, D., Cantero, E., Arroyo, R. C., Courtney, M., Cuxart, J., Dellwik, E., Gottschall, J., Ivanell, S., Kühn, P., Lea, G., Matos, J. C., Palma, J. M. L. M., Pauscher, L., Peña, A., Rodrigo, J. S., Söderberg, S., Vasiljevic, N., and Rodrigues, C. V.: Complex terrain experiments in the New European Wind Atlas, *Philosophical Transactions of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*, 375, <https://doi.org/10.1098/rsta.2016.0101>, <http://rsta.royalsocietypublishing.org/content/375/2091/20160101>, 2017.
- 10 Menke, R., Mann, J., and Vasiljevic, N.: Perdigão-2017: multi-lidar flow mapping over the complex terrain site, <https://doi.org/10.11583/DTU.7228544.v1>, 2018a.

- Menke, R., Vasiljević, N., Hansen, K., Hahmann, A. N., and Mann, J.: Does the wind turbine wake follow the topography? – A multi-lidar study in complex terrain, *Wind Energy Science Discussions*, 2018, 1–18, <https://doi.org/10.5194/wes-2018-21>, <https://www.wind-energ-sci-discuss.net/wes-2018-21/>, 2018b.
- Neiman, P. J., Hardesty, R. M., Shapiro, M. A., and Cupp, R. E.: Doppler Lidar Observations of a Downslope Windstorm, *Monthly Weather Review*, 116, 2265–2275, [https://doi.org/10.1175/1520-0493\(1988\)116<2265:DLOAD>2.0.CO;2](https://doi.org/10.1175/1520-0493(1988)116<2265:DLOAD>2.0.CO;2), 1988.
- Newman, J. F., Bonin, T. A., Klein, P. M., Wharton, S., and Newsom, R. K.: 3D Volumetric Analysis of Wind Turbine Wake Properties in the Atmosphere Using High-Resolution Doppler Lidar, *Wind Energy*, 19, 2239, 2254, 2016.
- Pauscher, L., Vasiljevic, N., Callies, D., Lea, G., Mann, J., Klaas, T., Hieronimus, J., Gottschall, J., Schwesig, A., KäEhn, M., and Courtney, M.: An Inter-Comparison Study of Multi- and DBS Lidar Measurements in Complex Terrain, *Remote Sensing*, 8, 2016.
- Rapp, C. and Manhart, M.: Flow over periodic hills: an experimental study, *Experiments in Fluids*, 51, 247–269, 2011.
- Rhodes, M. E. and Lundquist, J. K.: The Effect of Wind-Turbine Wakes on Summertime US Midwest Atmospheric Wind Profiles as Observed with Ground-Based Doppler Lidar, *Boundary-Layer Meteorology*, 149, 85–103, 2013.
- Rose, T., Crewell, S., Löhnert, U., and Simmer, C.: A network suitable microwave radiometer for operational monitoring of the cloudy atmosphere, *Atmospheric Research*, 75, 183, 200, 2005.
- Sathe, A. and Mann, J.: A review of turbulence measurements using ground-based wind lidars, *Atmospheric Measurement Techniques*, 6, 3147–3167, <https://doi.org/10.5194/amt-6-3147-2013>, <https://www.atmos-meas-tech.net/6/3147/2013/>, 2013.
- Strauch, R. G., Merritt, D. A., Moran, K. P., Earnshaw, K. B., and Kamp, D. V. D.: The Colorado Wind-Profiling Network, *Journal of Atmospheric and Oceanic Technology*, 1, 37–49, [https://doi.org/10.1175/1520-0426\(1984\)001<0037:TCWPN>2.0.CO;2](https://doi.org/10.1175/1520-0426(1984)001<0037:TCWPN>2.0.CO;2), 1984.
- Taylor, P. A. and Teunissen, H. W.: The Askervein Hill project: Overview and background data, *Boundary-Layer Meteorology*, 39, 15–39, <https://doi.org/10.1007/BF00121863>, 1987.
- UCAR/NCAR - Earth Observing Laboratory: NCAR/EOL Quality Controlled 5-minute ISFS surface flux data, geographic coordinate, tilt corrected. Version 1.1, <https://doi.org/10.26023/zdmj-d1ty-fg14>, 2019.
- Vasiljević, N., L. M. Palma, J. M., Angelou, N., Carlos Matos, J., Menke, R., Lea, G., Mann, J., Courtney, M., Frölen Ribeiro, L., and M. G. C. Gomes, V. M.: Perdigoão 2015: methodology for atmospheric multi-Doppler lidar experiments, *Atmospheric Measurement Techniques*, 10, 3463–3483, 2017.
- Wagner, T. J., Klein, P. M., and Turner, D. D.: A New Generation of Ground-Based Mobile Platforms for Active and Passive Profiling of the Boundary Layer, *Bulletin of the American Meteorological Society*, 100, 137–153, 2019.
- Waldteufel, P. and Corbin, H.: On the Analysis of Single-Doppler Radar Data, *Journal of Applied Meteorology*, 18, 532–542, [https://doi.org/10.1175/1520-0450\(1979\)018<0532:OTAOSD>2.0.CO;2](https://doi.org/10.1175/1520-0450(1979)018<0532:OTAOSD>2.0.CO;2), 1979.
- Wang, H., Barthelmie, R. J., Clifton, A., and Pryor, S. C.: Wind Measurements from Arc Scans with Doppler Wind Lidar, *Journal of Atmospheric and Oceanic Technology*, 32, 2024–2040, <https://doi.org/10.1175/JTECH-D-14-00059.1>, 2015.
- Wildmann, N., Kigle, S., and Gerz, T.: Coplanar lidar measurement of a single wind energy converter wake in distinct atmospheric stability regimes at the Perdigoão 2017 experiment, *Journal of Physics: Conference Series*, 1037, 052 006, 2018a.
- Wildmann, N., Vasiljevic, N., and Gerz, T.: Wind turbine wake measurements with automatically adjusting scanning trajectories in a multi-Doppler lidar setup, *Atmospheric Measurement Techniques*, 11, 3801–3814, 2018b.