

We thank all of the reviewers for their valuable comments. Below, we have added some responses (in red) to the comments submitted (in black).

Reviewer 1 General Comments:

The manuscript approaches the subject as if its TBS is a novel sampling technique that has never before been attempted, when in fact, the literature contains references to cloud sampling with tethered balloons for nearly the past 40 years. Kitchen and McClatchey (1981) flew an instrumented aerostat in cumulus clouds in the UK. Several investigators have followed suit, including measurements in the Arctic (Lawson et al. 2011) and at the South Pole (Lawson and Gettelman 2014). The manuscript needs to provide context for their research by discussing the previous efforts and explain why their current approach is an improvement, or how it differs.

We thank the reviewer for their comments, but believe historical TBS flight activities are discussed significantly in the existing manuscript on pg. 2, lines 16-26. We did add a reference to the highly relevant work discussed in Lawson 2011 and have included a summary of that publication to the existing discussion on pg. 2. We agree that we should better explain why our current approach is an improvement or how it differs. Towards that end we have revised the following text to read: “The work discussed herein pertains to the new capability of using tethered balloon systems within restricted airspace for persistent, repeatable, interannual flights inside Arctic mixed phase clouds, with supercooled liquid water sondes and distributed temperature sensing optical fiber systems.”

The methodology used to process and present the measurements does not do justice to the larger variance in the different techniques being compared. While the variance can be seen in some of the measurements (e.g. time series in Fig. 3; scatterplots in Fig. 7), the overall message presented is that there is relatively good agreement in the measurements and that therefore they are useful. In fact, it is not at all clear that the vibrating wire technique is of any value in quantitatively measuring SLWC. The manuscript compares mean values of SLWC measured from the two vibrating wire techniques to validate the instruments when the variance in the measurements is larger than the mean; this is not an acceptable method for validating instrument performance. I agree that the technique may be useful as an SLWC detection method, and perhaps it can differentiate between low values i.e., < a few tenths g m^{-3} and high values ($> \sim 1 \text{ g m}^{-3}$), but even this cannot be validated since high SLWC measurements are not presented.

Again we thank the reviewer, but believe the discrepancies in the vibrating wire measurements are thoroughly discussed in the manuscript. In order to allow the reader to judge the efficacy of the vibrating wire SLWC measurements, comparisons between the SLWC measured by more than one vibrating wire instrument are shown, in addition to how the vibrating wire-measured SLWC compares with radiosonde-derived SLWC and MWR-derived SLWC. We admit we are unclear what the viewer is referring to by “The manuscript compares mean values of SLWC measured from the two vibrating wire techniques to validate the instruments . . . “ since no comparison of mean values of SLWC measured from the two vibrating wire techniques as a validation of the instruments is presented. The mean differences between the pairs of Anasphere sondes in Figure 3 is presented to depict the noise or relative uncertainty in the Anasphere sonde measurements. If the reviewer is referring to Figure 9, which depicts LWP measured by the two different vibrating wire sondes and the MWR, the closest relationship between the mean and variance of the SLWC values occurs for the Anasphere sonde during the first descent with values of 0.02 and 0.0007 g/m^3 for the mean and variance, respectively.

I do feel that the DTS measurements are sufficiently accurate to be useful, but the validation is against a radiosonde. If the comparison is good, why not just use radiosonde data? Certainly it is more cost effective than the complexity involved with launching a tethered aerostat or helikite. One possible use of the DTS

measurements is to better define low-level inversions, but I did not find a meteorological use for this presented in the paper.

This is a good suggestion and the authors have added the following text to the Introduction in regard to the advantages of using tethered balloon DTS measurements compared to radiosonde data. “DTS provides greatly improved spatial and temporal resolution of temperature compared to radiosonde measurements and allows measurements to be collected continuously between the balloon and the surface for the duration of the tethered balloon flight.”

Before the manuscript is fit for publication it should be modified considerably. The measurements are presented in a manner that embellishes their actual efficacy. The manuscript should present the data in a biased manner and focus on the ability of the TBS to make routine, long-term measurements, but eliminate the impression that the instruments themselves are useful for making quantitative measurements.

We thank the reviewer for their comments but believe the ability of the TBS to make routine, long-term measurements is discussed significantly in the Introduction and sections 2.1.2, 3.1.4, 3.1.5, 3.2.2, and 3.2.4 of the manuscript. We also believe the comparisons of the SLWC vibrating wire sonde data between both sondes, the MWR, and simultaneous radiosonde data are fairly presented and the discrepancies associated with the vibrating wire sonde measurements are extensively discussed in sections 3.1.1 – 3.1.3.

Reviewer 1 Specific Comments:

Introduction: Add TBS background references and discuss.

Please see response to Reviewer 1 General Comments.

Page 3, Lines 11 – 14: This is incorrect. There are much larger helikytes currently in service. For example, Bodenschatz, in Goettingen has deployed a 250 m³ helikyte from a ship in the Arctic.

We are uncertain what the reviewer is referring to in this case, since pg 3, lines 11-14 of the manuscript discuss the MWR. Perhaps the reviewer is referring to pg 3, line 31 – 32: “Helikites are typically used for flights with desired altitudes to 700 m Above Ground Level (AGL), a maximum payload of less than 10 kg, and in surface wind speeds less than 11 m/s.” For clarity the authors have revised this line to begin with “In the ARM TBS, helikites . . . “

Figure 3: The figure and text states that the difference in mean values of SLWC between the two Anasphere devices is 0.01, 0.02 and 0.06 g m⁻³. This is meaningless without also giving some measurement of the variance, standard deviation or show a scatterplot. Even two noise signals can have the same mean. The figure suggests that there is little correlation between the two devices.

We thank the reviewer and have added pdfs of each sonde’s measurements as suggested by Reviewer #2 to better illustrate the data collected by the two devices.

Figure 7: I applaud the authors for showing the scatterplots in this figure, but the interpretation of the results does not fit the data. I am not sure how an R² value is even relevant. The scatterplot and time series tell the story. There is virtually no correlation in the measurements. The best that one can ascertain here is that the TBS is an SLWC detector.


As discussed in pg 12, line 18 through pg 13, line 9 the authors view the timing of SLWC detection between the airborne SLWC sensor and the surface-based MWR as significant. This result is especially relevant considering the uncertainties associated with the ceilometer-reported cloud base, the GPS-reported altitude of the airborne SLWC sonde in relation to the cloud base, and the determination of the cloud top altitude from the KAZR data, in addition to the variation in the cloud base on 10/15/16, and the saturation of the vibrating wire on the sonde and resulting ice shedding events on 10/20/16. As the reviewer mentions, the authors have included scatter plots of the results so the reader can evaluate the relationship between the two measurements.

Figures 8 and 9: This is a good representation of the measurements, but again, the interpretation is off the mark. The statement on p. 16, “Overall, the two sensors seem to provide broadly similar SLWC profiles, but not without some discrepancies. This increases confidence in the use of each of them and provides independent verification of the measurements.” grossly overstates the efficacy of the measurements. The profiles in Figure 9 often diverge and differ by factors of 2 to 3. The authors need to show measurements with better correlation over a much larger range of SLWC’s, and the sensors need to agree with SLWCad to convince readers that the instruments can be used quantitatively. Several aircraft campaigns have shown that single-layer ice-free Arctic stratus clouds typically have adiabatic SLWC profiles up to 60 to 90% of the distance between cloud base and cloud top. Of course, this will be challenging if the balloons cannot achieve higher altitudes.

The reviewer is correct in that there are differences in the magnitude of the SLWC detected by the various sensors, but this is to be expected for some of the reasons detailed on pg 16, lines 5-12. To this we have also added “The ice accumulation on the vibrating wire of each sonde may be dependent upon the upwind or downwind orientation of the sonde with respect to the balloon tether”. The measurement of SLWC is a difficult one to make and these sensors are designed to be as inexpensive and lightweight as possible so as to be carried on disposable balloons, therefore the fact that the sensors roughly track each other and are generally within a factor of 2 is a reasonable achievement. If this was a comparison between aircraft instruments then we would expect better agreement, but one should not expect such accuracy from inexpensive disposable instruments.

Page 17, Lines 4 – 5: Equation 3 computes the adiabatic maximum SLWC. Since the vibrating wires measured a higher value than adiabatic, the measurements exceed the theoretical maximum. Also, once again, only reporting means does not show the variance in the measurements, which should also be reported, preferably by showing a scatterplot.

The theoretical calculation of adiabatic SLWC results in mean SLWC values of $< 0.05 \text{ g/m}^3$ for 91% of 43 in-cloud TBS flights, which is inconsistent with in situ SLWC measurements within mixed-phase Arctic clouds from the literature. The in situ measurements collected by the TBS SLWC sondes exhibit better agreement with the literature values. This result depicts the value of the TBS to collect in situ atmospheric measurements and better refine cloud parameterization schemes used in climate models. A pdf and cdf of the SLWC data has also been added and the text updated to read “The probability density and cumulative distribution functions of all SLWC data collected with the Anasphere sondes on the TBS for the 43 flights are shown in Figure 12, and the probability density of SLWC values $< 0.05 \text{ g/m}^3$ was 34%.”

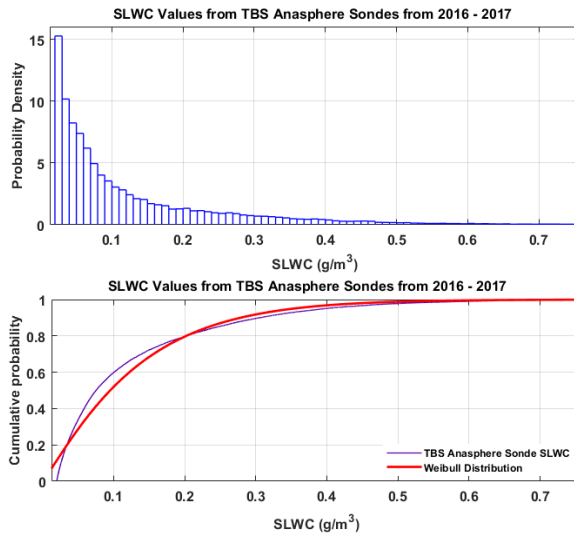

Page 17, Line 8: I have examined the Sand et al. (1984) article and I cannot find any text or figures that support the claim in the manuscript. Please show how 36% of the samples $< 0.05 \text{ g m}^{-3}$ was derived from the Sand paper. Also, the minimum measurement sensitivity of the J-W used in the Sand study was 0.1 g m^{-3} due to drift and noise affecting the baseline. The FSSP was used for lower values, but its fundamental measurement is drop size and raising drop size to the third power increases sizing errors commensurately. Thus, the FSSP is not a fundamental measurement of LWC. Reference to the Sand paper is a stretch and appears to be an unsubstantiated attempt to validate the vibrating wire measurements.

We thank the reviewer for this close review. On closer inspection the results referred to were in fact modified from Sand et al. (1984) and are reported at www-das.uwyon.edu/~geerts/cwx/notes/chap08/moist_cloud.html. We have updated the text and references to refer to the University of Wyoming reference.

Conclusions: The conclusions are very misleading. The measurements are limited to very low values of SLWC, so the dynamic range over which the measurements are constrained is tiny. Means are compared within this very limited dynamic range, making the comparison look good (e.g., the means of the measurements compared within 0.1 g m^{-3}). This a totally unacceptable methodology for presenting the measurements. Showing the time series comparisons and scatterplots is representative and these figures are the saving grace of this manuscript. The paper should focus on the mechanics of how the TBS systems are operated, and that they can be successfully operated for extended periods of time. The vibrating wire technology is used on commercial aircraft to detect icing conditions, not to quantify icing rate, even though there was an attempt in the 80's to do so (i.e., Baumgardner and Rodi 1989). While Baumgardner and Rodi reported that independent laboratory calibration of the Rosemount icing probe improved its performance, they also reported that each of the four instruments tested had different mass sensitivities. There has been virtually no quantitative reporting of SLWC from an airborne Rosemount Icing probe in the literature. In time perhaps better SLWC measurement techniques applicable to TBS will be developed, implemented and reported.

As we have added the cdf and pdf of all SLWC values at the good suggestion of the reviewer, the reader can now observe that 40% of the SLWC data collected were $\geq 0.1 \text{ g/m}^3$. The text of the Conclusion has also been updated to refer to the SLWC data in the pdf/cdf figure.

Reviewer 2 Comments:

Page 1, Line 14: Please provide a bit more clarification of which kind of in situ atmospheric measurements you did.


We agree that the types of in situ measurements collected should be expounded. We have updated the text to read “of aerosol properties, cloud microphysical information, and thermodynamic structure”.

Page 6, Figure 2: The beginning of the second sentence in the caption seems to be redundant. If I understood it correctly, the Anasphere SLWC sonde next to the InterMet radiosonde is shown on the left, the Anasphere SLWC sonde above the Anasphere tethersonde is shown in the middle and the Reading SLWC sonde is shown on the right. I would ask you to reformulate the caption accordingly.

We agree that this caption was poorly written and have revised it to read “Anasphere SLWC sonde left of InterMet radiosonde on TBS tether (left). Anasphere SLWC sonde above Anasphere tethersonde (center). InterMet radiosonde in center with Anasphere SLWC sonde on left and Reading SLWC sonde on right (right). “

Page 7, Figure 3: Figure 3 provides a good qualitative comparison of the sonde pairs, but I would recommend to include an additional figure to compare the measured distribution functions of SLWC. For that I would use only those times where both sondes had valid, non-zero readings, calculate the cumulative distribution function (or probability distribution function, whatever you like better) for each sonde and put the CDFs / PDFs for each pair of sondes in one plot.

We appreciate this feedback and have added the recommended PDF figure.

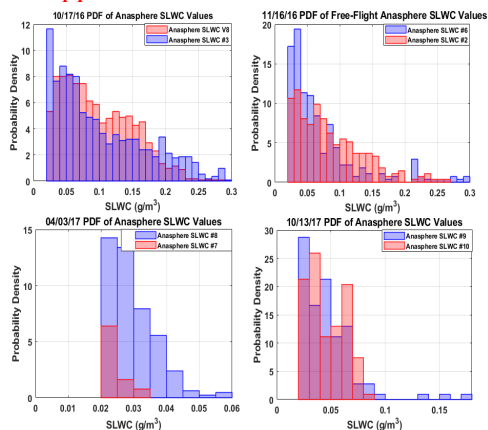

Page 9, Line 10: I am pretty sure that you mean Fig. 4 instead of Fig. 7 for the figure reference.

Corrected, thank you.

Page 11: I do not see a figure reference to Fig. 6.

Thank you, a reference has been added.

Page 12, Figure 6: There is almost no contrast in the data points showing the SLWC. I would suggest plotting the values below the detection limit either white or transparent to enhance the contrast for the data that actually matter.

We agree the contrast is insufficient and the figure has been replotted with SLWC values below the noise threshold of 0.02 g/m^3 shown in grey.

Page 14: I do not see a figure reference to Fig. 8.

Thank you, the reference is in line 25 of page 14, “Figure 8 shows the time series of the flight and Figure 9 compares the two SLWC profiles.”

Page 17: I do not see a figure reference to Fig. 10, Fig. 11 and Fig. 12.

Thank you, these three figure references have been added.

Page 19: I do not see a figure reference to Fig. 13.

Thank you, a reference has been added.

Page 20: I do not see a figure reference to Fig. 14.

Thank you, a reference has been added.

Page 20, Line 14: Please describe the radiation correction of the DTS in more detail (reference or equation, if possible). It might be best to explain the radiation correction in Subsection 2.3.

We appreciate the need for further detail and have expanded the existing section to include the text “While the multimode fiber used for TBS DTS measurements is white, some excess heating due to solar radiation could still occur. The iMet radiosonde temperatures are corrected within the collection software Skysonde, which was developed by the National Oceanic and Atmospheric Administration (NOAA), for solar radiation based on solar elevation and flight altitude. The correction factors were derived from a proprietary report developed by InterMet for NOAA (e.g., InterMet, 2009), and are not fixed but are interpolated between the solar elevations and altitudes shown in Table 2. In an effort to correct DTS temperatures for excess solar heating, the linear fit between the radiation-corrected iMet radiosonde temperatures and DTS temperatures was applied to the DTS temperature values for each flight. The mean RMSE between the iMet radiosonde temperatures and uncorrected DTS temperatures was $0.39 \text{ }^\circ\text{C}$, improving to $0.32 \text{ }^\circ\text{C}$ after the corrections were applied to DTS temperatures.” A table was also added of the correction factors that are applied to the iMet radiosonde temperatures.

Page 21, Line 10: When looking closely at Fig. 15, I do not see an increase of the temperature with altitude by more than 1 to 1.5 degrees Celsius. Please clarify where exactly the 3-4 $^\circ\text{C}$ warmer layer is located. Could it be the wrong figure that is put in the manuscript?

Thank you for this close review. An error was made with the color mapping and the map has been revised to better contrast the temperatures. The text has also been updated to read “Figure 16 depicts results from 7/10/18, when the continuous DTS temperature profiles and iMet radiosonde temperatures reveal a cooler layer at the surface below 100 m with a 1-1.5 $^\circ\text{C}$ warmer layer between 150 and 800 m, then another cooler layer above the inversion from 800 m to 1 km. The AMF3 radiosonde launch at 23:30 measured a similar temperature profile. The particle concentration measured by the POPS at a sample rate of 1 Hz demonstrates increased particle concentration within the temperature inversion, with fewer particles above the inversion and in the surface-cooled layer. The surface layer warmed in the afternoon and the base of the inversion layer became higher in altitude with time. An inversion was no longer present at 01:00 GMT, and the boundary layer became warmer and more well-mixed below 1 km. The particle concentrations measured by the POPS after 01:00 GMT were also similar at both measurement altitudes, which indicated the well-mixed boundary layer in the afternoon.”

Page 21: I do not see a figure reference to Fig. 15 and Fig. 16.

Thank you, references have been added.

Page 22, Fig. 15 and 16: It is hard to actually see where the inversion is located in the vertical temperature profile. Would it be more intuitive to localize if you plot the potential temperature instead of the temperature? And is there an explanation for the high near-surface temperatures in Fig. 16 around 19:40 UTC?

Thank you again for this close review. The color mapping on this figure has been improved and the text has been revised to read “On 7/11/18 the surface layer below 200 m was roughly 2 °C cooler than on the previous day, as were temperatures in the inversion layer between 200 m and 1.2 km (Figure 17). POPS particle concentrations were elevated within the inversion layer and were similar to the observation on the previous day. Unlike the previous day, particle concentrations did not decrease to almost 0 above the inversion layer, indicating a less stratified aerosol profile. The base of the inversion layer decreased between 18:30 and 19:30, and a shallow ~50 m-deep warm layer was isolated around 400 m after 19:30. An iMet radiosonde on the tether corroborated this shallow warm layer measured by the DTS temperature profiles. No clouds were present within the TBS flight altitudes on either day. Elevated temperatures at the surface were caused by friction of the fiber against sharply-angled metal tubing as it entered and exited the calibration bath.”

Page 23: I do not see a figure reference to Fig. 17.

Thank you, a reference has been added.

Evaluation of ARM Tethered Balloon System instrumentation for supercooled liquid water and distributed temperature sensing in mixed-phase Arctic clouds

Darielle Dexheimer¹, Martin Airey², Erika Roesler¹, Casey Longbottom¹, Keri Nicoll^{2,5}, Stefan Kneifel³, Fan Mei⁴, R. Giles Harrison², Graeme Marlton², Paul D. Williams²

- 5 ¹Sandia National Laboratories, Albuquerque, New Mexico, USA
²University of Reading, Dept. of Meteorology, Reading, UK
³University of Cologne, Institute for Geophysics and Meteorology, Cologne, Germany
⁴Pacific Northwest National Laboratory, Richland, Washington, USA
⁵University of Bath, Dept. of Electronic and Electrical Engineering, Bath, UK

10 *Correspondence to:* Darielle Dexheimer (ddexhei@sandia.gov)

Abstract. A tethered balloon system (TBS) has been developed and is being operated by Sandia National Laboratories (SNL) on behalf of the U.S. Department of Energy's (DOE) Atmospheric Radiation Measurement (ARM) User Facility in order to collect in situ atmospheric measurements within mixed-phase Arctic clouds. Periodic tethered balloon flights have been conducted since 2015 within restricted airspace at ARM's Advanced Mobile Facility 3 (AMF3) in Oliktok Point, Alaska, as part of the AALCO (Aerial Assessment of Liquid in Clouds at Oliktok), ERASMUS (Evaluation of Routine Atmospheric Sounding Measurements using Unmanned Systems), and POPEYE (Profiling at Oliktok Point to Enhance YOPP Experiments) field campaigns. The tethered balloon system uses helium-filled 34 m³ helikites and 79 and 104 m³ aerostats to suspend instrumentation that is used to measure aerosol particle size distributions, temperature, horizontal wind, pressure, relative humidity, turbulence, and cloud particle properties and to calibrate ground-based remote sensing instruments.

20 Supercooled liquid water content (SLWC) sondes using the vibrating wire principle, developed by Anasphere Inc., were operated at Oliktok Point at multiple altitudes on the TBS within mixed-phase clouds for over 200 hours. Sonde-collected SLWC data were compared with liquid water content derived from a microwave radiometer, Ka-band ARM Zenith radar, and ceilometer at the AMF3, as well as liquid water content derived from AMF3 radiosonde flights. The in situ data collected by the Anasphere sensors were also compared with data collected simultaneously by an alternative SLWC sensor developed at the University of Reading, UK; both vibrating wire instruments were typically observed to shed their ice quickly upon exiting the cloud or reaching maximum ice loading. Tethered balloon fiber optic distributed temperature sensing measurements were also compared with AMF3 radiosonde temperature measurements. Combined, the results indicate that TBS distributed temperature sensing and supercooled liquid water measurements are in reasonably good agreement with remote-sensing and radiosonde-based measurements of both properties. From these measurements and sensor evaluations, tethered balloon flights are shown to offer an effective method of collecting data to inform and constrain numerical models, calibrate and validate remote sensing instruments, and characterize the flight environment of unmanned aircraft, circumventing the difficulties of in-cloud unmanned aircraft flights such as limited flight time and in-flight icing.

1 Introduction

Understanding microphysical properties of persistent Arctic mixed-phase stratiform clouds is a critical factor in accurately representing the radiative energy balance in climate models (e.g., Morrison et al., 2012; Jouan et al. 2012; Shupe et al., 2013). In particular, supercooled liquid water content (SLWC) within these clouds has great significance in determining the radiation balance between the surface and clouds (e.g., Shupe and Intrieri, 2004), as well as presenting a potential in-flight icing hazard to aircraft (e.g., Fernandez-Gonzalez et al., 2014). Supercooled liquid water measurements within clouds have been collected using manned aircraft (e.g., Gultepe and Isaac, 1996), but typically not in the Arctic, where operational concerns and the frequent occurrence of these clouds within 2 km of the surface present additional challenges. Surface-based microwave radiometers are widely used to monitor the temporal evolution of liquid water path, i.e. the vertically integrated amount of liquid water, inside these mixed-phase clouds (e.g., Cremerwell et al., 2009). Liquid water has no absorption line in the microwave spectrum, however, so these instruments cannot directly provide information on the distribution of the SLWC vertically inside the cloud, which is key for radiation and ice microphysics. Development of a tethered balloon system was supported by the U.S. Department of Energy's (DOE) Atmospheric Radiation Measurement (ARM) program in order to collect semi-regular, in situ measurements [of aerosol properties, cloud microphysical information, and thermodynamic structure](#) within Arctic clouds while avoiding the expense and potential risk of manned aircraft flights.

Tethered balloon systems have been used to collect tropospheric atmospheric measurements for over 40 years, including profiles of biogenic compounds, chemical species, turbulence, radiation, [cloud microphysics](#), and meteorological parameters (e.g., Morris et al., 1975; Owens et al., 1982; Greenberg et al., 1998; Knapp et al., 1998; [Lawson et al., 2011](#); Egerer et al., 2019). Morris et al. (1975) developed a portable tethered balloon system that essentially behaved as a tethered radiosonde that was able to be operated by one person at altitudes up to 750 m above ground level (AGL) in wind speeds as high as 10 m s^{-1} . Owens et al. (1987) advanced the capabilities of tethered balloon systems by creating a system capable of lifting 2.75 kg to 800 m AGL that was used to collect meteorological data and ozone concentrations. Greenberg et al. (1998) further promoted tethered balloon system development by deploying sampling packages used to measure biological volatile organic compounds in the mixed layer in a series of deployments conducted over 11 years. Knapp et al. (1998) combined tethered balloon system and kite measurements to study the anticorrelation between ozone and water vapor mixing ratios. [Lawson et al. \(2011\) deployed a TBS with a cloud particle imager and 4- \$\pi\$ radiometer up to 1.6 km MSL at Ny-Ålesund and 0.8 km at South Pole Station.](#) Most recently, in 2019 Egerer et al. (2019) operated sets of instruments to measure turbulent, energy, and radiative fluxes to altitudes of 1.5 km AGL within Arctic clouds.

Use of tethered balloon systems can be limited by the very meteorological conditions that would be desirable to operate during however, including elevated wind speeds and wind speed and directional shear, and convective updrafts and downdrafts. Additionally, outside of restricted airspaces tethered balloon systems are often unable to receive aviation authority approvals in the U.S. to operate near or within clouds, to altitudes higher than 1 km above ground level, or in reduced surface visibilities. The work discussed herein pertains to the new capability of using tethered balloon systems within restricted airspace for

persistent, repeatable, interannual flights-flight inside Arctic mixed phase clouds, with supercooled liquid water sondes and distributed temperature sensing optical fiber systems.

Vibrating wire-based devices for measuring supercooled liquid water on radiosondes have been in development since the 1980s (e.g., Hill and Woffinden, 1980; Hill, 1994). In the past decade vibrating wire-based supercooled liquid water content radiosonde flights have been conducted concurrently with a collocated microwave radiometer, ceilometer, and Ka-band radar to validate the sonde-measured vertical profile of supercooled liquid water (e.g., Serke et al., 2014; King, 2016). Advancing this approach, supercooled liquid water content sondes from two manufacturers were operated on the ARM TBS at multiple altitudes within Arctic clouds simultaneously for over 200 hours, in order to collect comparatively higher spatially and temporally-resolved data than were available from radiosonde balloon flights. Supercooled liquid water measurements from collocated sondes from one manufacturer, that were operated simultaneously on the TBS, were used to estimate the measurement uncertainty. Liquid water path from the zenith-pointing microwave radiometer at Oliktok Point was adiabatically distributed through a single cloud layer using the ceilometer-determined cloud base and Ka-band radar-determined cloud top altitudes for inter-comparison.

The microwave radiometer does not discriminate between liquid and supercooled liquid, and is insensitive to ice and snow at frequencies lower than 90 GHz, so a high-resolution temperature profile is desirable when conducting comparisons of SLWC sonde and radiometer measurements within Arctic clouds composed of cloud water in both conditions; where water that continues to exist in a liquid state at temperatures below 0 °C is considered supercooled. In addition to radiosonde-based measurements of temperature from each SLWC sonde, near-continuous measurements of temperature were collected using a fiber optic distributed temperature sensing (DTS) system. DTS provides greatly improved spatial and temporal resolution provided vertical profiles of temperature compared to radiosonde measurements and allows measurements to be collected continuously every 0.25 m between the surface and the balloon and the surface for the duration of the tethered balloon flight every 30 to 60 s. Distributed temperature sensing has been shown to be an effective method of collecting atmospheric temperature measurements (e.g., Keller et al., 2011, Thomas et al., 2012, de Jong et al., 2015), but has been limited in the duration, altitude, and ambient conditions of measurement. DTS was used to provide sub-meter vertical profiles of temperature between the surface and the balloon every 30 to 60 s. The present paper discusses tethered balloon-based distributed temperature sensing measurements and their comparison with concurrent AMF3 radiosonde temperature measurements under cloudy and clear conditions to altitudes over 1 km above the surface. An overview of the tethered balloon system is provided, followed by descriptions of the SLWC sondes and DTS system, subsequent flight results from Oliktok Point, and a discussion of future operational plans.

2 Tethered Balloon System (TBS)

2.1 TBS components

The TBS may be driven mechanically by a 52 horsepower DC motor and reversible variable speed controller or smaller electrical winches depending on the mission and balloon in use. The most commonly used winch deploys over 2 km of

Plasma® 12 strand synthetic rope, which has a minimum breaking strength of 2,494 kg (Cortland Company, 2019). Allsops 34 m³ helikites (Fig. 1) are a balloon/kite hybrid that use lighter-than-air principles to obtain initial lift, and then a kite to achieve stability and dynamic lift. In the ARM TBS, helikites are typically used for flights with desired altitudes to 700 m Above Ground Level (AGL), a maximum payload of less than 10 kg, and in surface wind speeds less than 11 m/s. SkyDoc™ and Drone Aviation Corp 79 – 104 m³ aerostats use a skirt to maintain orientation and stability in flight. Aerostats are generally used when the desired maximum flight altitude is higher than 600m, the payload is 10 – 25 kg, and in surface wind speeds less than 8 m/s (see Dexheimer (2018) for a full description of the TBS).



10 **Figure 1.** 34 m³ helikite in flight with three tethersondes (left) and 79 m³ aerostat in flight with radar calibration sphere (right).

2.1.2 TBS operations

The TBS was operated with multiple instrument payloads. This paper focuses on TBS flights using SLWC sondes and DTS at the AMF3 at Oliktok Point, Alaska, for almost 337 hours from October 2015 – September 2018. Flights occurred during daylight to altitudes of 1.45 km AGL and with durations from one to nine hours in various atmospheric conditions including clear sky, broken to overcast clouds, rain, sleet, snow, and temperatures from -20 °C to 25 °C.

15

Formatted: Font color: Auto, Not Expanded by / Condensed by

Formatted: Font color: Auto, Not Expanded by / Condensed by

Formatted: Font color: Auto, Not Expanded by / Condensed by

Formatted: Font color: Auto, Not Expanded by / Condensed by

Formatted: Font color: Text 1, Not Expanded by / Condensed by

Table 1. Overview of TBS flights analyzed within this study including date, duration, sensor payload, and campaign.

Dates	TBS Flight Hours	Relevant Sensors	Campaign
October 22-28, 2015	33.5	SLWC sondes	ERASMUS
April 3-20, 2016	9.3	SLWC sondes	AALCO, ERASMUS
May 13-16, 2016	14.8	SLWC sondes, Sensornet Oryx DTS	AALCO, ERASMUS
June 5-11, 2016	24.0	SLWC sondes, Sensornet Oryx DTS	AALCO, ERASMUS
July 24-27, 2016	7.4	Sensornet Oryx DTS	AALCO, ERASMUS
October 10-20, 2016	33.0	SLWC sondes, Sensornet Oryx DTS	AALCO, ERASMUS
November 14-17, 2016	10.5	SLWC sondes	AALCO
April 2-10, 2017	8.5	SLWC sondes	AALCO, ERASMUS
May 15 – 24, 2017	30.8	SLWC sondes, Sensornet Oryx DTS with Fiber Optic Rotary Joint (FORJ)	AALCO, ERASMUS
August 4 – 9, 2017	17.0	SLWC sondes, Sensornet Oryx DTS with Fiber Optic Rotary Joint (FORJ)	AALCO, ERASMUS
October 13 – 22, 2017	9.7	SLWC sondes, Silixa XT DTS with Fiber Optic Rotary Joint (FORJ)	AALCO, ERASMUS
July 1 – 11, 2018	41.8	SLWC sondes, Silixa XT DTS with Fiber Optic Rotary Joint (FORJ)	POPEYE
July 24 – August 3, 2018	43.5	SLWC sondes, Silixa XT DTS with Fiber Optic Rotary Joint (FORJ)	POPEYE
August 17 – 26, 2018	22.9	SLWC sondes, Silixa XT DTS with Fiber Optic Rotary Joint (FORJ)	POPEYE
September 21 - 28, 2018	29.5	SLWC sondes, Silixa XT DTS with Fiber Optic Rotary Joint (FORJ)	POPEYE
TOTAL	336.2		

2.2 TBS Anasphere SLWC sondes

SLWC sondes developed by Anasphere Inc. were operated on the TBS with both InterMet (iMet) radiosondes and Anasphere tethersondes (Fig. 2). The vibrating wires on the SLWC sondes were oriented orthogonal to the freestream direction, meaning

they were oriented perpendicularly to the surface on the TBS. The rate of change of the frequency of the 0.61 mm diameter steel vibrating wire on the SLWC sonde and other atmospheric parameters were used to calculate supercooled liquid water based on Equation 1, where b_0 is the vibrating wire mass per unit length of 2.24 g m^{-1} , f_0 is the un-iced wire frequency in Hz, f is the wire frequency in Hz at time t , ϵ is the droplet collection efficiency between 0 and 1 found using the method described in Lozowski et al. (1983), D is the wire diameter in m, and ω is the velocity of the air relative to the wire in m s^{-1} .

$$SLWC = -\frac{2b_0 f_0^2}{\epsilon D \omega f^3} \frac{df}{dt} \quad (1)$$

The raw wire frequencies had outliers removed if the frequency deviated over 0.1 Hz from a 30s moving average of the frequency, and the remaining frequencies were then smoothed using the robust LOESS (locally estimated scatterplot smoothing) model. Wind speeds from the Doppler lidar at the AMF3 or tether-based anemometers were used in the calculation. Pressure, temperature, and relative humidity values from iMet radiosondes were typically used in the collection efficiency calculation, if radiosonde measurements were unavailable tether-sonde-measured values of these parameters were used. An estimate of median droplet diameter, d_0 , was required for the collection efficiency calculation. SLWC was calculated using median droplet diameters of 11, 16, and $20 \text{ }\mu\text{m}$ based on Lozowski et al. (1983) and Bain and Gayet (1981), with results for a median droplet diameter of $16 \text{ }\mu\text{m}$ being presented here. At wind speeds $\geq 5 \text{ m s}^{-1}$, which were typical during TBS flights, a median droplet diameter of $16 \text{ }\mu\text{m}$ results in a collection efficiency greater than ~ 0.9 . Therefore, we use this diameter to get the lower estimate of SLWC in all deployments so as provide the most conservative estimates given our lack of particle size knowledge. The three median droplet diameters had limited impact on the resulting calculated SLWC, with mean SLWC values for each TBS flight being within $\pm 0.01 \text{ g/m}^3$ when all other values were kept constant and the median droplet diameter was varied. A full discussion of the Anasphere SLWC sonde measurement theory and design is available in Serke et al., 2014 and King, 2016.

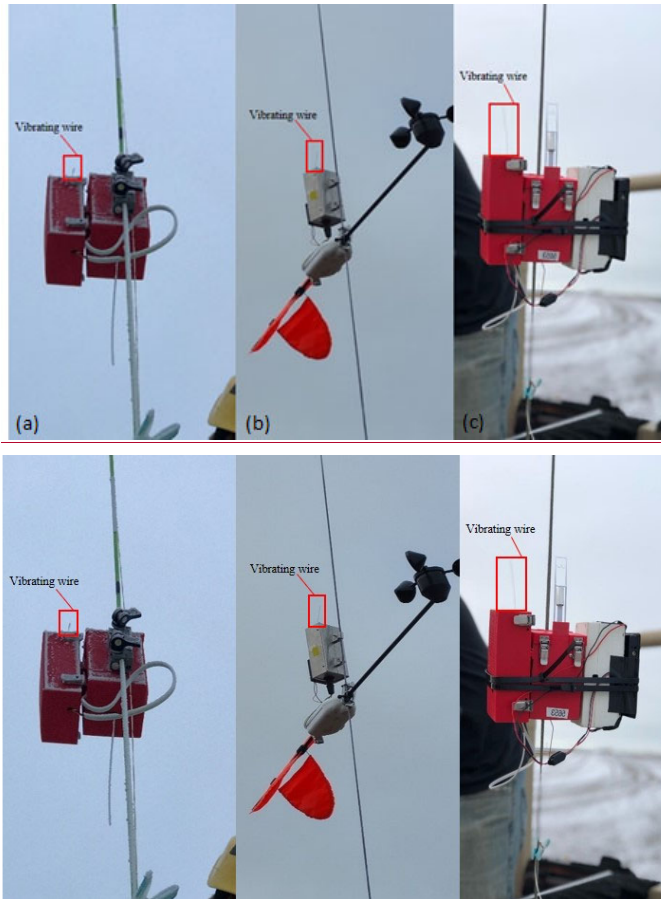






Figure 2. Anasphere SLWC sonde left of InterMet radiosonde on TBS tether (a)left). Anasphere SLWC sonde above
 Anasphere tethersonde (b). InterMet radiosonde in center with .) ~~From left to right~~ Anasphere SLWC sonde on left and,
 5 InterMet radiosonde, Reading SLWC sonde on TBS-tether (right (c).

Another SLWC detector, developed at the University of Reading, UK (Airey et al. 2017), was operated alongside the
 Anasphere sensor on some of the deployments to provide independent comparison and validation. This sensor was designed
 10 with programmable versatility in mind. It was also designed with disposability for routine radiosonde use, by implementing
 complex on-board processing on relatively cheap hardware. The device operates on the same principle as the Anasphere sensor,

that is, a vibrating wire that determines mass accretion (ice) from a reduction in natural oscillation frequency, however it is highly versatile, with programmable on-board processing that measures the frequency in three different ways. Implemented methods to determine the resonant frequency include a Fast Hartley Transform (FHT), a frequency sweep, and a Phase-Locked Loop (see Airey et al. (2017) for a full description of these methods). This experiment combined the FHT and frequency sweep modes, the former providing fast identification of the broad region of frequency (± 0.2 Hz), the latter using this to focus the sweep region for more rapid resonance detection, which also provides a much higher precision (± 0.005 Hz). Outlier removal and data smoothing is also required for this sensor, in this case fitting method, that uses a first order polynomial, achieves a better fit to the data given the longer update time when compared with the Anasphere sensor, which uses the second order polynomial fit; both implementations use the fitting models defined in Mathworks' MATLAB version 2018b. The SLWC is calculated using the same method as that for the Anasphere device. In contrast to the Anasphere design, which mechanically actuates the wire, the Reading design uses a piezoelectric device to both drive the wire and measure the frequency after the drive ceases, thereby eliminating all moving parts. The sensors were flown with the collecting wire horizontal, to better sense the lateral airflow. This sensor is designed to relay the data through a radiosonde via the PANDORA interface, also developed at Reading (Harrison et al. 2012). In normal operation the data are transmitted via the standard radiosonde telemetry; for this study, it was adapted to function as a standalone unit, self-logging to SD card.

2.2.2 Anasphere SLWC sonde uncertainty

Throughout the ICARUS and AALCO campaigns pairs of eight different Anasphere SLWC sondes were operated side-by-side, in the presence of SLW clouds, for over four hours. Three such comparison flights were conducted with SLWC sondes on the TBS, while one flight was conducted using a free-flight meteorological balloon. The SLWC values calculated at simultaneous times for each SLWC sonde pair and the corresponding probability density functions are shown in Figures Figure 3 and 4 respectively. The mean differences between simultaneous non-zero SLWC values calculated by all sonde pairs operated on the TBS were 0.01 to 0.02 $\text{g m}^{-3}/\text{m}^3$, and larger for the free-flight balloon pair at 0.06 $\text{g m}^{-3}/\text{m}^3$.

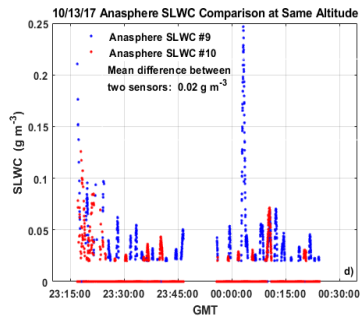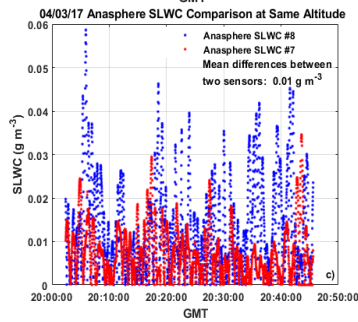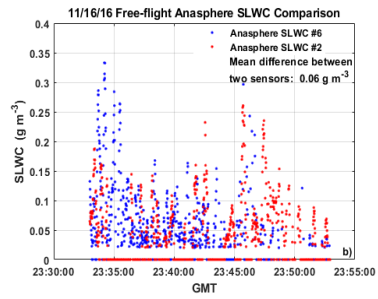

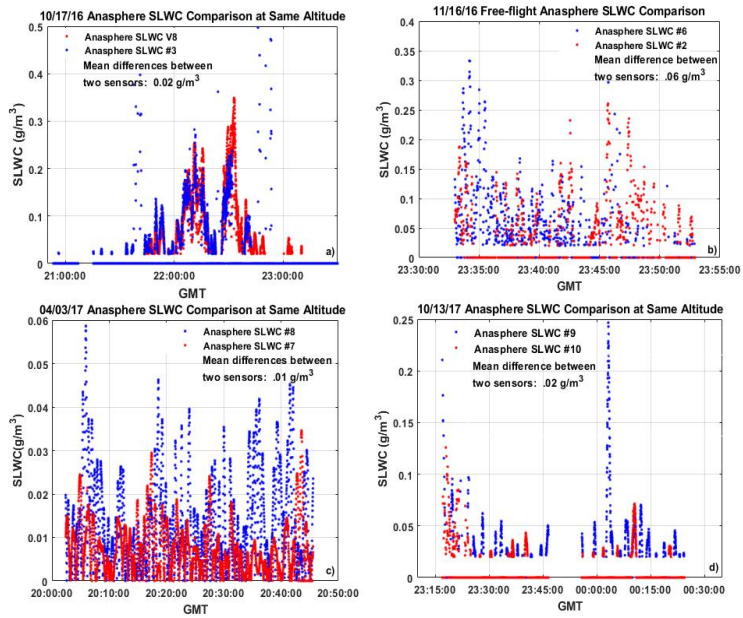


Figure 3. Results of four side-by-side comparison flights of Anasphere SLWC sondes.

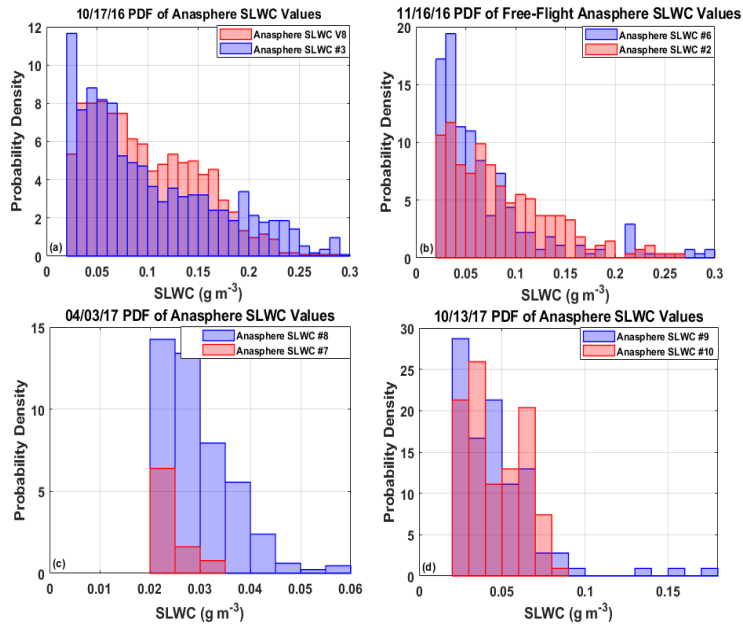


Figure 4: PDFs of four side-by-side comparison flights of Anasphere SLWC sondes.

2.3 Distributed Temperature Sensing system components

5 Two DTS systems were used on the TBS over the three field campaigns studied. The Sensomet Oryx DTS fires a center wavelength 971 nm laser pulse lasting less than 10 ns through attached 50 μm multimode optical fibers. Up to four fibers may be deployed from each DTS system simultaneously. Some of the laser light is Rayleigh scattered as it collides with the structure of the fiber and returns down the fiber at the incident wavelength. The portions of the backscattered signal that are shifted towards lower and higher frequencies are considered Stokes and anti-Stokes scattering, respectively. The ratio of Anti-

10 Stokes to Stokes photons produced increases with temperature, and their different respective attenuations are combined in order to represent the proportional total return intensity. The velocity of light in the fiber is constant, so the number of ns between the laser pulse firing and the detection of the returned light can be used to determine the scattering site, and thus the calculated temperature. When DTS is operated on the TBS the scattering site represents an altitude. Under Equation 2 below, the intensity of the backscattered light (I) is proportional to the difference in the molecular energy state of the photons before and after scattering (ΔE) divided by the Boltzmann constant (k) and the temperature of the scattering site.

15

$$\frac{I_{Stokes}(z)}{I_{antiStokes}(z)} \propto \exp(\Delta E / kT(z)) \quad (2)$$

When the balloon is stationary DTS data may be collected by directly connecting an optical fiber to the DTS system. However, there are some disadvantages of this configuration for the TBS: at least twenty minutes are required to install and remove coils of fiber in calibration baths, there is a potential risk of damage to the fiber whenever it is coiled or uncoiled, and the TBS is required to float at a fixed altitude when vertical profiling may be a more desirable method of operation. To overcome these constraints DTS data may be collected when the balloon is in motion by using a fiber optic rotary joint (FORJ) between the optical fiber and DTS. However, the low loss (< 0.5 dB) required for DTS measurements approaches the limits of most currently-available commercial FORJs. Multiple FORJs were tested before successfully collecting accurate DTS measurements through an FORJ by using a spool of fiber deployed with a variable-speed electric motor. The fiber was spooled and unspooled using foot pedals to match the rate of the TBS winch during ascent and descent (Fig. 57). If a significant temperature differential does not exist between the surface and lowest few meters of the atmosphere, a method of demarcating the surface is helpful in determining the starting location of the suspended portion of fiber with respect to the portion of fiber remaining on the spool. Various methods of surface demarcation were tested and a saltwater bath proved to be the most ideal solution.

15 A Sensornet Oryx DTS system was used prior to October 2017, with a 30 s measurement interval and 1 m sampling resolution. Single-ended DTS measurements were collected after initially collecting double-ended measurements, due to the reduction in datafile size and processing effort related to correlating the deployed fiber length with the balloon altitude, as it is affected by horizontal drag. Approximately 15 m of fiber were coiled into ice water and hot water calibration baths, with 15 m of fiber between each bath. A PT100 temperature sensor was placed in each bath and logged by the DTS. An iMet-1-RSB radiosonde
 20 measuring temperature every 1 s was placed at the balloon-end of the fiber to serve as an independent temperature measurement aloft for calibration. In September 2017 a second DTS system, a Silixa XT, was procured. The Silixa XT has a center wavelength of 1064 nm and is capable of 25 cm spatial resolution, largely due to a reduction in pulse duration to 2.5 ns, which allowed a smaller section of fiber to be used in the surface calibration baths and demarcation portion.

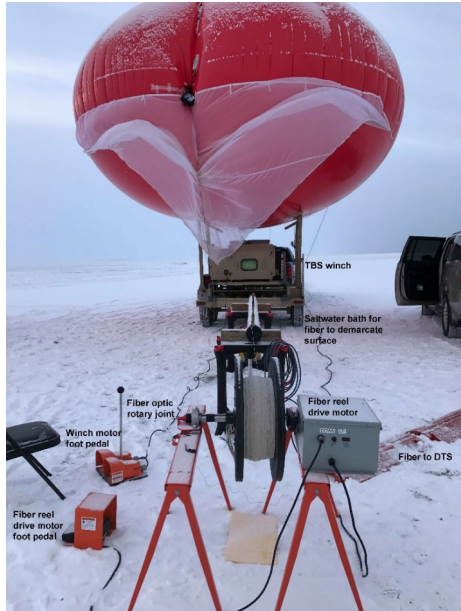


Figure 54. TBS with optical fiber operating through rotary joint and saltwater bath

3 Results

3.1 SLWC Results


5 3.1.1 10/13/17 SLWC from TBS flight with concurrent SLWC from free radiosonde launch

Between 10/13/17 22:20 UTC and 10/14/17 00:20 UTC two Anasphere SLWC sondes were operated in the presence of two stratocumulus cloud layers, the lowest with a base at 0.45 - 0.55 km and a second with a base at approximately 0.75 km and a top near 1 km. These cloud layers were representative of the persistent, low-level stratocumulus clouds which commonly occur in the Arctic. A stratocumulus cloud base between 100 m and 1.2 km persisted at Oliktok Point for 96 hours between 10/12/17 and 10/16/17. Temperature decreased during the TBS flight from -2 °C at the surface to -5.5 °C near 600 m.

The ARM AMF3 23:27 UTC sounding, that occurred during the TBS flight, was analyzed using the commercial software RAOB (Fig. 6Figure 5). LWC was calculated from the sounding using the enthalpy equation for cloud water (LWC) in RAOB. This equation uses the adiabatic Enthalpy (γ) lapse-rate equation, where LWC is a function of air density $\rho(z)$, specific heat at constant pressure (C_p), latent heat of vaporization (L), dry adiabatic lapse rate (Γ_d), and the moist adiabatic lapse rate (Γ_s).

$$LWCad(z) = \int \rho(z) \frac{Cp}{L} (\Gamma - \Gamma_s) dz$$

(3)

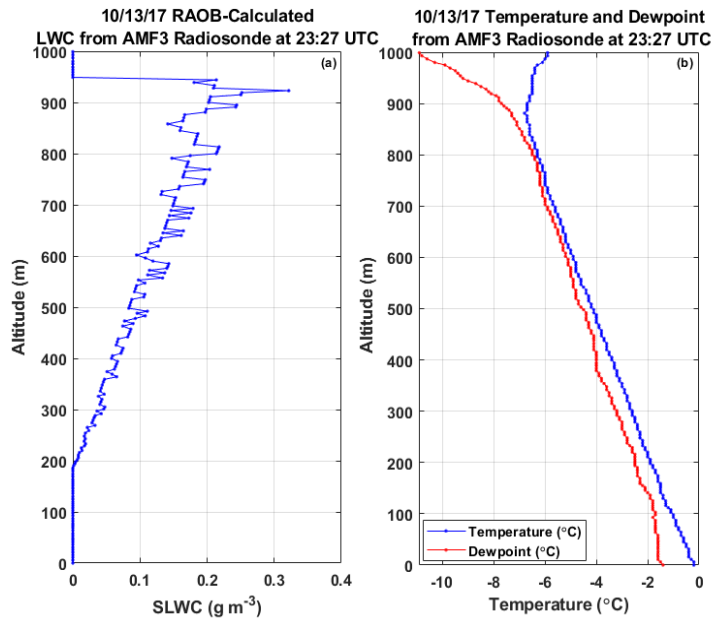




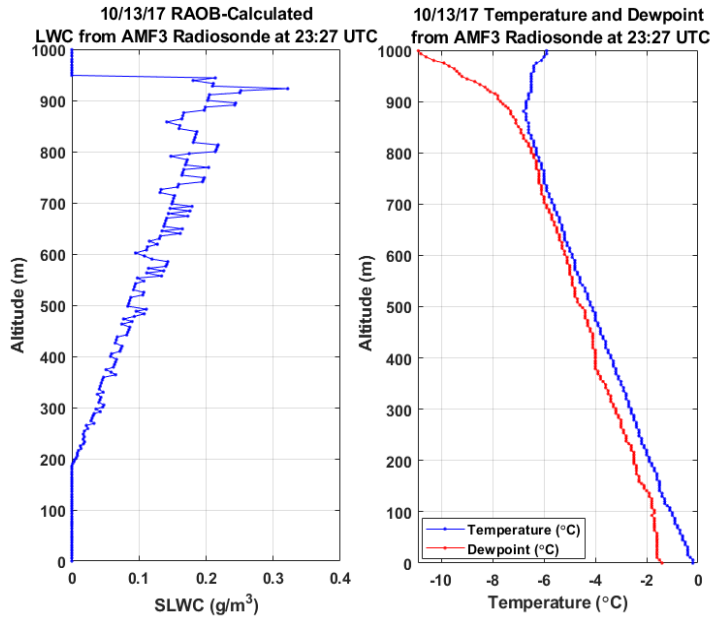


Figure 65: LWC calculated in RAOB software using Equation 3 for 10/13/17 23:30 UTC AMF3 sounding (left) and temperature and dewpoint from sounding (right).

The LWC calculated by RAOB, which in this case was considered SLWC since the entirety of the cloud was below 0 °C, increased adiabatically through the cloud reaching a maximum of 0.32 $\text{g m}^{-3}/\text{m}^3$ just below cloud top at 0.95 km. Supercooled liquid water content was also calculated from the two SLWC sondes operating on the TBS. The LWC values calculated by RAOB from the free radiosonde flight at the same altitudes as both tethered balloon vibrating-wire SLWC sondes were both 0.14 g m^{-3} . As shown in Fig. 7 the m^{-3} . The lowest cloud base reported by the AMF3 ceilometer between 23:26 and 23:32 UTC had a standard deviation of 120 m and varied widely from a minimum of 210 m to a maximum of 740 m. This variation in the cloud base would be expected to cause significant variation in whether or not SLWC was measured by the TBS SLWC sondes. The maximum SLWC observed by the highest altitude TBS SLWC sonde between 23:26 UTC and 23:32 UTC was 0.14 $\text{g m}^{-3}/\text{m}^3$, while the maximum SLWC observed by the lower altitude sonde was 0.05 $\text{g m}^{-3}/\text{m}^3$. Given the variation in the cloud base during the flight and the spatial variation between the TBS and AMF3 radiosonde measurements, the TBS SLWC sondes and RAOB LWC calculation showed reasonable agreement.

Formatted: Superscript

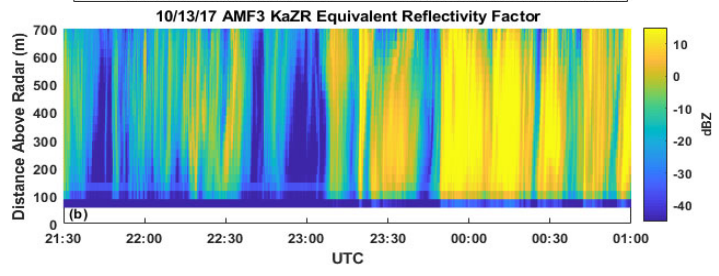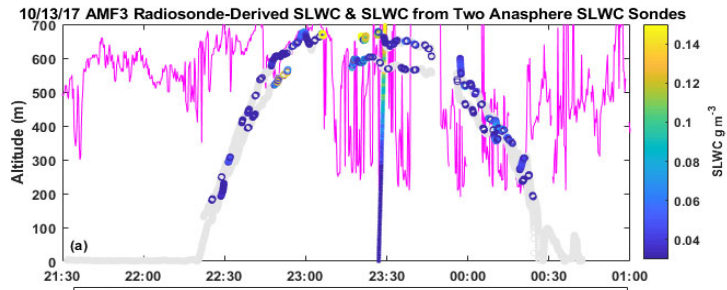

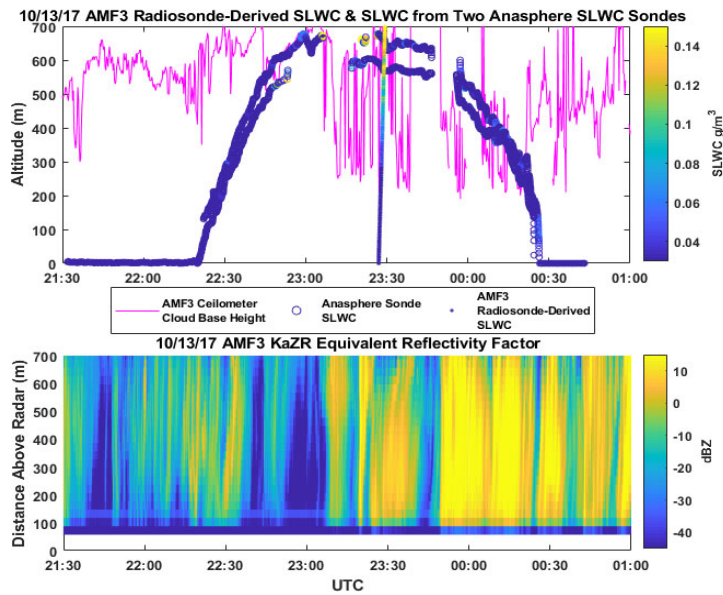


5 **Figure 76:** TBS Flight of two SLWC sondes with concurrent free balloon radiosonde launch at 10/13/17 23:27 UTC. The RAOB LWC values calculated from the 23:27 UTC AMF3 free radiosonde launch are plotted (dots), as well as SLWC measured by two TBS SLWC sondes (circles), the lowest cloud base height reported by the AMF3 ceilometer (magenta), and the reflectivity from the AMF3 KaZR (bottom plot).


3.1.2 10/15/16 and 10/20/16 TBS Anasphe SLWC sondes and SLWC from MWR

For two TBS flights that did not occur during one of the twice daily AMF3 radiosonde launches, SLWC values measured by TBS Anasphe SLWC sondes were compared with SLWC derived from the surface-based AMF3 MWR. These TBS flights occurred in single-layer, subfreezing stratocumulus clouds on 10/15/16 and 10/20/16. SLWC was derived by distributing MWR Liquid Water Path values adiabatically through the single cloud layer. The cloud layer thickness was defined using the lowest cloud base from the ARM AMF3 ceilometer and cloud top from the ARM ARSC (Active Remote Sensing of Clouds) Value-Added Product (VAP). The ARSC VAP combines ceilometer data and the deviation of the KAZR reflectivity from received sky noise to assign bases and tops to up to 10 cloud layers. Non-zero SLWC values $\leq 0.02 \text{ g m}^{-3} \text{ m}^3$ were considered to be below the noise threshold of the Anasphe SLWC sonde and removed, then all remaining SLWC values were smoothed with a moving average.

On 10/15/16 the cloud base altitude deviated significantly with time, resulting in the Anasphere SLWC sondes flying above and below the ceilometer-defined cloud base (Fig. 8Figure 7). The SLWC values from both sensors were non-zero when in-cloud as expected although the magnitude differed, resulting in an R^2 value of 0.38. Given the ceilometer cloud height resolution of +/- 10 m (e.g., Morris, 2016) and TBS iMet radiosonde GPS altitude resolution of +/- 15 m, the agreement of SLWC detection between the two sensors is surprisingly good considering the uncertainty regarding the placement of the SLWC sonde with respect to cloud base.

On 10/20/16 the Anasphere SLWC sonde flew for two hours at 150 m above cloud base, descending to 85 m above cloud base with time, due to the accumulation of ice on the balloon, sensors, and tether. The Anasphere SLWC sonde experienced multiple shedding events during the flight, where the maximum ice load on the vibrating wire is reached and subsequently shed, resulting in erroneously low SLWC values. The R^2 value for SLWC values from the flight was 0.79, with MWR SLWC values averaging $0.03 \text{ g m}^{-3}/\text{m}^3$ higher, largely due to offset low sonde SLWC values during shedding events.

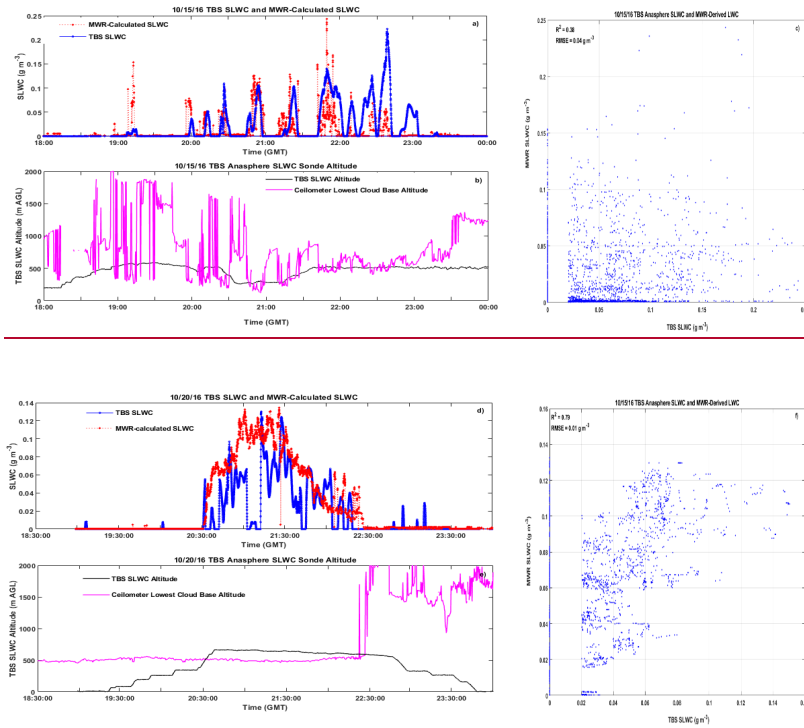

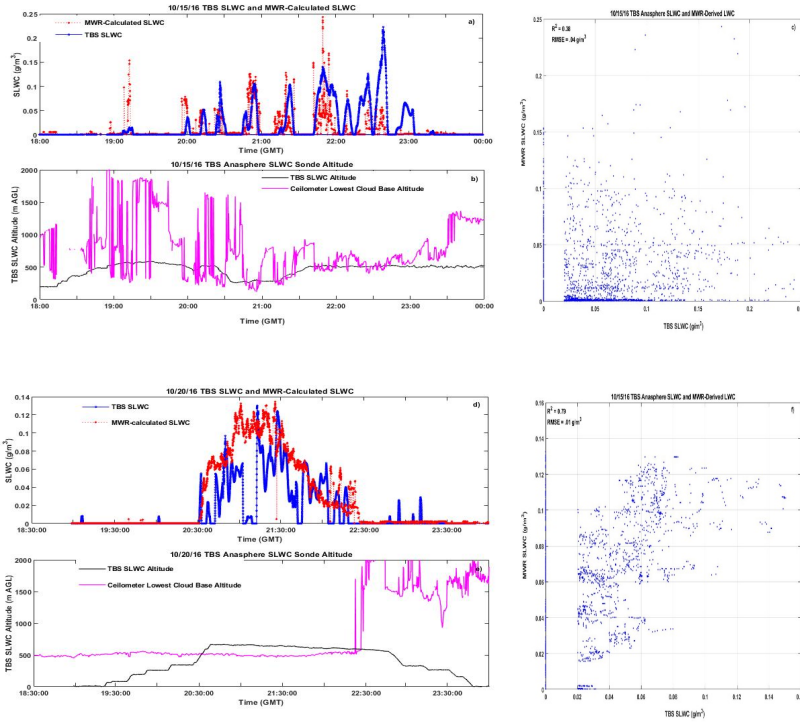

5 **Figure 87:** 10/15/16 SLWC from TBS Anasphere sonde and calculated from MWR (a), 10/15/16 TBS Anasphere sonde and ceilometer cloud base altitude (b), and 10/15/16 SLWC from Anasphere sonde vs. SLWC calculated from MWR (c), 10/20/16 SLWC from TBS Anasphere sonde and calculated from MWR (d), 10/20/16 TBS Anasphere sonde and ceilometer cloud base altitude (e), and 10/20/16 SLWC from Anasphere sonde vs. SLWC calculated from MWR (f).

10 **3.1.3 Comparison of simultaneous in situ SLWC measurements from the Anasphere and Reading sensors on the TBS**


To independently test the validity of the in situ measurements collected by the Anasphere sondes, some balloon flights were instrumented with an additional Reading SLWC sensor so that simultaneous profiles could be taken and compared between the two sensing methods and against the MWR data. One such flight was conducted on 08/02/18, where the sensors were deployed on the helikite platform through the cloud base to an altitude of ~400 m and returned to ~150 m below the cloud base over two cycles, each of around 60 minutes duration. Both sensors successfully detected SLW, particularly during the ascent and descent phases at approximately 2100, 2130, 2200, and 2230. During the initial ascent a gradual increase in SLWC is observed between 200 – 400 m from 0 – 0.3 $\text{g m}^{-3}/\text{m}^3$. At the maximum altitude, SLWC decreased to 0 $\text{g m}^{-3}/\text{m}^3$ as the sensors emerge into a region of low relative humidity (~65%) interpreted to be above the cloud top. During the subsequent descent,

Formatted: Font color: Auto
 Formatted: Font color: Auto
 Formatted: Font color: Auto, Superscript

both sensors once again detected similar values of SLWC, albeit lower, probably due to either the vibrating wires being at maximum ice loading or descent through an anomalously low-SLW region. The MWR LWP detected during this descent (Fig. 10Figure 9) would suggest the former. The second cycle follows the same pattern, with similar SLWC during ascent and above the cloud, although the Reading sensor detected somewhat less SLW during this ascent possibly due to the retention of more ice on the wire than the AnaspHERE sensor. The final descent also shows reasonably good agreement, peaking at $\sim 0.3 \text{ g m}^{-3}/\text{m}^3$ between 300-350 m as observed in the preceding ascents. Following the final descent, both sensors continue to detect SLW while they are held at ~ 150 m, somewhat higher than the period following the first descent and, in this case, coinciding periodically with the cloud base, which would account for the continued detection. The higher LWP value detected by the Reading sensor during descent 2 may be due to the longer sensing wire (120 mm rather than 90 mm) allowing a greater overall detection possible after the shorter wire reaches maximum ice loading, which in King 2016 is suggested as $0.75 \text{ g m}^{-3}/\text{m}^3$ as the response of the wire becomes non-linear in that environment.

The calculated LWP from each sonde is compared with that derived from the MWR in Fig. 10Figure 9 and show both sensors achieving good agreement with the MWR data during the ascents (to within ± 0.008 mm for the Reading sensor and ± 0.003 mm for the AnaspHERE sensor); however, this is less good during the descents for the possible reasons discussed above. Fig. 9Figure 8 shows the time series of the flight and Fig. 10Figure 9 compares the two SLWC profiles.

Formatted: Font color: Auto

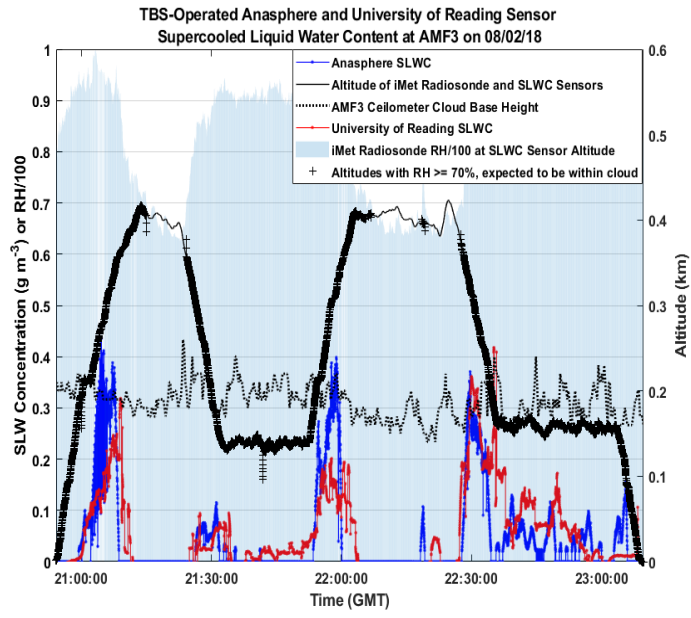

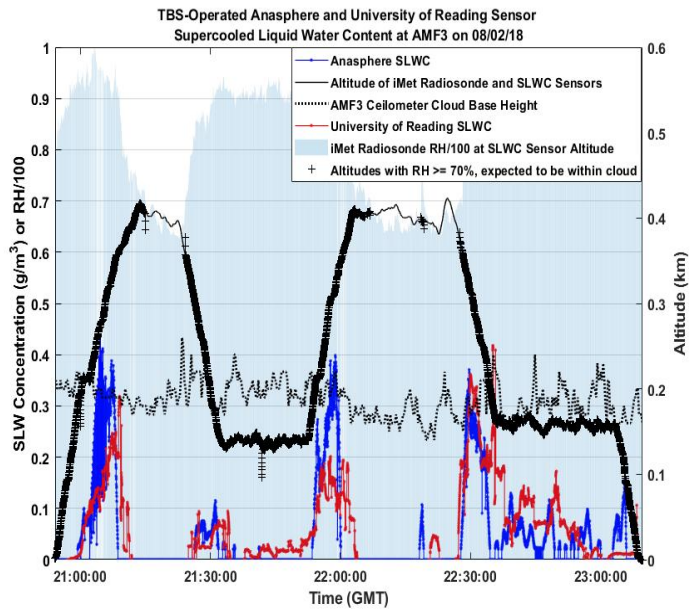
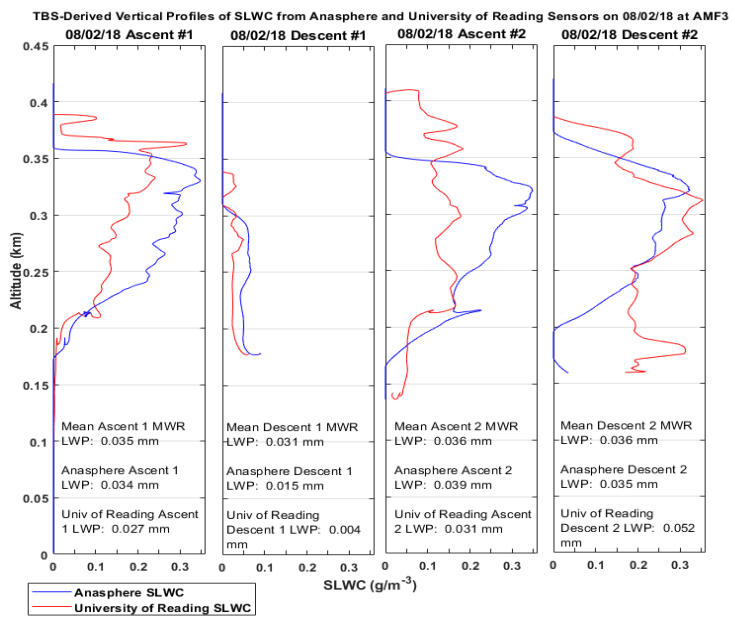


Figure 98: Time-series of 08/02/18 TBS flight with Anasphere and Reading SLWC data, sensor altitude and relative humidity, and cloud base height.



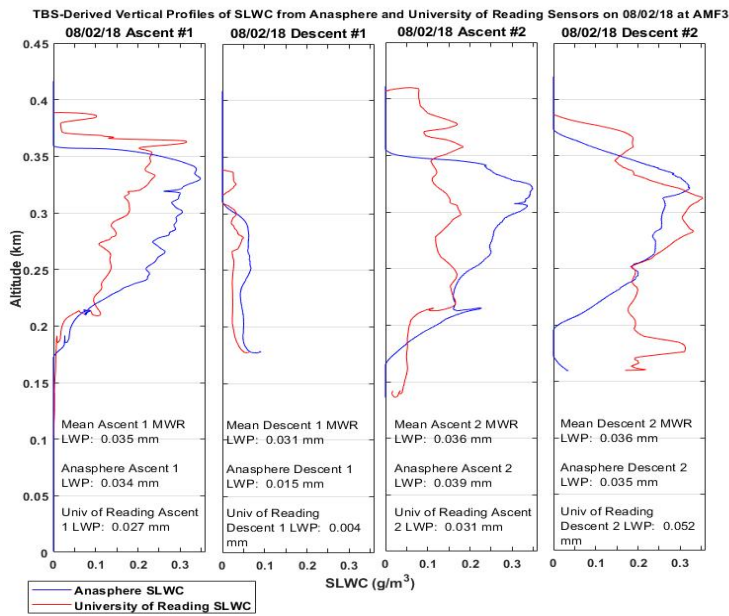


Figure 109: Vertical profiles of Anasphere and Reading SLWC from 08/02/18 TBS flight with mean surface-based MWR LWP values.

Overall, the two sensors seem to provide broadly similar SLWC profiles, but not without some discrepancies. This increases confidence in the use of each of them and provides independent verification of the measurements. The variation between them is partly due to both methods being reliant on different sensor data acquisition methods and physical geometry, but also the sampling conditions of the two sensors may differ. The ice accumulation on the vibrating wire of each sonde may be dependent upon the upwind or downwind orientation of the sonde with respect to the balloon tether. The conversion of the frequency of the wire oscillation to SLWC is also non-trivial depending on the appropriateness of theoretical assumptions, and small differences in frequency data may result in somewhat larger discrepancies in the derived SLWC. The processing of outliers and smoothing of data to allow df/dt to be obtained is another source of sensor to sensor variation but, given these considerations, the good agreement between them provides some confidence in their measurements. The Reading sensor has higher precision and sampling frequency than the Anasphere sensor, but is more prone to data gaps. Therefore, the result of the processing algorithms applied will result in sensor-specific nuances.

15 **3.1.4 Comparison of in situ SLWC Anasphere sonde measurements and SLWC calculated from radiosonde flights**


Mean values of SLWC from the in situ vibrating wire sondes deployed on the TBS for 43 flights were compared with mean SLWC values calculated from AMF3 radiosonde launches that occurred during each TBS flight at the altitudes of the TBS SLWC sondes using the enthalpy lapse-rate equation for cloud water (LWC) in RAOB shown in Equation 3.

As shown in Fig. 11 the mean SLWC values measured by the in situ vibrating wire sondes averaged 0.045 g m^{-3} higher than the mean SLWC values calculated from the radiosonde flights using Equation 3. Some of this difference could be attributed to temporal and spatial variation between the TBS and radiosonde flights. Despite this however, the mean SLWC values calculated from Equation 3 are quite small, at $< 0.05 \text{ g m}^{-3}$ for 91% of the dataset. Previous aircraft measurements in supercooled stratiform clouds measured SLWC values $< 0.05 \text{ g m}^{-3}$ for 36% of the samples (e.g., University of Wyoming, 1999 Sand et al., 1984), which is consistent with the results from the TBS Anasphere sonde measurements at 38%. The probability density and cumulative distribution functions of all SLWC data collected with the Anasphere sondes on the TBS for the 43 flights are shown in Fig. 12, and the probability density of SLWC values $< 0.05 \text{ g m}^{-3}$ was 34%.

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

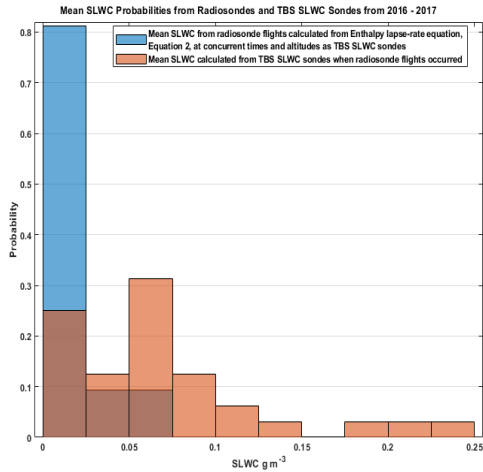

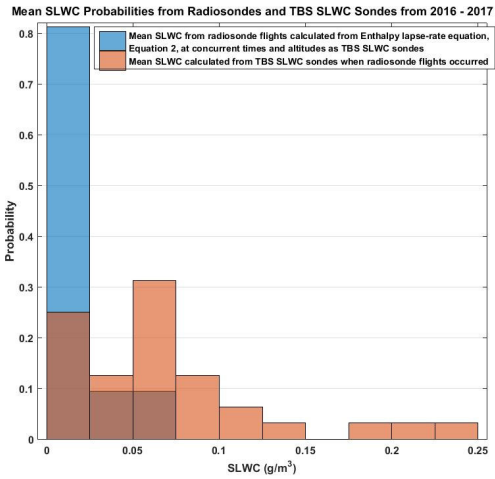


Figure 1140: 2016–2017 Mean SLWC from Anasphere sondes (orange) and mean SLWC calculated from AMF3 radiosonde flights (blue) during TBS flights over the TBS flight altitude range.

Formatted: English (United Kingdom)

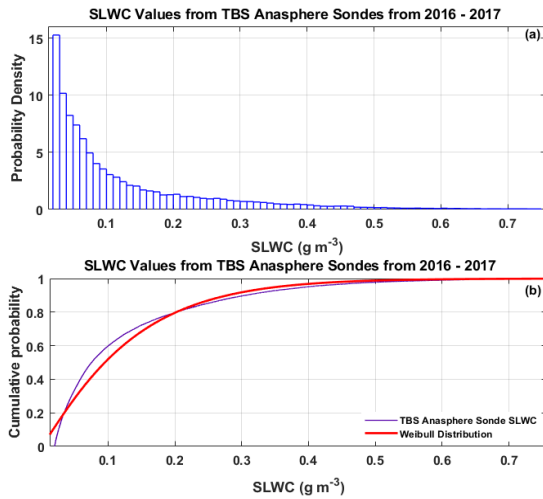


Figure 12: PDF and CDF of 2016–2017 TBS Anasphere SLWC sonde data collected over 43 flights.

3.1.5 SLWC from TBS Anasphere sondes from 2015 – 2017 by month, altitude, and temperature

Fig. 13 depicts results from recurring TBS Anasphere SLWC sonde deployments that occurred at the ARM AMF3 during fall and spring months between 2015 and 2017. The highest SLWC values were measured in the late spring during May and June, with lower values being measured in fall and early spring. As shown in Fig. 14 measured SLWC values increased at flight altitudes between 400 m and 1 km AGL and were lower below 400 m, and the highest measured SLWC values occurred at temperatures above -14 °C and below -2 °C. In respect to interannual variability of SLWC, the mean SLWC values in three sequential Octobers were 0.06, 0.10, and 0.14 $\text{g m}^{-3}/\text{m}^3$; sequential average April values were both 0.05 $\text{g m}^{-3}/\text{m}^3$, and sequential May means were 0.26 and 0.14 $\text{g m}^{-3}/\text{m}^3$, respectively.

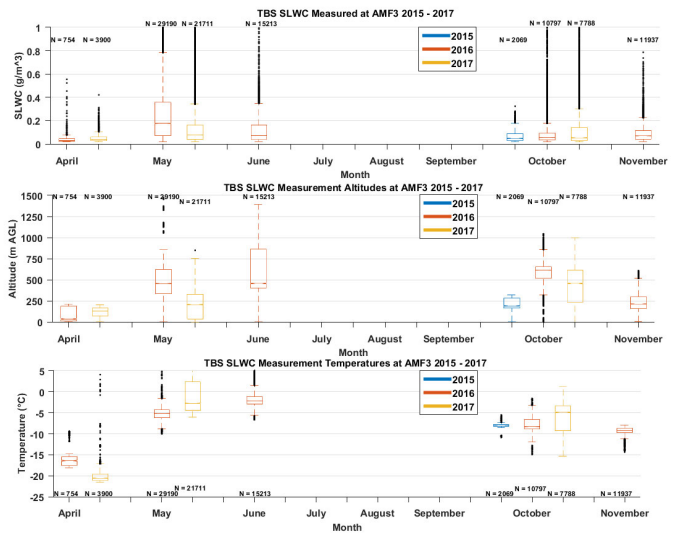
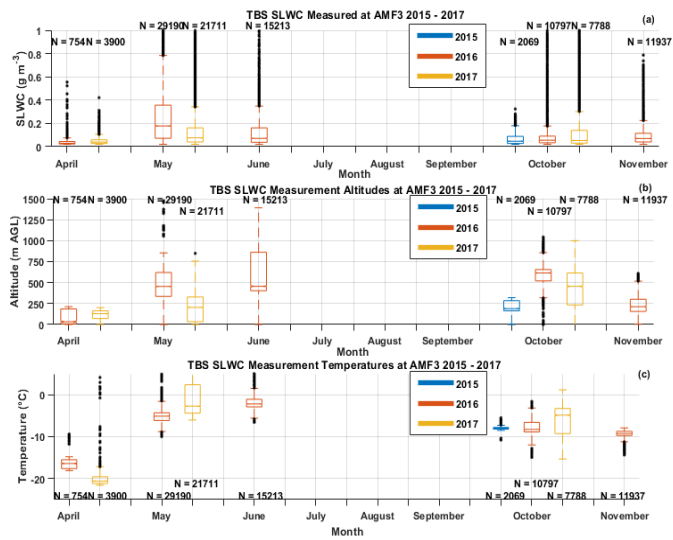



Figure 134: SLWC measured by Anasphere sondes flown on the TBS and SLWC measurement altitudes and temperatures by month from 2015 – 2017, where N refers to the number of SLWC measurements and the median is shown by the horizontal line. The 25th and 75th percentiles are shown by the bottom and top edges of the box, the whiskers extend to the data points not considered outliers, and outliers are plotted with '+'.


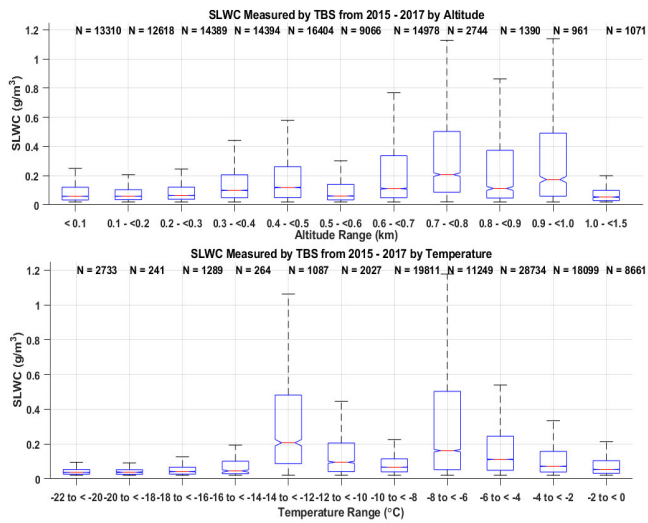
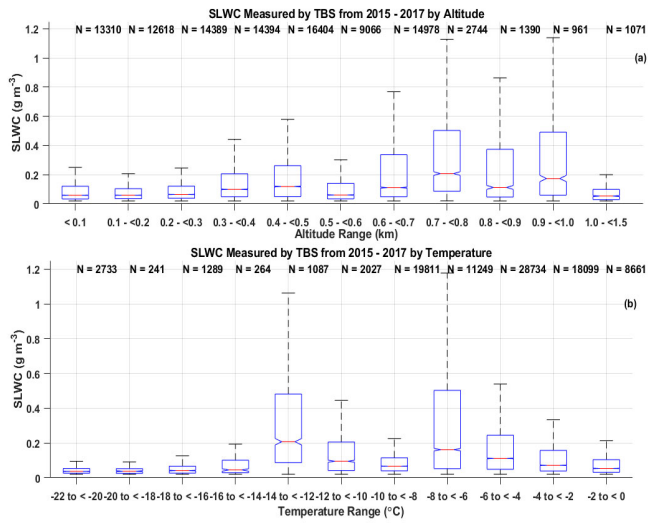


Figure 1442: SLWC measured by Anasphere sondes flown on the TBS by altitude and temperature from 2015 – 2017, where N refers to the number of SLWC measurements and the median is shown by the horizontal line. The 25th and 75th percentiles are shown by the bottom and top edges of the box, the whiskers extend to the data points not considered outliers, and outliers are plotted with '+'.

3.2 DTS Results

5 3.2.1 6/11/16 DTS measurements with concurrent free radiosonde launch

DTS measurements were collected once a minute with a Sensornet Oryx using fiber suspended along the TBS tether from 6/11/16 21:18 – 6/12/16 01:19 UTC. During this time a free flight radiosonde was launched from the AMF3 at 23:30 UTC. The vertical resolution of the radiosonde was approximately 10 m, while DTS measurement vertical resolution was every 1 m. The radiosonde temperature measurement from the altitude closest to each DTS measurement altitude was used for comparison (Fig. 15). The 23:30 UTC radiosonde and DTS temperature measurements between the surface and the maximum altitude of the fiber (839 m AGL) showed a correlation of R^2 of 0.99 and an RMSE of 0.6 °C.

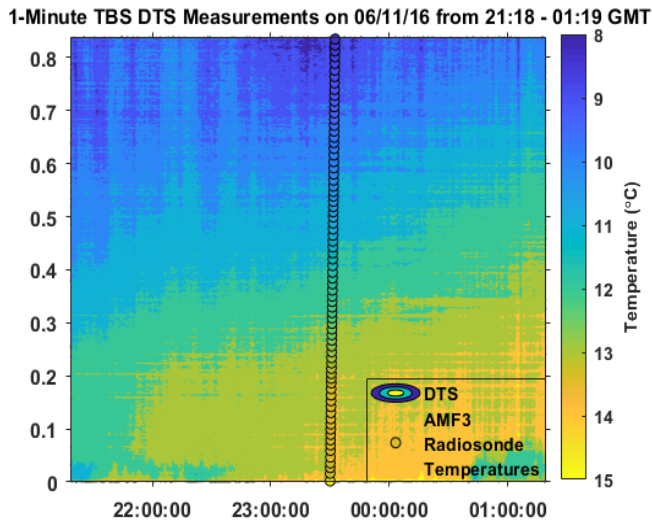


Figure 1543: TBS DTS measurements collected once per minute with concurrent free balloon radiosonde launch at 23:30 UTC.

3.2.2 Comparison of DTS temperature measurements with TBS iMet radiosonde temperatures at the same altitude

15 While the comparison of TBS DTS measurements and free flight radiosonde measurements is informative, the dataset is limited since only two radiosondes are launched daily from the AMF3. In order to compare a larger number of samples (197 samples over a 20 °C range were available), temperatures from an iMet radiosonde suspended on the TBS tether were compared with DTS measurements collected at the same altitude over nine TBS flights from 2016 – 2017 (Fig. 16). DTS 1 m spatial

resolution and 60 second temporal data were averaged over 10 m to match the simultaneous AMF3 radiosonde vertical resolution. During two of these nine flights two channels were used on the DTS. While the multimode fiber used for TBS DTS measurements is white, some excess heating due to solar radiation could still occur. The iMet radiosonde temperatures are corrected within the collection software Skysonde, which was developed by the National Oceanic and Atmospheric Administration (NOAA), for solar radiation based on solar elevation and flight altitude. The correction factors were derived from a proprietary report developed by InterMet for NOAA (e.g., InterMet, 2009), and are not fixed but are interpolated between the solar elevations and altitudes shown in Table 2. In an effort to correct DTS temperatures for excess solar heating, the linear fit between the radiation-corrected iMet radiosonde temperatures and DTS temperatures was applied to the DTS temperature values for each flight.
 5 In an effort to assess and correct for this excess heating, the linear fits between proprietary solar radiation-corrected iMet radiosonde temperatures and DTS temperatures for each flight were applied to the DTS temperature values.
 10 The mean RMSE between the iMet radiosonde temperatures and uncorrected DTS temperatures was 0.39 °C, improving to 0.32 °C after the ~~corrections~~radiation-correction factors were applied to DTS temperatures.

Table 2. Solar radiation correction factors applied in SkySonde collection software as a function of iMet radiosonde flight altitude and solar elevation.

Altitude km	Solar Elevation								
	-7	-3	-1	2	5	15	30	60	90
0	0.120	0.072	0.048	-0.072	-0.072	-0.036	0.000	0.060	0.096
5	-0.060	-0.228	-0.204	-0.120	-0.084	-0.024	0.000	0.036	0.048
10	-0.228	-0.336	-0.192	-0.120	-0.120	-0.024	0.000	0.036	0.048
15	-0.444	-0.420	-0.228	-0.132	-0.084	-0.024	0.000	0.048	0.060
20	-0.624	-0.432	-0.264	-0.132	-0.084	-0.024	0.000	0.060	0.096
25	-0.828	-0.468	-0.276	-0.144	-0.096	-0.036	0.000	0.084	0.120
30	-1.020	-0.492	-0.264	-0.144	-0.072	-0.048	0.000	0.108	0.156
35	-1.152	-0.552	-0.288	-0.156	-0.120	-0.048	0.000	0.132	0.192

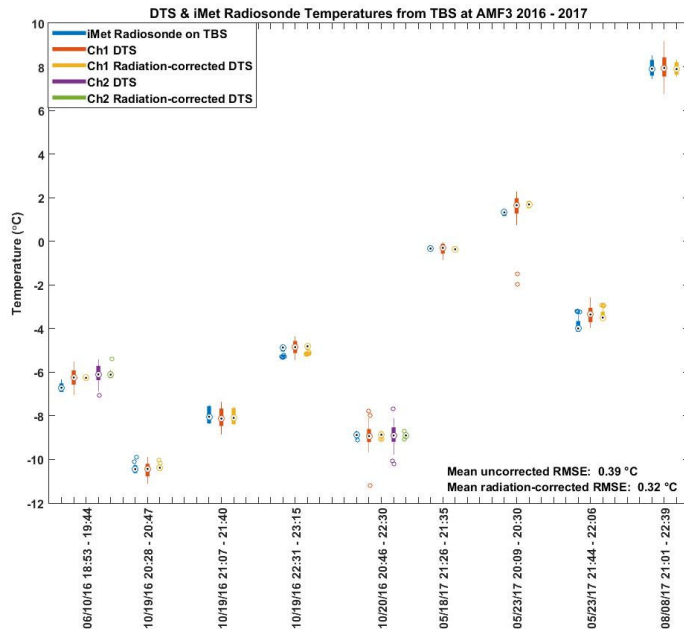


Figure 164: DTS and iMet radiosonde temperatures at matching altitudes from nine TBS flights at the AMF3 from 2016 – 2017.

3.2.3 7/10/18 and 7/11/18 DTS measurements with POPS aerosol instruments

During the POPEYE field campaign a Silixa XT DTS system was operated on the TBS using 50 micron multimode optical fiber suspended along the tether. Temperature measurements were collected every 30 – 60 s with a spatial resolution of 0.65 cm. Two POPS (Printed Optical Particle Spectrometers) were suspended along the tether at different altitudes. One POPS was operated just below the balloon in order to reach the maximum possible altitude, which was ideally above cloud top. A second POPS was generally operated several meters lower than the top POPS to sample the near cloud base.

Fig. 17 depicts results from 7/10/18, when the continuous DTS temperature profiles and iMet radiosonde temperatures reveal a cooler layer at the surface below 100 m with a 1 to 1.5–4 °C warmer layer between 150 and 800 m, then another cooler layer above the inversion from 800 m to 1 km. The AMF3 radiosonde launch at 23:30 measured a similar temperature profile. The particle concentration per second measured by the POPS at a sample rate of 1 Hz demonstrates increased particle concentration within the temperature inversion, with fewer particles above the inversion and in the surface-cooled layer. The surface layer warmed in the afternoon and the base of the inversion layer became higher in altitude with time. An inversion was no longer present at 01:00 GMT, and the boundary layer became warmer and more well-mixed below 1 km. The particle

~~concentrations measured by the POPS after 01:00 GMT were also similar at both measurement altitudes, which indicated the well-mixed boundary layer in the afternoon.~~


~~height of the inversion layer increased with time.~~ On 7/11/18 the surface layer below 200 m was roughly 2 °C cooler than on the previous day, as were temperatures in the inversion layer between 200 m and 1.2 km (Fig. 18). POPS particle

5 ~~concentrations were elevated concentration per second within the inversion layer and were similar to the observation was approximately double that observed on the previous day. Unlike the previous day, particle concentrations did not decrease to~~

~~almost 0 above the inversion layer, indicating a less stratified aerosol profile. The base height of the inversion layer decreased between 18:30 and 19:30, and a shallow ~50 m-deep warm inversion layer was isolated around 400 m after 19:30, with a 200 m-deep cooler layer above.~~

10 ~~An iMet radiosonde on the tether corroborated this shallow warm inversion layer measured by the DTS temperature profiles. No clouds were present within the TBS flight altitudes on either day. Elevated temperatures at the~~

~~surface were caused by friction of the fiber against sharply-angled metal tubing as it entered. POPS particle concentrations were elevated within this shallow warm layer and exhibited increased variability. Similar to the day prior, POPS particle concentrations decreased above and exited below the calibration bath, inversion.~~

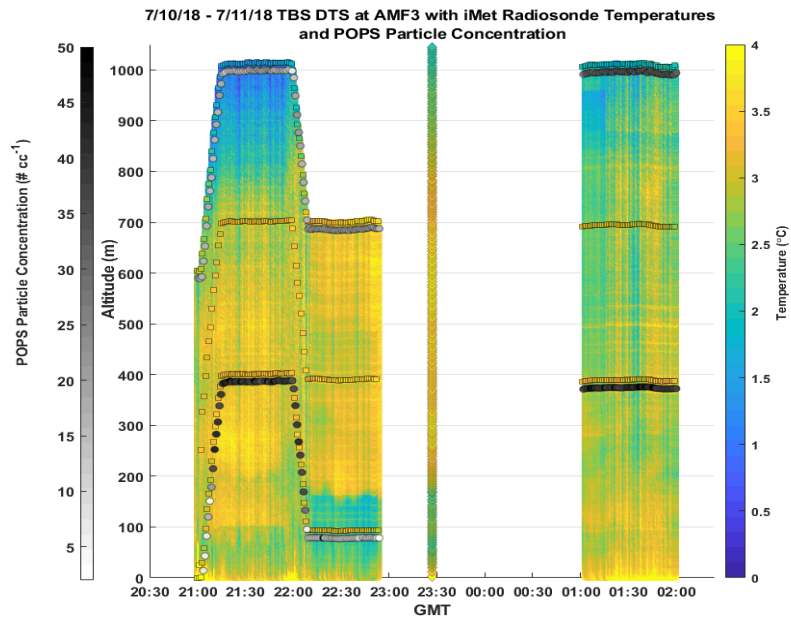

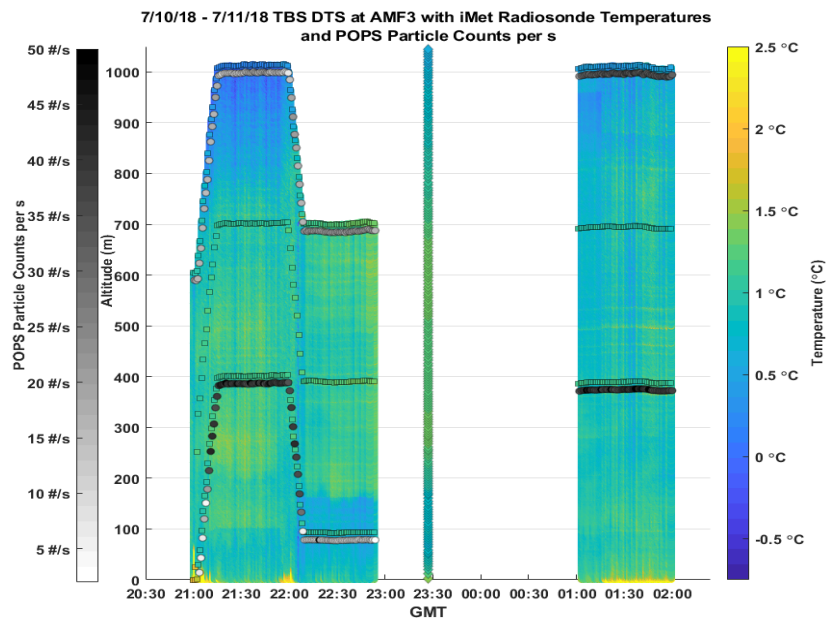
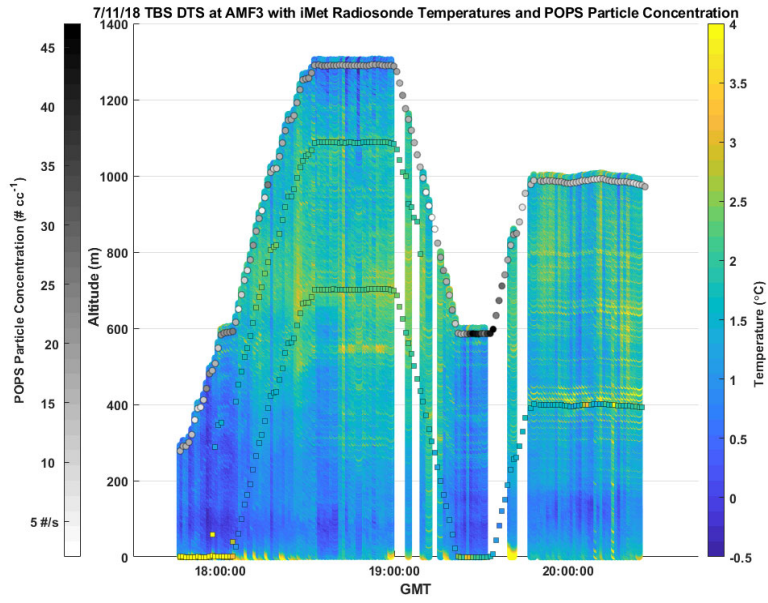


Figure 1745: 7/10/18 – 7/11/18 TBS DTS profiles at AMF3 with TBS iMet temperatures (squares), free-flight radiosonde temperatures (diamonds), and POPS particle concentrations per second (circles).



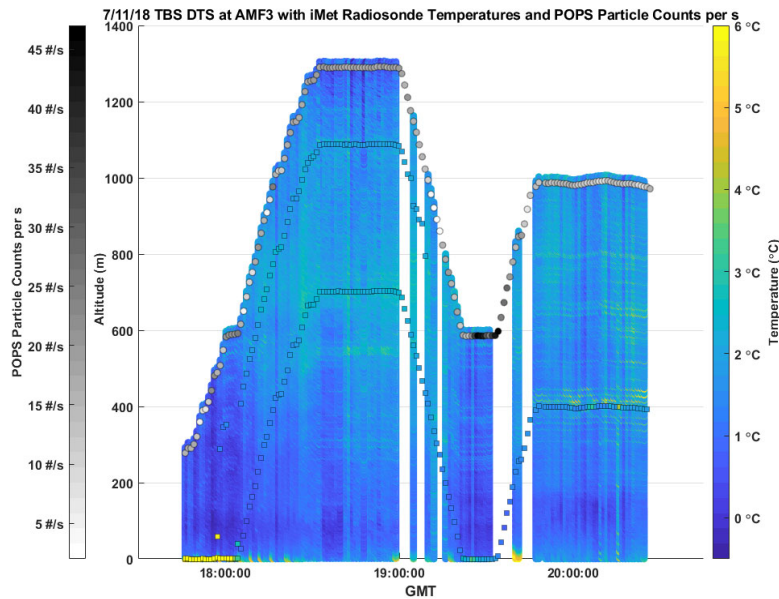


Figure 1846: 7/11/18 TBS DTS profiles at AMF3 with TBS iMet temperatures (squares) and POPS particle concentrations per-second (circles).

3.2.4 DTS temperature calibration source and fiber optic rotary joint impacts on measurement accuracy

- 5 The DTS collected over 250 samples~~300 hours~~ of 30s measurements with two fibers during the POPEYE field campaign. One fiber did not include a rotary joint and was in use only when the balloon was not ascending or descending. The other fiber was installed with a fiber optic rotary joint (FORJ) and measured continuously. The DTS measurements were calibrated with a reference temperature sensor installed on the tether at the maximum-altitude ends of the fibers. An iMet radiosonde and iMet XQ2 sensor were both used to provide reference temperatures. The DTS temperatures were averaged vertically over 5 m in
- 10 order to compare with temperatures from simultaneous radiosonde profiles. The average correlation coefficients and RMSEs between the DTS fiber measurements calibrated with the iMet radiosonde or XQ2 sensor, collected with or without a FORJ, and free-flight radiosonde temperatures are shown in Table [32](#).
- The iMet radiosonde and XQ2 sensors performed almost identically as reference temperature sources. The FORJ and non-FORJ temperatures correlated to each other at 0.74 and had an RMSE of 0.5 °C. Both the FORJ and non-FORJ measurements
- 15 correlated to radiosondes at 0.97 with RMSEs from 0.4–0.6 °C. DTS temperature measurements from both fibers with respect

to altitude collected during a TBS flight on 09/26/18 are shown in Fig. 19. The relationship between the DTS temperature measurements from each fiber was consistent across all altitudes.

5 **Table 32.** Correlation coefficients and RMSEs for iMet-1-RSB radiosonde or iMet XQ2-calibrated DTS data, and DTS data collected with or without a Fiber Optic Rotary Joint (FORJ).

	Correlation	RMSE (°C)
Mean iMet-Calibrated, XQ2-Calibrated	0.76	0.49
Mean iMet-Calibrated FORJ, iMet-Calibrated non-FORJ	0.74	0.51
Mean XQ2-Calibrated FORJ, XQ2-Calibrated non-FORJ	0.74	0.50
FORJ iMet-Calibrated vs Radiosonde	0.97	0.49
FORJ XQ2-Calibrated vs Radiosonde	0.97	0.60
Non-FORJ iMet-Calibrated vs Radiosonde	0.97	0.43
Non-FORJ XQ2-Calibrated vs Radiosonde	0.97	0.46

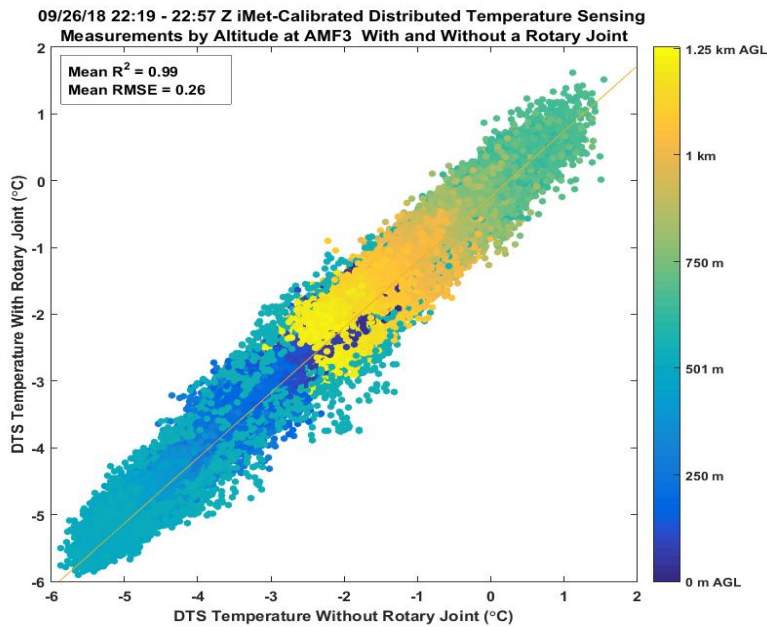


Figure 1917: 9/26/18 TBS DTS measurements with and without a fiber optic rotary joint (FORJ).

4 Conclusions

In situ, vibrating wire-based measurements of supercooled liquid water within Arctic clouds collected using a tethered balloon system have been evaluated against surface-based remote sensing and radiosonde-derived measurements. First, a free-balloon sounding that occurred during the TBS flight was analyzed using the enthalpy equation for cloud water (LWC) in the commercial software RAOB. The supercooled liquid water contents calculated by RAOB from the free radiosonde flight at the altitudes of two vibrating-wire Anasphere SLWC sondes on the tethered balloon were both $0.14 \text{ g m}^{-3}/\text{m}^3$. The maximum SLWC observed by the highest altitude SLWC sonde at the time of the radiosonde flight was $0.14 \text{ g m}^{-3}/\text{m}^3$, while the maximum SLWC observed by the lower altitude sonde was $0.05 \text{ g m}^{-3}/\text{m}^3$. While the absolute uncertainty between the two measurements is difficult to determine given the standard deviation of 120 m in the cloud base measured by the ceilometer at the time of the radiosonde flight, and the spatial variation between the TBS vibrating-wire sonde and AMF3 radiosonde measurement sites, the TBS Anasphere SLWC sondes and RAOB LWC measurements agree within $0.1 \text{ g m}^{-3}/\text{m}^3$.

Second, SLWC values from in situ TBS Anasphere sondes were compared with adiabatically-distributed LWP values from the AMF3 MWR for two TBS flights in October 2016. During the first flight the cloud base varied significantly. Both SLW measurements closely identified the occurrence of SLW in time, although the magnitude differed, resulting in an R^2 value of 0.38. Again, given the uncertainties in the cloud base height, the altitude of the vibrating-wire sonde, and the relative positions of each, the temporal agreement of SLWC detection between the two sensors is significant. For the second flight the R^2 value was 0.79, with MWR SLWC values averaging $0.03 \text{ g m}^{-3}/\text{m}^3$ higher. The low bias of the TBS SLWC sonde can be partially attributed to the vibrating wire experiencing maximum ice loading and incompletely shedding multiple times during the flight, resulting in slightly low SLWC values, due to the failure of the wire to completely return to its un-iced initial frequency.

The Anasphere sensor was deployed alongside an alternative SLWC sensor developed at the University of Reading in order to compare data sensed using different available vibrating wire-based sensors. There was general good agreement between the two vibrating sensors and also between them and the MWR measurements (LWP ± 0.008 mm for the Reading sensor and ± 0.003 mm for the Anasphere sensor during ascents and $0.1 \text{ g m}^{-3}/\text{m}^3$ RMSE between the two sensors for the flight). Some potential for additional variation related to ice load saturation and instrument geometry may be important and should be considered when comparing data collected using different sensors.

Mean values of SLWC from the Anasphere sondes deployed on the TBS for 43 flights were compared with mean SLWC values calculated from AMF3 radiosonde soundings that occurred during each TBS flight using the enthalpy lapse-rate equation for cloud water (LWC) in the commercial software RAOB. The mean SLWC values measured by the in situ vibrating wire sondes averaged $0.045 \text{ g m}^{-3}/\text{m}^3$ higher than the mean SLWC values calculated from the radiosonde flights. SLWC values from vibrating sondes were $< 0.05 \text{ g m}^{-3}/\text{m}^3$ for 3438% of the samples, which is in agreement with ~~lose to~~ previous aircraft measurements in supercooled stratiform clouds of $< 0.05 \text{ g m}^{-3}/\text{m}^3$ for 36% of the samples (e.g., University of Wyoming, 1999Sand et al., 1984).

Formatted: Font color: Auto

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Recurring TBS Anasphere SLWC sonde deployments occurred at the ARM AMF3 during fall and spring months between 2015 and 2017. The largest SLWC values were measured during May and June, with smaller values being measured in fall and early spring. Larger SLWC values were measured above 400 m altitude and at temperatures between -14 °C and -2 °C.

DTS measurements collected between the surface and the balloon were compared with concurrent radiosonde temperature measurements. The effect of different calibration measurement source instruments upon the DTS measurement accuracy were evaluated, as was the use of a fiber optic rotary joint. Radiosonde and DTS temperature measurements between the surface and the maximum altitude of the fiber, 0.84 km AGL, correlated with an R^2 of 0.99 and an RMSE of 0.6 °C. In order to compare a larger number of samples (197 samples over a 20 °C range), temperatures from an iMet radiosonde suspended on the TBS tether were compared with DTS measurements collected at the same altitude over nine TBS flights from 2016 – 2017.

The mean RMSE between the iMet radiosonde temperatures and uncorrected DTS temperatures was 0.39 °C, improving to 0.32 °C after solar radiation-correction factors were applied to DTS temperatures.

DTS temperature measurements collected with and without a fiber optic rotary joint correlated to each other at 0.74 and had an RMSE of 0.5 °C. FORJ DTS measurements had an average correlation of 0.97 with radiosonde temperatures, and RMSE values of 0.5 and 0.6 °C for the iMet-1-RSB radiosonde and iMet XQ2-calibrated DTS datasets, respectively. The non-FORJ DTS measurements had an identical average correlation of 0.97 with radiosonde temperatures, and RMSE values of 0.43 and 0.46 °C for the iMet-1-RSB and iMet XQ2-calibrated DTS datasets, respectively.

The similar RMSE values between the DTS and radiosonde datasets both with and without an installed FORJ indicates the presence of the FORJ has very limited impact on the measurement accuracy of DTS measurements. For context, the stated temperature measurement accuracies are +/- 0.2 °C, +/- 0.3 °C, and +/- 0.2 °C, for the iMet-1-RSB radiosonde, iMet XQ2, and

Vaisala RS-92 sensors, respectively. The average RMSE of 0.4 – 0.6 °C between DTS temperature and radiosonde temperature measurements indicates DTS measurements from TBSs provide accurate, highly spatially and temporally-resolved, persistent temperature profiles within the lowest two kilometers of the atmosphere. The approximate average RMSE of 0.5 °C between the DTS measurements and Vaisala radiosonde measurements may partially be attributed to spatial disparity between the tethered and free-flight sensors, noting that free-flight radiosonde launches were intentionally launched upwind of the tethered balloon during simultaneous flights to avoid potential entanglement. Additional differences in temperature measurement may be due to measurement bias between the iMet-1-RSB radiosondes and iMet XQ2 sensors used to calibrate the TBS DTS measurements, and the Vaisala RS-92 sondes used in AMF3 radiosonde launches. Some RMSE may also be attributed to uncertainty in the GPS-reported altitude from each sensor, given the stated vertical accuracy of +/- 12m of the iMet XQ2 sensor, +/- 15m of the iMet-1-RSB, and +/- 20 m of the Vaisala RS-92. The relationship between iMet sensor temperatures and Vaisala radiosonde temperatures will be investigated in future TBS flights.

[Data availability](#)

[TBS Anasphere SLWC sonde, TBS iMet radiosonde, ceilometer, KAZR, MWR, and radiosonde data related to this article are available from the ARM Data Discovery website and more specific information is listed in the References. TBS DTS data and some SLWC data are in the process of being made available on the ARM Data Discovery website.](#)

5 **Author contributions**

[DD and MA developed the instruments, analyzed the data and drafted the manuscript. ER guided deployment of the Anasphere SLWC sondes. DD and CL operated the balloon system and instruments. KN, GH, GM, and PW developed the Reading SLWC sensor and contributed to the writing of the manuscript. SK provided guidance on the comparison of sonde SLWC and MWR data and contributed to the writing of the manuscript. FM provided expertise on TBS POPS data and](#)
10 [contributed to the writing of the manuscript.](#)

Competing interests

[The authors declare that they have no conflicts of interest.](#)

15 **Acknowledgements**

We [gratefully](#) acknowledge the US Department of Energy Atmospheric Radiation Measurement program and Sandia National Laboratories for logistics support. This work was supported in part by the Laboratory Directed Research and Development program at Sandia National Laboratories, a multi mission laboratory managed and operated by National Technology and Engineering Solutions of Sandia, LLC., a wholly owned subsidiary of Honeywell International Inc., for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525. MA, KN, RGH, PDW, and GM acknowledge support from NERC Grant No. NE/P003362/1 (VOLCLAB) for development of the Reading SLWC sensor. KN acknowledges support through NERC Independent Research Fellowships NE/L011514/1 and NE/L011514/2. SK was supported by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) under grant KN 1112/2-1 as part of the Emmy-Noether Group OPTIMIce.

25 The authors wish to thank Dr. Gijs de Boer for leading the [ARM](#) ICARUS and POPEYE field campaigns. John Shewchuk of Eosonde Research Services provided documentation regarding RAOB software calculations. Dr. John Bognar of Anasphere, aided in the development of the SLWC Anasphere sonde data processing methodology. Dr. David Serke of UCAR provided guidance regarding the collection of SLWC data in flight. Allen Jordan and Emrys Hall of NOAA developed the Skysonde software for iMet radiosondes that was used to collect all iMet radiosonde-derived data used in this research. Dr. Scott Tyler of University of Nevada, Reno and CTEMPS provided initial training on the use of DTS and DTS data processing. [Mark](#)
30 [Benoit of InterMet provided technical support regarding iMet radiosondes and XQ2 sensors.](#)

References

- Airey, M. W., Harrison, R. G., Nicoll, K. A., Williams, P. D., and Marlton, G. J.: Note: A miniature oscillating microbalance for sampling ice and volcanic ash from a small airborne platform, *Rev. Sci. Instrum.*, 88, 086108, doi:10.1063/1.4998971, 2017.
- 5 Atmospheric Radiation Measurement (ARM) user facility. 2015, updated hourly. Active Remote Sensing of CLouds (ARSCL) product using Ka-band ARM Zenith Radars (ARSCLKAZR1KOLLIAS). 2016-10-15 to 2018-08-03, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by K. Johnson, S. Giangrande and T. Toto. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1350629>.
- Atmospheric Radiation Measurement (ARM) user facility. 2013b, updated hourly. Ceilometer (CEIL). 2016-10-15 to 2018-10-01, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by B. Ernold and V. Morris. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1181954>.
- 10 Atmospheric Radiation Measurement (ARM) user facility. 2014, updated hourly. Doppler Lidar Profiles (DLPROFWIND4NEWS). 2016-10-15 to 2018-10-01, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by L. Riihimaki, R. Newsom and T. Shippert. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1190027>.
- 15 Atmospheric Radiation Measurement (ARM) user facility. 2013, updated hourly. Microwave Radiometer, 3 Channel (MWR3C). 2015-10-15 to 2018-10-01, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by M. Cadeddu and V. Ghate. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1025248>.
- Atmospheric Radiation Measurement (ARM) user facility. 2013, updated hourly. Balloon-Borne Sounding System (SONDEWNP). 2018-07-01 to 2018-10-01, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by D. Holdridge, J. Kyrrouac and R. Coulter. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1021460>.
- 20 Atmospheric Radiation Measurement (ARM) user facility. 2017, updated hourly. Tethered Balloon System (TBSIMET). 2017-05-15 to 2018-10-01, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by D. Dexheimer and E. Cromwell. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1426242>.
- 25 Atmospheric Radiation Measurement (ARM) user facility. 2016, updated hourly. Tethered Balloon System (TBSSLWC). 2016-05-14 to 2018-10-01, ARM Mobile Facility (OLI) Oliktok Point, Alaska; AMF3 (M1). Compiled by D. Dexheimer and Y. Shi. ARM Data Center. Data set accessed at <http://dx.doi.org/10.5439/1246826>.
- Bain, M., and J. F. Gayet: Aircraft measurements of icing in supercooled and water droplet/ice crystal clouds. *J. Appl. Meteor.*, 21, 631–641, doi: 10.1175/1520-0450(1982)021<0631:AMOIIS>2.0.CO;2, 1982.
- 30 Cortland Company, Inc.: LoCo 12 Strand Tech Sheet, CT_TL_047_1112_US, 2019.
- Crewell, S., Ebell, K., Loehnert, U., Turner, D.: Can liquid water profiles be retrieved from passive microwave zenith observations? *Geophys. Res. Lett.* 36., <https://doi.org/10.1029/2008GL036934>, 2009.

- De Jong, S.A.P., Slingerland, J.D., van de Giesen, N.C.: Fiber optic distributed temperature sensing for the determination of air temperature. *Atmos. Meas. Tech.* 8, 335–339, doi: 10.5194/amt-8-335-2015, 2015.
- Dexheimer, D.: Tethered Balloon System (TBS) Instrument Handbook. Ed. by Robert Stafford, ARM Climate Research Facility. DOE/SC-ARM-TR-206, 2018.
- 5 Egerer, U., Gottschalk, M., Siebert, H., Ehrlich, A., and Wendisch, M.: The new BELUGA setup for collocated turbulence and radiation measurements using a tethered balloon: First applications in the cloudy Arctic boundary layer. *Atmos. Meas. Tech. Discuss.*, <https://doi.org/10.5194/amt-2019-80>, in review, 2019.
- Fernández-González, S., Sánchez, J., Gascón, E., López, L., García-Ortega, E., Merino, A.: Weather features associated with aircraft icing conditions: a case study. *Sci. World J.* 2014, 1–17, doi:10.1155/2014/279063, 2014.
- 10 Greenberg, J., Guenther, A., Zimmerman, P., Baugh, W., Geron, C., Davis, K., Helmig, D., Klinger, L.: Tethered balloon measurements of biogenic VOCs in the atmospheric boundary layer. *Atmos. Environ.* 33, 855–867. doi: 10.1016/S1352-2310(98)00302-1, 1999.
- Gultepe, I. and Isaac, G. A.: Liquid water content and temperature relationship from aircraft observations and its applicability to GCMs, *J. Climate*, 10, 447–452, doi:10.1175/1520-0442(1997)010<0446:LWCATR>2.0.CO;2, 1997.
- 15 Harrison, R. G., Nicoll, K. A., and Lomas, A. G.: Note: Programmable data acquisition system for research measurements from meteorological radiosondes. *Rev. Sci. Instrum.*, 83, doi:10.1063/1.3697717, 2012.
- Hill, G.E., Woffinden, D.: A Balloonborne Instrument for the Measurement of Vertical Profiles of Supercooled Liquid Water Concentration. *J. Appl. Meteorol.* 19, 1285–1292, [https://doi.org/10.1175/1520-0450\(1980\)019<1285:ABIFTM>2.0.CO;2](https://doi.org/10.1175/1520-0450(1980)019<1285:ABIFTM>2.0.CO;2), 1980.
- 20 Hill, G.E.: Analysis of Supercooled Liquid Water Measurements Using Microwave Radiometer and Vibrating Wire Devices. *J. Atmos. Ocean. Technol.* 11, 1242–1252, doi:10.1175/1520-0426(1994)011<1242:AOSLWM>2.0.CO;2, 1994.
- [International Met Systems.: Temperature Radiation Error Correction Analysis Report, DIN-A037-R1-03, Silver Spring, Maryland, United States, 2009.](#)
- Jouan, C., Girard, E., Pelon, J., Gultepe, I., Delanoë, J., and Blanchet, J.-P.: Characterization of Arctic ice cloud properties observed during ISDAC. *J. Geophys. Res.*, 117, D23207, doi:10.1029/2012JD017889, 2012.
- 25 Keller, C.A., Huwald, H., Vollmer, M.K., Wenger, A., Hill, M., Parlange, M.B., Reimann, S.: Fiber optic distributed temperature sensing for the determination of the nocturnal atmospheric boundary layer height. *Atmos. Meas. Tech.*, 4, 143–149, doi:10.5194/amt-4-143-2011, 2011.
- King, M., Bognar, J., and Guest, D.: Vibrating-Wire, Supercooled Liquid Water Content Sensor Calibration and Characterization Progress. 8th AIAA Atmospheric and Space Environments Conference, AIAA AVIATION Forum, AIAA 2016-4055, doi.org/10.2514/6.2016-4055, 2016.
- 30 Knapp, K., Jensen, M., Balsley, B., Bognar, J., Oltmans, S., Smith, T., Birks, J.: Vertical profiling using a complementary kite and tethered balloon platform at Ferryland Downs, Newfoundland, Canada: Observation of a dry, ozone-rich plume in the free troposphere. *J. of Geophys. Res. Atmos.* 103. doi:10.1029/97JD01831, 1998.

Lawson, R. P., Starnes, K., Starnes, J., Zmarzly, P., Koskuliks, J., Roden, C., Mo, Q., Carrithers, M.: Deployment of a Tethered Balloon System for Cloud Microphysics and Radiative Measurements at Ny-Ålesund and South Pole, J. Atmos. Oceanic Technol. 28, 656 – 670. doi:10.1175/2010jtecha1439.1, 2011.

Lozowski, E.P., Stallabrass, J.R., Hearty, P.F.: The Icing of an Unheated, Nonrotating Cylinder Part I: A Simulation Model. J. Clim. Appl. Meteorol. 22, 2053–2062, doi:10.1175/1520-0450(1983)022<2053:TIOAUN>2.0.CO;2, 1983.

Morris, A., Call, D., and McBeth, R.: A small tethered balloon sounding system. Bull. Amer. Meteor. Soc., 56, 964- 969, [https://doi.org/10.1175/1520-0477\(1975\)056<0964:ASTBSS>2.0.CO;2](https://doi.org/10.1175/1520-0477(1975)056<0964:ASTBSS>2.0.CO;2), 1975.

Morris, Victor R. Ceilometer Instrument Handbook. United States: N. p., 2016. Web. doi:10.2172/1036530.

Morrison, H., De Boer, G., Feingold, G., Harrington, J., Shupe, M.D., and Sulia, K.: Resilience of persistent Arctic mixed-phase clouds. Nat Geosci., 5, 11-17, doi:10.1038/ngeo1332, 2012.

Owens, T. L., Storey, R. W., and Youngbluth, O., NASA Langley Research Center Tethered Balloon System, NASA TM-83260, 1982.

Sand, W. R., Cooper, W. A., Politovich, M. K., and Veal, D. L.: Icing Conditions Encountered by a Research Aircraft. J Clim Appl Meteorol, 23, 1427-1440, doi: 10.1175/0733-3021-23.10.1427, 1984.

Serke, D., Hall, E., Bogner, J., Jordan, A., Abdo, S., Baker, K., Seitel, T., Nelson, M., Reehorst, A., Ware, R., McDonough, F., Politovich, M.: Supercooled liquid water content profiling case studies with a new vibrating wire sonde compared to a ground-based microwave radiometer. Atmos. Res., 149, 77–87, doi:10.1016/j.atmosres.2014.05.026, 2014.

Shupe, M.D. and Intrieri, J.M.: Cloud radiative forcing of the Arctic surface: The influence of cloud properties, surface albedo, and solar zenith angle. J. Climate, 17, 616-628, doi:10.1175/1520-0442(2004)017<0616:CRFOTA>2.0.CO;2, 2004.

Shupe, M. D., Persson, P. O. G., Brooks, I. M., Tjernström, M., Sedlar, J., Mauritsen, T., Sjogren, S., and Leck, C.: Cloud and boundary layer interactions over the Arctic sea ice in late summer. Atmos. Chem. Phys., 13, 9379-9399, doi:10.5194/acp-13-9379-2013, 2013.

Thomas, C.K., Kennedy, A.M., Selker, J.S., Moretti, A., Schroth, M.H., Smoot, A.R., Zeeman, M.J.: High-resolution fibre-optic temperature sensing: a new tool to study the two-dimensional structure of atmospheric surface-layer flow. Bound.-Layer Meteorol., 142 (2), 177–192, doi:10.1007/s10546-011-9672-7, 2011.

University of Wyoming: http://www-das.uwyo.edu/~geerts/cwx/notes/chap08/moist_cloud.html, last access: 28 June 2019, 1999.

Formatted: Indent: Left: 0", Hanging: 0.25"

Formatted: Font: 10 pt, Not Bold