

## Genera comment:

We would like to thank all three reviewers for their very insightful comments. This study has been a humbling experience for the first author who has dedicated several years working on extracting scientific value out of the ARM facility radars and other sensors. A great challenge was to consolidate the differences between the ARM radars and generalized enough an algorithm initially developed by Alain Protat to work on a much larger dataset.

A project website has been developed and gives a graphical overview of the calibration procedure as applied to each site and radar system described in the manuscript. The web site is now available to the ARM radar user community. We hope to continue updating the material on the web site as the ARM program conducts additional field deployments. We also plan to expand our analysis to the European radar network.

[http://doppler.somas.stonybrook.edu/CloudSat\\_GlobalCalibrator/index.html](http://doppler.somas.stonybrook.edu/CloudSat_GlobalCalibrator/index.html)

## Anonymous Referee #1

Received and published: 10 April 2019 Review of the article titled “Calibration of the 2007-2017 record of ARM cloud radar observations using CloudSat” by Kollias and coauthors for publication in AMT.

The authors have compared the reflectivity from vertically pointing Doppler cloud radars at the ARM sites to the reflectivity from radar onboard polar orbiting satellite. The goal of this study is to characterize the performance of the ground-based radars, as the spaceborne radar is well-calibrated. They find significant calibration offset for the ground-based radars throughout the 10-year period, and inherent inconsistencies between the different modes of them. The technique is already well-established and used here in a relatively straightforward manner. The article is overall okay but needs several small tweaks in writing. Due the number of small corrections listed below; I recommend this article for major revisions.

### Major Suggestions:

1) As the authors have already made CFAD of all the ARM radars, it will be relatively straightforward for them to calculate the minimum detectable signal (MDS) for them. You can just pick up the bottom 5% of reflectivity at 1 km and make its average. This will greatly assist the scientific user community, as it is unclear how sensitive are the ARM radars and if their sensitivity has changed through years. You already have the data for calculating this and hence will be a worthy and useful effort. If you do this, then you can add this as another column in Table 1. Thanks.

We would like to thank the reviewer for his comment. The detail tables with the calibration offsets, the RMSE and the number of samples have been provided to the ARM infrastructure. This study is not an official reference document for the ARM facility and the author team is not representing ARM in any capacity. Our understanding is that the ARM facility will consider our findings and decide a path forward on how to report them to the user community. This includes the requested

minimum detectable signal information that as the reviewer correctly suggests can be relatively easy released by ARM.

2) Please add one more column to Table 1 and report the average and standard deviation of the calibration offset for each radar. This table will be very useful for users who'd like to use your calibration offsets in their research. Please add the different modes of KAZR and MMCR in the rows. I understand that this will be an average through many years, but still worthy of reporting. Thanks.

If it fair to state that a considerable amount of work and analysis was performed to complete this long-term ARM – CloudSat calibration. As part of the manuscript, we are also releasing a web site that provide graphics and animations for all the ARM sites and radar systems compared to CloudSat. We hope that the reviewer and the larger user community will find the material on the web site useful.

[http://doppler.somas.stonybrook.edu/CloudSat\\_GlobalCalibrator/index.html](http://doppler.somas.stonybrook.edu/CloudSat_GlobalCalibrator/index.html)

3) The article ends abruptly, and you only provide a brief summary without discussing the implications of your results. It will be good if you can devote one paragraph each on the following two things i) the impact of calibration offset on the regular data products produced by the ARM program. I did a quick search and the radar reflectivity is used for doing microphysical retrievals like MicroBase and cloud drop concentrations. Please discuss how a calibration offset might affect these data-products. ii) The lead author has significant expertise in retrieving vertical air motion and microphysical properties from ground-based radars. A quick search made me realize that scientists have also used radar reflectivity in those studies in addition to using mean Doppler. It will be good if you can elaborate on how your results will impact the results previous studies by you and from Giangrande, Verlinde, Luke, Shupe, Dong, Chiu etc. So please add two separate paragraphs at the end and rename the section as “Summary and Discussion”.

The reviewer is correct, the summary does ends abruptly. The impact of the calibration offsets reported here is not negligible and as the reviewer suggested, will affect any retrievals and/or data product that depends on calibrated radar reflectivity values. Here is the text added in the revised manuscript: “In most cases, the observed calibration offsets exceeded this uncertainty value suggesting that the ARM profiling radar record contains considerable calibration biases. The reported calibration biases are expected to have a large impact on routine ARM microphysical data products such as the Continuous Baseline Microphysical Retrieval (MICROBASE) value-added product [Zhao et al., 2012]. In addition, cloud retrieval techniques and associated products are impacted by the reported calibration offsets ([Shupe et al., 2015]; [Dong et al., 2014]). For reference, a 3-dB calibration offset is equivalent to a factor of 2 bias in hydrometeor content or number concentration retrievals. The estimated calibration offsets, the RSME's and the number of samples as a function of time for each radar system evaluated here have been provided to the ARM facility. The ARM facility is currently considering reprocessing of the ARM radar record with these new calibration offsets.”

Minor Issues:

It is unclear to me if the authors are referring to the funding agency ARM or their observatories through the user facility. I recommend using the ARM Climate User Facility throughout the article. Thanks.

The reviewer is correct. ARM has not been a program since it was designated a user facility. Thus, we use “ARM facility” throughout the manuscript.

Page-1, Line 16: Add “collectively” before “Over”. Thanks.

The manuscript is revised according to your suggestion. Thank you.

Page-1, Line 12: Add :1990s

The manuscript is revised according to your suggestion. Thank you.

Page-1, Line 15: the sentence doesn't read well, please rephrase.

The sentence is revised as follows: Here, a well-characterized spaceborne 94-GHz cloud profiling radar (CloudSat) is used to characterize the calibration of the ARM cloud radars. The calibration extends from 2007 to 2017 and includes both fixed and mobile deployments. Thank you.

Page 2, Line 8: “Surprise” not “surprised”.

The manuscript is revised according to your suggestion. Thank you.

Page 3: Add outline of the paper before the section 2.

The manuscript is revised according to your suggestion. Thank you. Here is the revised last paragraph of the introduction:

“In section 2, the ARM facility cloud radars are presented and the Protat et al. [2011] methodology is revised and improved. Section 3 presents the results from the application of the calibration procedure to almost the entire record of ARM profiling cloud radar observations at the fixed and mobile sites from 2007 to the end of 2017 (at total of 43.5 years of radar observations). Finally, section 4 presents a summary on our finding and their implications. The application of the technique is such diverse set of radar systems and locations is expected to demonstrate the applicability of this approach to existing profiling radar networks such as the ARM facility and the future European research infrastructure network for the observations of Aerosol, Clouds and Trace gases (ACTRIS).”

Page 3, Line 19: “At couple of sites”.

The manuscript is revised according to your suggestion. Thank you.

Page 4, line 1-2: Please rephrase and remove “us”.

The phrase is removed since it is basically a repetition of what is already mentioned in the previous paragraph. Thank you.

Page 4, Line 15: “Computed” and not “computer”.

The manuscript is revised according to your suggestion. Thank you.

Page 5 Line 10 and Page 7 line 13: It is unclear which numbers to believe.

The correct range is 200 to 300 km. We corrected the inconsistency between the numbers reported in page 5 and page 7 regarding the maximum distance of CloudSat observations used in the calibration. Thank you.

Page 5-6: It will be good if you mention the equation used for doing gaseous correction in CloudSat. Thanks.

The gaseous attenuation correction in the operational CloudSat products (R04/R05) is based on the Millimeter-wave Propagation Model (MPM) of Liebe 1989

H. J. Liebe, “MPM—An atmospheric millimeter-wave propagation model,” *Int. J. Infrared Millim. Waves*, vol. 10, no. 6, pp. 631–650, Jun. 1989

This information was added in the revised manuscript. Thank you.

Page 8 Line 15: “were” not “where”.

The manuscript is revised according to your suggestion. Thank you.

Page 10 Line 15: you mean “observatory” and not “laboratory”?

The manuscript is revised according to your suggestion. Thank you.

Page 11 Line 20: there is a typo, it should be 616 samples according to Page 7 line 32. Thanks.

The reviewer is correct. In the summary, we refer to the total number of 6-months ARM-CloudSat comparisons. A phrase was added to clarify the number of cases we were able to estimate a calibration coefficient. The revised manuscript reads as follows: “A total of 653 ARM – CloudSat comparisons are performed using a running 6-month time window. Acceptable calibration coefficients are estimated in 616 of the cases, a 94.3% success rate”. Thank you.

## Anonymous Referee #2

Received and published: 2 May 2019

The present manuscript describes the efforts of the Authors to calibrate a long series of ground-based radar measurements using space-borne radar measurements from CloudSat. This task is all the more important as it can affect the quality of atmospheric retrievals. Moreover, the calibration of such a long time series on a common ground helps greatly the study of the climate on such time scales. The article provides in-depth information into the operation and maintenance of the ARM radar network. As such, it makes publicly available information that otherwise would be known only to the few expert users/members of the ARM program. For that alone, this manuscript is worth publishing.

The Authors follow a clear path to describe their datasets, its quality control, and the methods to collocate and optimize the calibration assessment. Various graphs provide a nice illustration of the performance of the proposed method. Before publishing this article, these are the points I would like the Authors to address:

1. The article needs a serious editorial revision to correct for grammar errors and typos. In particular, the Authors should revise the tenses of the verbs for consistency.

We would like to thank the reviewer about his numerous comments regarding grammar errors and typos in the original manuscript. All the reviewer suggestions and those from the other two reviewers have been included in the revised manuscript. Furthermore, we revise the tense of the verbs when needed for consistency.

2. Please provide a table listing the various acronyms, and please define these acronyms in the article at their first occurrence.

All the acronyms in the text are now defined at their first occurrence.

3. As a general question, would the statistical method that you use (to match the mean profiles) work if you also match the envelope of the CFAD (lower and upper quantiles)? This envelope may have useful information, e.g. on the variability of the reflectivity profile over time or space.

We believe that the statistical method used here (RMSE of the mean profiles) will also work on other CFAD parameters such as the lower and upper quantiles.

4. Would the Authors see any merit/advantage in applying their optimal calibration method to other satellite datasets collocated with ARM radars? Could you please comment on this in your article?

This is an interesting suggestion. Over the recent years, the ARM facility has acquired and operated several cm-wavelength radars that are also in need of calibration. One could see that observations from NASA's GPM Dual-Frequency Precipitation Radar could be used to evaluate the calibration of the ARM facility cm-wavelength radars. In addition to referencing radars, we believe there is


great value in evaluating ARM observations against those provided by geostationary satellites (GOES-R, MSG) and the A-train. The following text was added in the revised manuscript at the end of the summary and discussion section:

“Furthermore, there is merit in extending the presented analysis to other satellite measurements. For example, NASA’s Global Precipitation Mission (GPM) Dual-Frequency Precipitation Radar (DPR) observations could be used in a similar manner to evaluate the calibration of the ARM facility cm-wavelength radars [Lamer et al., 2019]. In addition to radar calibration, the statistical comparison between cloud and precipitation properties such as cloud base height, cloud thickness, precipitation occurrence and intensity and liquid water path measured at the ARM facility and those derived by research satellites such as NASA’S A-train constellation [Stephens et al., 2018] should be considered. The ARM facility provides a bottom-up view of clouds and precipitation with superior vertical resolution especially in the boundary layer. Statistically significant differences with the top-down view provided by the A-train satellites should be considered when conducting cloud-scale process studies using global satellite datasets.”

Please also note the supplement to this comment: <https://www.atmos-meas-tech-discuss.net/amt-2019-34/amt-2019-34-RC2-supplement.pdf>

Thank you very much for annotated supplement!

Following the reviewer’s recommendation Fig. 4 was updated

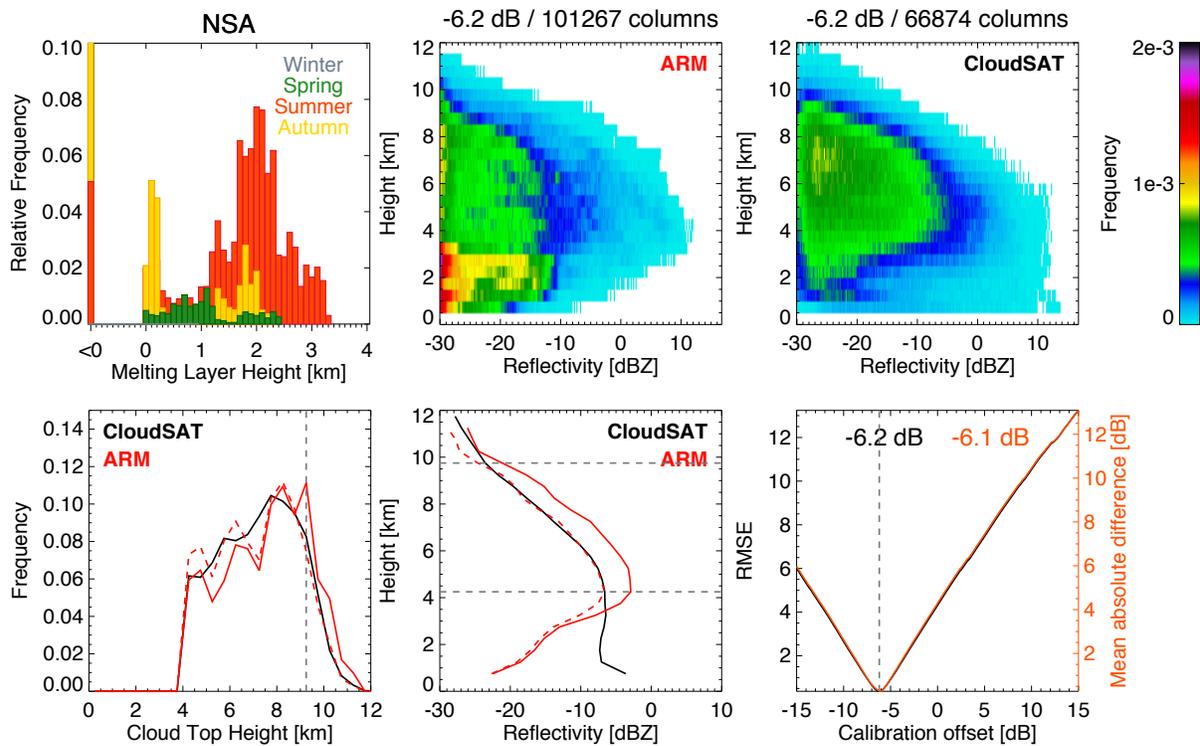

**Roger Marchand (Referee) rojmarch@uw.edu**

Received and published: 5 May 2019 Review of Manuscript amt-2019-34

Title: Calibration of the 2007-2017 record of ARM Cloud Radar Observations using CloudSat  
Authors: Kollias, Treserras and Protat

Overview:

I think publication of this technique and the results for ARM radars will be of value to many investigators and investigations that have (and will continue to) rely on ground-based radar datasets. While I was under no illusion that the ARM radars were well calibrated, I nonetheless found the results to be sobering.

Recommendation: Publish after minor revisions

General Comments:

1) A few more details on the technique. I largely follow the technique, but you need to add a few more details, see specific comments for Page 6. The goal should be to make it so that someone else could implement the approach given this description. In particular, please discuss uncertainties in estimated calibration corrections associated with equations 2 and 3, as well as the height range used to estimate the best offset.

We would like to thank the reviewer for his excellent comments that help us to clean up the methodology and provide additional information on how to reproduce our approach. Details comments are provided below

2) Differences in rules and thresholds for including or not including columns & Verification metrics. Do the different rules and thresholds for including or not including radar columns, which are to some degree necessarily different between CloudSat and ARM, matter? (see e.g. differences on Page 5, line 16; Page 7 line 17). I am concerned about the possibility that differences in the mean Z-profiles might be due simply to having different conditions or “distributions of cloud-types” in each collection from which the mean-Zprofile is calculated. One way to check this would be to look not just at the mean-Z-profile but also to ask if the two profiles are based on a similar fraction of the observations in each set. Said another way, once you construct your “non-precipitating CFAD” and pick your dBZthreshold (for calculating the mean-Z-profile), is the profile of cloud fraction associated with this dBZ-threshold the same for both CloudSat and ARM. If it is, then one can be confident that errors in the reflectivity correction due to differences in cloud populations will be small. I suggest creating a metric, such as the vertically integrated absolute cloud-fraction difference divided by the mean cloud fraction, and plotting this information along with the calibration corrections. Likewise, it would be interesting to see how this metric depends on the number of columns, which like figure #6, should give one a sense of what is a reasonable value for this quantity. Likewise, the cloud-top-height (CTH) distribution comparison you introduce (Fig 4d) provides confidence that the calibration correction is robust and that it is based on the same cloud populations. As far as I can see, after you introduce the idea of this as “a

verification”, you don’t use it. At a minimum it seems like you should discuss whether the CTH distributions are consistently improved (made more similar) with the radar correction or not. Again, you might make a metric that expresses this improvement – though I suspect the above cloud fraction metric is likely better for this purpose.

The reviewer is correct. The cloud-top-height (CTH) distribution comparison are used in a qualitative way to verify that they converge as we get closer to the correct calibration offset. As part of the manuscript, we are also releasing a web site that provide graphics and animations for all the ARM sites and radar systems compared to CloudSat. You can clearly see that in CTH distribution comparison always get better at each site as we approach the RMSE. In few cases, the improvement in the CTH was not evident and the estimated calibration offsets were removed manually. We hope that the reviewer and the larger user community will find the material on the web site useful.

[http://doppler.somas.stonybrook.edu/CloudSat\\_GlobalCalibrator/index.html](http://doppler.somas.stonybrook.edu/CloudSat_GlobalCalibrator/index.html)

3) Results for Darwin and the size of the analysis region I don’t typically like to point to my own work when reviewing an article, but in this case I think some work that a former student of mine Zheng Liu, Tom Ackerman and I have done at Darwin is very germane to this study. Liu, Z., R. Marchand, and T. Ackerman (2010), A comparison of observations in the tropical western Pacific from ground-based and satellite millimeter wavelength cloud radars, *J. Geophys. Res.*, 115, D24206, doi:10.1029/2009JD013575. In particular, we compared CloudSat and the Darwin MMCR measurements and we investigated the size of the analysis region and sampling uncertainties in some detail. That study very much supports using a 300 km radius area and 6 month window. Note also figure 8 in this paper. While we did not derived a calibration offset, our results are broadly consistent with idea that ARM calibration was too LOW at Darwin in the 2006-7 (wet season), and agrees your with figure 9a (CloudSat – ARM difference of  $\sim 5$  dB at this time).

We would like to thank the reviewer for pointing out to his previous work that is quite relevant to the results presented here. The suggested work is one of the first that compared ground-based and space-based millimeter wavelength radar observations. A reference was added in the revised manuscript regarding the finding of the study at Darwin.

Minor Comments:

Page 1, line 28. detail => detailed

The manuscript is revised according to your suggestion. Thank you.

Page 2, line 5. Opening sentence is awkward, rephrase. Perhaps "Part of the motivation for the ARM radar expansion, was to improve cloud microphysical retrievals through the use of dual-wavelength ratios, that is, making use of the relative difference in radar scattering at different wavelengths. This difference signal is often only a few dB and as one might expect, this .... "

This is a good way or rephrasing the opening sentence. The manuscript is revised according to your suggestion. Thank you.

Page 2, line 11. Do you mean calibrating ARM vertically pointing radars is more difficult than the WSR-88D network? What is being compared to what is not clear? Suggest you rephrase this and following sentence to be clearer and generally read better.

We agree with the reviewer. We rephrase the sentence as follows: “Soon after the National Aeronautics and Space Administration (NASA) Tropical Rainfall Measuring Mission (TRMM) spaceborne radar was in orbit, its remarkable stability made it a calibration standard and its comparison to the ground-based observations of the Weather Surveillance Radar -1998 Doppler (WSR-88D) network uncovered several issues with the calibration of the radars despite the mandate of the WSR-88D network on quantitative precipitation estimation and the implementation of routine calibration procedures [Bolen and Chandrasekar, 2000]. On the other hand, establishing routine calibration procedures based on engineering testing procedures or natural targets for the ARM profiling cloud radars is a far more challenging task.”

Page 3, line 3. Change “. . . is such diverse” to “. . . to such a diverse set . . .”.

The manuscript is revised according to your suggestion. Thank you.

Page 3, line 31. “. . .on the same. . .” to “at the same”.

The manuscript is revised according to your suggestion. Thank you.

Page 4: First paragraph: Mode analysis. How did you account for differences in the minimum detectable signal between the modes? I presume you only included neighboring time & range bins where both modes have a measurement with high SNR?

The reviewer is correct, we only used neighboring time/range bins with  $SNR > 0$ . We have revised the text to make it more clear: “The difference [dB] in the measured radar reflectivity between two modes is estimated at heights where both modes provide observations (e.g., the MMCR mode 2 does not provide data below 3.6 km) with high Signal-to-Noise ( $SNR > 0$  dB), and at ranges where the averaged profiles were correlated to filter our ranges where bid discrepancies due to radar artifacts were present” The last requirement (correlation of profiles in range) was introduced because the pulse compression can introduce range side lobes.

Page 4. The first paragraph launches into a discussion of mode differences (which is useful) but a bit confusing when one is expecting a comparison of CloudSat and ARM calibrations. I suggest breaking this paragraph about line 8 and adding. “Therefore as a prelude to comparing CloudSat and ARM, we begin with a comparison of reflectivity values between ARM radar modes. As will become clear later, changes in the reflectivities between modes is often, though not always, indicative of changes in overall calibration.”

The manuscript is revised according to your suggestion. Thank you.

Page 4, line 13. I presume “bid” should be “big”.

The manuscript is revised according to your suggestion. Thank you.

Perhaps Page 4, line 14. Specify period (6 months?).

The time window used to compare two ARM radar modes is 1-month since there is a large dataset to compare. The duration of the time window was added in the revised manuscript. Thank you.

Page 4, line 16. Perhaps change to read: “Overall, the mode reflectivity differences are small ( $\pm 2$  dB) and only occasionally are the differences much higher than 2 dB. While the absolute values of mode difference is in the next generation of ARM cloud profiling radars (KAZR and KAZR2) is often similar, arguably there are fewer jumps or rapid changes (except perhaps at OLI). In general it is difficult to identify which mode has a better calibration, because as will be shown, the calibration difference between CloudSat and ARM is typically larger than  $\pm 2$  dB.

The manuscript is revised according to your suggestion. Thank you.

\*\* Page 4: Second paragraph on difference between Protat and current approach. This paragraph is nearly impossible to follow if you don’t already know what Protat 2010 did. In particular, I have no idea what “. . . a rigorous selection of the CloudSat overpasses within a certain radius to avoid any errors in the estimation of the proximity of CloudSat columns to the ARM site location” means. But other parts of this are confusing to me (and I am familiar with Protat 2010). I strongly encourage you to reorganize the manuscript such that you FIRST explain your approach in detail and ONLY at the end of this material highlight how this approach differs from Protat (2010).

The comment regarding the “. . . a rigorous selection of the CloudSat overpasses within a certain radius to avoid any errors in the estimation of the proximity of CloudSat columns to the ARM site location” refers to a software bug found in the original code provided to us by Alain and sometimes was introducing CloudSat echoes that were not within the specified radius from the ARM site as being within the specified radius. We agree with the reviewer comment. We re-organized the description of the methodology, first we explain our approach in detail and at the end we highlight any differences to Protat 2010. We hope that the revised manuscript offers a clearer description of the methodology used in this study.

\*\* Page 6, equation 2. What is the justification for using a constant here? You used Rosenkranz and . . . ? Somehow you must have specified some set of atmospheric profiles to come up with these constants? Explain in enough detail so someone else could implement this idea. Nominally, I think it would have been better to calculate a set of gasses corrections for ARM (perhaps using ERA data just as CloudSat does). \*\*But in lieu of this, I think you need to address how much error (uncertainty) using this constant introduces in your calibration correction.

Initially, we wanted to use the ARM facility soundings to estimate the gaseous attenuation for the ARM radar observations. However, in most cases, the CloudSat overpasses and the ARM soundings which are available on 2-4 times per day are several hours apart. Our preliminary analysis indicated large differences in the two estimates especially during periods when large scale

advection was present. Thus, we decided to use the same thermodynamic profile for gaseous attenuation for both the ARM and CloudSat observations. As the reviewer pointed out, CloudSat uses ERA which is available all the time along the CloudSat orbit. The use of the ERA-based CloudSat gaseous attenuation for the ARM radar eliminates any possible biases related to biases in the reanalysis and mitigates all uncertainty in the methodology used to estimate the conversion constant. The estimation of the conversion constant was performed using a large number of ARM soundings at each fixed or mobile site. The ARM soundings were used as input to Rosenkranz to estimate the  $G_{94\text{-GHz}}^{\text{inv}}$  and the  $(G_{35\text{-GHz}})$ . The conversion factor was found to have a latitudinal dependency, thus, three different values we introduced. Per the reviewer request, we estimated the standard deviation of the parameter C and it was found to be around 0.5 for AWR, NSA, OLI and TMP and 0.8 for ENA, SGP and TWP. If we consider that the column integrated gaseous attenuation at 35-GHz is about 0.4 for AWR, NSA, OLI and TMP; 0.6 for ENA and SGP; and 1.0 for TWP, we can estimate the uncertainty introduced by using a constant C using Eq. 2. The uncertainty is: 0.14 dB for AWR, 0.09 dB for NSA, OLI and TMP, 0.15 dB for ENA and SGP and 0.2 dB for TWP. The following text was added in the methodology:

“The conversion factor is derived using [Rosenkranz, 1998] and a large number of ARM sounding and its average value depends on the ARM radar location (i.e.,  $1.45\pm 0.5$  for AWR,  $2.08\pm 0.5$  for NSA, OLI and TMP,  $3.36\pm 0.5$  for ENA and SGP and  $4.03\pm 0.5$  for TWP) . Considering that the averaged integrated two-way attenuation at 35-GHz at these locations is 0.4 dB for AWR, NSA, OLI and TMP, 0.6 dB for ENA and SGP and 1.0 for TWP, the uncertainty introduced by using the conversion factor is 0.13 dB at AWR, 0.09 dB at NSA, OLI and TMP, 0.15 dB at ENA and SGP and 0.2 dB at the TWP sites.”

**\*\* Page 6, equation 3. What assumptions does this equation entail? Again, I think you need to address how this impacts the uncertainty of your calibration corrections?**

Equation 3 is adopted by the methodology described in Protat (2010). In brief, Protat (2010) used a large database of in situ ice cloud microphysical measurements of the ice particle size distribution gathered in different international field experiments, assumed a temperature-dependent mass–dimension relationship, and calculate radar reflectivity at 35 and 94-GHz using Mie theory. The scattering calculations results here fitted to extract the power-law relationship shown in Eq. 3. As the reviewer suggests, there are a lot of assumption in estimating this relationship.

Fortunately, in our analysis we use sensitive radars. Both CloudSat and the ARM profiling radar are capable of observing ice clouds with reflectivities as low as -30 dBZ throughout the upper troposphere. Only a very small fraction of the CloudSat and ARM observations used for the comparison exceed 0 dBZ. We examined the sensitivity of the calibration offsets to the application or not of the Eq 3 and it was found negligible. In any case, and for consistency with previous effort, we did apply Eq 3. The following text was added:

“Eq. 3 is based on assumption regarding the mas-diameter relationship of the ice particles used in the Mie scattering calculations. According to Eq. 3, differences in the radar reflectivity at 35- and 94-GHz start exceeding 1-dB at about 0 dBZ at 35-GHz. In the analysis presented here, the vast majority of the 35-GHz radar ice reflectivities used are below 0 dBZ. Thus, any uncertainty introduced by using Eq. 3 is considered negligible.”

\*\* Page 6, line 17. I am not sure I understand this definition, there seems to be a grammatical error here. Do you simply mean "precipitating column = 10% (or more) of the radar volumes below the FL have ANY reflectivity (even if it is -30 dBZe). So if FL is 2 km at there are 20 bins below 2km, if 3 bins have ANY detection (even if it is just a low cloud) you are calling it precipitating?"

The reviewer is correct, there is a radar reflectivity threshold that is missing. The correct phrase is: "An ARM column is considered to be precipitating if at least 10% of the range gates below the freezing level report echoes higher than -10 dBZ". We have added this correction to the revised manuscript.

What do you do if the FL is near the surface (in the CloudSat clutter) or with only a few ARM bins ~ 5 ?

The same rules apply. However, our FL estimate is always conservative (always higher by at least 500 m than the actual FL) and we never use CloudSat observations in the lowest 1.5 km of the atmosphere

Why do you use a different threshold 35% for CloudSat? This seems arbitrary.

The following text was added in the revised manuscript: "The threshold selection 35% for CloudSat is based on an extensive sensitivity study. In particular, we estimated the sensitivity of calibration offset for different allowed % (from 0 to 100%) of CloudSat echoes with radar reflectivity exceed -10 dBZ below the freezing level. The calibration offset exhibited systematic biases for threshold values higher than 35%. Thus, the threshold value of 35% was selected to maximize the number of CloudSat columns used and at the same time eliminate the possibility of systematic biases."

\*\* Page 6, items 2 to 4. This material seems important and needs to be better explained. In particular, how does the "degradation" work? I presume you mean that the mean-Z-profiles, are obtained from the CFADS in step 4 by summing bins with  $\text{dBZ} > \text{Threshold} > \text{Minimum Detectable Signal (MDS)}$  weighted by the bin dBZe? (I note without weighting this just give you the "profile of cloud fraction"). If yes, it might be important to choose threshold that is + 3 to 5 dB larger than the MDS.

The CloudSat only echoes with cloud mask values higher than 20 are used. Based on these filtered values, we estimate the CloudSat MSD (one constant value for the entire troposphere). In ARM, we are doing pretty much what the reviewer suggests, we use a threshold of +3 to +5 dB larger than the theoretical MDS. This relates to the next question of the reviewer.

Where/How does the  $\text{SNR} > -15$  mentioned early come in?

Profiling cloud radars utilize high pulse repetition frequency (3-10 kHz) and long averaging (1-2 sec). Thus, are capable at extracting signal at low SNR conditions. Not all collected samples are independent (this depends on the signal bandwidth, or otherwise the Doppler spectrum width). For typical conditions of spectrum width encountered in weak reflectivity targets, we estimate that we

have 1000 or more independent samples used in the moment estimation. The resulting reduction in the received noise variance is given by the square root of the number of samples  $\sim 15$  dB. Although our experience with working with the ARM facility profiling cloud radars is that signal extraction is possible at even lower than  $-15$  dB SNR conditions, we decided to accept only radar reflectivity estimates with  $\text{SNR} > -15$  to ensure the removal of any outliers.

Page 7. It seems you address the issues of the number of columns in detail later in the text, but do NOT the distance issue. (see also general comment #3). Perhaps add some discussion and/or better yet show result for OLI site (where you have lots of data) – add a line to fig 7 – for results based on 100 vs. 300 km?

A details sensitivity study was performed at each ARM radar site to investigate the impact of the selected maximum distance for CloudSat observations on the estimated calibration offsets. It was found that a distance of 200 km was optimum for most locations. The following text was added in the revised manuscript: “In particular, we examined the sensitivity of the estimated calibration offset to the selected maximum distance of the CloudSat observations. Using difference distance values from 100 to 300 km every 25 km at different sites, we investigated the behavior of the estimated calibration offsets. Our analysis indicated that a maximum distance of 200 km was optimum for most ARM locations and therefore, was selected as a fixed value throughout the study.”

\*\* Page 7/8, analysis on number of columns vs. number of good columns ? I like very much the analysis you have included on the number of columns. But unless I misunderstand you are counting ALL columns here. Not the number of good columns (i.e. columns which are devoid of high/ice clouds or precipitating). I think it would be far more sensible to count the number of columns with good data (and set a minimum threshold on this) rather than all radar columns.

The number of columns reported is the number of good columns given the selection criteria described in the methodology section. This is consistent with Figure 5 that shows that the number of samples strongly depends on seasonal cloud variability.

Page 9, line 21. I presume you mean “only” not “on”. Why is it that only GE mode is available?


The reviewer is correct, we do mean only. Regarding the comment that only GE mode is available: After checking with the ARM facility, we discovered that there is a chirp mode that was given a different filename in the archive and thus, it is not possible for us to find it.

Page 9, line 22. The stability here demonstrates that changes in mode differences are “indicative” not necessary for there to be calibration issues.

The reviewer is correct. We have indicated in the revised summary and in the text that changes in model differences are only indicative of time periods with calibration issues.

Page 10, line 37. So the dots here in Fig. 11 represent different frequencies, not just different months? I strongly suggest using different symbols for the different frequencies.

In the revised manuscript, Fig 11 has been revised according to your suggestion. Thank you.

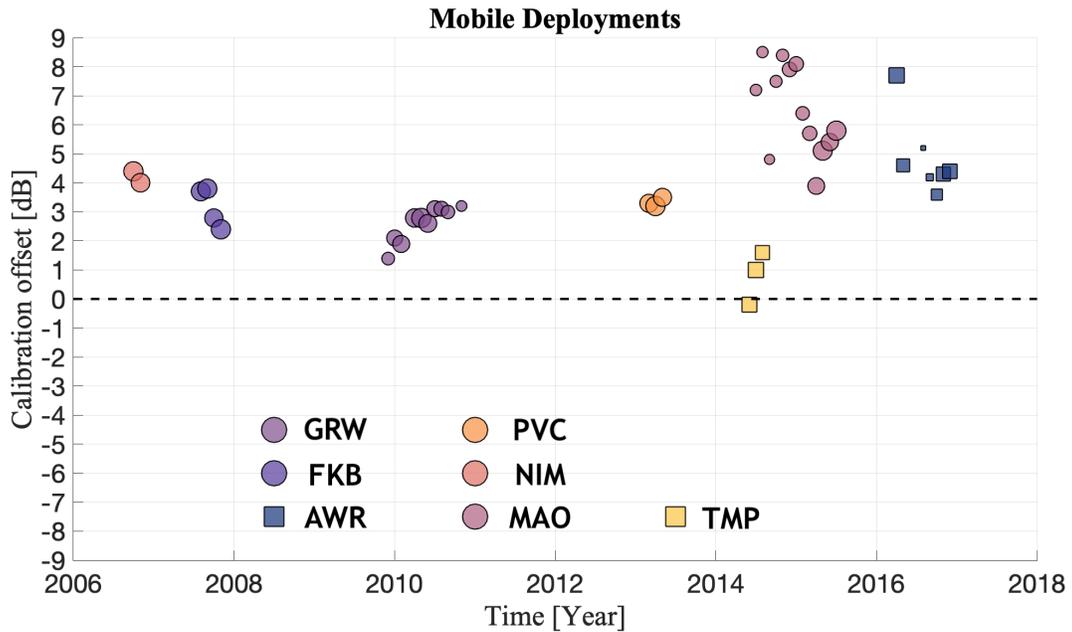

Page 11, line 27. Perhaps rephrase as "In many cases, the offset ... . Thus, changes in the reflectivity offset between the modes should be monitored, and used to identify periods where the calibration stability is suspect, and moving forward perhaps trigger more prompt additional external calibration evaluations".

The manuscript is revised according to your suggestion. Thank you.

Page 12, line 4. Seem redundant with the above comments on page 11.

The summary has been revised and we believe any redundancy has been removed.

# Calibration of the 2007-2017 record of ARM Cloud Radar Observations using CloudSat

Pavlos Kollias<sup>1,2</sup>, Bernat Puigdomènech Treserras<sup>3</sup> and Alain Protat<sup>4</sup>

5

<sup>1</sup>School of Marine and Atmospheric Sciences, Stony Brook University, USA

<sup>2</sup>Center for Multiscale Applied Sensing, Brookhaven National Laboratory, USA

<sup>3</sup>Department of Atmospheric and Oceanic Sciences, McGill University, Canada

<sup>4</sup>Bureau of Meteorology, Melbourne Australia

10 *Correspondence to:* Pavlos Kollias (pavlos.kollias@stonybrook.edu)

**Abstract.** The US Department of Energy (DOE) Atmospheric Radiation Measurements (ARM) facility has been at the forefront of millimeter wavelength radar development and operations since the late 1990's. The operational performance of the ARM cloud radar network is very high; however, the calibration of the historical record is not well established. Here, a well-characterized spaceborne 94-GHz cloud profiling radar (CloudSat) is used to characterize the calibration of the ARM cloud radars. The calibration extends from 2007 to 2017 and includes both fixed and mobile deployments. Collectively, over 43 years of ARM profiling cloud radar observations are compared to CloudSat and the calibration offsets are reported as a function of time using a sliding window of 6 months. The study also provides the calibration offsets for each operating mode of the ARM cloud radars. Overall, significant calibration offsets are found that exceed the uncertainty of the technique (1-2 dB). The findings of this study are critical to past, on-going and planned studies of cloud and precipitation and should assist the DOE ARM to build a legacy decadal ground-based cloud radar dataset for global climate model validation.

15

20

Deleted: program

Deleted: Here, we use a well-characterized spaceborne 94-GHz cloud profiling radar (CloudSat) to characterize the calibration of the different generations of the ARM cloud radars from 2007 to 2017 over a variety of climatological regimes and for fixed and mobile deployments...

Deleted: O

## 1 Introduction

The first millimeter wavelength cloud radars (MMCR, [Moran et al., 1998]) of the U.S. Department of Energy Atmospheric Radiation Measurement (ARM) facility were installed at the Tropical Western Pacific (TWP) Manus and Southern Great Plains (SGP) sites in 1996. Since then, the ARM facility has been at the frontier of short-wavelength radar development and operations for over two decades [Kollias et al., 2016]. At the beginning, emphasis was placed on demonstrating high operational stability and in developing standard hydrometeor location and spectral products ([Clothiaux et al., 2001] [Kollias et al., 2007b]). The ARM facility MMCR calibration efforts were limited to subcomponent characterization (i.e. antenna gain), monitoring of the transmitted peak power and infrequent detailed characterization of the radar receiver by injecting signal with known amplitude. In 2005, the ARM facility started the deployment of its mobile facilities and the gradual modernization of the MMCR receiver. This led to the development of the W-band ARM Cloud Radar (WACR). In 2009, the ARM facility embarked in a significant

25

30

Deleted: program

Deleted: program

Deleted: program

Deleted: ARM program

Deleted: ARM program

expansion of its radar facilities [Mather and Voyles, 2013]. The expansion included the addition of scanning mm- and cm-wavelength radars with Doppler and polarimetric capabilities ([Kollias et al., 2014a], [North et al., 2017]) and the development of the next generation profiling cloud radar, the Ka-band ARM Zenith-pointing Radar (KAZR) and its upgraded second generation (KAZR2).

Deleted: ,

Part of the motivation for the ARM radar expansion, was to improve cloud microphysical retrievals through the use of dual-wavelength ratios, that is, making use of the relative difference in radar scattering at different wavelengths. This difference signal is often only a few dB and as one might expect, this requirement brought the characterization of the ARM radar calibration to focus. Early comparisons between collocated profiling ARM cloud radar indicated differences in reported radar reflectivity profiles. This hardly came as a surprise, to those involved in radar characterization [Atlas, 2002]. Soon after the National Aeronautics and Space Administration (NASA) Tropical Rainfall Measuring Mission (TRMM) spaceborne radar was in orbit, its remarkable stability made it a calibration standard and its comparison to the ground-based observations of the Weather Surveillance Radar -1998 Doppler (WSR-88D) network uncovered several issues with the calibration of the radars despite the mandate of the WSR-88D network on quantitative precipitation estimation and the implementation of routine calibration procedures [Bolen and Chandrasekar, 2000]. On the other hand, establishing routine calibration procedures based on engineering measurements or natural targets for the ARM profiling cloud radars, is a far more challenging task. The systems are only vertically pointing, thus, makes the use of corner reflectors or metal spheres difficult; designed with sensitive receivers that can detect very low radar reflectivity targets but saturate in rain, thus, making the use of disdrometers challenging ([Gage et al., 2000]); operate in climate regimes that often have no or little precipitation and suffer from considerable gaseous and hydrometeor attenuation ([Kollias et al., 2005]; [Kollias et al., 2007a]). Furthermore, the four different profiling cloud radars (MMCR, WACR, KAZR, and KAZR2) were deployed in different climatological regimes, for small periods of time (9-24 months mobile deployments) and often with no gaps between deployments, thus, making it even more challenging to develop calibration standards. At present, the ARM facility employs a larger radar operations and engineering group and has set procedures for characterizing the ARM radars using a combination of subsystems calibrations, corner reflectors and natural targets. However, these methods are still not fully operational today and certainly not applicable to the historic ARM profiling cloud radar dataset that spans over two decades.

Formatted: Font: 10 pt

Deleted: The strengthening of the microphysical retrievals is one of the main drivers for routinely operating more than one radar frequencies in the atmospheric column. As expected, this ...

Deleted: d

Deleted: o

Deleted: Arguably,

Deleted: calibrating

Deleted: a small

Deleted: network of profiling cloud radars

Deleted: by

Deleted: several

Deleted: ARM program

Deleted: ave

Luckily, NASA's CloudSat mission, a 94-GHz spaceborne Cloud Profiling Radar (CPR) was launched in April 2006 ([Stephens et al., 2002]; [Tanelli et al., 2008]) on a circular sun-synchronous polar orbit providing coverage from 82° S to 82° N and is still operational today. In 2021, another 94-GHz spaceborne CPR with Doppler capability will be launched as part of the Earth Clouds, Aerosols and Radiation Explorer (EarthCARE) satellite a joint European Space Agency and Japanese Aerospace Exploration Agency mission ([Illingworth et al., 2015]; [Kollias et al., 2014b]). Over the 12-year mission of CloudSat, end-to-end system calibration is performed using measured backscatter off the ocean surface and the calibration of the CloudSat reflectivity measurements is accurate within 0.5 - 1 dB ([Li et al., 2005]; [Tanelli et al., 2008]). The CPR

Deleted: o

Deleted: continues to operate to present.

calibration quality and stability was exploited by [Protat et al., 2011] who, first demonstrated, that using a statistical approach, CloudSat could be used as a global radar calibrator for ground-based profiling cloud radars. In the Protat et al., 2011 study, two ground-based radars, the MMCR at the North Slope of Alaska (NSA) Barrow ARM site and another 35-GHz radar system at Cabauw, The Netherlands were calibrated using CloudSat over a short period of time (6-12 months).

In section 2, the ARM facility cloud radars are presented and the Protat et al. [2011] methodology is revised and improved. Section 3 presents the results from the application of the calibration procedure to almost the entire record of ARM profiling cloud radar observations at the fixed and mobile sites from 2007 to the end of 2017 (at total of 43.5 years of radar observations). Finally, section 4 presents a summary on our finding and their implications. The application of the technique to such a diverse set of radar systems and locations is expected to demonstrate the applicability of this approach to existing profiling radar networks such as the ARM facility and the future European research infrastructure network for the observations of Aerosol, Clouds and Trace gases (ACTRIS).

## 2 Methodology

Here, the ARM and CloudSat CPR measurements and the methodology used for the comparison between the ground-based and space-based observations are described

### 2.1 ARM Cloud Radar Measurements

The record of ARM profiling radar observations compared to CloudSat is detailed in Table 1. In total, ARM cloud radar observations from 14 different locations (Fig. 1) with four different radar systems (MMCR, WACR, KAZR, KAZR2) for a total of 43 years and 8 months long record are analyzed. At couple of sites, the calibration record starts as early as the launch of CloudSat (mid 2006) and in several sites stops at the end of 2017. For much of the record analyzed here, the WACR was the primary profiling cloud radar of the first ARM Mobile Facility (AMF) and as such have been deployed in different climatological locations. A marine version of the WACR (M-WACR) with smaller antenna and a ship-motion stabilizer has been the primary radar for marine deployments of the second AMF (AMF2). The WACR does not use pulse compression and operates only in co-polarization and cross-polarization modes. The single operating mode of the WACR combined with the fact that it uses the same frequency as the CloudSat CPR makes their comparison relatively straightforward. The MMCR used a complicated operating mode sequence ([Moran et al., 1998]; [Kollias et al., 2007b]) in order to meet the requirement of detecting all radiatively important clouds with radar reflectivity above -50 dBZ throughout the troposphere. The mode sequence includes a long pulse compression mode for detecting high level clouds (hereafter Mode 2), a very short pulse for boundary layer clouds detection, a nominal length general mode that covers all the troposphere (hereafter Mode 3) and a precipitation mode that provides additional receiver protection to avoid signal saturation. These modes operated in an

Deleted: Here

Deleted: ,

Deleted: and applied to

Deleted: The application of the technique is such diverse set of radar systems and locations is expected to demonstrate the applicability of this approach to existing profiling radar networks such as the ARM program and the future European research infrastructure network for the observations of Aerosol, Clouds and Trace gases (ACTRIS). The characterization of a decade long cloud radar record from multiple locations is a necessary step for the development of unbiased statistics on cloud occurrence and the estimation of microphysical parameters using retrieval techniques. Once the characterization and reprocessing of the ARM radar observations is completed, the decade long record and its value-added products can be used as an observational targets for Global Climate Model evaluation studies using suitable forward operators ([Zhang et al., 2018], [Lamer et al., 2018]).

Deleted: A

Deleted: of

Deleted: of radar observations

Deleted: several

Deleted: on

Deleted: a

interleaved sequence. The KAZR system provides the chirp (hereafter mode MD) and general mode (hereafter mode GE) at the same time using a dual radar receiver channel with enough frequency separation to enable detection of two pulses transmitted at the same trigger. Finally, the KAZR2 is an improved hardware version of the KAZR, which maintains the same operating modes as the KAZR but introduces also a precipitation mode that transmits a reduced amplitude pulse to avoid receiver saturation by strong precipitation returns. The use of different operating modes comes at the expense of frequent range sidelobe artifacts from high reflectivity targets from the use of pulse compression and possible differences in the reported radar reflectivity from the different modes. The latter is commonly observed in radar systems that operate with different modes.

Therefore, as a prelude to comparing CloudSat and ARM, we begin with a comparison of reflectivity values between ARM radar modes. As will become clear later, changes in the intramode reflectivity differences is often, though not always, indicative of changes in overall calibration. A detailed comparison between the reported radar reflectivities from all the radar systems with more than one operating mode was conducted (Fig. 2). The difference between mode 3 and mode 2 is reported for the MMCR systems and the difference between the GE and MD modes is reported for the KAZR and KAZR2 systems. The difference [dB] in the measured radar reflectivity between two modes is estimated at heights where both modes provide observations (e.g., the MMCR mode 2 does not provide data below 3.6 km) with high Signal-to-Noise ( $SNR > 0$  dB), and at ranges where the averaged profiles were correlated to filter our ranges where big discrepancies due to radar artifacts were present. At each height, the average reflectivity profile of each mode (in linear units) is computed using a 1-month running window. The mean of the differences in the averaged radar reflectivity profiles between the two modes is computed and shown as a function time in Fig. 2. Overall, the mode reflectivity differences are small ( $\pm 2$  dB) and only occasionally are the differences much higher than 2 dB. While the absolute values of mode difference is in the next generation of ARM cloud profiling radars (KAZR and KAZR2) is often similar, arguably there are fewer jumps or rapid changes. In general, it is difficult to identify which mode has a better calibration, because as will be shown, the calibration difference between CloudSat and ARM is typically larger than  $\pm 2$  dB.

## 2.2 The ARM – CloudSat comparison methodology

The comparisons between the ARM radars (MMCR, KAZR and KAZR2) and the CloudSat CPR are performed independently for two modes for the MMCR (2 and 3) and two modes for the KAZR and KAZR2 (MD and GE). The approach is similar to that described in [Protat et al., 2011]. The technique consists in a statistical comparison of the mean vertical profiles of non-precipitating ice cloud radar reflectivities from the ground-based and spaceborne radar observations. One of the improvements introduced in this study is that the averaging of the radar reflectivity value at each height is performed in linear space (Z) and not dBZ as in [Protat et al., 2011]. These averaged profiles use data extracted from CloudSat overpasses in a radius of 200 km around the ARM site and  $\pm 1$  h time lag around the overpass time for the ground-based radars. Another improvement introduced in this study is a rigorous selection of the CloudSat overpasses within a certain radius to avoid any errors in the estimation of

Deleted: on

Deleted: on

Deleted: ¶

The use of different modes by the majority of the ARM profiling cloud radars allow us to achieve high sensitivity for all cloud system and enables us to avoid velocity aliasing and receiver saturation effects. However,

Deleted: t

Deleted: While the process of tracking down the detail hardware and/or software issue responsible for the intramode differences is difficult, their temporal evolution can provide clues for identifying time periods where the performance of the radar hardware changed or when the radar data post-processing algorithms were changed.

Deleted: at ranges

Deleted: d

Deleted:

Deleted: r

Deleted: Overall, the differences are small ( $\pm 2$  dB) and only in few MMCR cases, the differences are much high, suggesting that during these periods, the hardware performance was questionable or that the radar operators performed tests. Overall, few changes in the relative difference between the modes is observed in the next generation ARM cloud profiling radars (KAZR and KAZR2). These differences are small, and it is difficult to identify which of the two radar reflectivities is correct unless an independent radar calibration procedure is available.

Deleted: of

the proximity of CloudSat columns to the ARM site location. Finally, the methodology investigates the difference between the ARM and CloudSat profiles in a large range of calibration offsets from -15 to +15 dB with a fine spacing of 0.1 dB rather than using an iterative process as in [Protat et al., 2011]. The radar reflectivity difference between the ARM and CloudSat profiles is evaluated only at the range of heights where enough samples from both sensors are available.

Several factors need to be taken into account to achieve an objective statistical comparison between ground-based and space-based observations: frequency of each radar, sensitivity, viewing geometry, attenuation correction, etc. The approximations to deal with all these factors introduce errors that are difficult to assess. The necessary steps required to find the calibration offset for each radar are described here, following the algorithm flow outlined in Fig 3.

The CloudSat overpasses are predicted using the two-line element set (TLE) files that encode all necessary information to define the latitude and longitude of the satellite over the Earth's surface at any given time. Using these files, the satellite position is computed with high resolution in time and the distances to each ARM radar location are used to define the overpass. Only CloudSat data passing in a radius between 100 and 300 km around the ARM radar location are extracted. Knowing the orbits of the overpasses, the CloudSat respective files are read. In this present study, the data from the fourth and fifth release (R04 and R05) of the 2B-GEOPROF product are used to extract the CPR radar reflectivity, height, DEM elevation, CPR cloud mask, gaseous attenuation and data quality flags. In addition, the height of the freezing level is extracted from the 2C-PRECIP-COLUMN product. Fig 4a shows the probability density function (pdf) of the freezing level height at the North Slope of Alaska (NSA).

All CPR observations within 500 m from Earth's surface are removed to avoid residual surface clutter contamination. In addition, all CPR detections at very low Signal-to-Ratio (SNR) conditions (CPR Cloud Mask < 20) and poor data quality points (Data Quality ≠ 0) are removed.

The gaseous attenuation correction reported in the CloudSat files is added to the reflectivity profile. The CPR reflectivity is normalized for the differences in the values used for the dielectric constant (K) using Eq. 1. CloudSat uses a value of 0.75 and the ARM facility uses a value of 0.99 for all MMCR, 0.84 for all WACR and 0.88 for all KAZR.

$$Z_{\text{CloudSat}} = Z_{\text{CloudSat}} - 10 \cdot \log_{10} \left( \frac{K_{\text{ARM}}}{K_{\text{CloudSat}}} \right) \quad (1)$$

On the ARM radar data processing, only data with ±1h time lag around the overpass exact time are used. All radar reflectivity values measured at SNR < - 15 dB conditions are removed. The ARM radar reflectivities are corrected for gaseous attenuation using the top-down gaseous attenuation profile ( $G_{94\text{-GHz}}$ ) available in the CloudSat data products. The

Deleted: ,

Deleted: sources of

Deleted: A detailed description of all

Deleted: 2

Deleted: location

Deleted: 2

Deleted:

Deleted: ARM program

Deleted: is

Deleted: n

$G_{94-GHz}$  estimates in the operational CloudSat products are based on [Liebe 1989]. First, the profile is inverted ( $G_{94-GHz}^{inv}$ ) to represent the gaseous attenuation for a ground-based system. If the ground-based system is the WACR (same frequency with CloudSat), no further conversion is needed and the  $G_{CloudSat}^{inv}$  is used to correct the WACR radar reflectivities. If the ground-based system is a 35-GHz radar (MMCR, KAZR, KAZR2), then a conversion factor C is used to convert the  $G_{94-GHz}^{inv}$  to 35-GHz gaseous attenuation ( $G_{35-GHz}$ ) using Eq. 2.

$$G_{35-GHz} = \frac{G_{94-GHz}^{inv}}{C} \quad (2)$$

The conversion factor is derived using [Rosenkranz, 1998] and a large number of ARM sounding and its average value depends on the ARM radar location (i.e.,  $1.45 \pm 0.5$  for AWR,  $2.08 \pm 0.5$  for NSA, OLI and TMP,  $3.36 \pm 0.5$  for ENA and SGP and  $4.03 \pm 0.5$  for TWP). Considering that the averaged integrated two-way attenuation at 35-GHz at these locations is 0.4 dB for AWR, NSA, OLI and TMP, 0.6 dB for ENA and SGP and 1.0 for TWP, the uncertainty introduced by using the conversion factor is 0.13 dB at AWR, 0.09 dB at NSA, OLI and TMP, 0.15 dB at ENA and SGP and 0.2 dB at the TWP sites. If the ARM cloud radar operates at 35-GHz, another important step is to address the difference in the scattering of ice particles at 35- and 94-GHz. Here, we use the relationship introduced by [Protat et al., 2010], that is applied to reflectivity values lower than 30 dBZ and it is shown in Eq. 3:

Deleted: for

$$dBZ_{94GHz} = dBZ_{35GHz} - 10^{-16.8251} \cdot (dBZ_{35GHz} + 100)^{8.4923} \quad (3)$$

Eq. 3 is based on assumption regarding the mass-diameter relationship of the ice particles used in the Mie scattering calculations. According to Eq. 3, differences in the radar reflectivity at 35- and 94-GHz start exceeding 1-dB at about 0 dBZ at 35-GHz. In the analysis presented here, the vast majority of the 35-GHz radar ice reflectivities used are below 0 dBZ. Thus, any uncertainty introduced by using Eq. 3 is considered negligible. Subsequently, the ARM radar reflectivities are averaged to 1-min using linear averaging and 250 m vertical resolution to best match the CloudSat footprint (~1.4 km) and range resolution. If there are data from both radars for a given overpass, the following processing prepares the data for the final statistical comparison:

1) The profiles are carefully separated in 2 groups: precipitating and non-precipitating ice clouds. Ice clouds are assumed at heights above the freezing level while liquid particles are assumed below. An ARM column is considered to be precipitating if at least 10% of the range gates below the freezing level report echoes higher than -10 dBZ. For CloudSat columns, a maximum of 35% of the heights below the freezing level are allowed to report echoes higher than -10 dBZ before the column is characterized as precipitating. Precipitating profiles are eliminated from the ARM-CloudSat comparison since they are not attenuated in the same way from nadir or zenith viewing geometries. This conservative selection will ensure that only non-precipitating ice clouds observations, that have negligible hydrometeor attenuation are

Deleted: if 10% or more of the

Deleted: heights

Deleted: hydrometeor

Deleted: hydrometeor

Deleted:

used. The threshold selection 35% for CloudSat is based on an extensive sensitivity study. In particular, we estimated the sensitivity of calibration offset for different allowed % (from 0 to 100%) of CloudSat echoes with radar reflectivity exceed -10 dBZ below the freezing level. The calibration offset exhibited systematic biases for threshold values higher than 35%. Thus, the threshold value of 35% was selected to maximize the number of CloudSat columns used and at the same time eliminate the possibility of systematic biases.

- 2) The performance of the most sensitive radar is degraded to match the minimum detectable signal (MDS) of the least sensitive radar. Due to the large distance between CloudSat and the Earth's troposphere, the CloudSat MDS is practically constant around -30 dBZ throughout the troposphere, while the ARM radar MDS decreases with the square of the range from the radar.
- 3) If the ARM radar operates at 35-GHz, the radar reflectivity is converted to 94-GHz radar reflectivity using Eq. 3.
- 4) Using all available columns within the selected time window (6 months), a reflectivity frequency by altitude diagram (CFAD) is constructed for each radar (Fig. 4b,c). This diagram will be used to generate the mean vertical reflectivity profile used in the final comparison (Fig. 4e).
- 5) Steps 1 and 3 are repeated for all possible calibration offsets, from -15 to +15 dBZ with increments of 0.1 dBZ. At each iteration, the calibration offset is added to the original profile prior to the frequency conversion (prior to step 3) and 1 CFAD is constructed for each calibration offset by accumulating columns from all overpasses.
- 6) Each CFAD constructed with the previous methodology is representative of one averaged profile. As we have N calibration offsets, we have N averaged profiles for each CloudSat and ARM radar (Fig 4e).
- 7) The final calibration result is found by computing the root mean square error (RMSE) between the profiles of each radar for each calibration and at heights with enough data points (at least 3% of the total sample size). The calibration offset representative of the profiles with the least RMSE will be the final calibration result (Fig. 4f).
- 8) The probability density function (pdf) of cloud top heights (Fig. 4d) is also used for verification purposes, assuming that occurrences of the highest clouds should be similar when the ground and spaceborne radars have equal sensitivity, [Protat et al., 2010].

The most important factor in determining our ability to perform a good comparison is the number of available CloudSat profiles. Several temporal windows were considered, and the decision was made to use a time window of 6 months throughout this study. In addition to the length of the time window, the impact of the maximum distance of the CloudSat observations from the ARM site (we tested values from 100 to 300 km) was investigated. In particular, we examined the sensitivity of the estimated calibration offset to the selected maximum distance of the CloudSat observations. Using difference distance values from 100 to 300 km every 25 km at different sites, we investigated the behavior of the estimated calibration offsets. Our analysis indicated that a maximum distance of 200 km was optimum for most ARM locations and therefore, was selected as a fixed value throughout the study. Fig. 5 shows the number of CloudSat profiles with suitable measurements (non-precipitating ice) with a 6-month window for all the ARM fixed and mobile sites as a function of time. As expected, there is strong seasonal

Deleted: ss

Deleted: 1

Deleted: and of the maximum fraction of hydrometeor echoes allowed in warm temperatures ...

Deleted:

variability that is dictated by the seasonal cloud type and atmospheric temperature profile variability. Of particular interest is the availability of suitable CloudSat profiles at the NSA. There is a significant decrease in the number of available CloudSat profiles during the period when the ARM facility transitioned from the MMCR to the KAZR radar system. The reduction in the number of CloudSat profiles is not related to the changes of the ARM radar system (these two systems have similar MDS) nor is related to significant changes in the cloud climatology at the NSA. The transition from the MMCR to the KAZR system coincided with the battery anomaly that occurred on CloudSat in 2011 and resulted in CloudSat operating since then only during daylight conditions, thus, effectively halving the possible number of CloudSat columns ([Stephens et al., 2018]). The daylight-only operations of CloudSat challenged our ability to collect a good size sample of column especially at very high latitudes (e.g. ARM West Antarctic Radiation Experiment (AWR) during the southern hemisphere winter).

Deleted: that

Deleted: ARM program

Deleted: that

A total of 653 ARM – CloudSat comparisons were performed using a running 6-month time window. The relationship between the minimum RMSE value achieved in a particular ARM – CloudSat comparison and the corresponding number of CloudSat columns is shown in Fig. 6. As expected, the RMSE value decreases with the number of samples. The analysis of the entire ARM-CloudSat comparison record suggests that when the number of CloudSat columns is less than 500, the comparison is difficult to perform. In addition to the value of RMSE and the number of CloudSat columns, the goodness of the fit between the ARM and CloudSat cloud top height pdf's is evaluated when the minimum RMSE is achieved. Out of the possible 653 calibration coefficients, 616 were accepted, i.e., 94.3% success rate.

Deleted: reduces

Deleted: a

### 20 3 Results

First, the results of the ARM – CloudSat comparison at the two sites that feature the most recently acquired profiling cloud radar systems of the ARM facility are discussed. The two KAZR2 systems are located at critical climatological locations (ENA and OLI) and are the primary source of cloud observations. The OLI KAZR2 is compared against the CloudSat CPR for the period 09/2015 to 12/2017. Fig. 7a shows the calibration offset (dB) we need to add to the MD mode observation to minimize the RMSE with the CloudSat observations. If the calibration offset is positive, this suggests that the MD mode underestimates the radar reflectivity compared to CloudSat. Although a 6-month running time window is used, considerable temporal variability is observed especially at the beginning of the period. At the beginning of the period, -2.3 dB need to be added to the ARM observations to statistically minimize their differences against the CloudSat observations. During the first 4 months of 2016, + 3.4 to + 4.6 dB need to be added. The last estimate of this 4-month period is higher (+6.9 dB) and coincides with a period when considerable changes occurred in the radar hardware/software and the calibration offset is back to -2.3 dB. Through our analysis, every time the ARM radar hardware and/or software (including receiver signal processing) underwent a change, we noticed that the ARM-CloudSat comparison where challenging to achieve. This is attributed to the fact that part of the 6-month observing period uses observations with one configuration and the other part use observations with a different

Deleted: ARM program

Deleted: s

Deleted: go

configuration. After this period, the calibration offset changes slowly **increasing** to +1-3 dB in early 2017 and during the latter part of 2017 the calibration offset is less than +0.5 dB.

**Deleted:** raising

Fig. 7b shows the calibration offset for both KAZR2 operating modes (MD and GE) using **the** ARM – CloudSat comparison methodology applied to the recorded radar reflectivities of each mode. Overall, the calibration offsets closely follow each other throughout the observing period. During the first six months, the calibration offset for the MD is about 1 dB higher, suggesting that the MD reported, on average 1-2 dB lower radar reflectivities than the GE mode. This relationship is reversed around 04/2016 and until the end of the observing period, the calibration offset for the MD mode is now 1-2 dB lower than that estimated for the GE mode. Noticeably, the reversal in relationship of the calibration offsets coincides with the period **that** we argued earlier coincides with changes in the radar configuration around 04/2016. During that period, the number of FFTs in the recorded radar Doppler spectra changed from 256 to 512 and the calibration was updated (Joseph Hardin, ARM radar engineer, personal communication).

**Deleted:** s

**Deleted:** to match the CloudSat observations.

**Deleted:** that

As discussed in section 2.1 the ARM MD and GE modes observations can be used to estimate their relative offset. Fig. 7c shows the difference (MD – GE) in dB of the two KAZR2 operating modes (black line). On the same plot, the difference (MD – GE) **in** dB as seen from CloudSat is also reported (circles). Overall, **a** very good agreement is found between the two estimates of the radar reflectivity offset between the two KAZR2 modes. This suggests that the ARM – CloudSat comparison can provide high quality information regarding the absolute and relative calibration offsets between radar modes.

**Deleted:** s

The second KAZR2 system is operated at the ENA since the fall of 2015. Fig. 8 shows two calibration offset (dB) values for the KAZR 2 MD (white symbols). Contrary to the OLI site, the ENA site cloud and temperature climatology do not favor the collection of **a** large number of suitable CloudSat columns for calibration (Fig. 5). During the first 9 months of operation (10/2015 -07/2016) the calibration offset was very small (+0.3 dB) indicating that the radar was well calibrated. During the last 10 months of the observing period (01/2017 – 10/2017), the calibration offset is +5.2 dB. In an attempt to independently verify the observed trend in the KAZR2 calibration offset, the Parsivel disdrometer particle size distribution (PSD) measurements available at 1-min temporal resolution are used. The difference between the Parsivel-derived radar reflectivity and the KAZR2 radar reflectivity is shown on Fig. 8 (white dotted line) and suggests a trend, similar to the calibration offset estimated from the ARM - CloudSat comparison. Additional information regarding the estimation of the KAZR2 calibration offset using the Parsivel disdrometer can be found in Appendix A.

The ARM TWP Darwin, Manus and Nauru sites are located deep in the tropics and featured MMCR systems until the first quarter of 2011. Only at two sites (Darwin and Manus) the MMCR systems were replaced by KAZR systems. All TWP sites terminated operations in 2014 ([Long et al., 2016]). The calibration offsets for the period 2007 to 2014 at the TWP sites are shown in Fig. 9. The calibration offsets record is not continuous since the number of CloudSat columns is affected by the significant inter- and intraseasonal cloud and precipitation variability driven by large-scale features at different temporal-spatial scales such as El-Nino Southern Oscillation, the Madden-Julian Oscillation, and the movement of the intertropical convergence zone (ITCZ). The operational record of the TWP systems is also intermittent due to the logistical challenges associated with the physical presence of ARM engineers at these sites; delays associated with the delivery of hardware

**Deleted:**

components at the TWP sites, and poor communications for instrument monitoring especially at Manus and Nauru ([Long et al., 2016]). Overall, the calibration offsets are within  $\pm 6$  dB. The ARM intramode differences in the reported radar reflectivities are also reported (gray circles) to help interpret the estimated calibration offset trends. The Darwin MMCR exhibits the highest variability in the ARM intramode differences suggesting frequent changes in the MMCR hardware and/or software. During these periods, no reliable ARM-CloudSat calibration offsets are estimated. [Liu et al., 2009] compared radar reflectivity histograms from the Darwin MMCR and CloudSat and their analysis support the suggestion that the MMCR calibration was low at Darwin in the 2006-2007 wet season. The Darwin KAZR GE calibration offset record is very sparse due to long periods with no observations. Noticeably, only GE mode observations are available at the Darwin and Manus sites. At Manus, the ARM intramode differences are small (less than 1 dB) and remain stable over a long period (3.5 years). As a result, we have calibration offset estimates for the entire observed period. The Manus MMCR 2 calibration offset gradually drifts from negative in 2007 to near zero for almost all 2008, then increases to +7 dB in early 2009 and after the middle of 2009 to the end of its observational record slowly fluctuates  $\pm 3$  dB. The KAZR GE calibration record is also sparse with a small calibration offset during its early operation and a +5 dB offset during the late period of its operational record at Manus. Finally, the record of MMCR observations at Nauru that overlaps with CloudSat operations in space is short (1.5 year). During that period, the ARM intramode differences fluctuate between two stages (+1.5 dB and near 0 dB). The ARM – CloudSat calibration offsets also fluctuate temporally in a similar manner between two stages (+5-6 dB and 2-3 dB). No KAZR observations were conducted at Nauru.

Deleted: er

Deleted: intentional or unintentional

Deleted: raises

Deleted: positive

Deleted:

The ARM NSA and SGP sites are the two longest operating sites of the ARM facility ([Sisterson et al., 2016]; [Verlinde et al., 2016]). The NSA represents a typical Arctic environment with very low temperatures while the SGP has been the observational centerpiece and anchor of the ARM facility since 1992. The calibration offsets for the period 2008 to 2017 at these two sites along with the ARM intramode differences are shown in Fig. 10. The NSA MMCR 2 significantly overestimates the radar reflectivity and a calibration offset between -4.4 to -8.4 dB (gradually increasing from 2008 to 2009) is required to minimize the RMSE when compared to CloudSat. This large calibration offset is consistent with the impact of corrosion on the waveguide that was attached to the antenna feed effectively breaking the connection between the waveguide and the feed. This hardware failure went unobserved until was accidentally discovered during a system inspection ([Kollias et al., 2016]). During the same period, the ARM intramode difference (Mode 3 – Mode 2) gradually increases from 0.8 to 2.5 dB. The NSA KAZR MD mode is compared to Cloudsat for the period 2012 to 2017. During the first two years, the KAZR MD calibration offset is for the most part within  $\pm 1$  dB suggesting that the radar was well calibrated. During the 2014-2017 period, the KAZR MD mode calibration offset is between +3 to +6 dB and the ARM intramode (GE – MD) difference is around -1.7 dB. The SGP MMCR mode 2 calibration offset is significant during the period 2008-2011. In 2008 the calibration offset is between +7 and +10 dB, -3.5 to -4.5 dB in the early part of 2009 and +4 to +6 dB for remainder of the operating period of the MMCR at the SGP. The ARM intramode difference (Mode 3 – Mode 2) is for the most part between +0.5 to 0.9 dB. The SGP KAZR MD mode is compared to Cloudsat for the period 06/2011 to 12/2017. The calibration offset values are positive (+3 to +6 dB) at the beginning and then negative (-1 to -6 dB) during the 2014-2017 period. The ARM intramode differences (GE – MD) are between  $\pm 1$  dB and small shifts in their magnitude and sign correlate with periods where the calibration offset changes.

Deleted: ARM program

Deleted: ARM Program

Deleted: during one of the visits of the ARM program radar engineer ...

Deleted: 2

Deleted: ing

Deleted: 2

Deleted: 3

Deleted: here

The ARM Mobile Facility (AMF) is a portable atmospheric ~~observatory~~, equipped with a sophisticated suite of instruments designed to collect essential data from cloudy and clear atmospheres in important but under-sampled climatic regions. As such, the AMF deployments are often the only source for ground-based observations of clouds and precipitation at some of the AMF deployments ([Miller et al., 2016]). Here, we report the calibration offsets for 5 deployments of the first ARM Mobile Facility (AMF1) and 2 deployments of the second ARM Mobile Facility (AMF2). The results are shown in Fig. 11. The AMF1 deployments are: Niger, West Africa (NIM), Black Forrest, Germany (FKB), Graciosa island, Azores (GRW), Cape Cod, Massachusetts (PVC), and Manicaparua, Brazil (MAO) and the AMF2 deployments are: Hyytiälä, Finland (TMP) and McMurdo Station, Antarctica (AWR). The AMF deployments are typically one-year deployments, except for the GRW and MAO deployments that lasted for two years. At the AMF1 deployments the main profiling cloud radar system was the WACR and at the AMF2 deployments a KAZR. The short duration of the mobile deployments coupled with the time needed to relocate the AMF's to their next field location makes the AMF calibration offset record sparse. At NIM, the AMF deployment was over 13 months long but the WACR was deployed for only 8 months and two WACR calibration offset are estimated (+4.4 and +4.0 dB). The following year, during the FKB AMF deployment, four WACR calibration offsets are estimated (+3.7, +3.8, +2.8 and 2.4 dB). During the 2-year deployment at GRW the WACR calibration offset started from a low value of +1.4 dB and gradually ~~rose~~ to +3.2 dB. At PVC, the WACR calibration offset was between +3.3 to +3.5 dB. ~~During the same period, the WACR was deployed also in India and China, however, the short record of WACR observations during these deployments does not allow to conduct an ARM - CloudSat comparisons. Despite the large number of field deployments, the WACR calibration did not change a lot. However, during the 2-year MAO deployment, the estimated calibration offsets were higher~~ and more variable (+3.9 to +8.5 dB).

The AMF2 was established later than the AMF1, thus, its deployment record is shorter. The AMF2 deployment in Hyytiälä, Finland (TMP) has been considered as the first successful deployment of triple-frequency radar observations by the ~~ARM facility~~ ([Kneifel et al., 2015]) with well calibrated radar systems. The ARM - CloudSat comparison confirms that the KAZR MD mode was well calibrated during the TMP deployment and the calibration offsets are -0.2, +1.0 and +1.6 dB (Fig. 11). During the most recent AMF2 deployment at McMurdo Station (AWR), significant calibration offset ~~was~~ found. Due to surrounding elevated topography, AWR is the only site where additional post-processing of the CloudSat observations was required to eliminate antenna sidelobe contributions. In addition, the AWR high latitude location in combination with the restriction of daylight, only CloudSat observations limited the number of available CloudSat samples especially during the southern hemisphere winter (Fig. 5). As a result, most of the CloudSat samples are available at the beginning and the end of the field campaign. At the beginning, the calibration offset is +7.7 dB and during the latter part of the mobile deployment, ~~it~~ is between +3.5 and +5.1 dB (Fig. 11). The ARM intramode difference (GE - MD) is -1.2 dB at the beginning of the period and -0.65 dB later in the deployment.

**Deleted:** laboratory

**Deleted:** ise

**Deleted:** Noticeably

**Deleted:** after a number of field deployments including two in Asia (China and India) were not sufficient record of WACR observations are available to conduct an ARM - CloudSat comparison....

**Deleted:** are

**Deleted:** d

**Deleted:**

**Deleted:** ARM program

**Deleted:** is

**Deleted:**

**Deleted:** time period

#### 4 Summary and Discussion

The DOE ARM facility has been at the forefront of the development and application of profiling and scanning millimeter wavelength radars for over 20 years. The long record of ARM cloud radar observations represents a unique dataset that provides a bottom-up, high resolution view of clouds and precipitation at a number of locations around the globe. The characterization of a decade long cloud radar record from multiple locations is a necessary step for the development of unbiased statistics on cloud occurrence and the estimation of microphysical parameters using retrieval techniques. Once the characterization and reprocessing of the ARM radar observations is completed, the decade long record and its added-value products can be used as observational targets for Global Climate Model evaluation studies using suitable forward operators (Zhang et al., 2018; Lamer et al., 2018).

The use of CloudSat as a global calibrator for cloud radars was first proposed by [Protat et al., 2011]. Here, the [Protat et al., 2011] technique is revised, improved and automated and the entire record of CloudSat observations (2007 – 2017) is used to provide a calibration reference for over 43 years of ARM profiling cloud radar observations at fixed and mobile sites. Four generations of ARM cloud radar systems, operating at two different radar frequencies (35- and 94-GHz) are evaluated. All the radar systems (with the exception of the AMF1 WACR) operate using a sequence of modes with different capabilities in order to provide a uniform radar sensitivity and performance throughout the troposphere. The offsets in the reported radar reflectivity by these different modes for each radar are documented as a function of time. Abrupt changes in the offset magnitude and sign are found to correlate well with changes in the radar calibration as deduced by the statistical comparison with CloudSat. Thus, changes in the reflectivity offset between the modes should be monitored and used to identify periods where the calibration stability is suspect and moving forward perhaps trigger more prompt additional external calibration evaluations. Furthermore, the geographical location, the seasonal variability of the clouds and precipitation occurrence and the operational status of the CloudSat CPR significantly affect the number of samples available within a 6-month time window to perform the ARM – CloudSat comparison. When the number of CloudSat columns is less than 500-1000 the comparison is difficult to perform. Out of the possible 653 calibration coefficients, 616 were accepted, i.e. 94.3% success rate.

The analysis demonstrates that both historic (i.e., MMCR) and recent ARM radar operations (i.e. KAZR2) require considerable adjustments before they can be used in a quantitative way. The analysis from [Protat et al., 2011] and the experience gained in this study using the technique in a much larger dataset suggest that the accuracy of the CloudSat-based calibration of ground-based cloud radar systems is accurate within 1-2 dB. In most cases, the observed calibration offsets exceeded this uncertainty value suggesting that the ARM profiling radar record contains considerable calibration biases. The reported calibration biases are expected to have a large impact on routine ARM microphysical data products such as the Continuous Baseline Microphysical Retrieval (MICROBASE) value-added product [Zhao et al., 2012]. In addition, cloud retrieval techniques and associated products are impacted by the reported calibration offsets ([Shupe et al., 2015]; [Dong et al., 2014]). For reference,

Deleted: ARM program

Deleted: Calibration is an important step in utilizing the full potential of these observations for the evaluation of numerical models and the development of quantitative microphysical retrievals

Deleted: .

Formatted: Normal, Left, Line spacing: single

Deleted: A total of 653 ARM – CloudSat comparisons are performed using a running 6-month time window.

The application of the ARM – CloudSat comparison methodology across the entire network of ARM profiling cloud radars is not straightforward.

Deleted: ce

Deleted: a

Deleted: st

a 3-dB calibration offset is equivalent to a factor of 2 bias in hydrometeor content or number concentration retrievals. As part of the outcome of this study, the estimated calibration offsets, the RSME's and the number of samples as a function of time for each radar system evaluated here have been provided to the ARM facility. The ARM facility is currently considering reprocessing of the ARM radar record with these new calibration offsets. Furthermore, the gradual temporal change in the observed calibration offsets, the correlation of large swings in the calibration offset with periods when the ARM radar hardware and/or software was not operating in an optimal way, suggest that the use of CloudSat can provide reliable information that can be used to characterize the calibration of ground-based radar systems.

Deleted: e

Deleted: estimated calibration coefficients should be

Deleted: red

Deleted: in a future

Deleted:

Deleted: um

Planned and future spaceborne radar systems such as the Earth Clouds Aerosols and Radiation Explorer (EarthCARE, [Illingworth et al., 2015]; [Kollias et al., 2018]) or future spaceborne radar concepts (Tanelli et al., 2018) will provide similar spaceborne radar measurements to evaluate large profiling cloud radar networks (e.g., ARM, ACTRIS) in the future. A website that describes the ARM – CloudSat comparison at all the ARM sites and radar systems is now available to the entire user community: [http://doppler.somas.stonybrook.edu/CloudSat\\_GlobalCalibrator/index.html](http://doppler.somas.stonybrook.edu/CloudSat_GlobalCalibrator/index.html) The web site contains graphics and animations that show the convergence of the radar reflectivity profiles and cloud top height distributions as a function of the calibration offset. In addition, the temporal evolution of the calibration offsets and the ARM radar mode differences are shown. In the future, the website will be updated to include future ARM fixed and mobile deployments and will also include a similar analysis for the European cloud radar network (ACTRIS).

Finally, there is merit in extending the presented analysis to other satellite measurements. For example, NASA's Global Precipitation Mission (GPM) Dual-Frequency Precipitation Radar (DPR) observations could be used in a similar manner to evaluate the calibration of the ARM facility cm-wavelength radars [Lamer et al., 2019]. In addition to radar calibration, the statistical comparison between cloud and precipitation properties such as cloud base height, cloud thickness, precipitation occurrence and intensity and liquid water path measured at the ARM facility and those derived by research satellites such as NASA'S A-train constellation [Stephens et al., 2018] should be considered. The ARM facility provides a bottom-up view of clouds and precipitation with superior vertical resolution especially in the boundary layer. Statistically significant differences with the top-down view provided by the A-train satellites should be considered when conducting cloud-scale process studies using global satellite datasets.

Formatted: Font: Palatino Linotype, 11 pt

Formatted: Don't adjust space between Latin and Asian text, Don't adjust space between Asian text and numbers

## 5 Acknowledgements

P. Kollias and B. Puigdomènech Treserras were supported by the US DOE ARM and ASR radar science project. The authors would like to thank Jim Mather, Bradley Isom and Joseph Hardin for reviewing the manuscript and providing valuable feedback. All ARM data streams are available online at: <http://www.archive.arm.gov/discovery/>.

## Appendix A

The use of surface-based measurements of the raindrop PSD using impact or optical disdrometers to calibrate profiling and scanning precipitation radars is not new. This technique has been widely used in the past for calibrating profiling cm-wavelength Doppler radars ([Gage et al., 2000]; [Tridon et al., 2013]). In the case of cm-wavelength radars, wet radome or antenna attenuation is negligible, the systems are configured to have sufficient dynamic range to detect intense precipitation returns without receiver saturation and the Rayleigh scattering approximation is valid in most cases. At mm-wavelength radars, several factors need to be considered: the wet radome can induce considerable attenuation, at high rain rates the Rayleigh scattering approximation is not valid and receiver saturation occurs at lower rain rates. Here, we use the Parsivel2 disdrometer (OTT Hydromet GmbH) measurements. The disdrometer provides 1-min averaged raindrop PSD's. From the Parsivel2 files, the variable "equivalent\_radar\_reflectivity" which is the radar reflectivity calculated by the ARM ingest is used. All 1-min Parsivel2 measurements where raindrops with diameter > 4.5 mm are detected are filtered out to avoid the impact of false detection of large raindrops in the Parsivel2 - KAZR2 comparison. The Parsivel2 time assigned to each data point indicates the beginning of a 1-min period of averaging. Using this time, 1-min averages of the KAZR2 reflectivities in linear units are estimated. Next, the KAZR2 radar reflectivities are corrected for path attenuation induced by the hydrometeor. The relationship  $A \text{ (dBkm}^{-1}\text{)} = 0.28 \cdot R \text{ (mmhr}^{-1}\text{)}$  is used to estimate the one-way attenuation at Ka-band ([Matrosov, 2005]). Only the 1-min data when the Parsivel2 radar reflectivity is between 0 and 20 dBZ are used. The lower limit is used to ensure that the Parsivel2 samples enough raindrops. The upper limit is used to minimize the impact of wet radome attenuation and to ensure that the Parsivel2 radar reflectivity estimates using the Rayleigh scattering approximation have no or negligible non-Rayleigh effects. The KAZR2 and Parsivel2 radar reflectivity time series were investigated for possible time lag, however, given the proximity of the radar data to the ground, no significant time lag was found. Finally using a running time window of 90 days, the mean of the differences of the KAZR2 and Parsivel2 radar reflectivities is estimated.

Fig. A1a shows the time series of the calibration offset between the Parsivel2 and the KAZR2 for different KAZR2 range gates. In general, the calibration offset is positive, thus, implying that the KAZR2 underestimates the radar reflectivity. However, the calibration offset varies a lot with the range gate. The KAZR2 is a pulsed radar, thus after each pulse transmission the receiver protection circuit (T/R switch network) needs to switch from transmit (closed receiver) to receive (open receiver) mode. The switch takes several hundreds of nanoseconds, thus, the KAZR2 returns from the first range gates (3 to 7) report lower radar reflectivity values, resulting in higher radar calibration offset values. Our analysis identified range gate 8 (240 m) as the closest range gate to the surface that is unaffected by the KAZR2 T/R switch network. Above range gate 8, the calibration offset continues to decrease, highlighting the impact of the evaporation in modifying the raindrop PSD. The scatter plots between the KAZR2 radar reflectivity at range gate 8 and the Parsivel2 radar reflectivities during the two extensive periods are shown in Fig. A1b, c. These two periods match the periods used to estimate calibration offsets using the ARM – CloudSat comparison technique (Fig. 8). The ARM – CloudSat comparison indicated calibration offsets of 0.3 and 5.2 dB and the ARM – Parsivel2 comparison indicated calibration offsets of 0.57 and 3.91 dB.

Deleted: ¶

Deleted: ¶

Deleted: ies

Deleted: to

Disdrometers have certainly the potential to monitor the calibration of profiling cloud radars and this topic warrants additional analysis using comprehensive datasets from different cloud radar systems and for different climatological conditions. For example, Frequency Modulated Continuous Wave (FMCW) radars ([Küchler et al., 2017]) do not have T/R switch networks, but careful analysis is required to ensure proper alignment of the two antennas or correct for the antenna parallax problem ([Sekelsky and Clothiaux, 2002]). Furthermore, careful analysis is required to avoid using radar returns that saturate the radar receiver especially at short ranges and to account for non-Rayleigh scattering in the case of 94-GHz radar systems. This careful analysis is beyond the scope of this study.

10

15

20

25

## References

- Atlas, D.: Radar calibration: Some simple approaches, *Bulletin of the American Meteorological Society*, 83(9), 1313-1316, 2002.
- 5 Bolen, S. M., and V. Chandrasekar: Quantitative cross validation of space-based and ground-based radar observations, *Journal of Applied Meteorology*, 39(12), 2071-2079, 2000.
- Clothiaux, E. E., M. A. Miller, R. C. Perez, D. D. Turner, K. P. Moran, B. E. Martner, T. P. Ackerman, G. G. Mace, R. T. Marchand, and K. B. Widener: The ARM millimeter wave cloud radars (MMCRs) and the active remote sensing of clouds (ARSCL) value added product (VAP), DOE Tech Memo. ARM VAP-002.1, 2001.
- 10 Dong, X., B. Xi, and P. Wu: Investigation of the Diurnal Variation of Marine Boundary Layer Cloud Microphysical Properties at the Azores. *J. Climate*, 27, 8827–8835, 2014 <https://doi.org/10.1175/JCLI-D-14-00434.1>.
- Gage, K. S., C. R. Williams, P. E. Johnston, W. L. Ecklund, R. Cifelli, A. Tokay, and D. A. Carter: Doppler radar profilers as calibration tools for scanning radars, *Journal of Applied Meteorology*, 39(12), 2209-2222, 2000.
- Illingworth, A. J., H. Barker, A. Beljaars, M. Ceccaldi, H. Chepfer, N. Clerbaux, J. Cole, J. Delanoë, C. Domenech, D. P.
- 15 Donovan, S. Fukuda, M. Hidakata, R.J. Hogan, A. Huenerbein, P. Kollias, T. Kubota, T. Nakajima, T.Y. Nakajima, T. Nishizawa, Y. Ohno, H. Okamoto, R. Oki, K. Sato, M. Satoh, M.W. Shephard, A. Velázquez-Blázquez, U. Wandinger, T. Wehr, and G. van Zadelhoff: The EarthCARE satellite: The next step forward in global measurements of clouds, aerosols, precipitation, and radiation, *Bulletin of the American Meteorological Society*, 96(8), 1311-1332, 2015.
- Kneifel, S., A. Lerber, J. Tiira, D. Moisseev, P. Kollias, and J. Leinonen: Observed relations between snowfall microphysics and triple-frequency radar measurements, *Journal of Geophysical Research: Atmospheres*, 120(12), 6034-6055, 2015.
- 20 Kollias, P., B. A. Albrecht, E. E. Clothiaux, M. A. Miller, K. L. Johnson, and K. P. Moran: The Atmospheric Radiation Measurement program cloud profiling radars: An evaluation of signal processing and sampling strategies, *Journal of Atmospheric and Oceanic Technology*, 22(7), 930-948, 2005.
- Kollias, P., A. Battaglia, A. Tatarovic, K. Lamer, F. Tridon, and L. Pfizenmaier: The EarthCARE cloud profiling radar (CPR)
- 25 Doppler measurements in deep convection: challenges, post-processing, and science applications, *Proc. SPIE 10776, Remote Sensing of the Atmosphere, Clouds and Precipitation VII*, 107760R; doi:10.1117/12.2324321, 2018.
- Kollias, P., N. Bharadwaj, K. Widener, I. Jo, and K. Johnson: Scanning ARM cloud radars. Part I: Operational sampling strategies, *Journal of Atmospheric and Oceanic Technology*, 31(3), 569-582, 2014a.
- Kollias, P., E. Clothiaux, M. Miller, B. Albrecht, G. Stephens, and T. Ackerman: Millimeter-wavelength radars: New frontier
- 30 in atmospheric cloud and precipitation research, *Bulletin of the American Meteorological Society*, 88(10), 1608-1624, 2007a.

**Formatted:** Font: (Default) Times New Roman, 10 pt, Font color: Black

**Formatted:** Normal, Left, Line spacing: single

**Formatted:** Font: Times New Roman, 10 pt, Not Italic, Font color: Black

**Formatted:** Font: (Default) Times New Roman, 10 pt, Font color: Black

**Formatted:** Font: (Default) Times New Roman, 10 pt, Not Bold, Font color: Black

**Formatted:** Font: (Default) Times New Roman, 10 pt, Font color: Black

**Formatted:** Font: (Default) Times New Roman, 10 pt, Font color: Auto

**Formatted:** Font: (Default) Times New Roman, 10 pt, Font color: Black

**Formatted:** Check spelling and grammar

**Field Code Changed**

**Deleted:** d

- Kollias, P., E. E. Clothiaux, T. P. Ackerman, B. A. Albrecht, K. B. Widener, K. P. Moran, E. P. Luke, K. L. Johnson, N. Bharadwaj, and J. B. Mead: Development and applications of ARM millimeter-wavelength cloud radars, *Meteorological Monographs*, 57, 17.11-17.19, 2016.
- Kollias, P., M. A. Miller, E. P. Luke, K. L. Johnson, E. E. Clothiaux, K. P. Moran, K. B. Widener, and B. A. Albrecht: The Atmospheric Radiation Measurement Program cloud profiling radars: Second-generation sampling strategies, processing, and cloud data products, *Journal of Atmospheric and Oceanic Technology*, 24(7), 1199-1214, 2007b.
- Kollias, P., S. Tanelli, A. Battaglia, and A. Tatarevic: Evaluation of EarthCARE cloud profiling radar Doppler velocity measurements in particle sedimentation regimes, *Journal of Atmospheric and Oceanic Technology*, 31(2), 366-386, 2014b.
- Küchler, N., S. Kneifel, U. Löhnert, P. Kollias, H. Czekala, and T. Rose: A W-Band Radar–Radiometer System for Accurate and Continuous Monitoring of Clouds and Precipitation, *Journal of Atmospheric and Oceanic Technology*, 34(11), 2375-2392, 2017.
- Lamer, K., A. M. Fridlind, A. S. Ackerman, P. Kollias, E. E. Clothiaux, and M. Kelley: GO2-SIM: a GCM-oriented ground-observation forward-simulator framework for objective evaluation of cloud and precipitation phase, *Geoscientific Model Development*, 11(10), 4195-4214, 2018.
- 15 [Lamer, K., B. Puigdomènech, Z. Zhu, B. Isom, N. Bharadwaj, and P. Kollias: Characterization of Shallow Oceanic Precipitation using Profiling and Scanning Radar Observations at the Eastern North Atlantic ARM Observatory. \*Atmos. Meas. Tech. Discuss.\*, <https://doi.org/10.5194/amt-2019-160>, in review, 2019.](#)
- Li, L., G. M. Heymsfield, L. Tian, and P. E. Racette: Measurements of ocean surface backscattering using an airborne 94-GHz cloud radar—Implication for calibration of airborne and spaceborne W-band radars, *Journal of Atmospheric and Oceanic Technology*, 22(7), 1033-1045, 2005.
- 20 [Liu, Z., Marchand, R., and Ackerman, T: A comparison of observations in the tropical western Pacific from ground-based and satellite millimeter-wavelength cloud radars. \*J. Geophys. Res.\*, 115, D24206, 2010 doi:10.1029/2009JD013575](#)
- [Liebe, H. J.: MPM – An atmospheric millimeter-wave propagation model. \*Int. J. Infrared Millim. Waves\*, vol 10, no 6, pp. 631-650, 1989.](#)
- 25 Long, C., J. Mather, and T. Ackerman: The ARM Tropical Western Pacific (TWP) sites, *Meteorological Monographs*, 57, 7.1-7.14, 2016
- Mather, J. H., and J. W. Voyles: The ARM Climate Research Facility: A review of structure and capabilities, *Bulletin of the American Meteorological Society*, 94(3), 377-392, 2013.
- Matrosov, S. Y.: Attenuation-based estimates of rainfall rates aloft with vertically pointing Ka-band radars, *Journal of Atmospheric and Oceanic Technology*, 22(1), 43-54, 2005.
- 30 Miller, M., K. Nitschke, T. Ackerman, W. Ferrell, N. Hickmon, and M. Ivey: The ARM mobile facilities, *Meteorological Monographs*, 57, 9.1-9.15, 2016.
- Moran, K. P., B. E. Martner, M. Post, R. A. Kropfli, D. C. Welsh, and K. B. Widener: An unattended cloud-profiling radar for use in climate research, *Bulletin of the American Meteorological Society*, 79(3), 443-456, 1998.

Formatted: Font: Times New Roman, 10 pt, English (US)

Formatted: Normal, Left, Line spacing: single

Formatted: Check spelling and grammar

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Normal, Left, Line spacing: single

Formatted: Font: (Default) Times New Roman, 10 pt, Not Italic

Formatted: Font: (Default) Times New Roman, 10 pt

Field Code Changed

Formatted: Font: Times New Roman, 10 pt

North, K. W., M. Oue, P. Kollias, S. E. Giangrande, S. M. Collis, and C. K. Potvin: Vertical air motion retrievals in deep convective clouds using the ARM scanning radar network in Oklahoma during MC3E, *Atmospheric Measurement Techniques Atmos. Meas. Tech.*, 10, 2785-2806, <https://doi.org/10.5194/amt-10-2785-2017>, 2017.

Protat, A., D. Bouniol, E. O'Connor, H. Klein Baltink, J. Verlinde, and K. Widener: CloudSat as a global radar calibrator, *Journal of Atmos. and Oceanic Tech.*, 28(3), 445-452, 2011.

Protat, A., J. Delanoë, E. O'Connor, and T. L'Ecuyer: The evaluation of CloudSat and CALIPSO ice microphysical products using ground-based cloud radar and lidar observations, *Journal of Atmospheric and Oceanic Technology*, 27(5), 793-810, 2010.

Rosenkranz, P. W.: Water vapor microwave continuum absorption: A comparison of measurements and models, *Radio Science*, 33(4), 919-928, 1998.

Sekelsky, S. M., and E. E. Clothiaux: Parallax errors and corrections for dual-antenna millimeter-wave cloud radars, *Journal of atmospheric and oceanic technology*, 19(4), 478-485, 2002.

Sisterson, D., R. Pepler, T. Cress, P. Lamb, and D. Turner: The ARM Southern Great Plains (SGP) site, *Meteorological Monographs*, 57, 6.1-6.14, 2016.

Shupe, M.D., D.D. Turner, A. Zwink, M.M. Thieman, E.J. Mlawer, and T. Shippert: Deriving Arctic Cloud Microphysics at Barrow, Alaska: Algorithms, Results, and Radiative Closure, *J. Appl. Meteor. Climatol.*, 54, 1675-1689, 2015, <https://doi.org/10.1175/JAMC-D-15-0054.1>.

Stephens, G., D. Winker, J. Pelon, C. Trepte, D. Vane, C. Yuhas, T. L'Ecuyer, and M. Lebsock: CloudSat and CALIPSO within the A-Train: ten years of actively observing the Earth system, *Bulletin of the American Meteorological Society*, 99(3), 569-581, 2018.

Stephens, G.L., D.G. Vane, R.J. Boain, G.G. Mace, K. Sassen, Z. Wang, A.J. Illingworth, E.J. O'connor, W.B. Rossow, S.L. Durden, S.D. Miller, R.T. Austin, A. Benedetti, C. Mitrescu, and, 2002: THE CLOUDSAT MISSION AND THE A-TRAIN, *Bull. Amer. Meteor. Soc.*, 83, 1771-1790, <https://doi.org/10.1175/BAMS-83-12-1771>

Tanelli, S., S. L. Durden, E. Im, K. S. Pak, D. G. Reinke, P. Partain, J. M. Haynes, and R. T. Marchand: CloudSat's cloud profiling radar after two years in orbit: Performance, calibration, and processing, *IEEE Transactions on Geoscience and Remote Sensing*, 46(11), 3560-3573, 2008.

Tridon, F., A. Battaglia, P. Kollias, E. Luke, and C. R. Williams: Signal postprocessing and reflectivity calibration of the atmospheric radiation measurement program 915-MHz wind profilers, *Journal of Atmospheric and Oceanic Technology*, 30(6), 1038-1054, 2013.

Verlinde, J., B. Zak, M. Shupe, M. Ivey, and K. Stamnes: The ARM North Slope of Alaska (NSA) sites, *Meteorological Monographs*, 57, 8.1-8.13, 2016,

Zhang, Y., S. Xie, S. A. Klein, R. Marchand, P. Kollias, E. E. Clothiaux, W. Lin, K. Johnson, D. Swales, and A. Bodas-Salcedo: The ARM Cloud Radar Simulator for Global Climate Models: Bridging Field Data and Climate Models, *Bulletin of the American Meteorological Society*, 99(1), 21-26, 2018.

- Deleted: s
- Deleted: g
- Deleted: p
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Formatted: Normal, Left, Line spacing: single
- Formatted: Font: Times New Roman, 10 pt, Not Italic, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Not Bold, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Formatted: Check spelling and grammar
- Deleted: e
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Formatted: Normal, Left, Line spacing: single
- Formatted: Font: Times New Roman, 10 pt, Not Italic, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Not Bold, Font color: Black
- Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Black
- Deleted: n
- Deleted: s
- Deleted: a

[Zhao, C., et al.: Toward understanding of differences in current cloud retrievals of ARM ground-based measurements, J. Geophys. Res., 117, D10206, 2012, doi:10.1029/2011JD016792](#)

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt, Not Italic

Formatted: Line spacing: 1.5 lines

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: Times New Roman, 10 pt

Field Code Changed

Deleted: ¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶

¶


¶

Table 1: Information on the sites (name and location), the type of radar and the start and end date of the calibration period

Site	Radar	Lat (°); Long (°)	Start time [mm/yyyy]	End time [mm/yyyy]
ENA	KAZR2	39.09; -28.03	12/2015	12/2017
OLI	KAZR2	70.49; -149.88	07/2015	12/2017
AWR	KAZR	-77.85; 166.73	12/2015	01/2017
NSA	KAZR	71.32; -156.62	10/2011	12/2017
NSA	MMCR	71.32; -156.62	01/2008	12/2009
SGP	KAZR	36.60; -97.48	02/2011	12/2017
SGP	MMCR	36.60; -97.48	01/2008	12/2010
TMP	KAZR	61.84; 24.29	01/2014	09/2014
MAO	WACR	-3.21; -60.60	03/2014	12/2015
PVC	WACR	42.03; -70.05	10/2012	06/2013
GRW	WACR	39.09; -28.03	01/2009	12/2010
FKB	WACR	48.54; 8.40	04/2007	12/2007
NIM	WACR	13.48; 2.18	04/2006	12/2006
TWP-Darwin	KAZR	-12.42; 130.89	02/2011	04/2014
TWP-Darwin	MMCR	-12.42; 130.89	01/2007	02/2011
TWP-Manus	KAZR	-2.06; 147.42	10/2011	10/2013
TWP-Manus	MMCR	-2.06; 147.42	05/2007	03/2011
TWP-Nauru	MMCR	-0.52; 166.92	05/2007	02/2009

5

10

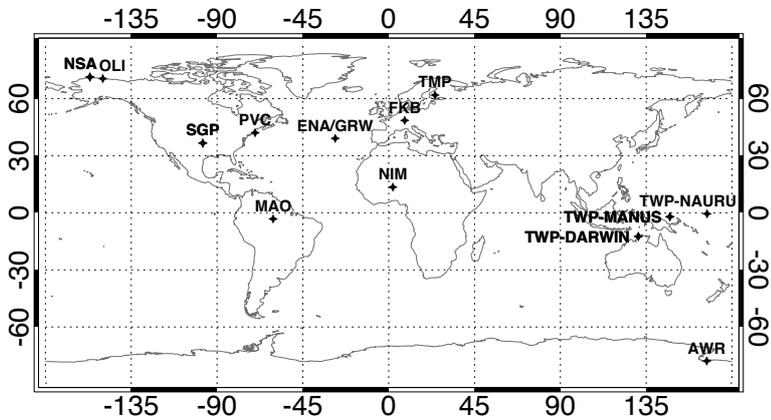

15

Figure 1: Location of the fixed and mobile ARM profiling cloud radars calibrated using the CloudSat Cloud Profiling Radar

20


Deleted: 1

1

5

10

Deleted: [ ]

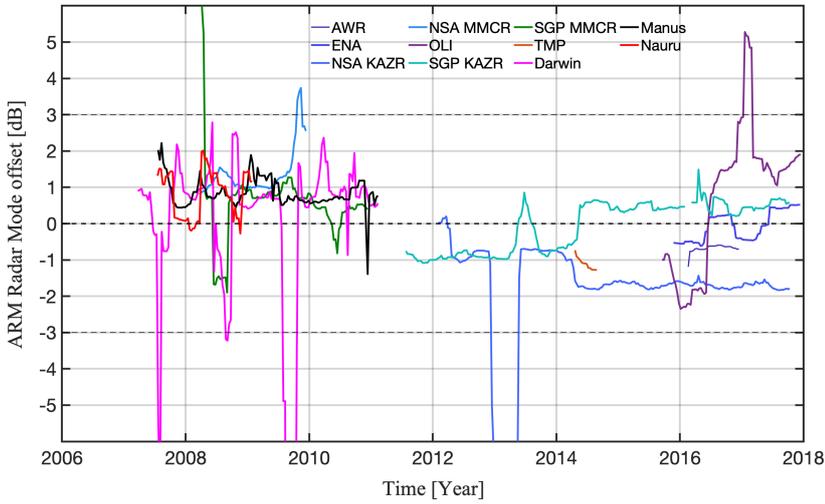

15

Figure 2: The difference [dB] in the radar reflectivity reported between different ARM modes. For KAZR/KAZR2 systems the GE – MD difference and for MMCR systems the Mode 3 – Mode 2 differences are reported.

20


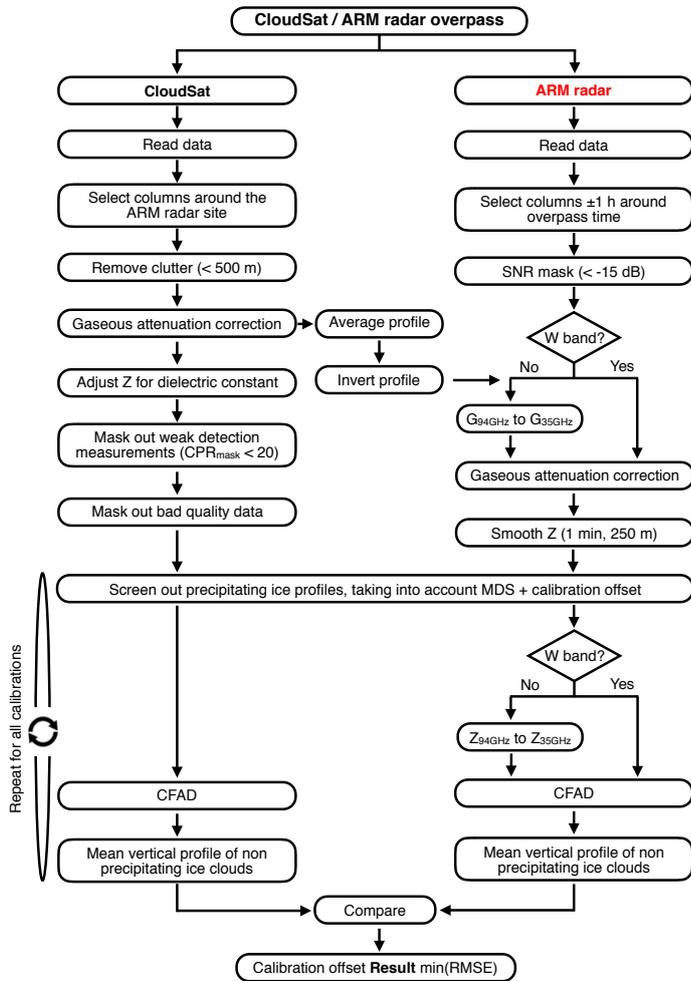


Figure 3: Algorithm flowchart of the calibration of the ARM Cloud Radars using CloudSat Observations


5

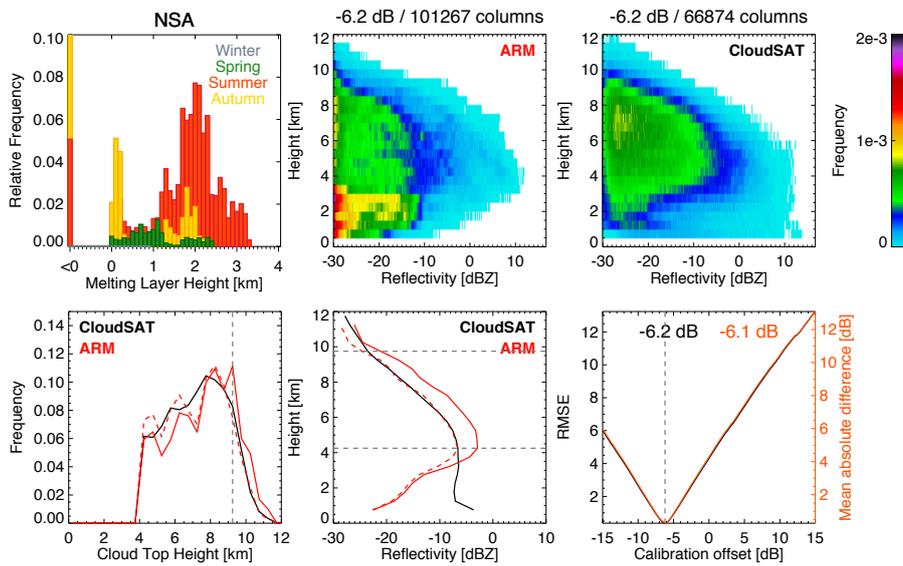

10

Figure 4: Example of the CloudSat – ARM radar calibration at the NSA for mode 2 of the MMCR for the period 01/2008 to 12/2009. (a) the seasonal distribution of the melting layer heights, (b) the distribution with height of the ARM radar reflectivities, (c) the distribution with height of the CloudSat radar reflectivities, (d) the comparison of the CloudSat (black) and ARM (red) cloud top height histograms. The solid red line indicates the cloud top height distribution from the archived ARM radar data and the dashed red line indicates the cloud top height distribution after 6.2 dB is subtracted by the ARM radar reflectivities, (e) the comparison of the CloudSat (black) and ARM (red) mean radar reflectivity profiles. The solid red line indicates the ARM mean radar reflectivity profile using the archived ARM radar data and the dashed red line indicates the ARM radar reflectivity profile after 6.2 dB is

15

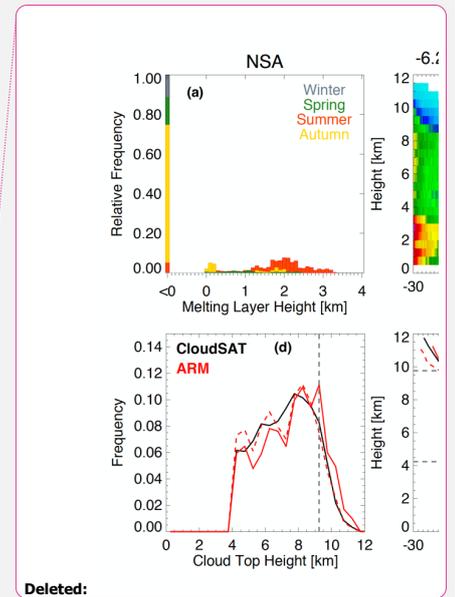


Deleted:

subtracted by the ARM radar reflectivities, (f) the RSME value between the radar reflectivity profiles for different calibration offsets.

5

10

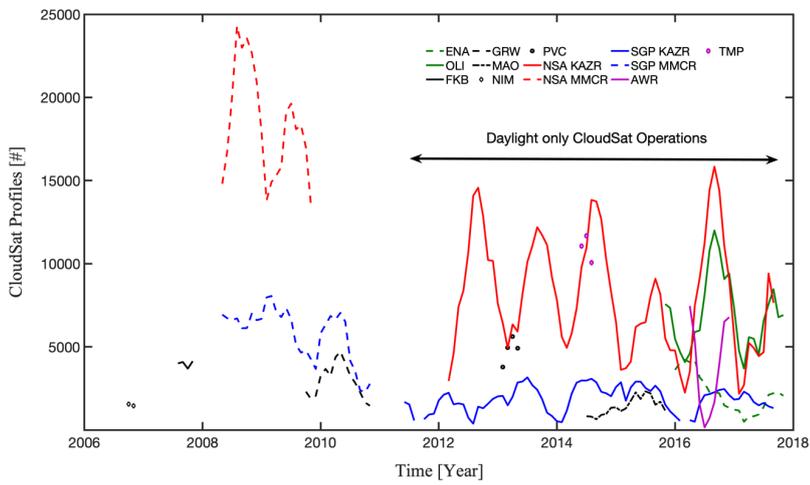


15

Figure 5: The number of CloudSat profiles found within a  $\pm 3$  month window to be suitable for calibrating the ARM cloud radars as a function of time for the different ARM sites.

20

5

10

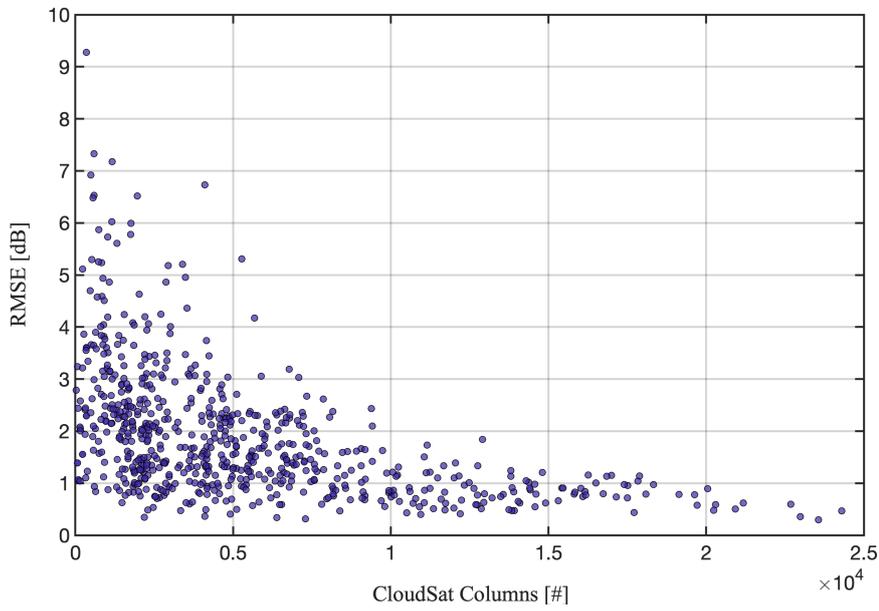


Deleted: 1

15

Figure 6: The relationship between the minimum RMSE [dB] achieved in a particular ARM – CloudSat comparison and the corresponding number of CloudSat columns.

5

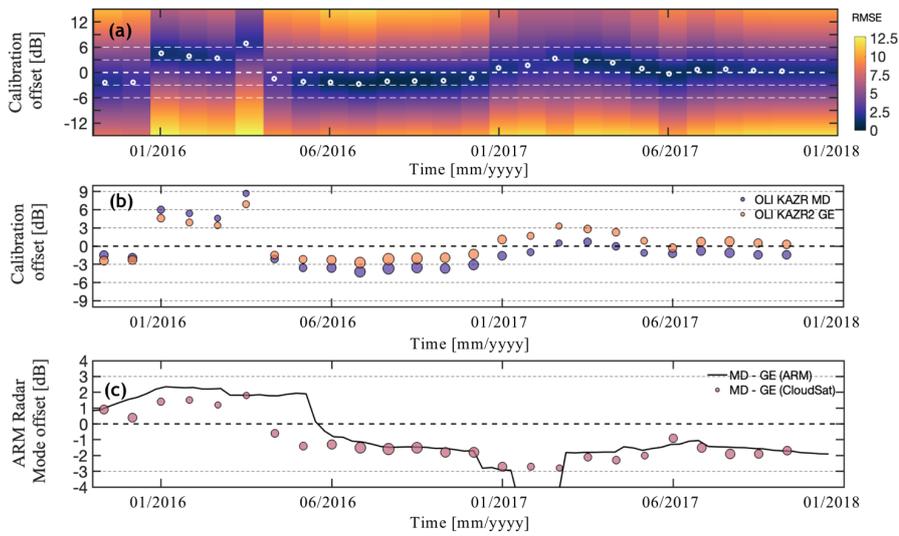


10

Figure 7: (a) The OLI KAZR2 MD mode calibration offset as reported by the CloudSat-ARM comparison (circles). The colors indicate the RSME of the CloudSat-ARM comparison for different radar calibration offsets, (b) The AMF3 (Oliktok Point, Alaska) KAZR2 MD and GE modes calibration offset as reported by the CloudSat-ARM comparison. The size of the circles indicates the ratio of the sample size of the CloudSat columns for any given calibration offset estimate relative to the maximum sample size of CloudSat columns observed during the same period by the same mode, (c) The difference between the MD-GE modes as reported by the CloudSat-ARM comparison and as reported by the ARM radar mode to ARM radar mode comparison.

20

5

10

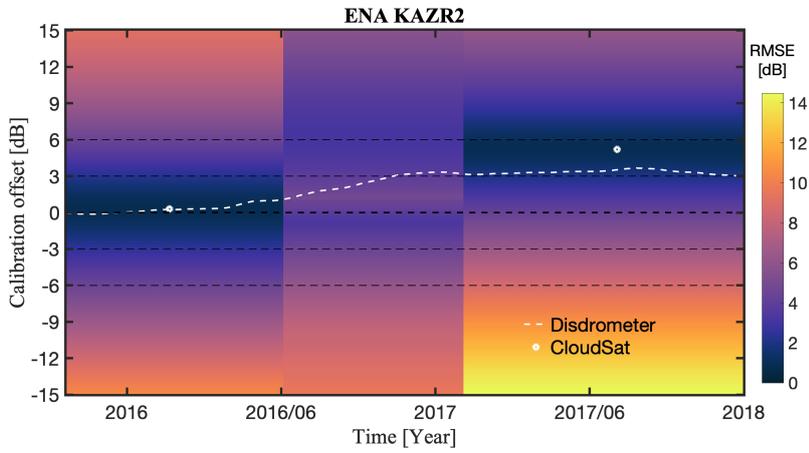


15

Figure 8: The ENA KAZR2 calibration offset as reported by the CloudSat-ARM comparison (star symbol) and by the KAZR2 and Parsivel disdrometer comparison (line). The colors indicate the RSME of the CloudSat-ARM comparison for different radar calibration offsets.

20

25


5

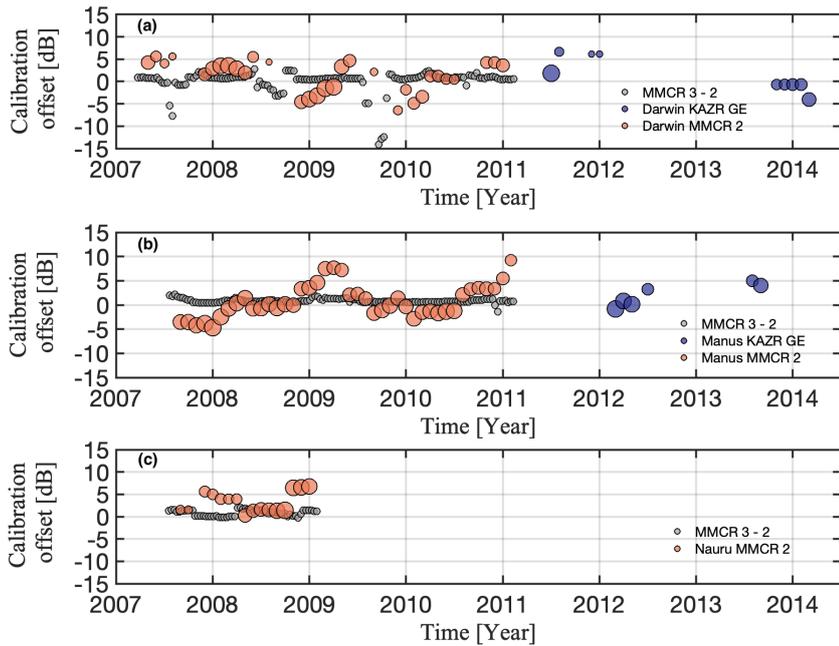

Deleted: 1

Figure 9: The calibration offset for the MMCR mode 2 and KAZR GE mode at the Tropical Western Pacific (TWP) sites of (a) Darwin, (b) Manus and (c) Nauru based on the ARM – CloudSat comparison. The size of the circles indicates the ratio of the sample size of the CloudSat columns for any given calibration offset estimate relative to the maximum sample size of CloudSat columns observed during the same period by the same mode. The gray circles indicate the ARM mode 3 -mode 2 difference as estimated from the ARM radar mode intercomparison.


15

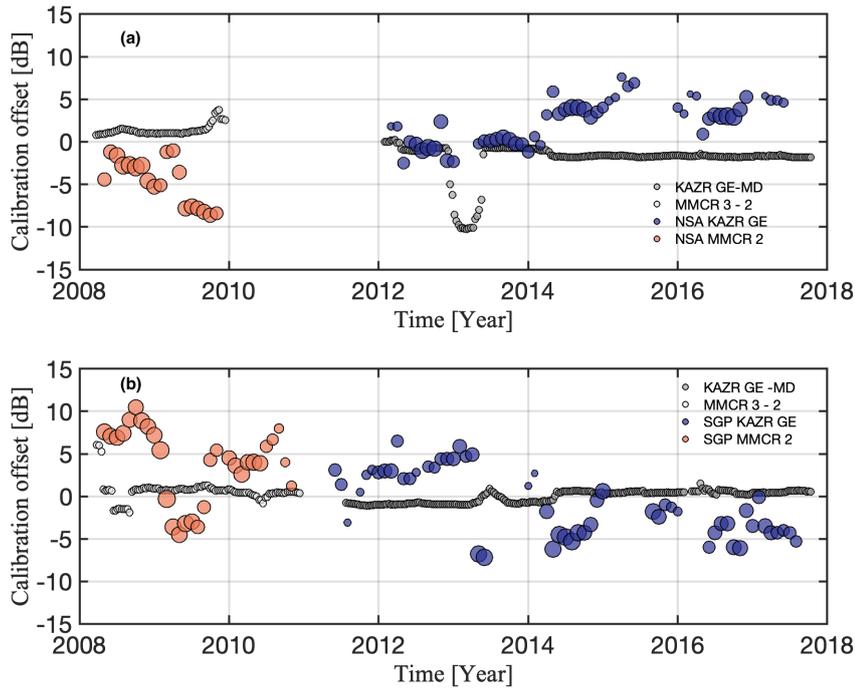

5


10 **Figure 10:** The calibration offset for the MMCR mode 2 and KAZR GE mode at (a) NSA and (b) SGP sites based on the ARM – CloudSat comparison. The size of the circles indicates the ratio of the sample size of the CloudSat columns for any given calibration offset estimate relative to the maximum sample size of CloudSat columns observed during the same period by the same mode. The gray circles indicate the ARM MMCR mode 3 - mode 2 and KAZR GE -MD mode difference as estimated from the ARM radar mode intercomparison.

Deleted: ¶

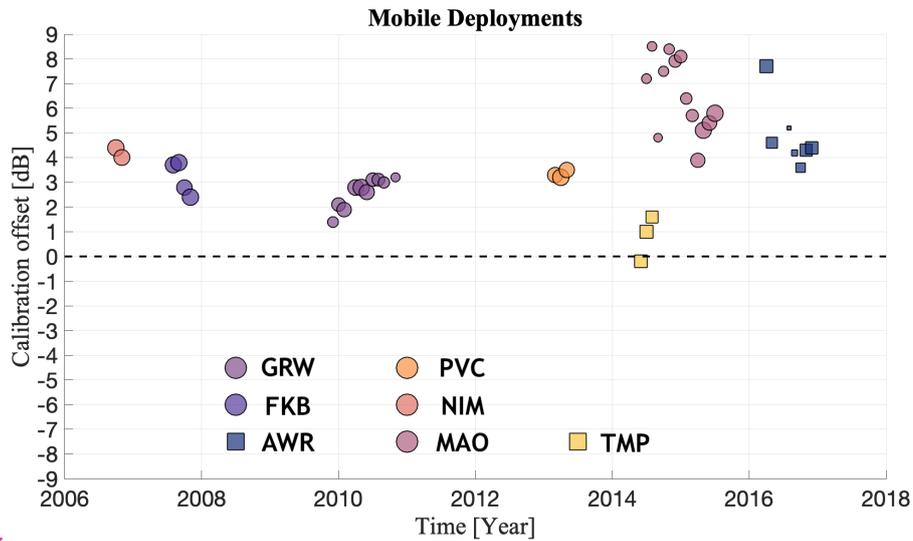




5 Figure 11: The radar calibration offset we should add to the reported ARM cloud radar reflectivities in order to minimize their differences with those reported by the CloudSat CPR at the ARM Mobile Facilities (AMF) sites. The size of the circles indicates the ratio of the sample size of the CloudSat columns for any given calibration offset estimate relative to the maximum sample size of CloudSat columns observed during the same period by the same mode.

10

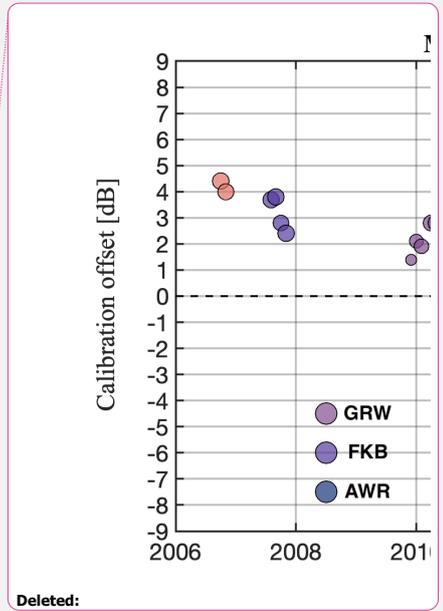

Deleted:

Deleted:

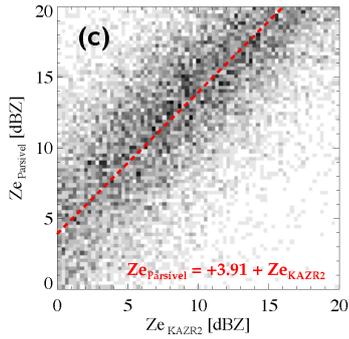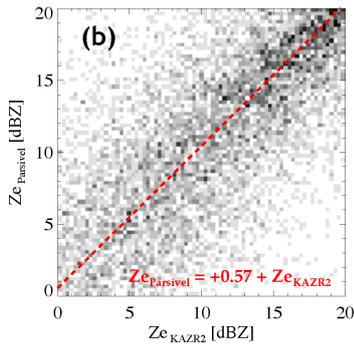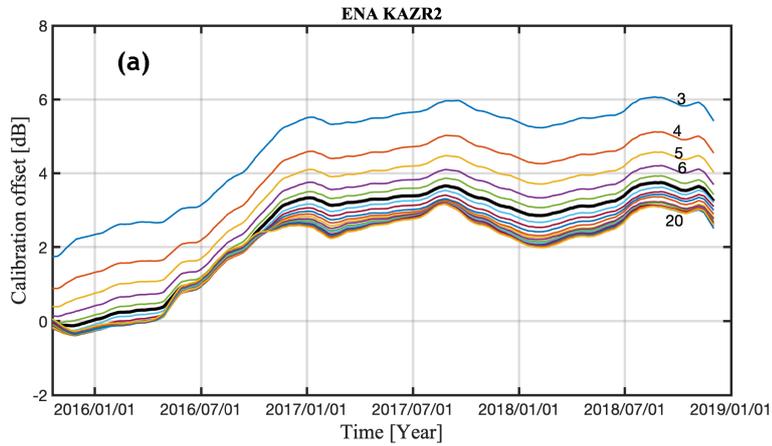

**Figure A1:** (a) The calibration offset between the KAZR2 and Parsivel2 estimated using KAZR2 measurements from difference range gates (from the 3<sup>rd</sup> to the 20<sup>th</sup>), (b) the calibration offset for the period 01/01/2016 to 06/01/2016 using the 8<sup>th</sup> KAZR2 range gate and (c) the calibration offset for the period 01/01/2017 to 10/01/2017 using the 8<sup>th</sup> KAZR2 range gate. These two periods correspond to the periods used for the ARM - CloudSat calibration offsets shown in Fig. 8.

Deleted: ¶