

Author's Reply to Anonymous Referee #1

First of all we would like to thank the reviewer for taking the time to read and review our manuscript. The helpful comments certainly helped to improve the manuscript and to clarify what we want to demonstrate in this first paper. The referee comments are listed below along with the corresponding reply from the authors (in italic font style) as well as possible changes in the manuscript (in blue italic font style).

General comments

Detection of an emission plume is not the same as accurate quantification of emissions and the paper including the abstract must make clear what exactly is meant here. Abstract, line 6 following: Sentences: "...the goal is to reliably estimate the CO₂ emissions from localized sources down to a source strength of approx. 1 MtCO₂/yr," and "Resolving CO₂ plumes also from medium-sized power plants (1-10 MtCO₂/yr) is of key importance for independent quantification of CO₂ emissions from the coal-fired power plant sector.". What does "to reliably estimate the CO₂ emissions from localized sources" mean? Please clarify already in the abstract. Is 1 MtCO₂/yr the expected 1-sigma uncertainty / detection limit? If yes, this would mean that the 1-sigma uncertainties of the medium-sized power plants are in the range 10 %-100 %. Is this good enough? Or is this just good enough for detection of medium-sized emission sources but not for accurate quantification? In this context: Is it good enough if errors are larger than 4 ppm in 32 % of all cases?

This is a valid point and we agree with the reviewer that we tend to be one step ahead when discussing the goals of the instrument concept in terms of CO₂ flux quantification. The long-term goal of the instrument concept is the ability to independently derive CO₂ fluxes from point sources with an emission rate down to 1 MtCO₂/yr. The goal of the present study is, however, to present an instrument concept and demonstrate that it can resolve/detect CO₂ plumes from such point sources at all, assuming a realistic instrument design, and thus has the potential of independent flux quantification. A quantitative evaluation of how accurately the corresponding CO₂ fluxes can be determined from such satellite observations under various conditions is the task of a follow-up study currently being prepared. With the results of that study, we will be able to quantify with what expected accuracy CO₂ fluxes can be determined and thus better define what "reliably estimate" means. Before that follow-up study, which is too comprehensive to include in the present paper, we refrain from specifying a goal for the CO₂ flux estimation accuracy as it would be too speculative. To make this clear we have adapted the corresponding part of the abstract, which now reads: "In this paper, we present the concept and first performance assessment of a compact space-borne imaging spectrometer with a spatial resolution of $50 \times 50 \text{ m}^2$ that could contribute to the "monitoring, verification and reporting" (MVR) of CO₂ emissions worldwide. CO₂ emissions from medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$), currently not targeted by other space-borne missions, represent a significant part of the global CO₂ emission budget. In this paper we show that the proposed instrument concept is able to resolve emission plumes from such localized sources as a first step towards corresponding CO₂ flux estimates". Also the last part of the abstract was a bit too bold at this early point and has been changed to: "...i.e. well below the target source strength of $1 \text{ MtCO}_2 \text{ yr}^{-1}$. This leaves a significant margin for additional error sources like scattering particles and complex meteorology and shows the potential for subsequent CO₂ flux estimates with the proposed instrument concept."

We have further revised the conclusions section accordingly. The first paragraph now reads: "To follow the progress on reducing anthropogenic CO₂ emissions worldwide, independent monitoring systems are of key importance. In this paper, we present the concept of a compact space-borne imaging spectrometer with a high spatial resolution of $50 \times 50 \text{ m}^2$, targeting the monitoring of localized CO₂ emissions. We further demonstrate how the instrument concept could resolve CO₂ emission plumes from localized point sources like medium-sized power plants, thus having the potential to contribute to the independent large-scale verification of reported CO₂ emissions at facility level.". Similarly, the last paragraphs has been revised and now reads: "Given the results from this first performance assessment, the proposed instrument concept demonstrates a clear potential for the independent quantification of CO₂ emissions from medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$), which are currently not targeted by other planned space-borne CO₂ monitoring missions. On the local scale (Indianapolis), we have constrained the present analysis to one day in July using a rather simplistic Gaussian dispersion model that assumes constant atmospheric stability and (unidirectional) horizontal wind speed. It might be that the ability to resolve the CO₂ emission plumes becomes more, perhaps even too, challenging under certain more realistic conditions. Nevertheless, these first results are certainly promising and encourage further studies."

"With the successful demonstration in this paper, i.e. that CO₂ emission plumes from medium-sized power

plants can be resolved from space with a compact, yet realistic, instrument design, the next step will be to analyse the ability to quantify the corresponding CO₂ emission rates from the two-dimensional fields of synthetically retrieved XCO₂ enhancements. This follow-up study will be conducted for different seasons (with varying surface albedo and solar zenith angles), meteorological conditions and emission source strengths using large eddy, rather than Gaussian, modelling of the CO₂ plume dispersion. Although the effect of aerosols has partly been assessed on the global scale in this study, information on the properties and distribution of aerosols should be included also in the local scale simulations in order to better understand the instrument's ability to resolve and quantify localized CO₂ emissions under more realistic conditions. Such an in-depth aerosol analysis is, however, the task of further future studies."

Moreover we have rephrased small parts of the manuscript where the aspect of CO₂ flux quantification is too pronounced.

The 1 MtCO₂/yr is the target source strength that we want to be able to determine emission rates for and does not represent the uncertainty of the emission estimates. How accurate the emission estimates will be for such sources will be addressed in the upcoming study, as explained above. To clarify, the XCO₂ errors are only larger than 4 ppm in 32 % of the cases when aerosols and cirrus are included. Accordingly these errors also include systematic errors and should not be understood/treated as statistical errors. We do realize, that the chosen percentiles and presentation of these systematic errors in the manuscript might be confusing and make the reader think that the errors are statistical. This has been revised throughout the manuscript.

Specific comments

Page 4, line3: Sentence With such a dense spatial sampling, . . . This seems to refer to spatial resolution mentioned in the sentence before but resolution is not sampling.

The term "dense spatial sampling" here refers to the large amount of pixels per unit area. To avoid confusion the sentence has been revised and now reads: "With such a high spatial resolution and large amount of ground pixels per unit area, averaging of . . ."

Page 4, line 6: Sentence "Wilzewski et al. (2019) recently demonstrated . . ." This statement is too strong as the cited paper is still in review.

The paper by Wilzewski et al. (2019) has now been accepted and published in AMT (<https://doi.org/10.5194/amt-13-731-2020>). Thus we keep the formulation as it is.

Page 5, line 9: Is there a reason why "a local equatorial crossing time at 13:00" has been selected?

13:00 is chosen in order to have 1) the sun high up in the sky leading to a stronger signal and 2) a relatively well developed boundary layer such that the CO₂ plumes can be well dispersed vertically. The following sentence has been added to the manuscript: "This orbit is chosen in order to have a well developed boundary layer at overpass together with good radiometric performance (high SNR)."

Table 1: Please add Adet (detector area) as this is used in several equations. Is the aperture circular so that the aperture area can be computed given the listed diameter? Please add the missing information.

This is a good point and since we use pixel area rather than pixel pitch, we have replaced the information about the detector's pixel pitch with the detector's pixel area in Table 1 as well as in the text.

The aperture is indeed circular such that the aperture area can be computed using the given diameter. This information has been added in the manuscript.

Figure 4 (a): The dotted vertical line is at $x=0.1$ and the label refers to Albedo=0.1 whereas the x-axis annotation lists Albedo times $\cos(\text{SZA})/\text{PI}$. If this is not correct then please correct this.

The dotted vertical line is actually at approx. $0.01 (=0.1 \cdot \cos(70)/\pi)$. The figure and corresponding labels and legends is thus correct as it is.

Page 9, bottom: Please add a reference for the statement that the SWIR-1 albedo is higher than the SWIR-2 albedo. Is this always the case?

Although not always the case, it is certainly most often the case. We have added a reference (Fig. 7 in <https://doi.org/10.1364/AO.48.003322>) where this general pattern is visualized for the global trial ensemble used in this study. Additionally, Fig. 1 below shows surface reflectance/albedo data for SWIR-1

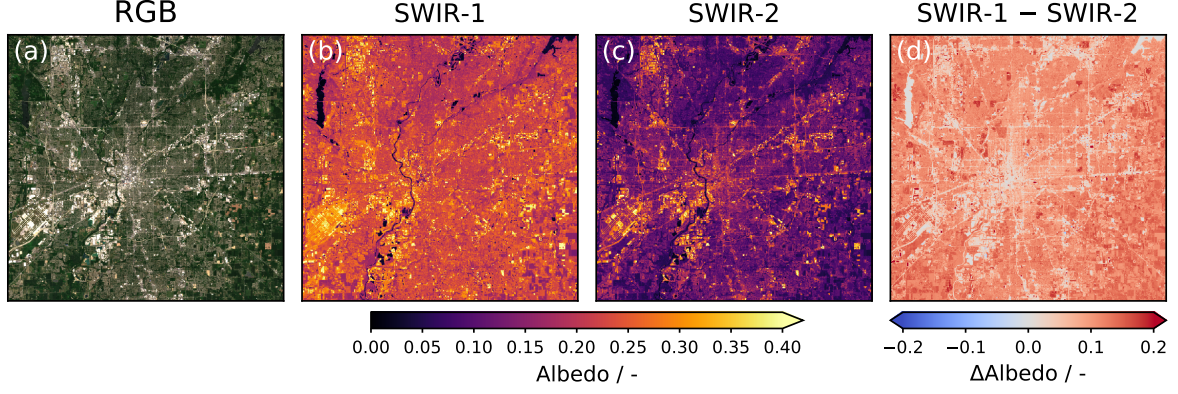


Figure 1: (a) True color RGB for the city of Indianapolis. Corresponding surface reflectance/albedo data in SWIR-1 (b) and SWIR-2 (c) as well as the difference between SWIR-1 and SWIR-2 (d).

and SWIR-2 (and the difference between the two) inside the Indianapolis domain analysed in this study. The SWIR-2 surface reflectance data are the same data used for the study and the SWIR-1 surface reflectance data are derived from Sentinel-2's band 11 (approx. 1560–1660 nm), which is well aligned with the potential SWIR-1 window assumed in this study. The figure clearly shows that the SWIR-2 reflectance is generally lower than the SWIR-1 reflectance, also at urban scale. In addition to the added reference, the manuscript has also been revised to say that the albedo in SWIR-2 is **generally** lower than in SWIR-1. Furthermore the important aspect of higher solar (ir)radiance in SWIR-1, compared to SWIR-2, was missing as an explanation for the consistently higher SNR for SWIR-1. After some further rearrangements, the related paragraph in the paper now reads: “Figure 4a shows the continuum SNR (calculated with Eqs. (1)–(5)) as a function of the scene brightness for the two prospective spectral set-ups SWIR-1 and SWIR-2. The scene brightness describes the conversion from incident solar irradiance to reflected solar radiance and is calculated as the product of the surface albedo and the cosine of the SZA, divided by π , hence assuming a Lambertian surface. For the reference scene (albedo = 0.1, SZA = 70), the continuum SNR is approx. 180 and 100 for SWIR-1 and SWIR-2, respectively. The consistently higher SNR for SWIR-1, compared to SWIR-2, is mainly the result of higher solar radiance (see Fig. 3) as well as generally higher surface albedo (see e.g. Fig. 7 in Butz et al. (2009)) in SWIR-1. Looking at the individual contributions from the different instrument noise sources in Fig. 4b, it is clear that the readout noise and signal shot noise are the major contributors, whereas the noise arising from quantization errors, dark current and thermal background radiation has a small or even negligible contribution in comparison. The signal shot noise is, however, smaller than the dark current, read-out noise and quantization noise inside the CO₂ absorption bands, where the signal, and hence the signal shot noise, decreases. Note that all noise terms, except for the signal shot noise σ_{ss} , are constant.”

Section 4.2, Fig.9, Fig.10: Is the retrieval using the true CO₂ profile? If not: are the reported errors including the smoothing error? Do Figs. 9(b) and 10(top) only show noise or are there also systematic XCO₂ biases? If yes, where are the biases coming from? Is the bias correlated with the emission plume (e.g., due to aerosols)? Please show retrieved minus true also for Fig. 10. I would expect to see an aerosol-related XCO₂ bias correlated with the emission plume.

Yes, the true CO₂ profile is used for the retrieval and no smoothing error is included. Figs. 9 and 10 only show the noise. Systematic biases from e.g. aerosols is not analysed at urban scale in this study, but will be investigated in further studies. Since there is no bias, we see no added value of including further panels in Fig. 10, showing retrieved minus true XCO₂.

Technical comments

Page 12, line 4: Strange sentence: “For the SWIR-2 set-up it is only retrievals over scenes ...”. Probably “it is” needs to be removed.

Revised. The sentence now reads: “For the SWIR-2 set-up, only retrievals over scenes that are darker than our reference scene (albedo = 0.1, SZA = 70) are expected to have instrument noise induced errors larger than approx. 2 ppm.”

Page 12, line 14: Add “nm” after “1.29”.

Revised.

Page 14, line 2: “Which effect that is dominating ...: delete “that”.

Revised.

Page 14: “...the Hestia Project was gridded ...”. Replace by “...the Hestia Project data set was gridded ...” or equivalent.

Revised.

Various places including References: Check CO₂ etc and use subscripts where needed, e.g., for CO₂ and CH₄.

Several instances without proper use of subscript in the reference list have been revised. In the main text, however, no such instance could be found apart from “CO₂M” and “CO₂MON”, which should be written without the use of subscript.

Author's Reply to Luis Guanter

First of all we would like to thank the reviewer for taking the time to read and review our manuscript. The comments raised by the reviewer certainly helped to improve the manuscript and to clarify several aspects. The referee comments are listed below along with the corresponding reply from the authors (in italic font style) as well as possible changes in the manuscript (in blue italic font style).

General comments

1) Plume mapping vs emission quantification - I understand that the quantification of CO₂ emissions is the core goal of the proposed system (e.g. “the goal is to reliably estimate the CO₂ emissions from localized sources” p1 L7). However, the entire analysis in this manuscript is focused on XCO₂ retrieval, without any discussion of the subsequent CO₂ flux calculation. Here, I wonder whether the latter drives any observational requirement affecting the instrument/mission configuration. For example, does the CO₂ flux estimation interpose any requirement on either revisit or overpass time? On the other hand, the analysis of results in Figs.9-10 is highly based on whether or not XCO₂ plumes can be visually detected from the retrieval results. But can those “detected plumes” be used to infer CO₂ fluxes within the expected accuracy? I reckon that propagating measurement errors all the way to CO₂ fluxes is probably beyond the scope of this study, but some overall discussion of the potential and limitations of the proposed mission/instrument for CO₂ emission quantification is certainly missing.

The two aspects of plume detection and flux quantification and how they shall be addressed in the present paper is a valid point. As implied above, the long-term goal of the instrument concept is indeed the ability to independently derive CO₂ fluxes from point sources with an emission rate down to 1 MtCO₂/yr. The goal of the present study is, however, to present an instrument concept and demonstrate that it can resolve/detect CO₂ plumes from such point sources at all, assuming a realistic instrument design, and thus has the potential of independent flux quantification. A quantitative evaluation of how accurately the corresponding CO₂ fluxes can be determined from such satellite observations under various conditions is the task of a follow-up study currently being prepared. It is correct that this follow-up study is too comprehensive to include in the present paper. To clarify the two aspects and the goal of the present paper, the related part in the abstract has been rewritten and now reads: “In this paper, we present the concept and first performance assessment of a compact space-borne imaging spectrometer with a spatial resolution of $50 \times 50 \text{ m}^2$ that could contribute to the “monitoring, verification and reporting” (MVR) of CO₂ emissions worldwide. CO₂ emissions from medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$), currently not targeted by other space-borne missions, represent a significant part of the global CO₂ emission budget. In this paper we show that the proposed instrument concept is able to resolve emission plumes from such localized sources as a first step towards corresponding CO₂ flux estimates”

Nevertheless, the we agree that some overall discussion of the potential and limitations of the proposed instrument concept for CO₂ flux quantification could be added. A new paragraph has been added to the conclusions section: “Given the results from this first performance assessment, the proposed instrument concept demonstrates a clear potential for the independent quantification of CO₂ emissions from medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$), which are currently not targeted by other planned space-borne CO₂ monitoring missions. On the local scale (Indianapolis), we have constrained the present analysis to one day in July using a rather simplistic Gaussian dispersion model that assumes constant atmospheric stability and (unidirectional) horizontal wind speed. It might be that the ability to resolve the CO₂ emission plumes becomes more, perhaps even too, challenging under certain more realistic conditions. Nevertheless, these first results are certainly promising and encourage further studies.” This is followed by the discussion on further limitation in terms of spatial coverage, arising from the high spatial resolution and forward motion compensation.

The conclusions section has also in general been revised in order to make clear that the goal of this paper is to demonstrate that the target CO₂ plumes can at all be detected, and that the aspect of flux estimation will be addressed in a follow-up study. The first and last paragraphs of the conclusions section now read: “To follow the progress on reducing anthropogenic CO₂ emissions worldwide, independent monitoring systems are of key importance. In this paper, we present the concept of a compact space-borne imaging spectrometer with a high spatial resolution of $50 \times 50 \text{ m}^2$, targeting the monitoring of localized CO₂ emissions. We further demonstrate how the instrument concept could resolve CO₂ emission plumes from localized point sources like medium-sized power plants, thus having the potential to contribute to the independent large-scale verification of reported CO₂ emissions at facility level. . . . With the successful demonstration in this paper, i.e. that CO₂ emission plumes from medium-sized power plants can be

resolved from space with a compact, yet realistic, instrument design, the next step will be to analyse the ability to quantify the corresponding CO₂ emission rates from the two-dimensional fields of synthetically retrieved XCO₂ enhancements. This follow-up study will be conducted for different seasons (with varying surface albedo and solar zenith angles), meteorological conditions and emission source strengths using large eddy, rather than Gaussian, modelling of the CO₂ plume dispersion. Although the effect of aerosols has partly been assessed on the global scale in this study, information on the properties and distribution of aerosols should be included also in the local scale simulations in order to better understand the instrument's ability to resolve and quantify localized CO₂ emissions under more realistic conditions. Such an in-depth aerosol analysis is, however, the task of further future studies."

After the above mentioned follow-up study, when the proposed instrument's abilities in terms of CO₂ flux quantification are better understood, observational requirements like revisit, overpass time, reasonable number of satellites etc. can be further analysed and defined. For now, no such observational requirements have been clearly defined.

2) Cloud screening - I understand that the retrieval can account for aerosol and cirrus, but I miss a discussion on how optically-thicker clouds would be detected and screened out from the processing. Just avoiding cloudy sites in the mission acquisition plan doesn't seem to be enough. As far as I know, either the O2 A-band or the combination of information from two SWIR channels is used for cloud detection in other CO₂ monitoring missions (e.g. OCO-2). What would be the approach here?

It is correct that we will have to be able to identify and screen scenes with thicker clouds and aerosol layers from the data acquired with a single spectral window. The approach we plan is to retrieve XCO₂ independently from the two CO₂ absorption bands centred near 2010 nm and 2060 nm, respectively, assuming a non-scattering atmosphere. Given accurate spectroscopic data, any differences in the XCO₂ retrieved from the two bands will be due to scattering particles as a result of the different optical depths of the two CO₂ bands. Hence, scenes with significant scattering can be identified and screened out. We have added the following piece of text in Sect. 4.2 of the manuscript: "Although layers of aerosol and cirrus can be partly accounted for in the retrieval, scenes with thicker clouds and aerosol layers will have to be identified and filtered out in the data processing chain. Such a cloud filter could exploit the different optical depths of the two CO₂ bands in the SWIR-2 window by retrieving XCO₂ from the two CO₂ bands independently (assuming a non-scattering atmosphere) and filter for discrepancies."

3) Spectral albedo variations - the authors discuss the effect of surface albedo on their retrieval using simulations based on Sentinel-2 surface reflectance data, but if I understand correctly a constant reflectance value is assumed for the entire fitting window. However, I think the impact of different spectral signatures within the fitting window should also be tested. This could be especially relevant for retrievals over urban environments, which are not only characterized by highly heterogeneous surfaces, but also by the presence of artificial materials with strong absorption features in the SWIR. See for example Ayasse et al. (<https://doi.org/10.1016/j.rse.2018.06.018>) or Cusworth et al. (<https://doi.org/10.5194/amt-2019-414>) for analysis of the impact of surface reflectance on methane retrievals for 10-nm sampling instruments. It might be the case that the decoupling between CH₄ and surface reflectance is less challenging for the much higher spectral sampling of the proposed instrument, but I think a test of this effect would be important nonetheless. The authors could perhaps link their Sentinel-2 background image with the ECOSTRESS spectral library, SPECCHIO (<https://specchio.ch/>) and/or any other spectral library containing impervious/urban materials (e.g. <http://www.met.reading.ac.uk/micromet/LUMA/SLUM.html>).

It is correct that we assume a constant reflectance for the entire window. We believe that the decoupling between CO₂ and surface reflectance indeed will be less challenging with the higher spectral resolution of 1.29 nm assumed for the spectrometer proposed here. Cusworth et al. (2019) show how the retrieval artefacts due to surface reflectance inhomogeneity decrease when the AMPS sensor is assumed, an atmospheric sensor dedicated for CH₄ retrievals with a spectral resolution of 1 nm (i.e. similar to the spectral resolution assumed in this study).

Following the reviewer's suggestion, we have analysed the spectral reflectance in the SWIR spectral range in more detail using the SLUM (Spectral Library of Impervious Urban Materials) dataset. This dataset has a spectral resolution of approx. 2.5 nm for the spectral range analysed here. Figure 1 below shows spectral reflectances for various urban materials belonging to different sub-categories like asphalt, stone, cement, metal, granite etc. While significant features in the spectral reflectance are evident between 1800 to 2400 nm for several urban materials, the spectral range of the spectrometer proposed in this study (1982–2092 nm, marked black in the attached figure) exhibit little variability. In many cases the

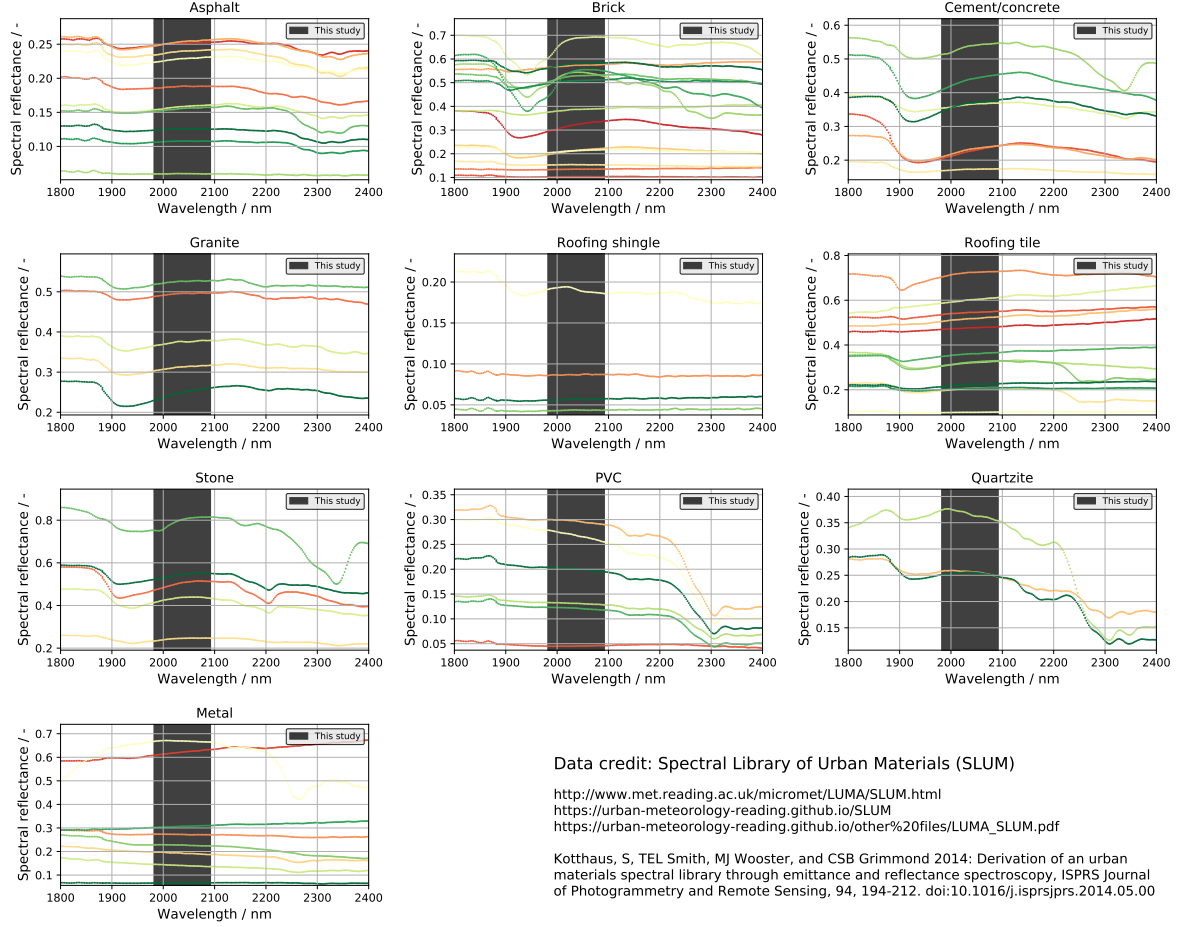


Figure 1: Spectral reflectances for various urban materials belonging to different sub-categories (see plot titles) as provided by the SLUM dataset.

assumption of a constant albedo is valid, and for the other cases the reflectance is sufficiently smooth to be fitted using a second order polynomial during the retrieval. In the 2200–2400 nm spectral region, stronger reflectance features are seen, supporting the conclusion by Ayasse et al. (2018), i.e. that surface reflectance features in the 2200–2400 nm region can cause errors in the CH_4 retrieval. Hence, we argue that the challenges in decoupling CH_4 and surface reflectance at 2200–2400 nm cannot be directly compared to the ability to decouple CO_2 and surface reflectance at 1982–2092 nm, even at the same spectral resolution.

That being said, we acknowledge that the albedo heterogeneity at urban scale and at such high spatial resolution will be an important aspect to consider in future studies, especially when scattering by aerosols is considered.

Specific and technical comments

p6, L1 SNR already defined (p4, L5)

Revised.

Table 1 - specs for swath (1000 across-track pixels?), MTF/PSF and uniformity (smile/keystone) would also be useful

We have added information about the assumed 50 km swath width. We do, however, argue that information about MTF/PSF and uniformity (smile/keystone) would be too detailed at this point. This information would be more relevant in future studies, when the preliminary design assumed here has been further consolidated or even realized.

p9, L1, FMC: does this mean that there is a variation of the view zenith angle from +20 to -20 in the along track direction of the image? how is this handled by the retrieval? Please, comment.

Our FMC approach means that the satellite will operate in a normal push-broom configuration but the ground speed will be reduced by a factor 5. Thus, considering a whole target tile of approx. 50 km along-track length, the viewing zenith angle (VZA) will be approx. +20 degrees for the first across-track row of ground-pixels in the tile. The VZA will then continuously decrease to 0 degrees at the center of the tile. This is followed by a continuous decrease down to approx. -20 degrees at the end of the tile. Measuring the whole tile takes about 70 seconds. The range of VZA for a single ground-pixel is, however, very small, since each ground-pixel is only observed for 70 ms (5 times longer than without FMC). For the study, each tile consists of 1000 ground-pixels in the along-track direction, meaning that if the VZA ranges over 40 degrees for the entire tile, each ground-pixel will have a VZA range on the order of $40/1000 = 0.04$ degrees (assuming that the FMC was perfectly linear in VZA). The information about the VZA for each ground-pixel is used in the retrieval in order to accurately calculate the corresponding light path. The tile is assembled from all individual ground-pixels after the retrieval. Hence, the range of VZA should not be a problem.

p10, 3rd paragraph, forward simulation set-up:

- Since CH₄ and H₂O are included in the retrieval state vector for SWIR-1, shouldn't they be varied in the forward simulations as well?

In our global trial ensemble, the abundance of CO₂, CH₄ and H₂O varies between the scenes. Hence, these greenhouse gas concentrations are all varied in the forward simulations, not only CO₂.

- Should the surface BRDF be considered in the forward simulations in order to evaluate errors from the Lambertian assumption in the retrieval? Not trivial to implement, but probably relevant esp. In the case of urban environments

As noted above, retrievals are performed for individual ground-pixels under well-defined viewing geometry given the viewing zenith (VZA) and solar zenith angles (SZA) and the relative azimuth. If there is no scattering in the atmosphere, there should not be any BRDF effect on the retrievals since the retrievals estimate an "albedo" parameter. This "albedo" parameter is just the ground reflectivity for the given combination of SZA and VZA - be it a particular value of a non-Lambertian or a Lambertian BRDF. If there is atmospheric scattering, the BRDF plays a role since the scattered light-beams might hit and exit the surface under different angles than the direct light-beam (SZA, VZA). For most parts of this study, we neglect scattering i.e. BRDF effects are by definition neglected as well. Even for the parts of the study that include scattering, we are in a regime of thin particle loads (AOD(NIR) mostly smaller than 0.5). While there might be a BRDF error contribution, we believe that is small compared to the other scattering induced errors (Fig. 6). But, the reviewer is right that we did not include BRDF effects in our study and the reviewer is also correct that this is not trivial. Since the BRDF effects are not decisive, we propose to postpone such an assessment. For clarification purposes, the following sentence has been added to the section with scattering simulations in the manuscript: "Note that errors arising from the Lambertian albedo assumption (BRDF (Bidirectional Reflectance Distribution Function) effects) are neglected in the scattering simulations."

p16, L21 Sen2Core → Sen2Cor

Revised.

p20, L1: "can nevertheless be clearly separated from the background" - OK, but is this still enough for a useful estimation of the emitted flux?

See response above regarding revision of abstract and conclusions section in order to clarify the goal of this paper in terms of plume detection vs. flux estimation.

p21 L1 & L18: references to potential synergies with companion instruments - a discussion of the planned strategy for cloud screening would be useful here

A new sentence including reference regarding the synergy between CO₂ and aerosol instruments has been added to the conclusions section: "As an example, a multi-angle polarimeter instrument is planned to fly

together with the CO₂ instrument onboard the CO2M mission in order to minimize the systematic XCO₂ errors (ESA, 2019¹)”

For potential synergies with an active instrument, we are not aware of any suitable reference and we propose to stick to the current reference to a CO₂ lidar (Kiemle et al. 2017).

A discussion about the planned strategy for cloud screening has been added to Sect. 4.2: “Although layers of aerosol and cirrus can be partly accounted for in the retrieval, scenes with thicker clouds and aerosol layers will have to be identified and filtered out in the data processing chain. Such a cloud filter could exploit the different optical depths of the two CO₂ bands in the SWIR-2 window by retrieving XCO₂ from the two CO₂ bands independently (assuming a non-scattering atmosphere) and filter for discrepancies.”.

¹ESA: Copernicus CO₂ Monitoring Mission Requirements Document, https://esamultimedia.esa.int/docs/EarthObservation/CO2M_MRD_v2.0_Issued20190927.pdf, EOP-SM/3088/YM-ym, 2019.

Towards space-borne monitoring of localized CO₂ emissions: an instrument concept and first performance assessment

Johan Strandgren¹, David Krutz², Jonas Wilzewski^{1,3}, Carsten Paproth², Ilse Sebastian², Kevin R. Gurney⁴, Jianming Liang⁵, Anke Roiger¹, and André Butz⁶

¹Deutsches Zentrum für Luft- und Raumfahrt, Institut für Physik der Atmosphäre, Oberpfaffenhofen, Germany

²Deutsches Zentrum für Luft- und Raumfahrt, Institut für Optische Sensorsysteme, Berlin-Adlershof, Germany

³Meteorological Institute Munich, Ludwig-Maximilians-Universität, Munich, Germany

⁴School of Informatics, Computing and Cyber Systems, Northern Arizona University, Flagstaff, AZ, USA

⁵School of Life Sciences, Arizona State University, Tempe, AZ, USA

⁶Institut für Umweltphysik, Universität Heidelberg, Heidelberg, Germany

Correspondence to: Johan Strandgren (johan.strandgren@dlr.de)

Abstract. The UNFCCC (United Nations Framework Convention on Climate Change) requires the nations of the world to report their carbon dioxide (CO₂) emissions. Independent verification of these reported emissions is a corner stone for advancing towards emission accounting and reduction measures agreed upon in the Paris agreement. In this paper, we present the concept and first performance assessment of a compact space-borne imaging spectrometer ~~that could support the task of with a~~
5 ~~spatial resolution of $50 \times 50 \text{ m}^2$ that could contribute to the~~ “monitoring, verification ~~,and~~ reporting” (MVR) of CO₂ emissions worldwide. ~~With a single spectral window in the short-wave infrared spectral region and a spatial resolution of $50 \times 50 \text{ m}^2$, the goal is to reliably estimate the~~ CO₂ emissions from ~~localized sources down to a source strength of approx. 1 Mt yr^{-1} , hence complementing other planned monitoring missions, like the planned European Carbon Constellation (CO2M). Resolving plumes also from~~ medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$) ~~is of key importance for independent quantification of~~
10 ~~, currently not targeted by other space-borne missions, represent a significant part of the global~~ CO₂ ~~emissions from the coal-fired power plant sector~~ emission budget. In this paper we show that the proposed instrument concept is able to resolve emission plumes from such localized sources as a first step towards corresponding CO₂ flux estimates.

Through radiative transfer simulations, including a realistic instrument noise model and a global trial ensemble covering various geophysical scenarios, it is shown that an instrument noise error of 1.1 ppm (1σ) can be achieved for the retrieval of
15 the column-averaged dry-air mole fraction of CO₂ (XCO₂). Despite limited amount of information from a single spectral window and a relatively coarse spectral resolution, scattering by atmospheric aerosol and cirrus can be partly accounted for in the XCO₂ retrieval, with deviations of at most 4.0 ppm from the true abundance for ~~%~~ two thirds of the scenes in the global trial ensemble.

We further simulate the ability of the proposed instrument concept to observe CO₂ plumes from single power plants in an
20 urban area using high-resolution CO₂ emission and surface albedo data for the city of Indianapolis. Given the preliminary instrument design and the corresponding instrument noise error, emission plumes from point sources with an emission rate down to the order of $0.3 \text{ MtCO}_2 \text{ yr}^{-1}$ can be resolved, i.e. well below the target source strength of $1 \text{ MtCO}_2 \text{ yr}^{-1}$. ~~Hence,~~

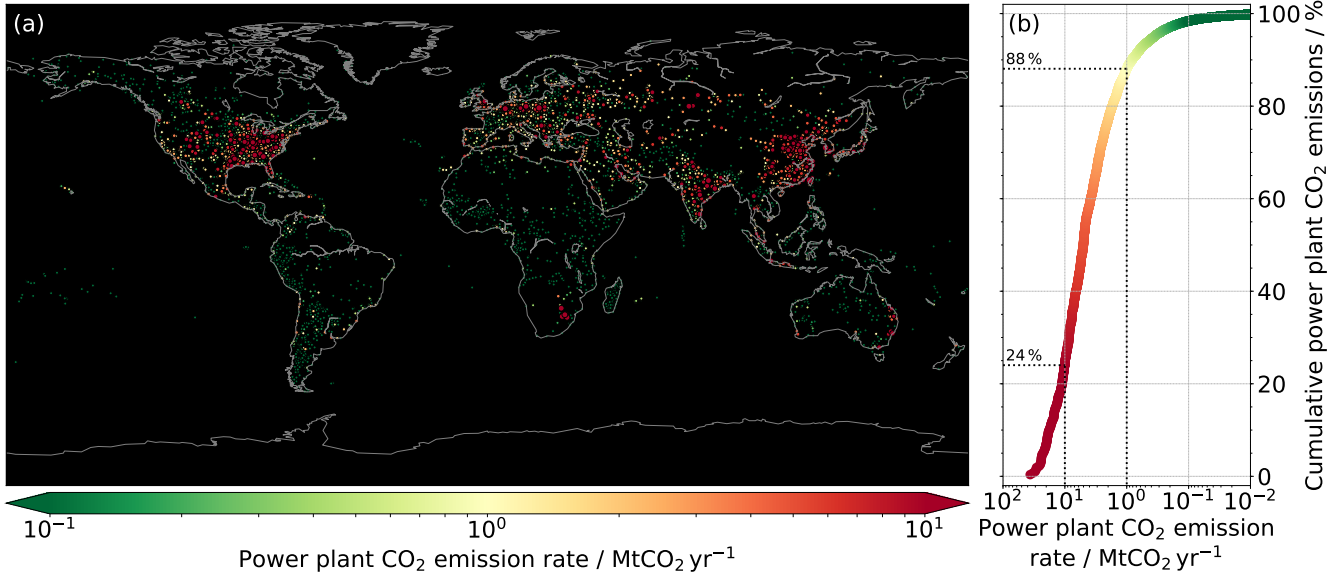


Figure 1. (a) Geographical distribution of reported and estimated annual CO₂ emissions from power plants worldwide for the year 2009, as provided by the CARMA v3.0 database. (b) Corresponding cumulative distribution showing the fraction of the power plant emission total (9.9 GtCO₂ yr⁻¹) that power plants with a source strength greater than X MtCO₂ yr⁻¹ make up. This should be understood as the fraction of the power plant CO₂ emission total that, theoretically, can be observed by an instrument with a given sensitivity. For visualization purposes, the marker sizes in (a) are scaled according to the respective emission rates.

~~the proposed instrument concept could be able to resolve and quantify the~~ This leaves a significant margin for additional error sources like scattering particles and complex meteorology and shows the potential for subsequent CO₂ plumes from localized point sources responsible for approx. 90 % of the power plant emission budget, assuming global coverage through a fleet of sensors and favourable conditions with respect to illumination and particle scattering flux estimates with the proposed instrument concept.

1 Introduction

Despite the broad consensus on the negative long-term effects of carbon dioxide (CO₂) emissions and the proclaimed efforts reducing these emissions, the atmospheric CO₂ concentrations continue to rise. During the course of 2018, the average CO₂ concentration increased from 407 to 410 ppm at the Mauna Loa observatory, representing the fourth-highest annual growth ever recorded at that observatory (NOAA, 2019). CO₂ emissions from localized point sources represent a large fraction of the CO₂ emitted into the atmosphere. The International Energy Agency (IEA) recently reported that emissions from coal-fired power plants exceeded 10 GtCO₂ yr⁻¹ for the first time in 2018, hence accounting for approx. 30 % of the global CO₂ emissions (IEA, 2019), mainly due to continued growth of coal use in Asia and other emerging economies. Figure 1 depicts the global

distribution of reported and estimated annual CO₂ emissions from power plants for the year 2009, as provided by the CARMA (Carbon Monitoring for Action) v3.0 database (Wheeler and Ummel, 2008; Ummel, 2012), together with the corresponding cumulative distribution of the power plant emissions. The emission total from 16 898 individual power plants, where exact or approximate coordinates are available, adds up to 9.9 GtCO₂ yr⁻¹. A large fraction of power plant emissions originates from a relatively small number of large to medium-sized power plants. The CARMA data show that 153 large power plants (> 10 MtCO₂ yr⁻¹) accounted for 24 % of the total annual power plant CO₂ emissions, whereas 2111 large and medium-sized power plants (> 1 MtCO₂ yr⁻¹) accounted for as much as 88 % of the power plant CO₂ emission budget, clearly manifesting the significant contribution from ~~such~~the medium-sized power plants (1–10 MtCO₂ yr⁻¹) to the global CO₂ emission budget.

To advance towards emission accounting and reduction measures, agreed upon in the Paris agreement in force since 2016, independent verification of reported emissions is of ~~significant~~high importance. To this end, space-borne instruments provide a suitable platform where continuous long-term measurements can potentially be combined with a near-global coverage with no geopolitical boundaries.

Most of the currently operating, planned and proposed instruments for passive CO₂ observations from space measure the reflected short-wave infrared (SWIR) solar radiation in several spectral windows covering the oxygen-A (O₂A) band near 750 nm as well as the weak and strong CO₂ absorption bands near 1600 and 2000 nm, respectively, e.g. GOSAT (Greenhouse Gases Observing Satellite; Kuze et al., 2009, 2016), OCO-2 (Orbiting Carbon Observatory-2; Crisp et al., 2004, 2017), TanSat (Liu et al., 2018), GOSAT-2 (Nakajima et al., 2012), OCO-3 (Eldering et al., 2019), MicroCarb (Buil et al., 2011), GeoCarb (Moore III et al., 2018), CarbonSat (Bovensmann et al., 2010; Buchwitz et al., 2013) and G3E (Geostationary Emission Explorer for Europe; Butz et al., 2015). These instruments and instrument concepts further rely on a comparatively high spectral resolution on the order of approx. 0.05 – 0.3 nm representing resolving powers (ratio of wavelength over the full-width half-maximum of the instrument spectral response function) ranging from approx. 3600 for the strong CO₂ absorption bands near 2000 nm for CarbonSat (Buchwitz et al., 2013) up to > 20 000 for the OCO and GOSAT instruments. Such advanced instruments, like for example GOSAT and OCO-2 that have been operating since 2009 and 2014, respectively, generally target an accuracy and coverage sufficient to study the natural CO₂ cycle on a regional to continental scale (e.g. Guerlet et al., 2013; Maksyutov et al., 2013; Parazoo et al., 2013; Eldering et al., 2017; Chatterjee et al., 2017; Liu et al., 2017), but have also been used to observe and quantify CO₂ gradients on the regional scale caused by anthropogenic CO₂ emissions in urban areas (Kort et al., 2012; Hakkarainen et al., 2016; Schwandner et al., 2017; Reuter et al., 2019). OCO-2 data have further been used to observe strong CO₂ plumes from localized natural and anthropogenic CO₂ sources like volcanoes and coal-fired power plants (Nassar et al., 2017; Schwandner et al., 2017; Reuter et al., 2019), demonstrating the capabilities of imaging spectrometers to monitor CO₂ from space. The spatial resolution of OCO-2 and similar instruments like e.g. OCO-3, TanSat and the planned ~~European Copernicus CO₂ satellite constellation for monitoring~~Monitoring mission CO2M (on the order of approx. 2–4 km²) does, however, pose a difficulty for the routine monitoring of localized power plant CO₂ emissions, since the plume is usually only sampled by a handful of pixels, where CO₂ plume enhancements cannot be fully separated from the background, making quantitative CO₂ emission rate estimates difficult and vulnerable to cloud contamination and instrument noise propagating into

CO₂ retrieval errors. For this reason CO₂M will ~~only address target~~ isolated large power plants ($\gtrsim 10 \text{ MtCO}_2 \text{ yr}^{-1}$) and large urban agglomerations (\gtrsim Berlin) (Kuhlmann et al., 2019) and thus, a large fraction of the emission total will be missed.

To contribute to closing this gap and expanding on the future CO₂ monitoring from space, we here present the concept and a first performance assessment of a space-borne imaging spectrometer that could be deployed for the dedicated monitoring of localized CO₂ emissions. By targeting power plants with an annual emission rate down to approx. $1 \text{ MtCO}_2 \text{ yr}^{-1}$, a substantial fraction ~~(on the order of 90 %) of~~ the CO₂ emissions from power plants and hence a significant part of the global man-made CO₂ emission budget in total could be ~~observed-resolved~~ (given a global coverage through a fleet of instruments). As shown in Fig. 1, it is of key importance to cover also the medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$) as they alone contributed to approx. 64 % of the CO₂ emissions from power plants in 2009, according to the CARMA v3.0 data. To achieve this, the proposed instrument has an envisaged spatial resolution of $50 \times 50 \text{ m}^2$. With such a ~~dense-spatial-sampling~~ high spatial resolution and large amount of ground pixels per unit area, averaging of plume enhancements and background concentration fields is avoided. This leads to an enhanced contrast compared to a coarser spatial resolution. To increase the number of collected photons and hence the signal-to-noise ratio (SNR) and relative precision of the CO₂ concentration retrievals, such a high spatial resolution has to be compensated for with a rather coarse spectral resolution. To further compensate for the limited spatial coverage of a single instrument, a comparatively compact and low-cost instrument design is an important aspect, as it would allow for a fleet of instruments to be deployed, increasing the spatial coverage.

Wilzewski et al. (2020) recently demonstrated that atmospheric CO₂ concentrations can be retrieved with an accuracy $< 1 \%$ using such a comparatively simple spectral set-up with one single spectral window and a relatively coarse spectral resolution of approx. 1.3–1.4 nm (resolving power of 1400–1600). Thompson et al. (2016) demonstrated the ability to resolve and quantify methane (CH₄) plumes, posing a similar remote sensing challenge as CO₂, using data from the space-borne Hyperion imaging spectrometer, with a spectral and spatial resolution of 10 nm (resolving power around 230) and 30 m, respectively. Observation of emission plumes, from plume detection to enhancement quantification and flux estimation, using imaging spectroscopy with a single narrow spectral window and a spectral resolution as coarse as 5 to 10 nm (resolving power around 200–500) has further been repeatedly demonstrated using airborne imaging spectroscopy data for both CO₂ (Dennison et al., 2013; Thorpe et al., 2017) and CH₄ (Thorpe et al., 2014; Thompson et al., 2015; Thorpe et al., 2016, 2017; Jongaramrungruang et al., 2019). For an airborne instrument primarily dedicated to the quantitative imaging of CH₄, but also CO₂ plumes, Thorpe et al. (2016) proposed a single spectral window and a spectral resolution of 1.0 nm (resolving power around 2000–2400), again coarse enough to reach a spatial resolution on the order of 10–100 m. The commercial instrument GHGSat-D operated by the Canadian company GHGSat Inc. was launched in 2016 as a demonstrator for a satellite constellation concept targeting the detection of CH₄ plumes from individual point sources within selected ~~approx. 10×10~~ $\approx 10 \times 10$ km² target regions at a spectral and spatial resolution of 0.1 nm (resolving power around 16 000) and 50 m, respectively (?). Varon et al. (2019) recently showed how anomalously large CH₄ point sources can be discovered with GHGSat-D observations.

Given the results from previous studies and the technology at hand, we are confident that the proposed instrument concept presented here could be realised and that it would be an important complement to the fleet of current and planned space-borne CO₂ instruments, allowing for the routine quantitative monitoring of CO₂ emissions from large and medium-sized

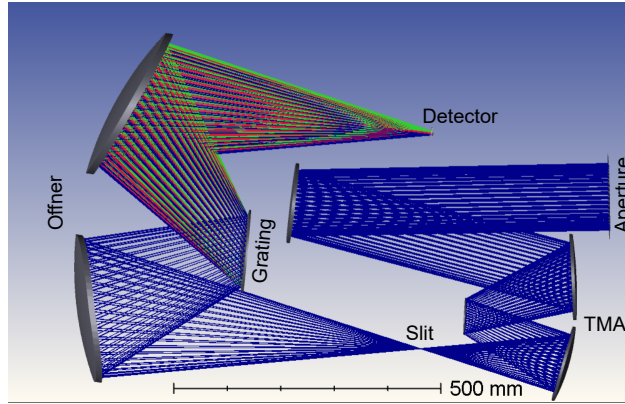


Figure 2. Ray-tracing diagram of the preliminary optical design assuming a Three-Mirror-Anastigmat (TMA) telescope combined with an Offner-type spectrometer.

power plants~~and the estimation of corresponding emission rates~~. The proposed instrument concept would also serve as a good complement and companion to CO2M, by targeting also medium-sized power plants and providing high-resolution images with finer CO₂ plume structures. The added value of such an instrument would be of interest, both in terms of advancing science as well as in providing independent emission estimates that could be used to verify reported CO₂ emission rates at facility level and inform policy makers on the progress of reducing man-made CO₂ emissions. The proposed instrument concept is described in Sect. 2, followed by a description of the instrument noise model in Sect. 3. A global performance assessment addressing instrument noise and the errors introduced by atmospheric aerosol is presented in Sect. 4. The ability to ~~monitor~~resolve single CO₂ emission plumes at urban scale is further simulated in Sect. 5. A short summary and our concluding remarks are finally presented in Sect. 6.

10 2 Mission and instrument concept

The instrument concept presented in this paper is based on a space-borne push-broom imaging grating spectrometer, measuring spectra of reflected solar radiation in one single SWIR spectral window, from which the column-averaged dry-air mole fraction of CO₂ (XCO₂) can be retrieved. With an expected instrument mass of approx. 90 kg, it is suitable for the deployment on small satellite buses. Since the proposed instrument is targeting the quantification of localized CO₂ emissions from e.g. coal-fired power plants, a high spatial resolution of $50 \times 50 \text{ m}^2$ is envisaged. The instrument is designed to fly in a sun-synchronous orbit at an altitude of 600 km and a local equatorial crossing time at 13:00. This orbit is chosen in order to have a well developed boundary layer at overpass together with good radiometric performance (high SNR).

The preliminary optical design assumes a circular aperture (15 cm ~~aperture in diameter~~) and is based on a Three-Mirror-Anastigmat (TMA) telescope, combined with an Offner-type spectrometer, as shown in Fig. 2. The optic system relies on metal-based mirrors and is designed as an athermal configuration for a wide temperature range onboard the satellite. The three

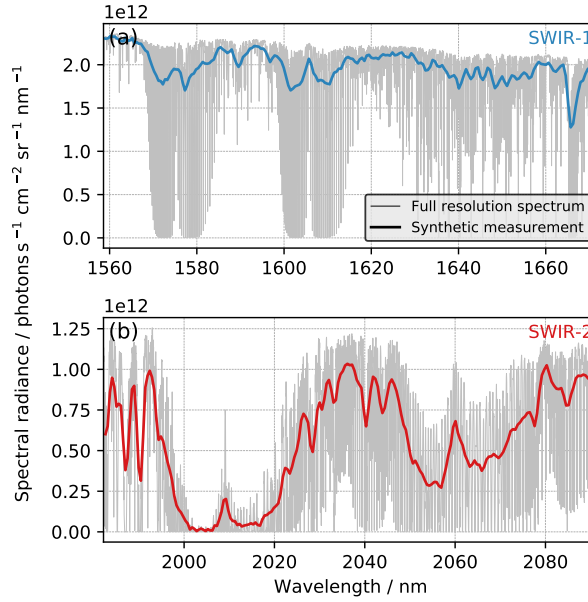


Figure 3. Simulated synthetic measurements of spectral radiances for the two spectral set-ups near 1600 nm (SWIR-1) (a) and 2000 nm (SWIR-2) (b) for our reference scene with surface albedo 0.1 and SZA = 70°. Thin grey lines show corresponding spectral radiances at approx. 0.003 nm spectral resolution.

mirrors of the TMA are standard aspheres aligned on a single optical axis. The efficiency of the optical bench (throughput), including e.g. transmittance and grating efficiency, is estimated to 0.48 and the f-number (f_{num}), equal to the ratio of focal length to aperture diameter, amounts to 2.4. The dispersed electromagnetic radiation is ~~then~~ focused onto a two-dimensional array detector that captures the spatial across-track dimension as well as the spectral dimension of the incoming radiation. A
 5 detector with a pixel ~~pitch of~~ area of 900 μm^2 and a quantum efficiency of 0.8 is assumed for this study. The quantum efficiency depends on the wavelength, but is for now assumed constant for both spectral windows. These values are in line with typical values for a state-of-the-art detector.

In order to reach a sufficient ~~signal-to-noise ratio (SNR)~~ SNR, the proposed spatial resolution only allows for a relatively coarse spectral resolution. Wilzewski et al. (2020) used spectrally degraded GOSAT soundings to demonstrate the capability of
 10 retrieving XCO₂ from a single spectral window at such a coarse spectral resolution using a spectral set-up (in terms of spectral range, resolution and oversampling ratio) compact enough to fit onto 256 detector pixels. They evaluate two alternative spectral set-ups covering the spectral ranges 1559–1672 nm (hereafter also referred to as SWIR-1) and 1982–2092 nm (hereafter also referred to as SWIR-2), each with a spectral resolution (full-width half-maximum (FWHM) of the instrument spectral response function) of 1.37 nm and 1.29 nm, respectively and an oversampling ratio of three. The resolving power of the SWIR-1 and
 15 SWIR-2 set-ups amounts to approx. 1200 and 1600, respectively. For optics design reasons, we use a spectral oversampling ratio of 2.5 in this study, resulting in a spectral sampling distance of approx. 0.55 and 0.52 nm for SWIR-1 and SWIR-2,

Table 1. Mission and instrument design parameters of the proposed space-borne CO₂ monitoring instrument concept.

Orbit	600 km, sun-synchronous
Mass / kg	90
<u>Swath / km</u>	50
Spatial resolution / m ²	50 × 50
Spectral range / nm	1559–1672 <i>or</i> 1982–2092
FWHM (2.5 pix) / nm	1.37 <i>or</i> 1.29
Resolving power / -	1200 <i>or</i> 1600
Aperture diameter / cm	15.0
f-number (f_{num}) / -	2.4
Optical efficiency (η) / -	0.48
Integration time (t_{int}) / ms	70
Detector pixel pitch -area (A_{det}) / μm^2	900
Quantum efficiency (Q_e)	0.8
/ e ⁻ photon ⁻¹	
Dark current (I_{dc})	1.6
/ fA pix ⁻¹ s ⁻¹	
Readout-noise / e ⁻	100
Quantization noise / e ⁻	40

respectively. Simulated synthetic measurements of spectral radiances for the two prospective spectral set-ups are shown in Fig. 3, assuming a Gaussian instrument response function with FWHM of 1.37 nm and 1.29 nm, respectively, as proposed by Wilzewski et al. (2020). The SWIR-1 window (Fig. 3a) exhibits two weak CO₂ absorption bands around 1568–1585 nm and 1598–1615 nm and has the advantage of a stronger top-of-atmosphere (TOA) signal due to higher solar irradiance and surface albedo at these wavelengths. It also allows for the simultaneous retrieval of CH₄ using the CH₄ absorption band near 1666 nm. The SWIR-2 window, on the other hand, exhibits two stronger CO₂ absorption bands around 1995–2035 nm and 2045–2080 nm and has higher sensitivity to atmospheric aerosol that can potentially be exploited during the XCO₂ retrieval (Wilzewski et al., 2020). Wilzewski et al. (2020) showed similar performance for SWIR-1 and SWIR-2, respectively, but suspect SWIR-2 to be the favourable spectral set-up given the stronger CO₂ absorption bands, the ability to account for particle scattering and the lower radiance SNR required to reach sufficiently small XCO₂ noise errors. In this paper, we further investigate the performance of the two spectral set-ups in order to finally conclude on the more suitable one given the preliminary instrument design and realistic instrument SNR assumed here.

The instrument is designed to have a radiance SNR of 100 at the continuum for a reference scene with a Lambertian surface albedo of 0.1 and solar zenith angle (SZA) of 70°. Given the altitude of 600 km and the corresponding orbital velocity of 7562 m s⁻¹, the instrument traverses along one 50 m ground pixel in approx. 7.2 ms. The amount of photons collected over the

course of 7.2 ms is, however, not enough to reach a SNR of 100. To increase the SNR, we suggest to increase the integration time to 70 ms. This would normally lead to elongated ground pixels (approx. $50 \times 500 \text{ m}^2$), but by using forward motion compensation (FMC), the instrument can be periodically altered in the along-track direction, such that each ground pixel is sampled for a time period longer than the actual satellite overpass time (see e.g. Sandau, 2010; Abdollahi et al., 2014). FMC has the evident drawback that the coverage along the satellite track is discontinuous, since no data are sampled when the instrument returns to the starting forward position. A second disadvantage is the geometrical distortion of the ground pixels, that increases with the maximum off-nadir angle. The baseline design assumes 1000 measurements to be made in the along-track dimension for each FMC repetition, leading to off-nadir angles up to approx. 20° . Further assuming a 1000 detector pixels in the spatial dimension would consequently result in observed tiles on the order of $50 \times 50 \text{ km}^2$.

Table 1 summarizes the preliminary mission concept and instrument design parameters assumed for this study. It should be clear that this is a preliminary baseline design used to demonstrate the CO_2 monitoring abilities and added value of the proposed instrument concept. Alternative instrument designs will be further investigated and the exact instrument design will most likely be subject to change before the instrument would be realized. The continuum SNR for our reference scene should, nevertheless, remain at roughly 100, ensuring a similar performance as presented in this paper.

3 Instrument noise model

To assess the performance of the proposed instrument concept w.r.t. retrieving XCO_2 and monitoring-resolving localized CO_2 emissions, the expected instrument noise levels that accompany the measurements have to be quantified. To this end a numerical instrument noise model that calculates the instrument's SNR is developed, following a similar approach as e.g. Bovensmann et al. (2010) and Butz et al. (2015). The SNR is given by

$$\text{SNR} = \frac{S}{\sigma_{\text{tot}}}, \quad (1)$$

where S is the signal, i.e. the number of photons emerging from a $50 \times 50 \text{ m}^2$ ground pixel that generate a charge in the detector and σ_{tot} is the corresponding instrument noise. The signal S is calculated as

$$S = L_\lambda \cdot \frac{\pi \cdot A_{\text{det}}}{4 \cdot f_{\text{num}}^2} \cdot \eta \cdot Q_e \cdot \Delta\lambda \cdot t_{\text{int}}, \quad (2)$$

where L_λ is the simulated reflected solar spectral radiance at the telescope, A_{det} the detector pixel area, f_{num} the instrument's f-number, η the efficiency of the optical bench, Q_e the detector's quantum efficiency, $\Delta\lambda$ the wavelength range covered by a single detector pixel and t_{int} the integration time between the detector pixel read-outs. Following the thin lens equation (for large distances between lens and object) and the magnification formula, the term $\frac{\pi \cdot A_{\text{det}}}{4 \cdot f_{\text{num}}^2}$ can also be expressed as $A_{\text{ap}} \cdot \Omega$, where A_{ap} is the area of the aperture ($= \pi r^2$ with $r = 7.5 \text{ cm}$) and Ω the instrument's solid angle i.e. the squared ratio of the ground sampling distance (50 m) over the orbit altitude (600 km). Apart from L_λ that is calculated for each scene using a forward radiative transfer model, all quantities in Eq. 2 and their corresponding values were introduced in Sect. 2.

The total noise σ_{tot} in Eq. 1 accounts for the noise contribution from five separate instrument noise sources

$$\sigma_{\text{tot}} = \sqrt{\sigma_{\text{ss}}^2 + \sigma_{\text{bg}}^2 + \sigma_{\text{dc}}^2 + \sigma_{\text{ro}}^2 + \sigma_{\text{qz}}^2}, \quad (3)$$

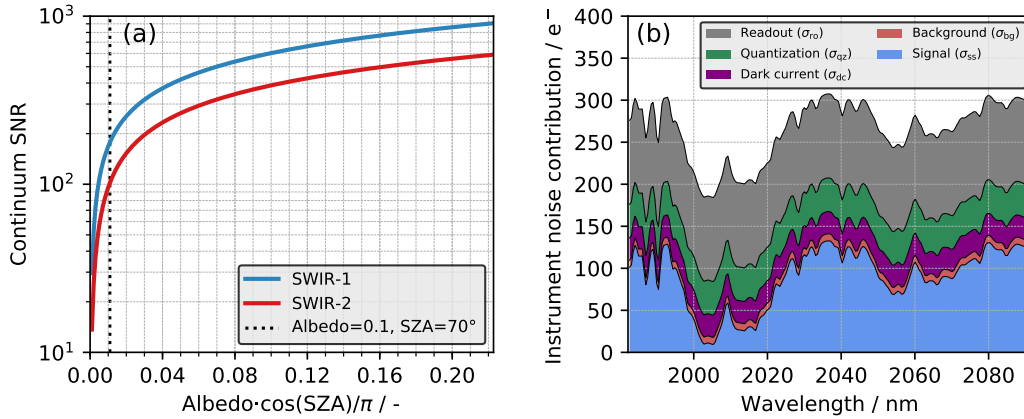


Figure 4. (a) Continuum SNR as a function of scene brightness ($\text{Albedo} \cdot \cos(\text{SZA}) / \pi$) for the SWIR-1 and SWIR-2 spectral set-ups, with the dotted line indicating the brightness of our reference scene. The highest scene brightness (approx. 0.22) represents a bright scene with albedo=0.7 and $\text{SZA} = 0^\circ$ (b) Instrument noise contributions for a simulated SWIR-2 spectrum.

where $\sigma_{ss} = \sqrt{S}$ is the signal shot noise, σ_{bg} is the noise due to thermal background radiation incident on the detector, σ_{dc} is the noise due to dark current in the detector, σ_{ro} is the noise upon detector read-out and σ_{qz} the quantization noise that arises when the analog signal is digitized. The thermal background signal per detector pixel is approximated as

$$S_{bg} = A_{det} \cdot Q_e \cdot t_{int} \cdot E_{BB}, \quad (4)$$

- 5 where E_{BB} is the thermal black-body irradiance incident on the detector. E_{BB} is determined by integrating the black-body spectral radiance $L_{\lambda, BB}(T_{bg})$ emitted by the background over the detector's cut-off wavelengths λ_1 and λ_2 and hemispheric opening angle

$$E_{BB} = \pi \int_{\lambda_1}^{\lambda_2} L_{\lambda, BB}(T_{bg}) d\lambda. \quad (5)$$

- For this study, detector cut-off wavelengths of 900 and 2500 nm are assumed and the background temperature T_{bg} is estimated to 200 K. The thermal background noise is then calculated as $\sigma_{bg} = \sqrt{S_{bg}}$. Similarly, the dark current noise is given by $\sigma_{dc} = \sqrt{S_{dc}}$, where $S_{dc} = I_{dc} \cdot t_{int} \cdot Q$ is the per-pixel detector signal due to dark current. While $Q = 6.242 \cdot 10^{18}$ electrons Coulomb⁻¹ is constant, the dark current I_{dc} strongly depends on the detector's operating temperature and is estimated to 1.6 fA pix⁻¹ s⁻¹ (assuming 150 K detector temperature), yielding a dark current signal of approx. 10000 electrons (e⁻) per detector pixel and second. Finally, the read-out noise (σ_{ro}) and quantization noise (σ_{qz}) are estimated to 100 and 40 e⁻, respectively. These noise levels are preliminary estimates used to test and evaluate the instrument concept, but are comparable to those of state-of-the-art detectors for space applications.

Figure 4a shows the continuum SNR (calculated with Eqs. (1)–(5)) as a function of the scene brightness for the two prospective spectral set-ups SWIR-1 and SWIR-2. The scene brightness describes the conversion from incident solar irradiance to

reflected solar radiance and is calculated as the product of the surface albedo and the cosine of the SZA, divided by π , hence assuming a Lambertian surface. Furthermore, Fig. 4b visualizes the individual contributions from the different noise sources for the SWIR-2 set-up. Since the instrument design is assumed to be similar, independent of whether the SWIR-1 or SWIR-2 set-up is finally used, the SNR is consistently higher for SWIR-1 compared to SWIR-2, as a result of the higher surface albedo at these wavelengths. For the reference scene (albedo = 0.1, SZA = 70°), the continuum SNR is approx. 180 and 100 for SWIR-1 and SWIR-2, respectively. When looking at the The consistently higher SNR for SWIR-1, compared to SWIR-2, is mainly the result of higher solar radiance (see Fig. 3) as well as generally higher surface albedo (see e.g. Fig. 7 in Butz et al. (2009)) in SWIR-1. Looking at the individual contributions from the different instrument noise sources in Fig. 4b, it is clear that the readout noise and signal shot noise are the major contributors, whereas the noise arising from quantization errors, dark current and thermal background radiation has a small or even negligible contribution in comparison. The signal shot noise is, however, smaller than the dark current, read-out noise and quantization noise inside the CO₂ absorption bands, where the signal, and hence the signal shot noise, decreases. Note that all noise terms, except for the signal shot noise σ_{ss} , are constant.

4 Generic performance evaluation

In this section we conduct a first performance evaluation of the proposed instrument concept by assessing the XCO₂ retrieval errors expected on a global scale. Such errors arise due to instrument noise and because of inadequate knowledge about the light path through the atmosphere due to scattering aerosol and cirrus particles. For this purpose we use a global trial ensemble with a large collection of geophysical scenarios with varying atmospheric gas concentrations, meteorological conditions, surface albedo, SZA as well as aerosol and cirrus compositions, that can be expected to be observed by a polar orbiting instrument. The same methodology and dataset have been used in several previous studies to assess the greenhouse gas retrieval performance of different satellite instruments (Butz et al., 2009, 2010, 2012, 2015).

The global trial ensemble contains geophysical data representative for the months of January, April, July and October. Atmospheric gas concentrations stem from the CarbonTracker model (CO₂ for the year 2010, Peters et al., 2007), the Tracer Model 4 (CH₄ for the year 2006, Meirink et al., 2006) and the ECHAM5-HAM model (H₂O, Stier et al., 2005). Surface albedo data, representative for the SWIR-1 and SWIR-2 windows, respectively, stem from the MODIS (Moderate Resolution Imaging Spectroradiometer) MCD43A4 product (Schaaf et al., 2002). Aerosol optical properties are calculated (assuming Mie scattering) for an aerosol size distribution, superimposed from seven log-normal size distributions and five chemical types at 19 vertical layers, as provided by the ECHAM5-HAM model (Stier et al., 2005). Cirrus optical properties are calculated for randomly orientated hexagonal columns and plates following the ray tracing model of Hess and Wiegner (1994) and Hess et al. (1998). In total the global trial ensemble consists of approx. 10 000 scenes with XCO₂ ranging from 340 to 400 ppm with an average of 382 ppm, albedo ranging from 0 to 0.7 with an average of 0.13 (SWIR-2 window), aerosol optical thickness (AOT) ranging from 0 to 1.1 with an average of 0.18 (SWIR-2 window) and cirrus optical thickness (COT) ranging from 0 to 0.8 with an average of 0.13 (SWIR-2 window). Thus, the global trial ensemble contains challenging scenes with scattering loads that would be filtered out by current satellite retrievals, such as those applied to OCO-2 and GOSAT data which typically screen

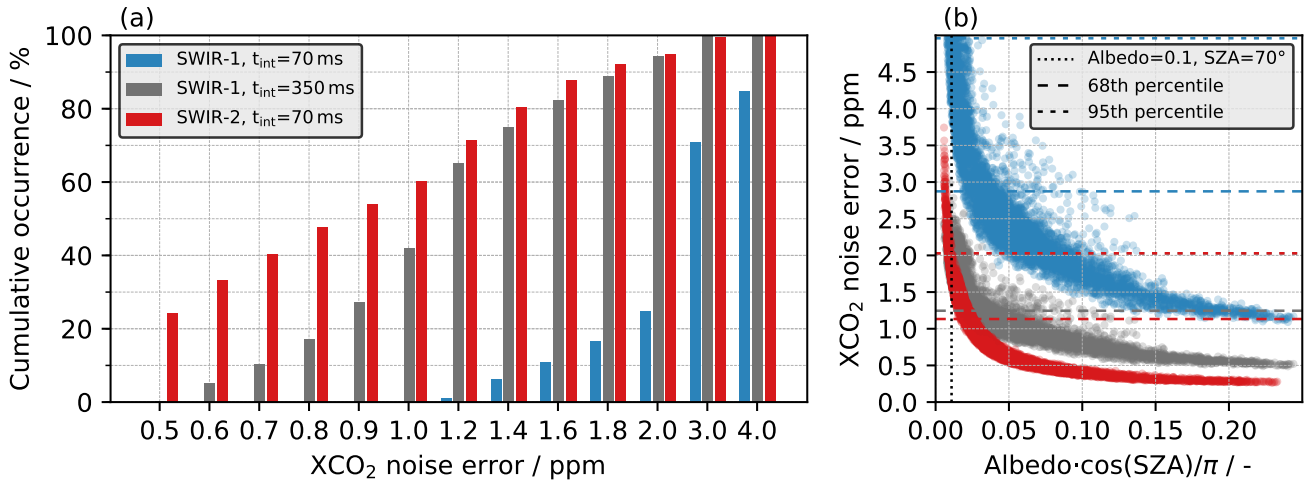


Figure 5. (a) Cumulative distribution of the estimated XCO₂ noise errors arising from instrument noise for all scenes in the global ensemble. (b) XCO₂ noise errors as a function of surface brightness, with the dotted line indicating our reference scene and the dashed lines indicating the 68th and 95th percentiles of the XCO₂ noise errors for the different spectral set-ups. Note that the blue-red and grey lines for the 95th percentile overlap at 2.03 ppm. Marker colors in (b) correspond to those in (a). Both panels show the results for the SWIR-1 (greenblue) and SWIR-2 (blue-red) set-ups as well as for an alternative SWIR-1 (grey) set-up for comparison (see text for details).

scenes with scattering optical thickness greater than 0.3 (at the O₂A band around 760 nm). All data in the global trial ensemble are re-gridded to a spatial resolution of approx. $2.8^\circ \times 2.8^\circ$. This is, of course, much coarser than the envisaged $50 \times 50 \text{ m}^2$, but for investigating the propagation of instrument noise into the target quantity XCO₂ on a global scale, this dataset serves its purpose. See previous studies (e.g. Butz et al., 2009, 2010) for further details on the content of the global trial ensemble.

- 5 The geophysical data for each scene are fed to ~~our~~-the radiative transfer software RemoTeC (Butz et al., 2011; Schepers et al., 2014) in order to simulate corresponding synthetic measurements. The measurement noise is calculated by propagating the instrument's SNR (Sect. 3) into a statistical error estimate according to the rules of Gaussian error propagation (Rodgers, 2000). Simulations are conducted globally for the 16th day of each of the four months January, April, July and October, hence covering SZA conditions ranging from 0 to 86 degrees.
- 10 By retrieving XCO₂ from the simulated synthetic spectra, the range of XCO₂ retrieval errors that can be expected with the proposed instrument concept can be estimated, as can the ability to account for atmospheric aerosol. The RemoTeC retrieval algorithm (e.g. Butz et al., 2011) is based on a Philipps–Tikhonov regularization scheme (Phillips, 1962; Tikhonov, 1963) that uses the first-order difference operator as a side-constraint to retrieve the CO₂ partial column profiles, from which XCO₂ can be determined. Additional retrieval parameters are the total column concentrations of H₂O and CH₄ (only for SWIR-1),
- 15 surface albedo (as second-order polynomial), spectral shift, solar shift and, possibly, information on scattering aerosol. Here we assume knowledge about the airmass (needed to calculate XCO₂), in reality meteorological and topography data would be required to estimate the airmass.

4.1 Instrument noise induced XCO₂ errors

In a first step, we assess XCO₂ retrieval errors that are induced by instrument noise. To this end, for now, we neglect scattering by aerosol and cirrus. These so-called non-scattering simulations assume no scattering particles to be present in the atmosphere and simply compute the transmittance along the geometric light path (Rayleigh scattering is included).

- 5 Figure 5a shows the cumulative distribution of the random XCO₂ noise error, i.e. the instrument noise propagated into XCO₂ uncertainties via Gaussian error propagation. Furthermore, Fig. 5b shows the XCO₂ noise error for each simulated scene as a function of the corresponding scene brightness. The noise errors are significantly smaller for the SWIR-2 set-up (bluered) when using the proposed integration time t_{int} of 70 ms. The red dashed lines in Fig. 5b show that on average 68 % and 95 % (1σ and 2σ respectively) of the retrievals have noise errors of less than approx. 1.1 and 2.0 ppm, respectively. For the
- 10 SWIR-1 set-up (greenblue), the corresponding numbers are 2.9 and 5.0 ppm. For the SWIR-2 set-up it is only retrievals over scenes that are darker than our reference scene (albedo = 0.1, SZA = 70°) that are expected to have instrument noise induced errors larger than approx. 2 ppm. For comparison, and as a reference, we also investigate how much the integration time has to be increased for the SWIR-1 set-up, in order to reach a SNR sufficient to yield XCO₂ noise errors comparable to those
- 15 to be increased to at least 350 ms (i.e. by a factor five) for SWIR-1 (grey) in order to reach a similar performance.

Despite the advantage of being able to retrieve XCH₄ alongside XCO₂ using the SWIR-1 set-up, the much longer integration time required to reach sufficiently low CO₂ noise errors is not feasible for the purpose of the proposed instrument concept. Hence, we conclude that the SWIR-2 set-up is superior for the passive satellite based CO₂ monitoring instrument proposed in this paper. Consequently, the remainder of this paper is limited to the SWIR-2 set-up, covering the spectral range 1982–

20 2092 nm with a spectral resolution (FWHM) of 1.29 nm, resolving power around 1600 and a spectral sampling distance of 0.52 nm.

4.2 Aerosol induced XCO₂ errors

- Atmospheric aerosol and cirrus particles modify the light path of the reflected solar radiation to a certain degree, depending on the particle abundance, optical properties, height and surface albedo. Consequently, this can cause large errors in the retrieved
- 25 XCO₂ if the effect of CO₂ absorption and particle scattering on the measured reflected solar radiation cannot be adequately separated during the retrieval process. In this section the ability to account for atmospheric aerosol and cirrus during the retrieval is investigated by including scattering by atmospheric particles in the simulation of the synthetic measurements as well as in the corresponding XCO₂ retrievals. This is done by using a more complex forward model and representation of the aerosol and cirrus particles when simulating the spectra, and a comparatively simple representation and forward model for
- 30 the corresponding retrievals. More precisely, the full physical representation of vertical profiles of hexagonal cirrus particles and spherical aerosol particles of the five chemical types characterized by the seven log-normal size distributions with known micro-physical properties for each aerosol and cirrus particle type is used when simulating the synthetic measurement for each scene in the global trial ensemble. On the contrary, only three aerosol parameters are fitted during the corresponding

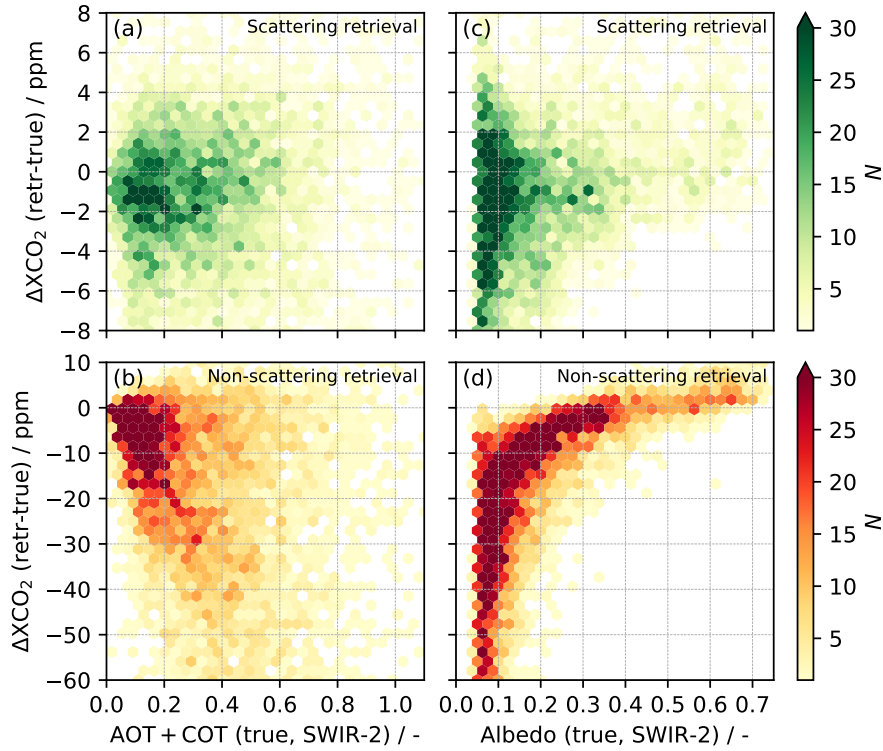


Figure 6. Left panels XCO_2 retrieval errors as a function of the total particulate optical thickness AOT + COT for scattering (a) and non-scattering (b) RemoTeC retrievals. Right panels XCO_2 retrieval errors as a function of SWIR-2 surface albedo for scattering (c) and non-scattering (d) RemoTeC retrievals. N denotes the number of retrievals. Note the different ranges of the y-axes in the upper and lower panels.

retrieval: the total column number density, the size parameter of a single mode power-law size distribution and the center height of a Gaussian height distribution. Such differences in the aerosol/cirrus representation lead to forward model errors that, alongside the instrument noise induced errors, propagate into the retrieved quantity XCO_2 . Previous studies have shown that this approach gives a good approximation of how well a satellite sensor can account for scattering by atmospheric aerosol while retrieving target gas concentrations (e.g. Butz et al., 2009, 2010).

Figure 6a shows the difference between the XCO_2 retrieved (“retr”) from the synthetic measurements and the corresponding “true” XCO_2 used as input to simulate these synthetic measurements. This deviation from the truth, contains information on both random instrument noise error (Sect. 4.1) and systematic errors arising from insufficient modelling of the aerosol and cirrus properties. For comparison, Fig. 6b shows the corresponding results achieved when using a non-scattering retrieval, i.e. where the scattering by atmospheric aerosol and cirrus, now present in the atmosphere and the simulated synthetic spectra, is neglected (similar to Sect. 4.1). The retrieval errors are strongly reduced when the RemoTeC retrieval algorithm accounts for the scattering by atmospheric aerosol. When scattering is considered, ~~%, % and 95 %~~ half of the XCO_2 retrievals deviate

from the true abundance by less than 2.5, ~~and~~ ppm, ~~respectively, with a mean bias of~~ while two thirds of the retrievals deviate by less than 4 ppm and (approx. 1 %), with no clear error-correlation with the optical thickness of the scattering particles. For the non-scattering retrieval, the corresponding numbers are ~~, and~~ 16 and 28 ppm, with a mean bias of -25 ppm that increases with optical thickness, exposing the necessity of accounting for atmospheric aerosol and cirrus when retrieving the XCO₂.

5 Scattering particles can modify the light path and hence the XCO₂ retrieval in primarily two ways. Firstly, an elevated layer of aerosol or cirrus will scatter parts of the incoming solar radiation towards the observing sensor at a higher altitude compared to the Earth's surface, leading to a reduced light path. Secondly, aerosol and cirrus will extend the light path to some degree as a result of multiple scattering between scattering particles and the surface. Such modifications of the light path will be understood as either too low (overall reduced light path) or too high (overall extended light path) CO₂ concentrations in the atmosphere if
10 scattering cannot be accounted for in the retrieval. Which effect ~~that~~ is dominating, is primarily driven by the surface albedo. This is visualized in Fig. 6d that shows the difference between retrieved and true XCO₂ as a function of the surface albedo when scattering by aerosol and cirrus is neglected in the retrieval. Over darker surfaces, where the effect of multiple-scattering between aerosol and surface is limited, aerosol and cirrus particles scattering the incoming solar radiation towards the sensor higher up in the atmosphere becomes the dominating effect, leading to a reduced light path and underestimation of the XCO₂.
15 Over brighter surfaces, where the effect of multiple scattering becomes dominant, the non-scattering retrieval is more likely to overestimate the CO₂ abundance, because the loss of radiation due to an extended light path, resulting from the multiple scattering, is assumed to be caused by more absorbing CO₂ molecules in the atmosphere. Fig. 6c shows the difference between retrieved and true XCO₂ as a function of the surface albedo when scattering by aerosol and cirrus is accounted for when retrieving XCO₂ from the synthetic measurements of the proposed satellite concept. It is clear that when aerosol properties are
20 retrieved alongside the CO₂ abundance, the curve-shaped relationship between the XCO₂ error and surface albedo vanishes with no clear error-correlation other than that XCO₂ errors increase with decreasing albedo (and thus SNR). Note that errors arising from the Lambertian albedo assumption (BRDF (Bidirectional Reflectance Distribution Function) effects) are neglected in the scattering simulations.

Although layers of aerosol and cirrus can be partly accounted for in the retrieval, scenes with thicker clouds and aerosol
25 layers will have to be identified and filtered out in the data processing chain. Such a cloud filter could exploit the different optical depths of the two CO₂ bands in the SWIR-2 window by retrieving XCO₂ from the two CO₂ bands independently (assuming a non-scattering atmosphere) and filter for discrepancies.

5 Performance evaluation for an urban case study

While the previous section assessed XCO₂ errors for the range of geophysical conditions expected to be encountered ~~over~~
30 ~~the globe on a global scale~~, this section evaluates the CO₂ monitoring capabilities at urban scale using high-resolution CO₂ concentration and surface albedo data. Similar to Sect. 4, the high-resolution data are used to simulate synthetic measurements, from which synthetic XCO₂ abundances can be retrieved in order to make a first assessment of the CO₂ monitoring ability of the proposed instrument concept in terms of resolving CO₂ emission plumes.

5.1 Datasets

5.1.1 CO₂ concentration field from the Hestia dataset

To compute a high-resolution three-dimensional field of CO₂ concentrations to be used as input for the radiative transfer simulations, annual estimates of fossil fuel CO₂ emissions for the city of Indianapolis in the year 2015 are used. These data are generated by the Hestia Project (Gurney et al., 2012, 2019) where the fossil fuel CO₂ emissions are quantified in urban areas down to the scale of individual buildings and streets using a bottom-up approach. The results for the city of Indianapolis are gridded and archived at a spatial resolution of $200 \times 200 \text{ m}^2$. For this study, [however](#), the Hestia Project [dataset](#) was gridded to $50 \times 50 \text{ m}^2$ via request to the Hestia research team in order to match the envisaged spatial resolution of the proposed instrument concept. The fossil fuel CO₂ emission rates for Indianapolis at $50 \times 50 \text{ m}^2$ resolution can be seen in Fig. 7a. CO₂ emissions from different sources and sectors like e.g. road traffic and point sources (single yellow pixels) can be seen. There is also an apparent emission gradient with stronger emissions in the city center and weaker emissions towards the suburbs. Hence, the Hestia CO₂ emission data for Indianapolis provide a realistic emission scenario for evaluating the CO₂ monitoring capabilities of the proposed instrument concept. Moreover, the area of the Hestia domain (approx. $34 \times 33 \text{ km}^2$) is comparable to what the prospective tile size of each observation target area could be.

The Hestia CO₂ emission data are used as input to a Gaussian dispersion model in order to compute a three-dimensional CO₂ concentration field. For a given CO₂ emission rate Q (in g s^{-1}), the CO₂ concentration C (in g m^{-3}) at a given position (x, y, z) downwind of the emitter is calculated as

$$C(x, y, z) = \frac{Q}{2\pi u \sigma_y \sigma_z} \exp\left(\frac{-y^2}{2\sigma_y^2}\right) \left[\exp\left(\frac{-(z-h)^2}{2\sigma_z^2}\right) + \exp\left(\frac{-(z+h)^2}{2\sigma_z^2}\right) \right] \quad (6)$$

where u is the horizontal wind speed in the x -direction (along-wind), h is the height of the emitting source (in m above ground level) and σ_y and σ_z are the standard deviations of the concentration distribution (in m) in the horizontal across-wind and vertical dimension, respectively. σ_y and σ_z , and hence the spread of the emission plume, depend on the atmospheric instability i.e. the degree of atmospheric turbulence as well as the downwind distance x from the emitting source. Here, we calculate σ_y and σ_z assuming the Pasquill-Gifford stability class C (slightly unstable atmosphere). Furthermore, a constant wind speed $u = 3 \text{ m s}^{-2}$ and an emitting source height $h = 75 \text{ m}$ (for all sources) are assumed. This model set-up is comparable to similar studies (e.g. Bovensmann et al., 2010; Dennison et al., 2013).

Downwind CO₂ concentrations from each emitting source (pixel) in the Hestia dataset are calculated across an equidistant grid at 50 m resolution in all dimensions and the contributions from all individual emitting sources (pixels) are subsequently combined to form a three-dimensional CO₂ concentration field over Indianapolis. Figure 7b shows the resulting (vertically integrated) two-dimensional field of (noise-less) XCO₂ enhancements at $50 \times 50 \text{ m}^2$ spatial resolution over a constant background with a surface pressure of 1013 hPa. While weaker diffuse sources like streets cannot be identified, the plumes from stronger point sources are clearly pronounced given the high spatial resolution that allows for a detailed mapping of the plumes.

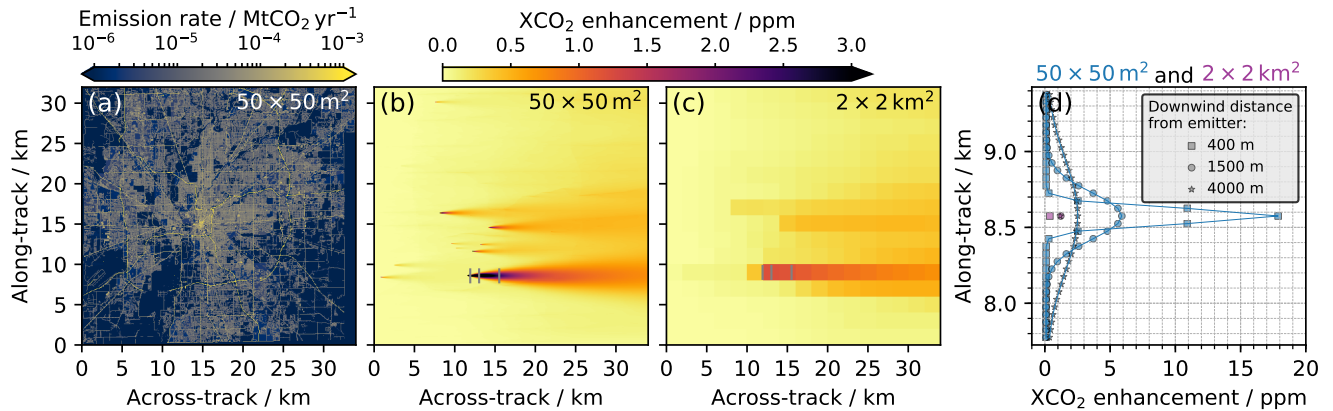


Figure 7. (a) Hestia fossil fuel CO₂ emission data for Indianapolis in 2015 at $50 \times 50 \text{ m}^2$ spatial resolution. (b) Corresponding field of vertically integrated XCO₂ enhancements at $50 \times 50 \text{ m}^2$ spatial resolution w.r.t. a constant background, computed using the Hestia CO₂ emission data and a Gaussian dispersion model. (c) same as (b), but at $2 \times 2 \text{ km}^2$ spatial resolution. (d) Per-pixel XCO₂ enhancements for three along-track excerpts centred at 400, 1500 and 4000 m downwind of the emitter at $50 \times 50 \text{ m}^2$ and $2 \times 2 \text{ km}^2$ spatial resolution. The respective position of the along-track excerpts are indicated by the small grey lines in (b) and (c). The x- and y-dimensions of the Hestia Indianapolis domain are illustrated as hypothetical satellite across-track and along-track dimensions, respectively.

For comparison, Fig. 7c shows the corresponding XCO₂ enhancements assuming a coarser spatial resolution of $2 \times 2 \text{ km}^2$. Although the stronger plumes can still be identified at the coarser resolution, the XCO₂ enhancements are significantly lower and each plume is only sampled by a few pixels. Figure 7d further shows these XCO₂ enhancements in more detail for three along-track excerpts centred at 400, 1500 and 4000 m downwind of the strongest emitter in Indianapolis, with an annual emission rate of $3.24 \text{ MtCO}_2 \text{ yr}^{-1}$ in 2015. The position of the three along-track excerpts are indicated with grey lines in Figs. 7b and 7c. With a spatial resolution of $2 \times 2 \text{ km}^2$, the along-track plume excerpts are only sampled by one pixel each, with a maximum XCO₂ enhancement of 1.2 ppm. With the envisaged $50 \times 50 \text{ m}^2$ spatial resolution, however, the plume is sampled by 7, 15 and 29 pixels in the along-track dimension 400, 1500 and 4000 m downwind of the emitter, respectively, with maximum XCO₂ enhancements reaching approx. 18, 6 and 3 ppm, respectively. This clearly demonstrates the benefit of an instrument with a high spatial resolution when resolving CO₂ emission plumes from space.

5.1.2 Surface albedo data from Sentinel-2

To accurately simulate the instrument SNR and hence the measurement noise, it is important to know how large a fraction of the solar radiation incident on the Earth's surface is reflected back towards space. To get realistic estimates of the surface albedo within the Hestia Indianapolis domain, data from the European Sentinel-2 [satellite](#) are used. The multi-spectral instrument aboard Sentinel-2 measures the TOA radiance in 13 spectral bands with a spatial resolution ranging from $10 \times 10 \text{ m}^2$ to $60 \times 60 \text{ m}^2$. For this study, we use the Sentinel-2 L1C radiances measured in the spectral band 12 (centred at approx. 2200 nm)

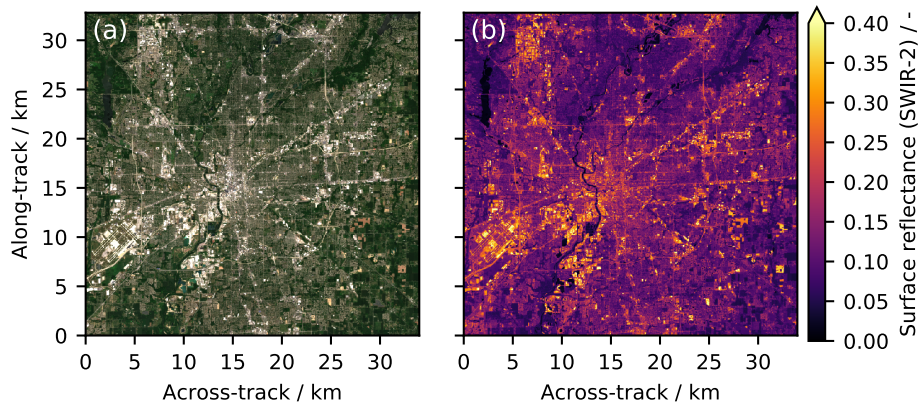


Figure 8. (a) Sentinel-2 true color RGB image of Indianapolis (Hestia domain) at $50 \times 50 \text{ m}^2$ spatial resolution derived from Sentinel-2 measurements in July 2018. (b) Corresponding surface reflectance data using data from Sentinel-2's spectral band 12 centred at approx. 2200 nm, scaled to the SWIR-2 spectral window. Again, the x- and y-dimensions of the Hestia Indianapolis domain are illustrated as hypothetical satellite across-track and along-track dimensions, respectively.

at a spatial resolution of $20 \times 20 \text{ m}^2$. The software *Sen2Cor* (ESA, 2018) is employed to compute corresponding L2 surface reflectances from the L1C TOA radiances, through a so-called atmospheric correction.

Surface reflectance data for the month of July 2018 are computed and re-gridded (using nearest neighbour) to the envisaged spatial resolution of $50 \times 50 \text{ m}^2$. The surface reflectance for Sentinel-2 pixels classified as vegetation are scaled by a factor 0.82 in order to account for the generally lower reflectance by vegetation in the SWIR-2 window compared to Sentinel-2's band 12. The scaling factor has been derived using spectral reflectance data from the ECOSTRESS spectral library (Baldrige et al., 2009; Meerdink et al.). Figure 8b shows the gridded surface reflectance data for Indianapolis together with a corresponding RGB composite (Fig. 8a), using the Sentinel-2 data from the bands centred at red, green and blue wavelengths, as reference. The scaled and gridded Sentinel-2 surface reflectance data are taken as representative for the Lambertian surface albedo within the SWIR-2 window.

The average surface reflectance within the Hestia domain is 0.13. Despite annual variability in surface reflectance, mainly due to changes in vegetation/crops, this is a value representative throughout most of the year. For comparison, average surface reflectances from the same source for January (snow-free days), April and October 2018, amount to 0.11, 0.17 and 0.11, respectively.

5.1.3 Background data from CarbonTracker

Background data, including vertical profiles of CO_2 , H_2O , temperature and pressure, are taken for the 15th of July 2016 from the CarbonTracker CT2017 dataset (Peters et al., 2007, with updates documented at <http://carbontracker.noaa.gov>). The

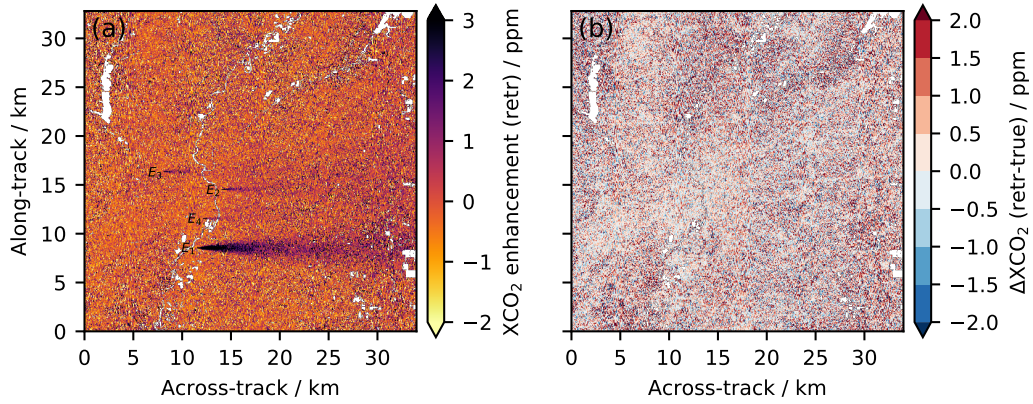


Figure 9. (a) XCO₂ enhancements w.r.t. the ~~constant CarbonTracker CT2017~~ background retrieved from the simulated synthetic measurements over the Hestia Indianapolis domain under non-scattering conditions. Locations of the four strongest point sources are labelled with E_{1-4} . (b) Corresponding deviations ~~from the between retrieved ("retr") and true XCO₂ enhancements (Fig. 7b)~~. Dark scenes with albedo < 0.05 have been filtered out due to unreliable XCO₂ retrievals.

CarbonTracker CT2017 data over Indianapolis are provided at a spatial resolution of $1^\circ \times 1^\circ$, meaning that the entire Hestia Indianapolis domain is covered by one single CarbonTracker pixel leading to a constant background data field.

5.2 Simulated CO₂ plume observations

As in Sect. 4, the above sets of input data are used to simulate synthetic measurements (spectral radiances) and corresponding instrument noise of the proposed instrument concept using the forward model and the instrument noise model (Sect. 3). The SZA is calculated for the given coordinates in the Hestia domain assuming the sun-synchronous orbit described in Sect. 2 and an observation date of July 15, 2018, which translate to a SZA of about 18° . Corresponding XCO₂ abundances are then retrieved from the simulated spectral radiances, such that the ability to observe the CO₂ emission plumes from the Hestia Indianapolis data can be evaluated. In this first assessment we focus solely on the instrument performance in terms of its CO₂ plume quantification capabilities and hence we perform the high-resolution simulations with the expected instrument noise induced errors only, i.e. by assuming a non-scattering atmosphere.

Figure 9a shows the retrieved field of XCO₂ enhancements w.r.t. the retrieved background XCO₂ over the Hestia domain. The CO₂ plume from the strongest point source, E_1 , with an annual CO₂ emission rate of $Q_1 = 3.24 \text{ MtCO}_2 \text{ yr}^{-1}$, is clearly resolved with local XCO₂ enhancements well above 100 ppm close to the emitting source. Although they emit considerably less CO₂, the plumes from the second and third strongest point sources, E_2 and E_3 , with annual CO₂ emission rates of $Q_2 = 0.55 \text{ MtCO}_2 \text{ yr}^{-1}$ and $Q_3 = 0.48 \text{ MtCO}_2 \text{ yr}^{-1}$, respectively, can be clearly separated from the background as well. The plume from the fourth strongest point source, E_4 , with an annual CO₂ emission rate of $Q_4 = 0.32 \text{ MtCO}_2 \text{ yr}^{-1}$ can also be observed, but is partly obscured by filtered out dark surface areas, where retrieval errors are too high. Plumes from weaker point

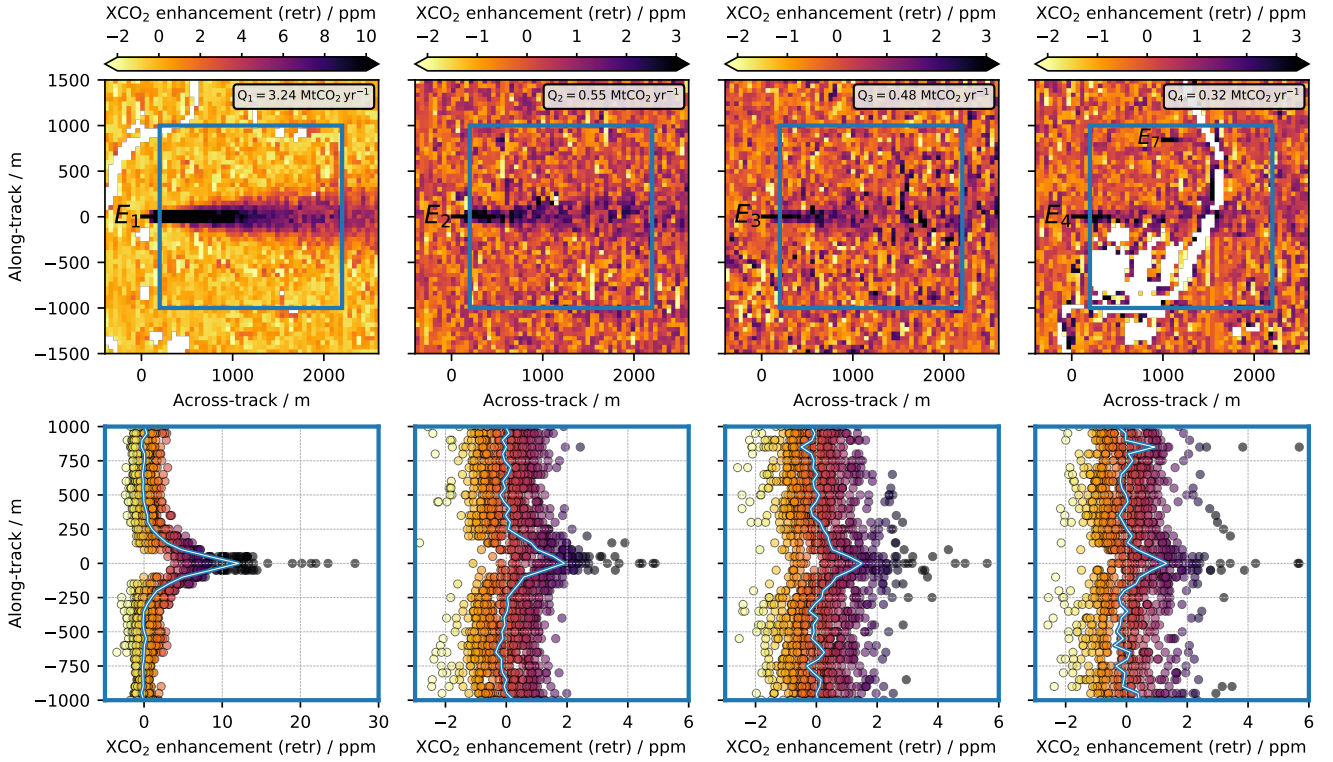


Figure 10. **Upper panels** Retrieved two-dimensional fields of XCO₂ enhancements in the vicinity of the four strongest CO₂ emitters E_1 , E_2 , E_3 and E_4 within the Hestia Indianapolis dataset. **Lower panels** Corresponding per-pixel (circles) and average (solid lines) along-track XCO₂ enhancements within the area 200 to 2200 m downwind and -1000 to 1000 across-wind of the respective emitters. The blue rectangles in the upper panels show the areas from which the corresponding per-pixel and average along-track XCO₂ enhancements, depicted in the respective lower panels, are extracted and calculated. The color of the circles follow the color bars in the respective upper panels.

sources ($\lesssim 0.1 \text{ MtCO}_2 \text{ yr}^{-1}$) and other sources like e.g. streets and highways cannot be identified given the spatial resolution and instrument noise errors of the proposed instrument.

One concern with high-resolution CO₂ remote sensing is the impact of the albedo heterogeneity at urban scale at such a high spatial resolution. For the non-scattering scenario simulated here, the ~~second-order polynomial~~ albedo fitted by the retrieval algorithm matches the reference input albedo with an average (absolute) deviation of 0.14 %, and there is consequently no spatial variability in the accuracy of the albedo retrieval that in turn affect the XCO₂ retrieval accuracy. There is, however, the evident effect that a higher albedo leads to a higher SNR and hence a generally lower noise error. This is evident from Fig. 9b showing the difference between the retrieved and true XCO₂, thus illustrating an instantaneous noise error field that would be expected for a single satellite overpass. Generally, the deviations from the true XCO₂ are smaller over areas of brighter surfaces like concrete, whereas the deviations are larger over dark surfaces like forests (see also Fig. 8). The effect of albedo

heterogeneity in combination with scattering particles is not addressed in this paper and will have to be analysed in future studies.

Across the entire Hestia domain (but excluding dark scenes with albedo < 0.05) 68 % and 95 % of the XCO_2 retrievals deviate from the true XCO_2 by less than 1.1 and 2.3 ppm, respectively. This is ~~slightly lower than~~ comparable to the noise error obtained for the global trial ensemble in Sect. 4.1 (1.1 and 2.0 ppm, respectively), ~~mostly as a result of lower SZA.~~

Figure 10 shows close-ups of the simulated XCO_2 enhancement field (upper panels) in the vicinity of the four strongest emitters in the Hestia Indianapolis dataset ($E_1 - E_4$ in Fig. 9a), along with the corresponding per-pixel and average along-track XCO_2 enhancements (lower panels) for the range 200–2200 m downwind of the respective emitting sources. Enhancements from the 200 m closest to each emitting source are excluded as those scenes could likely be obscured by condensate in a real situation.

The plume of the strongest emitter E_1 in Indianapolis with an annual emission rate of $Q_1 = 3.24 \text{ MtCO}_2 \text{ yr}^{-1}$ (Fig. 10, left panels) is clearly resolved. Within the area 200–2200 m downwind of the emitting source (blue square), maximum enhancements exceed 25 ppm, and in total, approx. 200 (60) pixels have enhancements above 4 (8) ppm, representing enhancements of approx. 1 (2) % w.r.t. the background. The average along-track XCO_2 enhancement 200–2200 m downwind of the emitting source (blue/white line) reaches 12 ppm. The plumes from the second and third strongest emitters E_2 and E_3 , approx. six times weaker than E_1 , with annual emission rates of $Q_2 = 0.55$ and $Q_3 = 0.48 \text{ MtCO}_2 \text{ yr}^{-1}$, respectively (Fig. 10, center panels) ~~has~~ have considerably lower XCO_2 enhancements, but can nevertheless be clearly separated from the background with distinct increments in both per-pixel and average XCO_2 enhancements within the area 200–2200 m downwind of the emitters (blue squares). While the background fields varies from approx. -1 to 1 ppm due to instrument noise, the per-pixel plume enhancements vary from approx. 0.5 to 3 ppm, with single enhancements exceeding 4 ppm close to the emitting source. The average along-track XCO_2 enhancements 200–2200 m downwind of the emitting sources (blue/white lines) reach 1.9 and 1.5 ppm for E_2 and E_3 , respectively. Despite being partly obscured by filtered out dark surfaces (water), also the plume from the fourth strongest emitter E_4 , with an annual emission rate of $Q_4 = 0.32 \text{ MtCO}_2 \text{ yr}^{-1}$ (Fig. 10, right panels) can be separated from the background, both when looking at the two-dimensional field and the per-pixel enhancements within the area 200–2200 m downwind of the emitter. With maximum average XCO_2 enhancements of at most approx. 1.3 ppm, the proposed instrument concept is, however, approaching the limit of what it could achieve in terms of CO_2 plume observation under favourable conditions, i.e. where the effect of aerosol induced errors are neglected and the SZA is relatively low. A second peak in the average along-track XCO_2 enhancements is observed approx. 850 m above (north of) the fourth strongest emitter E_4 . This enhancement stems from the CO_2 plume from the seventh strongest emitter in Indianapolis (labelled as E_7 in the top-right panel of Fig. 10) with an annual emission rate of $Q_7 = 0.1 \text{ MtCO}_2 \text{ yr}^{-1}$. Quantifying the CO_2 emission rate from such a weak source is, however, not realistic given the low sampling density (especially further downwind) in combination with the weak per-pixel enhancements.

6 Conclusions

To follow the progress on reducing anthropogenic CO₂ emissions worldwide, independent monitoring systems are of key importance. In this paper, we ~~show how a proposed concept of an imaging spectrometer, to be employed on a space-borne platform, can be used to map~~ present the concept of a compact space-borne imaging spectrometer with a high spatial resolution of $50 \times 50 \text{ m}^2$, targeting the monitoring of localized CO₂ emissions. We further demonstrate how the instrument concept could resolve CO₂ emission plumes from localized point sources ~~at a spatial resolution of m^2 for target tiles on the order to $50 \times 50 \text{ km}^2$ and, hence, like medium-sized power plants, thus having the potential to~~ contribute to the independent large-scale verification of reported CO₂ ~~emission rates~~ emissions at facility level.

Through radiative transfer simulations using a global trial ensemble, a preliminary, yet realistic, instrument design and an instrument noise model, we show that the expected instrument noise induced XCO₂ errors are smaller than 1.1 and 2.0 ppm for 68 % and 95 % of the retrievals, respectively, using the SWIR-2 spectral set-up covering the CO₂ absorption bands near 2000 nm. For the SWIR-1 spectral set-up, covering the weaker CO₂ absorption bands near 1600 nm, the instrument noise induced XCO₂ errors are significantly higher, making it inadequate for the proposed instrument concept. Although the main focus in this paper is on the performance of the proposed CO₂ monitoring instrument concept, we could also show that despite the usage of a single spectral window and a relatively coarse spectral resolution of 1.29 nm, scattering by highly complex atmospheric aerosol compositions can be partly accounted for during the XCO₂ retrieval on the global scale, limiting the deviation from the true XCO₂ to at most 4.0 ppm for ~~% two thirds~~ of the retrievals. This gives us confidence that accurate two-dimensional fields of XCO₂ enhancements could be retrieved from real spectra measured by the proposed instrument concept. A reasonable a-priori state vector w.r.t. the aerosol properties (e.g. provided through models or a companion aerosol instrument (Hasekamp et al., 2019)) would, however, still be important. As an example, a multi-angle polarimeter instrument is planned to fly together with the CO₂ instrument onboard the CO2M mission in order to minimize the systematic XCO₂ errors (ESA, 2019).

Using high-resolution CO₂ emission data for the city of Indianapolis together with a Gaussian dispersion model, corresponding high-resolution albedo data and additional radiative transfer simulations, we have clearly demonstrated that the instrument is well suited for the task of space-borne CO₂ monitoring of large and medium-sized power plants and can (only limited by its own instrument noise) resolve ~~and quantify~~ emission plumes from point sources with an emission source strength down to the order of $0.3 \text{ MtCO}_2 \text{ yr}^{-1}$. This is well below the target emission source strength of $1 \text{ MtCO}_2 \text{ yr}^{-1}$, hence leaving ~~some significant~~ margin for additional error sources ~~(and aspects not yet addressed here) and lower instrument SNR.~~

Given the results from this first performance assessment, the proposed instrument concept demonstrates a clear potential for the independent quantification of CO₂ emissions from medium-sized power plants ($1\text{--}10 \text{ MtCO}_2 \text{ yr}^{-1}$), which are currently not targeted by other planned space-borne CO₂ monitoring missions. On the local scale (Indianapolis), we have constrained the present analysis to one day in July using a rather simplistic Gaussian dispersion model that assumes constant atmospheric stability and (unidirectional) horizontal wind speed. It might be that the ability to resolve the CO₂ emission plumes becomes

more, perhaps even too, challenging under certain more realistic conditions. Nevertheless, these first results are certainly promising and encourage further studies.

The high spatial resolution ~~implies needed to resolve the emission plumes from localized sources like medium-sized power plant does, however, imply~~ limitations in terms of spatial coverage, arising from the narrow swath (50 km assuming 1000 detector pixels in the spatial dimension) and the forward motion compensation. Hence, a single ~~instrument of the proposed satellite with the proposed instrument~~ concept could not ~~map-quantify~~ CO₂ ~~concentrations-emissions~~ at local to regional scale with dense global coverage ~~and high temporal resolution~~, but would have to be restricted to some pre-defined targets; ~~where independent estimates of emissions are of highest interest~~. The relatively compact design with a single spectral window ~~could~~, however, ~~allows-allow~~ for the deployment of a fleet of instruments and hence independent monitoring of localized CO₂ emissions on a larger scale. ~~For real measurements, the proposed instrument concept would rely on meteorological and topography data to compute the air mass and thus X, indicating the demand for a high instrument pointing accuracy in order to avoid erroneous X estimates (Kiel et al., 2019). The proposed instrument with high temporal resolution. As an alternative to a fleet of satellites, the proposed instrument concept~~ could also prove useful in synergy with a space-borne CO₂ lidar (e.g. Kiemle et al., 2017), where the passive spectrometer would benefit from the lidar's accuracy and knowledge on the light path and the lidar would benefit from the spectrometer's imaging capability.

~~For this first performance assessment of the proposed instrument concept, the analysis on the local scale (Indianapolis) was constrained to one day in July using a rather simplistic Gaussian dispersion model that assumes constant atmospheric stability and (unidirectional) horizontal wind speed. As a next step, the~~

~~With the successful demonstration in this paper, i.e. that~~ CO₂ ~~monitoring capabilities on the local scale of the instrument concept will be evaluated further~~ emission plumes from medium-sized power plants can be resolved from space with a compact, yet realistic, instrument design, the next step will be to analyse the ability to quantify the corresponding CO₂ emission rates from the two-dimensional fields of synthetically retrieved XCO₂ enhancements. This follow-up study will be conducted for different seasons (with varying surface albedo and solar zenith angles), ~~atmospheric states-meteorological conditions~~ and emission source strengths using large eddy, rather than Gaussian, modelling of the CO₂ ~~plumes, also including the inverse flux estimates from the two-dimensional fields of synthetically retrieved X~~plume dispersion. Although the effect of aerosols has partly been assessed on the global scale in this study, ~~it is of key importance to also include~~ information on the properties and distribution of aerosols ~~should be included also~~ in the local scale simulations in order to better understand the instrument's ability to resolve and quantify localized CO₂ emissions under ~~more~~ realistic conditions. Such an in-depth aerosol analysis is, however, the task of further future studies ~~looking into realistic emission scenarios w.r.t. aerosol abundances in and around the plumes, also in combination with high-resolution surface albedo.~~

Data availability. Hestia Project data at 50 × 50 m² spatial resolution are available from KG upon request (Hestia project data at original 200 × 200 m² spatial resolution are available at <https://doi.org/10.18434/T4/1503341>). Sentinel-2 data are available at <https://scihub.copernicus.eu/dhus/#/home>. ECOSTRESS Spectral Library data are available at <https://speclib.jpl.nasa.gov>.

CarbonTracker CT2017 data are available at <http://carbontracker.noaa.gov>.

Author contributions. JS developed the instrument noise model, performed the simulations and wrote most of the manuscript. DK lead the instrument design work. JW performed the spectral sizing. CP assisted in developing the instrument noise model and performed the FMC analysis. IS did the optical design. KG and JL developed and provided the Hestia Project CO₂ emission data. JS, DK, JW, CP, IS, AR and AB defined the mission concept and instrument design. AR and AB lead the study.

5

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. We kindly acknowledge all persons and institutions that made their data available to us for this study. CARMA v3.0 CO₂ emission data for power plants worldwide were provided by Kevin Ummel. Sentinel-2 data used to derive high-resolution surface reflectance data were provided by ESA through the Copernicus Open Access Hub. Spectral reflectance data used to scale the Sentinel-2 surface reflectance data were reproduced from the ECOSTRESS Spectral Library through the courtesy of the Jet Propulsion Laboratory, California Institute of Technology, Pasadena, California, USA. CarbonTracker CT2017 data were provided by NOAA ESRL, Boulder, Colorado, USA. We also thank Peter Haschberger, Claas Köhler, Günter Lichtenberg, Andreas Baumgartner, Christoph Kiemle, Luca Bugliaro, Julian Kostinek and Andreas Luther for valuable input on the mission concept and instrument design and/or helpful comments on a previous version of this manuscript.

10

15 *Financial support.* The study was financially supported by the DLR (Deutsches Zentrum für Luft- und Raumfahrt) project CO2MON.

References

- Abdollahi, A., Dastranj, M., and Riahi, A.: Satellite Attitude Tracking for Earth Pushbroom Imaginary with Forward Motion Compensation, *International Journal of Control and Automation*, 7, 437–446, doi:10.14257/ijca.2014.7.1.39, 2014.
- Baldrige, A., Hook, S., Grove, C., and Rivera, G.: The ASTER spectral library version 2.0, *Rem. Sens. Envir.*, 113, 711–715, doi:10.1016/j.rse.2008.11.007, 2009.
- Bovensmann, H., Buchwitz, M., Burrows, J. P., Reuter, M., Krings, T., Gerilowski, K., Schneising, O., Heymann, J., Tretner, A., and Erzinger, J.: A remote sensing technique for global monitoring of power plant CO₂ emissions from space and related applications, *Atmos. Meas. Tech.*, 3, 781–811, doi:10.5194/amt-3-781-2010, 2010.
- Buchwitz, M., Reuter, M., Bovensmann, H., Pillai, D., Heymann, J., Schneising, O., Rozanov, V., Krings, T., Burrows, J. P., Boesch, H., Gerbig, C., Meijer, Y., and Löscher, A.: Carbon Monitoring Satellite (CarbonSat): assessment of atmospheric CO₂ and CH₄ retrieval errors by error parameterization, *Atmos. Meas. Tech.*, 6, 3477–3500, doi:10.5194/amt-6-3477-2013, 2013.
- Buil, C., Pascal, V., Loesel, J., Pierangelo, C., Roucayrol, L., and Tauziède, L.: A new space instrumental concept for the measurement of CO₂ concentration in the atmosphere, in: *SPIE 8176, Sensors, Systems, and Next-Generation Satellites XV*, vol. 8176, doi:10.1117/12.897598, 2011.
- Butz, A., Hasekamp, O. P., Frankenberg, C., and Aben, I.: Retrievals of atmospheric CO₂ from simulated space-borne measurements of backscattered near-infrared sunlight: accounting for aerosol effects, *Appl. Opt.*, 48, 3322–3336, doi:10.1364/AO.48.003322, 2009.
- Butz, A., Hasekamp, O., Frankenberg, C., Vidot, J., and Aben, I.: CH₄ retrievals from space-based solar backscatter measurements: Performance evaluation against simulated aerosol and cirrus loaded scenes, *J. Geophys. Res. Atmos.*, 115, doi:10.1029/2010JD014514, 2010.
- Butz, A., Guerlet, S., Hasekamp, O., Schepers, D., Galli, A., Aben, I., Frankenberg, C., Hartmann, J.-M., Tran, H., Kuze, A., Keppel-Aleks, G., Toon, G., Wunch, D., Wennberg, P., Deutscher, N., Griffith, D., Macatangay, R., Messerschmidt, J., Notholt, J., and Warneke, T.: Toward accurate CO₂ and CH₄ observations from GOSAT, *Geophys. Res. Lett.*, 38, doi:10.1029/2011GL047888, 2011.
- Butz, A., Galli, A., Hasekamp, O., Landgraf, J., Tol, P., and Aben, I.: TROPOMI aboard Sentinel-5 Precursor: Prospective performance of CH₄ retrievals for aerosol and cirrus loaded atmospheres, *Rem. Sens. Envir.*, 120, 267–276, doi:10.1016/j.rse.2011.05.030, 2012.
- Butz, A., Orphal, J., Checa-Garcia, R., Friedl-Vallon, F., von Clarmann, T., Bovensmann, H., Hasekamp, O., Landgraf, J., Knigge, T., Weise, D., Squali-Houssini, O., and Kemper, D.: Geostationary Emission Explorer for Europe (G3E): mission concept and initial performance assessment, *Atmos. Meas. Tech.*, 8, 4719–4734, doi:10.5194/amt-8-4719-2015, 2015.
- Chatterjee, A., Gierach, M. M., Sutton, A. J., Feely, R. A., Crisp, D., Eldering, A., Gunson, M. R., O'Dell, C. W., Stephens, B. B., and Schimel, D. S.: Influence of El Niño on atmospheric CO₂ over the tropical Pacific Ocean: Findings from NASA's OCO-2 mission, *Science*, 358, doi:10.1126/science.aam5776, 2017.
- Crisp, D., Atlas, R., Breon, F.-M., Brown, L., Burrows, J., Ciais, P., Connor, B., Doney, S., Fung, I., Jacob, D., Miller, C., O'Brien, D., Pawson, S., Randerson, J., Rayner, P., Salawitch, R., Sander, S., Sen, B., Stephens, G., Tans, P., Toon, G., Wennberg, P., Wofsy, S., Yung, Y., Kuang, Z., Chudasama, B., Sprague, G., Weiss, B., Pollock, R., Kenyon, D., and Schroll, S.: The Orbiting Carbon Observatory (OCO) mission, *Adv. Space Res.*, 34, 700–709, doi:10.1016/j.asr.2003.08.062, 2004.
- Crisp, D., Pollock, H. R., Rosenberg, R., Chapsky, L., Lee, R. A. M., Oyafuso, F. A., Frankenberg, C., O'Dell, C. W., Bruegge, C. J., Doran, G. B., Eldering, A., Fisher, B. M., Fu, D., Gunson, M. R., Mandrake, L., Osterman, G. B., Schwandner, F. M., Sun, K., Taylor, T. E., Wennberg, P. O., and Wunch, D.: The on-orbit performance of the Orbiting Carbon Observatory-2 (OCO-2) instrument and its radiometrically calibrated products, *Atmos. Meas. Tech.*, 10, 59–81, doi:10.5194/amt-10-59-2017, 2017.

- Dennison, P. E., Thorpe, A. K., Pardyjak, E. R., Roberts, D. A., Qi, Y., Green, R. O., Bradley, E. S., and Funk, C. C.: High spatial resolution mapping of elevated atmospheric carbon dioxide using airborne imaging spectroscopy: Radiative transfer modeling and power plant plume detection, *Rem. Sens. Envir.*, 139, 116–129, doi:10.1016/j.rse.2013.08.001, 2013.
- Eldering, A., Wennberg, P. O., Crisp, D., Schimel, D. S., Gunson, M. R., Chatterjee, A., Liu, J., Schwandner, F. M., Sun, Y., O'Dell, C. W.,
5 Frankenberg, C., Taylor, T., Fisher, B., Osterman, G. B., Wunch, D., Hakkarainen, J., Tamminen, J., and Weir, B.: The Orbiting Carbon Observatory-2 early science investigations of regional carbon dioxide fluxes, *Science*, 358, doi:10.1126/science.aam5745, 2017.
- Eldering, A., Taylor, T. E., O'Dell, C. W., and Pavlick, R.: The OCO-3 mission: measurement objectives and expected performance based on 1 year of simulated data, *Atmos. Meas. Tech.*, 12, 2341–2370, doi:10.5194/amt-12-2341-2019, 2019.
- ESA: Sen2Cor Configuration and User Manual, http://step.esa.int/thirdparties/sen2cor/2.5.5/docs/S2-PDGS-MPC-L2A-SUM-V2.5.5_V2.pdf, S2-PDGS-MPC-L2A-SUM-V2.5.5, 2018.
- 10 ESA: Copernicus CO₂ Monitoring Mission Requirements Document, https://esamultimedia.esa.int/docs/EarthObservation/CO2M_MRD_v2.0_Issued20190927.pdf, EOP-SM/3088/YM-ym, 2019.
- Guerlet, S., Basu, S., Butz, A., Krol, M., Hahne, P., Houweling, S., Hasekamp, O. P., and Aben, I.: Reduced carbon uptake during the 2010 Northern Hemisphere summer from GOSAT, *Geophys. Res. Lett.*, 40, 2378–2383, doi:10.1002/grl.50402, 2013.
- 15 Gurney, K. R., Razlivanov, I., Song, Y., Zhou, Y., Benes, B., and Abdul-Massih, M.: Quantification of Fossil Fuel CO₂ Emissions on the Building/Street Scale for a Large U.S. City, *Environ. Sci. Technol.*, 46, 12 194–12 202, doi:10.1021/es3011282, 2012.
- Gurney, K. R., Liang, J., O'Keeffe, D., Patarasuk, R., Hutchins, M., Huang, J., Rao, P., and Song, Y.: Comparison of Global Downscaled Versus Bottom-Up Fossil Fuel CO₂ Emissions at the Urban Scale in Four U.S. Urban Areas, *J. Geophys. Res. Atmos.*, 124, 2823–2840, doi:10.1029/2018JD028859, 2019.
- 20 Hakkarainen, J., Ialongo, I., and Tamminen, J.: Direct space-based observations of anthropogenic CO₂ emission areas from OCO-2, *Geophys. Res. Lett.*, 43, 11,400–11,406, doi:10.1002/2016GL070885, 2016.
- Hasekamp, O. P., Fu, G., Rusli, S. P., Wu, L., Di Noia, A., aan de Brugh, J., Landgraf, J., Smit, J. M., Rietjens, J., and van Amerongen, A.: Aerosol measurements by SPEXone on the NASA PACE mission: expected retrieval capabilities, *J. Quant. Spectrosc. Radiat. Transfer*, 227, 170–184, doi:10.1016/j.jqsrt.2019.02.006, 2019.
- 25 Hess, M. and Wiegner, M.: COP: a data library of optical properties of hexagonal ice crystals, *Appl. Opt.*, 33, 7740–7746, doi:10.1364/AO.33.007740, 1994.
- Hess, M., Koelemeijer, R. B., and Stammes, P.: Scattering matrices of imperfect hexagonal ice crystals, *J. Quant. Spectrosc. Radiat. Transfer*, 60, 301–308, doi:10.1016/S0022-4073(98)00007-7, 1998.
- IEA: Global Energy and CO₂ Status Report 2018: The latest trends in energy and emissions in 2018, https://webstore.iea.org/download/direct/2461?filename=global_energy_and_co2_status_report_2018.pdf, 2019.
- 30 Jongaramrungruang, S., Frankenberg, C., Matheou, G., Thorpe, A. K., Thompson, D. R., Kuai, L., and Duren, R. M.: Towards accurate methane point-source quantification from high-resolution 2-D plume imagery, *Atmos. Meas. Tech.*, 12, 6667–6681, doi:10.5194/amt-12-6667-2019, 2019.
- Kiel, M., O'Dell, C. W., Fisher, B., Eldering, A., Nassar, R., MacDonald, C. G., and Wennberg, P. O.: How bias correction goes wrong: measurement of X_{CO₂} affected by erroneous surface pressure estimates, *Atmos. Meas. Tech.*, 12, 2241–2259, doi:10.5194/amt-12-2241-2019, 2019.
- 35 Kiemle, C., Ehret, G., Amediek, A., Fix, A., Quatrevalet, M., and Wirth, M.: Potential of Spaceborne Lidar Measurements of Carbon Dioxide and Methane Emissions from Strong Point Sources, *Remote Sens.*, 9, doi:10.3390/rs9111137, 2017.

- Kort, E. A., Frankenberg, C., Miller, C. E., and Oda, T.: Space-based observations of megacity carbon dioxide, *Geophys. Res. Lett.*, 39, doi:10.1029/2012GL052738, 2012.
- Kuhlmann, G., Broquet, G., Marshall, J., Clément, V., Löscher, A., Meijer, Y., and Brunner, D.: Detectability of CO₂ emission plumes of cities and power plants with the Copernicus Anthropogenic CO₂ Monitoring (CO2M) mission, *Atmos. Meas. Tech.*, 12, 6695–6719, doi:10.5194/amt-12-6695-2019, 2019.
- 5 Kuze, A., Suto, H., Nakajima, M., and Hamazaki, T.: Thermal and near infrared sensor for carbon observation Fourier-transform spectrometer on the Greenhouse Gases Observing Satellite for greenhouse gases monitoring, *Appl. Opt.*, 48, 6716–6733, doi:10.1364/AO.48.006716, 2009.
- Kuze, A., Suto, H., Shiomi, K., Kawakami, S., Tanaka, M., Ueda, Y., Deguchi, A., Yoshida, J., Yamamoto, Y., Kataoka, F., Taylor, T. E., and Buijs, H. L.: Update on GOSAT TANSO-FTS performance, operations, and data products after more than 6 years in space, *Atmos. Meas. Tech.*, 9, 2445–2461, doi:10.5194/amt-9-2445-2016, 2016.
- 10 Liu, J., Bowman, K. W., Schimel, D. S., Parazoo, N. C., Jiang, Z., Lee, M., Bloom, A. A., Wunch, D., Frankenberg, C., Sun, Y., O'Dell, C. W., Gurney, K. R., Menemenlis, D., Gierach, M., Crisp, D., and Eldering, A.: Contrasting carbon cycle responses of the tropical continents to the 2015–2016 El Niño, *Science*, 358, doi:10.1126/science.aam5690, 2017.
- 15 Liu, Y., Wang, J., Yao, L., Chen, X., Cai, Z., Yang, D., Yin, Z., Gu, S., Tian, L., Lu, N., and Lyu, D.: The TanSat mission: preliminary global observations, *Science Bulletin*, 63, 1200–1207, doi:10.1016/j.scib.2018.08.004, 2018.
- Maksyutov, S., Takagi, H., Valsala, V. K., Saito, M., Oda, T., Saeki, T., Belikov, D. A., Saito, R., Ito, A., Yoshida, Y., Morino, I., Uchino, O., Andres, R. J., and Yokota, T.: Regional CO₂ flux estimates for 2009–2010 based on GOSAT and ground-based CO₂ observations, *Atmos. Chem. Phys.*, 13, 9351–9373, doi:10.5194/acp-13-9351-2013, 2013.
- 20 Meerdink, S., Hook, S., Abbott, E., and Roberts, D.: The ECOSTRESS Spectral Library 1.0, in prep.
- Meirink, J., Eskes, H., and Goede, A.: Sensitivity analysis of methane emissions derived from SCIAMACHY observations through inverse modelling, *Atmos. Chem. Phys.*, 6, 1275–1292, doi:10.5194/acp-6-1275-2006, 2006.
- Moore III, B., Crowell, S. M. R., Rayner, P. J., Kumer, J., O'Dell, C. W., O'Brien, D., Utembe, S., Polonsky, I., Schimel, D., and Lemen, J.: The Potential of the Geostationary Carbon Cycle Observatory (GeoCarb) to Provide Multi-scale Constraints on the Carbon Cycle in the Americas, *Front. Environ. Sci.*, 6, 109, doi:10.3389/fenvs.2018.00109, 2018.
- 25 Nakajima, M., Kuze, A., and Suto, H.: The current status of GOSAT and the concept of GOSAT-2, in: *SPIE 8533, Sensors, Systems, and Next-Generation Satellites XVI*, vol. 8533, doi:10.1117/12.974954, 2012.
- Nassar, R., Hill, T. G., McLinden, C. A., Wunch, D., Jones, D. B. A., and Crisp, D.: Quantifying CO₂ Emissions From Individual Power Plants From Space, *Geophys. Res. Lett.*, 44, 10,045–10,053, doi:10.1002/2017GL074702, 2017.
- 30 NOAA: Global carbon dioxide growth in 2018 reached 4th highest on record, <https://www.noaa.gov/news/global-carbon-dioxide-growth-in-2018-reached-4th-highest-on-record>, accessed: 2019-05-14, 2019.
- Parazoo, N. C., Bowman, K., Frankenberg, C., Lee, J.-E., Fisher, J. B., Worden, J., Jones, D. B. A., Berry, J., Collatz, G. J., Baker, I. T., Jung, M., Liu, J., Osterman, G., O'Dell, C., Sparks, A., Butz, A., Guerlet, S., Yoshida, Y., Chen, H., and Gerbig, C.: Interpreting seasonal changes in the carbon balance of southern Amazonia using measurements of XCO₂ and chlorophyll fluorescence from GOSAT, *Geophys. Res. Lett.*, 40, 2829–2833, doi:10.1002/grl.50452, 2013.
- 35 Peters, W., Jacobson, A. R., Sweeney, C., Andrews, A. E., Conway, T. J., Masarie, K., Miller, J. B., Bruhwiler, L. M. P., Pétron, G., Hirsch, A. I., Worthy, D. E. J., van der Werf, G. R., Randerson, J. T., Wennberg, P. O., Krol, M. C., and Tans, P. P.: An atmo-

- spheric perspective on North American carbon dioxide exchange: CarbonTracker, *Proc. Natl. Acad. Sci. (USA)*, 104, 18 925–18 930, doi:10.1073/pnas.0708986104, 2007.
- Phillips, D. L.: A Technique for the Numerical Solution of Certain Integral Equations of the First Kind, *J. ACM*, 9, 84–97, doi:10.1145/321105.321114, 1962.
- 5 Reuter, M., Buchwitz, M., Schneising, O., Krautwurst, S., O'Dell, C. W., Richter, A., Bovensmann, H., and Burrows, J. P.: Towards monitoring localized CO₂ emissions from space: co-located regional CO₂ and NO₂ enhancements observed by the OCO-2 and S5P satellites, *Atmos. Chem. Phys.*, 19, 9371–9383, doi:10.5194/acp-19-9371-2019, 2019.
- Rodgers, C.: *Inverse Methods for Atmospheric Sounding: Theory and Practice*, World Scientific, 2000.
- Sandau, R., ed.: *Digital Airborne Camera: Introduction and Technology*, Springer Science & Business Media B.V., doi:10.1007/978-1-4020-8878-0, 2010.
- 10 Schaaf, C. B., Gao, F., Strahler, A. H., Lucht, W., Li, X., Tsang, T., Strugnell, N. C., Zhang, X., Jin, Y., Muller, J.-P., Lewis, P., Barnsley, M., Hobson, P., Disney, M., Roberts, G., Dunderdale, M., Doll, C., d'Entremont, R. P., Hu, B., Liang, S., Privette, J. L., and Roy, D.: First operational BRDF, albedo nadir reflectance products from MODIS, *Rem. Sens. Envir.*, 83, 135–148, doi:10.1016/S0034-4257(02)00091-3, 2002.
- 15 Schepers, D., aan de Brugh, J., Hahne, P., Butz, A., Hasekamp, O., and Landgraf, J.: LINTRAN v2.0: A linearised vector radiative transfer model for efficient simulation of satellite-born nadir-viewing reflection measurements of cloudy atmospheres, *J. Quant. Spectrosc. Radiat. Transfer*, 149, 347–359, doi:10.1016/j.jqsrt.2014.08.019, 2014.
- Schwandner, F. M., Gunson, M. R., Miller, C. E., Carn, S. A., Eldering, A., Krings, T., Verhulst, K. R., Schimel, D. S., Nguyen, H. M., Crisp, D., O'Dell, C. W., Osterman, G. B., Iraci, L. T., and Podolske, J. R.: Spaceborne detection of localized carbon dioxide sources, *Science*, 20 358, doi:10.1126/science.aam5782, 2017.
- Stier, P., Feichter, J., Kinne, S., Kloster, S., Vignati, E., Wilson, J., Ganzeveld, L., Tegen, I., Werner, M., Balkanski, Y., Schulz, M., Boucher, O., Minikin, A., and Petzold, A.: The aerosol-climate model ECHAM5-HAM, *Atmos. Chem. Phys.*, 5, 1125–1156, doi:10.5194/acp-5-1125-2005, 2005.
- Thompson, D. R., Leifer, I., Bovensmann, H., Eastwood, M., Fladeland, M., Frankenberg, C., Gerilowski, K., Green, R. O., Kratwurst, S., 25 Krings, T., Luna, B., and Thorpe, A. K.: Real-time remote detection and measurement for airborne imaging spectroscopy: a case study with methane, *Atmos. Meas. Tech.*, 8, 4383–4397, doi:10.5194/amt-8-4383-2015, 2015.
- Thompson, D. R., Thorpe, A. K., Frankenberg, C., Green, R. O., Duren, R., Guanter, L., Hollstein, A., Middleton, E., Ong, L., and Ungar, S.: Space-based remote imaging spectroscopy of the Aliso Canyon CH₄ superemitter, *Geophys. Res. Lett.*, 43, 6571–6578, doi:10.1002/2016GL069079, 2016.
- 30 Thorpe, A., Frankenberg, C., Aubrey, A., Roberts, D., Nottrott, A., Rahn, T., Sauer, J., Dubey, M., Costigan, K., Arata, C., Steffke, A., Hills, S., Haselwimmer, C., Charlesworth, D., Funk, C., Green, R., Lundeen, S., Boardman, J., Eastwood, M., Sarture, C., Nolte, S., Mccubbin, I., Thompson, D., and McFadden, J.: Mapping methane concentrations from a controlled release experiment using the next generation airborne visible/infrared imaging spectrometer (AVIRIS-NG), *Rem. Sens. Envir.*, 179, 104–115, doi:10.1016/j.rse.2016.03.032, 2016.
- Thorpe, A. K., Frankenberg, C., and Roberts, D. A.: Retrieval techniques for airborne imaging of methane concentrations using high spatial and moderate spectral resolution: application to AVIRIS, *Atmos. Meas. Tech.*, 7, 491–506, doi:10.5194/amt-7-491-2014, 2014.
- 35 Thorpe, A. K., Frankenberg, C., Green, R. O., Thompson, D. R., Aubrey, A. D., Mouroulis, P., Eastwood, M. L., and Matheou, G.: The Airborne Methane Plume Spectrometer (AMPS): Quantitative imaging of methane plumes in real time, in: *2016 IEEE Aerospace Conference*, pp. 1–14, doi:10.1109/AERO.2016.7500756, 2016.

- Thorpe, A. K., Frankenberg, C., Thompson, D. R., Duren, R. M., Aubrey, A. D., Bue, B. D., Green, R. O., Gerilowski, K., Krings, T., Borchardt, J., Kort, E. A., Sweeney, C., Conley, S., Roberts, D. A., and Dennison, P. E.: Airborne DOAS retrievals of methane, carbon dioxide, and water vapor concentrations at high spatial resolution: application to AVIRIS-NG, *Atmos. Meas. Tech.*, 10, 3833–3850, doi:10.5194/amt-10-3833-2017, 2017.
- 5 Tikhonov, A.: On the solution of incorrectly stated problems and method of regularization, *Dokl. Akad. Nauk. SSSR*, 151, 501–504, 1963.
- Ummel, K.: CARMA Revisited: An Updated Database of Carbon Dioxide Emissions From Power Plants Worldwide, Center for Global Development Working Paper 304, 2012.
- Varon, D., McKeever, J., Jervis, D., Maasackers, J., Pandey, S., Houweling, S., Aben, I., Scarpelli, T., and Jacob, D.: Satellite discovery of anomalously large methane point sources from oil/gas production, *Geophys. Res. Lett.*, 46, doi:10.1029/2019GL083798, 2019.
- 10 Wheeler, D. and Ummel, K.: Calculating CARMA: global estimation of CO₂ emissions from the power sector, Center for Global Development Working Paper 145, 2008.
- Wilzewski, J. S., Roiger, A., Strandgren, J., Landgraf, J., Feist, D. G., Velazco, V. A., Deutscher, N. M., Morino, I., Ohyama, H., Té, Y., Kivi, R., Warneke, T., Notholt, J., Dubey, M., Sussmann, R., Rettinger, M., Hase, F., Shiomi, K., and Butz, A.: Spectral sizing of a coarse-spectral-resolution satellite sensor for XCO₂, *Atmos. Meas. Tech.*, 13, 731–745, doi:10.5194/amt-13-731-2020, 2020.