

Responses to referee comments and changes to the manuscript

Intercomparison of wind observations from ESA's satellite mission Aeolus and the ALADIN Airborne Demonstrator (<https://doi.org/10.5194/amt-2019-431>)

Response to Referee Comment 1

We appreciate the referees' very insightful and helpful remarks on our manuscript. The responses to the individual comments of the two referees and the corresponding changes in the manuscript are presented in the following.

General comment:

The current study deals with the intercomparison of AEOLUS' wind observations versus the ALADIN airborne demonstrator, whereas meteorological numerical outputs from the ECMWF are also employed for the further assessment of the spaceborne and airborne wind profiles. The analysis has been performed in the framework of the WindVal III campaign in which flights of the DLR Falcon are collocated with AEOLUS L2B observations. The manuscript is well organized and written, presenting adequately the obtained results while the authors' recommendations for relevant future Cal/Val studies enhance the quality of their work. The topic of the submitted paper fits very well to the scientific purposes of the AMT and can be published after addressing some minor comments and suggestions which are listed below.

Comment #1.1:

I think that it will be useful to provide a figure with the AEOLUS' observational geometry in order to help the readers to understand better the LOS, HLOS, projections etc.

Response to Comment #1.1:

A new subfigure (Fig. 5(a)) was added to the manuscript, depicting the Aeolus observational geometry and the wind vector projections (see below). The figure is referenced in the context of Eq. (1), where the relationship between LOS and HLOS winds is introduced (see also response to Comment 1.13).

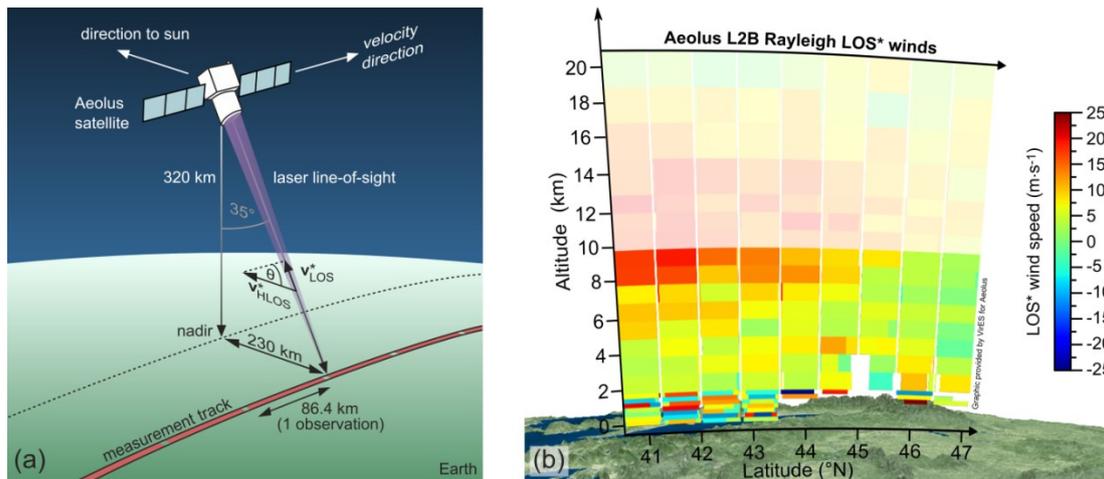


Figure 5. (a) Aeolus observational geometry (b) Aeolus L2B LOS* Rayleigh winds (positive if winds are blowing away from the instrument) measured during the underflight on 22 November 2018 between 40.6°N and 47.2°N. Only winds with an estimated wind error of less than 12 m·s⁻¹ are shown. Winds at altitudes above 10 km are outside of the measurement range of the A2D and therefore shown greyed out. The figure was created based on a screenshot from the Aeolus visualization tool *VirES for Aeolus* (<https://aeolus.services/>).

Comment #1.2:

My opinion is that much of the technical details (Sections 2.1 and 3.1) can be removed from the text.

Response to Comment #1.2:

We agree that the first part of the paper, especially the instrument description of the A2D (section 2.1) and the explanation of the response calibrations (section 3.1), are too long given the main focus of the article, namely the intercomparison of the A2D wind results with those of Aeolus. Therefore, we have shortened the two sections mentioned above to more concentrate on the methodology for adapting the A2D wind data to the Aeolus grid and viewing angle and on the wind comparisons. Nevertheless, we believe that it is important for the readers to understand the differences between the airborne and the satellite-borne wind lidar regarding the design and data acquisition, since these aspects are crucial for the understanding of the respective error sources and related limitations in terms of accuracy and precision.

In the revised manuscript, technical details in sections 2.1 and 3.1 were removed from the text. In particular, detailed information on the specifications of the receiver spectrometers and the measurement principle were omitted. Moreover, the explanation of the response calibrations was shortened.

Comment #1.3:

How much independent can be the comparison between AEOLUS and ECMWF winds since the spaceborne data are used in the data assimilation of the model?

Response to Comment #1.3:

As of November 2018, the Aeolus data was not yet used in the data assimilation of the model. Therefore, the two datasets are uncorrelated and the statistical comparison between them is independent. Operational assimilation of the Aeolus data by the ECMWF has started on 9 January 2020.

Comment #1.4:

Line 168: Clarify that groups refer to the observation level (i.e., Lines 146-147).

Response to Comment #1.4:

The grouping of the L2B processor was specified in revised manuscript as follows:

As a first step, Aeolus measurements (horizontal resolution of about 2.9 km corresponding to 0.4 s) are gathered together into groups where the length depends on the L2B parameter settings. During the analysed period in November 2018 the group length was set to 30 Aeolus measurements, **and thus identical to the previously defined observation length**, corresponding to a horizontal extent of about 86.4 km. **Note that groups can also be shorter than observations in case the horizontal averaging is set differently in the L2B processor.**

Comment #1.5:

Line 170: Could you be more specific about the estimates of the scattering ratio?

Response to Comment #1.5:

The distinction between “clear” and “cloudy” was specified in the revised manuscript as follows:

The measurement bins within the group are then classified into “clear” and “cloudy” bins using estimates of the **backscatter ratio which is defined as the ratio of the total backscatter coefficient (particles and molecules) to the molecular backscatter coefficient**. “Clear” bins are usually those for which the backscatter ratio is below 1.2 to 1.4 depending on L2B processor settings, while bins with higher backscatter ratios are considered “cloudy”.

Comment #1.6:

Apart from demonstrator, ALADIN and model winds, have you checked if there are available data from soundings (e.g. Wyoming)?

Response to Comment #1.6:

During the WindVal III campaign, only the first satellite underflight on 17 November 2018 included a ground station overpass from which wind data could be obtained for additional comparison. In particular, the ground station in Nordholz, Germany (53.78°N, 8.67° E) which operates a radar wind profiler was passed twice at 17:34 UTC and 17:59 UTC. However, since the A2D was not operational during this underflight, comparisons of the wind profiler data with the other lidar instruments were not performed. Regarding the soundings available from the website of the University of Wyoming, the spatial and temporal separation from the Aeolus wind observations is too large (>100 km and /or >1 hour) to allow for a meaningful comparison of the wind data. The analysis of collocated wind observations of Aeolus with radar wind profilers and radiosondes is carried out by other Cal/Val teams and not reported here. In addition, validation of the Aeolus winds by means of the coherent 2- μ m Doppler wind lidar is comprehensively discussed in Witschas et al. (2020).

Comment #1.7:

Line 180: Can you provide a short statement about the “known error sources”?

Response to Comment #1.7:

The “known error sources” are briefly specified in the revised manuscript as follows:

Aeolus wind data obtained from the L2B product which is discussed here is in a preliminary state, inasmuch as biases related to known error sources **such as instrumental drifts** are not corrected yet (Reitebuch et al., 2019; Rennie and Isaksen, 2019a).

A more comprehensive discussion of the error sources is included in section 4.3.

Comment #1.8:

Line 183: I would just say u and v components of the wind vector.

Response to Comment #1.8:

The text was changed accordingly to:

It contains the **u and v components of the wind vector** and supplementary geophysical parameters.

Comment #1.9:

Line 187: Replace “..., Germany in the in the time frame...” with “..., Germany in the time frame...”

Response to Comment #1.9:

The sentence was corrected. Thanks for noticing.

Comment #1.10:

Lines 239-241: Mie signals attributed to aerosols' presence can also "contaminate" the Rayleigh response.

Response to Comment #1.10:

The sentence was changed to

Above all, **cloud- and aerosol-free** conditions are necessary to avoid Mie backscatter signals which affect the backscatter spectrum, and thus **contaminate** the Rayleigh response in the respective range gates.

Comment #1.11:

In all curtain plots the longitudes are missing in x axes.

Response to Comment #1.11:

Longitudes were added to the x-axes of all curtain plots in Figs. 3, 4 and 9. Please note that, in contrast to the latitudes, the longitudes did not linearly increase with the flight time during the underflight on 22 November (see also flight track on Fig. 8), so that we refrained from showing an additional longitude axis with non-equidistant tick marks. Instead, for each integer latitude on the x-axes the corresponding longitude is provided in parentheses.

Comment #1.12:

Line 321: Do you mean below the clouds?

Response to Comment #1.12:

That's correct. The text was changed to:

Wind data is mainly obtained from the cloud tops along the track. Due to the high optical density of the clouds, the laser was strongly attenuated, thus preventing sufficient backscatter signal and valid Mie wind data over multiple range gates **within and below** the clouds.

Comment #1.13:

Equation 1: If I am not missing something, the formula should be $LOS=HLOS/\sin(\Theta)$. Please see my first comment.

Response to Comment #1.13:

Equation (1) is correct, as can be derived from the shown wind vector projections shown in the added subfigure Fig. 5(a), see response to Comment 1.1.

Comment #1.14:

Lines 431-432: Rephrase this sentence because it is somehow misleading. I suppose that the aerial weighting it is applied both in vertical and horizontal terms.

Response to Comment #1.14:

The sentence was modified as follows:

Each valid A2D range bin covering an Aeolus range bin is allocated **both** horizontal and vertical weights depending on the size of **its** contribution to the total area of the Aeolus bin, as illustrated in Fig. 7.

Comment #1.15:

Lines 500-503: It would be useful to provide also the curtain plot for the A2D winds without the off-nadir angle correction.

Response to Comment #1.15:

A curtain plot without off-nadir angle correction, albeit at the original horizontal and vertical resolution of the A2D, is already provided in Fig. 4(a). We believe that there is no large benefit in presenting the same plot after adaptation to the Aeolus grid, but without applying the off-nadir angle correction, especially as the latter is effectively a simple scaling of the wind speeds by the factor $\sin(37^\circ)/\sin(20^\circ) \approx 1.76$.

Comment #1.16:

Lines 514-515: It is quite strange to consider model outputs as reference values!

Response to Comment #1.16:

We agree that, in principle, model output is usually not considered as a reference for observational data. However, comparison of the ECMWF model winds (averaged onto the Aeolus measurement grid) with data from the highly-accurate 2- μm coherent Doppler wind lidar showed a nearly vanishing bias and low random error around $2 \text{ m}\cdot\text{s}^{-1}$, while the systematic and random errors of the A2D ($-0.7 \text{ m}\cdot\text{s}^{-1}$, $3.4 \text{ m}\cdot\text{s}^{-1}$) and Aeolus Rayleigh winds ($1.3 \text{ m}\cdot\text{s}^{-1}$, $2.4 \text{ m}\cdot\text{s}^{-1}$) with respect to the 2- μm DWL, determined on the A2D and Aeolus measurement grids respectively, were considerably


larger for the reasons described in the manuscript. Therefore, the model data was considered as the reference and also plotted on the x-axes of the scatterplots in Figs. 10 and 11.

Comment #1.17:


Figures 10 and 11: How much different are the results when are considered only coincident measurements from the three datasets?

Response to Comment #1.17:

When considering only those bins in the statistical comparisons for which valid wind data is available in all three datasets (ECMWF, A2D, Aeolus), i.e. considering only their common overlap, the statistical results from the model comparisons are slightly different. The corresponding scatterplots (in analogy to Figs. 10 and 11) are shown below.

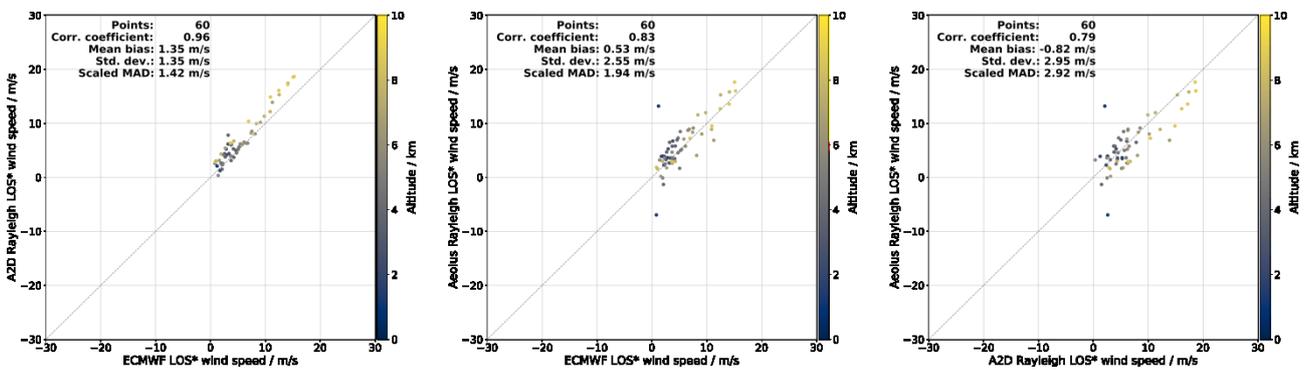

Scatterplots comparing (a) the A2D Rayleigh LOS* winds with the ECWFM model LOS* winds, (b) the Aeolus L2B Rayleigh LOS* winds with the ECWFM model LOS* winds and (c) the Aeolus L2B Rayleigh LOS* winds with the A2D Rayleigh LOS* winds for the wind scene on 22/11/2018 between 16:13 UTC and 17:15 UTC. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison. Only bins for which valid wind data is available in all three datasets (ECMWF, A2D, Aeolus) are considered.

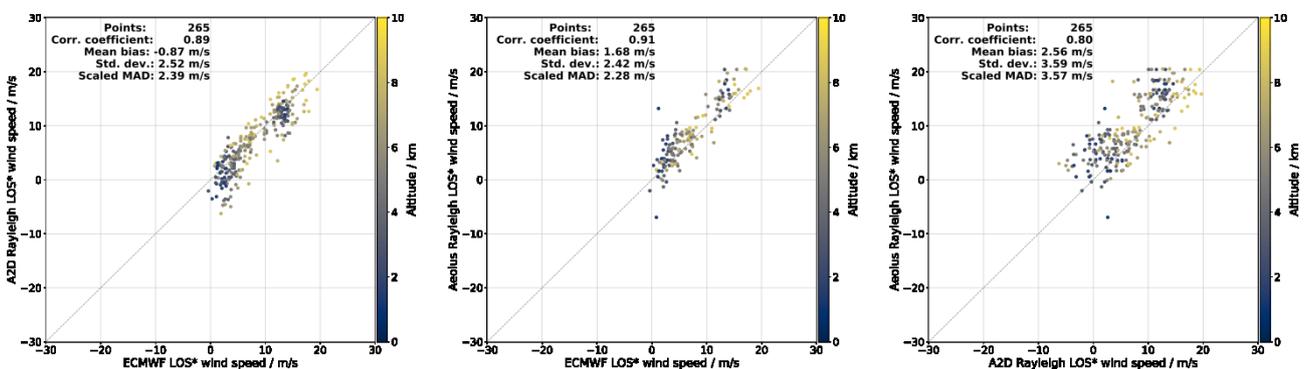

Scatterplots comparing (a) the A2D Rayleigh LOS* winds with the ECWFM model LOS* winds, (b) the Aeolus L2B Rayleigh LOS* winds with the ECWFM model LOS* winds and (c) the Aeolus L2B Rayleigh LOS* winds with the A2D Rayleigh LOS* winds for all underflights of the WindVal III campaign. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison. Only bins for which valid wind data is available in all three datasets (ECMWF, A2D, Aeolus) are considered.

For the wind scene on 22 November 2018, the A2D Rayleigh winds exhibit a slightly lower bias of $1.35 \text{ m}\cdot\text{s}^{-1}$ (instead of $1.41 \text{ m}\cdot\text{s}^{-1}$) with respect to the ECMWF model winds, whereas the bias of the Aeolus Rayleigh winds is slightly larger ($0.53 \text{ m}\cdot\text{s}^{-1}$ instead of $0.46 \text{ m}\cdot\text{s}^{-1}$). The respective random errors (in terms of the standard deviation) are comparable as well ($1.4 \text{ m}\cdot\text{s}^{-1}$ for A2D, $2.6 \text{ m}\cdot\text{s}^{-1}$ for Aeolus). Consequently, when cross-comparing the two lidar datasets on their coverage overlap, the bias of the Aeolus winds with respect to the A2D winds is $0.53 \text{ m}\cdot\text{s}^{-1} - 1.35 \text{ m}\cdot\text{s}^{-1} = -0.82 \text{ m}\cdot\text{s}^{-1}$, while the random errors add up quadratically: $[(1.4 \text{ m}\cdot\text{s}^{-1})^2 + (2.6 \text{ m}\cdot\text{s}^{-1})^2] \approx 3.0 \text{ m}\cdot\text{s}^{-1}$.

Regarding the datasets from the entire WindVal III campaign, the A2D Rayleigh wind bias is nearly unaffected ($-0.87 \text{ m}\cdot\text{s}^{-1}$ instead of $-0.92 \text{ m}\cdot\text{s}^{-1}$), when restricting the model comparison to those bins where valid Aeolus Rayleigh bins are also available. The same hold true for the Aeolus wind bias with respect to the ECMWF model data ($1.68 \text{ m}\cdot\text{s}^{-1}$ instead of $1.62 \text{ m}\cdot\text{s}^{-1}$). As a result, the Aeolus-to-A2D comparison yields a bias of $1.68 \text{ m}\cdot\text{s}^{-1} - (-0.87 \text{ m}\cdot\text{s}^{-1}) \approx 2.56 \text{ m}\cdot\text{s}^{-1}$. The respective random errors are only changed by around $0.2 \text{ m}\cdot\text{s}^{-1}$.

Taking into account the limited wind data obtained from the three underflights of the WindVal III campaign which is also a result from the A2D and Aeolus range gate settings, as explained in section 4.5 of the manuscript, we think that it is beneficial not to restrict the model comparisons of the two lidar instruments to the common overlap of all three datasets. In this way, the already small number of compared winds is not further reduced, although the cross-comparison of the three datasets is more complicated.

The following sentence was added to the discussion section of the wind comparisons:

It should be noted that the statistical results from the mutual comparisons only slightly deviate from the shown values (by less than $0.2 \text{ m}\cdot\text{s}^{-1}$) when restricting the respective datasets to those bins where both instruments have valid wind data.

Response to Referee Comment 2

General Comment:

The paper by Oliver Lux and coauthors reports the results of an airborne campaign dedicated to Aeolus wind product validation using its airborne demonstrator A2D operating onboard Falcon aircraft together with DWL lidar. The presented cal/val experiment is an important contribution and a tremendous effort towards improvement of direct-detection sensing of wind from space. The paper is carefully written, the experimental setup and validation methodology are thoroughly and comprehensively described, the graphical material is prepared with care, whereas the conclusions and recommendations are well substantiated.

That said, the general issue of this paper, in my opinion, is that its content is excessively biased towards methodological aspects of the intercomparison. I assume that most potential readers of this article would be rather interested in the Aeolus validation part (since the airborne lidars and their performance are already described elsewhere), however they would have to read a long way to get to what they are looking for.

The title of the paper promises a long-awaited result of Aeolus validation using its airborne demonstrator within a dedicated validation campaign carried out by the renown experts in the off-ground lidar technique. However, the results of A2D-Aeolus validation are mixed together with the A2D-ECMWF-AEOLUS statistical figures. It gets worse when the key results of intercomparison are reported as lidars' biases with respect to ECMWF. This raises a valid question i.e. what the Falcon-Aeolus underflights are for, if both lidars are finally referenced to the model.

I recommend the authors to address the following remarks, in order to reconcile the inconsistencies between the title and the content.

Response to the General Comment:

We agree that there are inconsistencies between the title and the content of the paper in its originally submitted version, which primarily originate from the mixture of the results from the Aeolus validation using the A2D with model comparisons of both lidar instruments. We also share the opinion that the first part of the paper, especially the instrument description of the A2D (section 2.1) and the explanation of the response calibrations (section 3.1), are too long given the main focus of the article, namely the intercomparison of the A2D wind results with those of Aeolus. Therefore, we have shortened the two sections mentioned above to more concentrate on the methodology for adapting the A2D wind data to the Aeolus grid and viewing angle and on the wind comparisons. Nevertheless, we believe that it is important for the readers to understand the differences between

the airborne and the satellite-borne wind lidar regarding the design and data acquisition, since these aspects are crucial for the understanding of the respective error sources and related limitations in terms of accuracy and precision. Furthermore, the assessment of the systematic and random error of the A2D by comparison with the 2- μm DWL and the ECMWF model is a prerequisite for the later derivation of the Aeolus accuracy and precision. This approach is not clearly formulated in the original version of the manuscript, but better presented in the revised version. In particular, following the referee's suggestion, we have separated the model comparisons from the lidar-lidar comparison (see also response to comment #2.4 below). Overall, we regard this paper as the basis for upcoming publications that will focus on the Aeolus validation during the operational phase of the mission. It is thus intended to present the necessary tools to be applied for making the wind data from the A2D (and other wind lidars) comparable with those of Aeolus, rather than to provide an extensive validation study. The latter will be the subject of forthcoming publications dealing with the airborne campaigns conducted in May and September 2019 which also yielded a much larger data set.

In order to remedy the deficiencies of the paper, we have revised it according to the reviewer's comments. The responses to the individual comments and the related changes to the manuscript are elaborated below.

Comment #2.1:

In the introduction (l.57-58), the authors claim their study a methodological reference for the airborne experiments on Aeolus validation. With that, the cal/val experiment is restricted to Rayleigh wind measurements. What are the other clear-air airborne Doppler lidars involved in Aeolus validation? If there are none, this methodological reference could be restricted to internal use. Please be more specific regarding the scope of potential applications of the presented methodology.

Response to Comment #2.1:

The methodology described in the manuscript is not only applicable (and necessary) for the A2D, but also any other Cal/Val instrument that measures only one LOS component of the wind vector. One example is the *LEANDRE New Generation* (LNG) which was developed at the *Laboratoire Atmosphères, Milieux, Observations Spatiales* (LATMOS). The three-wavelength-dual-polarization-backscatter lidar is based on a two-wave Mach-Zehnder interferometer and is, amongst others, capable of measuring line-of-sight wind speeds (Bruneau et al, 2015). The instrument is foreseen to be deployed on airborne campaigns for the Aeolus validation and was already used in pre-launch campaigns during NAWDEX (Schäfler et al., 2018) on coordinated flights with the DLR

Falcon. Intercomparison of the LNG wind data with the Aeolus winds will necessitate the consideration of the different viewing geometries, as it is the case for the A2D. In this respect, the study can be regarded as a methodological reference for upcoming publications on the Aeolus validation by means of the A2D, LNG or other wind lidars without the capability to retrieve the entire wind vector.

The introduction was specified along these lines in order to stress the relevance of the shown methodology:

More specifically, it is shown how to take account of the different LOS directions in order to make the wind data sets comparable. This procedure is not only required for the A2D, but any other Cal/Val instrument that measures only one component of the wind vector, such as e.g. the LEANDRE New Generation (LNG) (Bruneau et al., 2015) which is also foreseen to be deployed on airborne campaigns for the Aeolus validation.

The following reference was added:

Bruneau, D., Pelon, J., Blouzon, F., Spatazza, J., Genau, P., Buchholtz, G., Amarouche, N., Abchiche, A., and Aouji, O.: 355-nm high spectral resolution airborne lidar LNG: System description and first results, *Appl Opt*, 54, 8776–8785, doi:10.1364/AO.54.008776, 2015.

Moreover, the following sentence was added to the conclusions section:

This procedure is not only of relevance for future validation campaigns employing the A2D, but also other wind lidars without the capability to retrieve the entire wind vector.

Comment #2.2:

The key example of Aeolus-A2D intercomparison is presented in Fig. 9, however the panels a) and c) are difficult to compare as they are interspersed by the panel 9b, which should belong to the section describing the intercomparison setup.

Response to Comment #2.2:

See Response to Comment #2.3.

Comment #2.3:

Apart from the spatial curtains in Fig. 9, it would be useful to show a few examples of individual wind profiles measured by both lidars, probably also at their native vertical resolution. This will give a much better feeling on the capacities of different lidars than the tabulated numbers.

Response to Comment #2.3:

We agree with the reviewer's comments #2.2 and #2.3, and have revised Fig. 9 of the manuscript (see below). The panels (a) to (d) have been re-sorted such that the original A2D Rayleigh wind curtain after adaptation to the Aeolus grid but without azimuth correction is placed on the left-hand side of the figure together with the ECMWF model winds (from the Aeolus L2C product). The latter serve to apply the azimuth correction, as explained in section 4.1 of the manuscript, to produce the azimuth-corrected A2D wind curtain shown in panel (c). The Aeolus L2B Rayleigh wind curtain is plotted just below (panel (d)) which facilitates the comparison of the two. Moreover, the wind profile for one selected Aeolus observation is shown in an added panel (e) together with the corresponding profiles of the other three datasets. Here, the error bar for the Aeolus winds (blue squares) represents the estimated error included in the L2B product, while the error bar for the azimuth-corrected A2D winds (green dots) corresponds to the weighted standard deviation of the A2D winds from those bins that overlap with the respective Aeolus bin. Comparison of the wind profiles not only demonstrates the necessity of the azimuth correction, but also shows the good agreement of the Aeolus winds with the A2D and model data within the error margins.

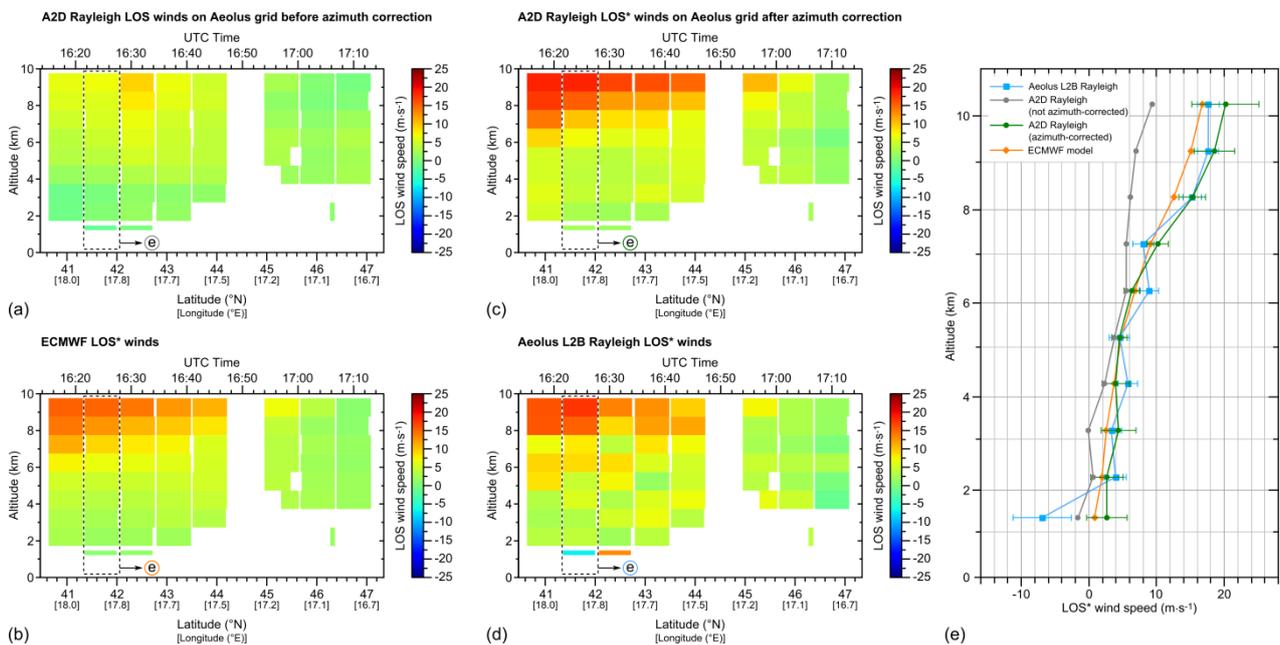


Figure 9. LOS* wind profiles obtained during the underflight on 22 November 2018 between 40.5°N and 47.2°N: (a) A2D Rayleigh winds averaged onto the Aeolus measurement grid and for an off-nadir angle of 37°, but without azimuth correction, (b) ECMWF model winds, (c) A2D Rayleigh winds with azimuth correction and (d) Aeolus L2B Rayleigh winds. White colour represents missing or invalid data of one of the two instruments, e.g. below dense clouds. Only Aeolus Rayleigh LOS* winds with an estimated error below 4.8 m·s⁻¹ were considered valid. The wind profile for one selected Aeolus observation is shown in panel (e) together with the corresponding profiles of the other three datasets. The error bar for the Aeolus winds (blue squares) represents the estimated error included in the L2B product, while the error bar for the azimuth-corrected A2D winds (green dots) corresponds to the weighted standard deviation of all A2D bins contributing to the respective Aeolus bin. For the uncorrected A2D winds (grey dots), the error bars were omitted for the sake of clarity.

We refrained from plotting the A2D wind profile in its original vertical resolution, since the azimuth correction procedure, in its current state, is only applicable after adaptation of the A2D data onto Aeolus grid. This is because the Aeolus L2C data (ECMWF model output on Aeolus measurement track), in particular the u and v components, are provided on that same grid. Hence, either higher resolution model data or interpolation of the L2C data onto the A2D grid would be required to apply the azimuth correction to the A2D data in its native resolution. Furthermore, since there are on average around 20 A2D observations within the range of one Aeolus observation, we think that it is more representative to show the weighted wind speed average of all observations instead of selecting one particular observation out of the set of 20.

The modified version of Fig. 9 was included in revised manuscript and discussed in section 4.2 as follows:

The left part of the figure shows the A2D Rayleigh winds averaged onto the Aeolus measurement grid and for an off-nadir angle of 37° , but without azimuth correction (panel (a)) and the Aeolus L2C Rayleigh winds, i.e. LOS* winds based on ECMWF model data (from the Aeolus L2C product) (b). The A2D Rayleigh winds after azimuth correction (A2D LOS* winds) (c) and the Aeolus L2B Rayleigh winds (d) are depicted in the middle of Fig. 9. Moreover, the wind profile for one selected Aeolus observation is shown in panel (e) together with the corresponding profiles of the other three datasets. Here, the error bar for the Aeolus winds (blue squares) represents the estimated error included in the L2B product, while the error bar for the azimuth-corrected A2D winds (green dots) corresponds to the weighted standard deviation of the A2D winds from those bins that overlap with the respective Aeolus bin. Only Aeolus LOS* winds with an estimated error below $4.8 \text{ m}\cdot\text{s}^{-1}$ (HLOS: $8 \text{ m}\cdot\text{s}^{-1}$) were considered valid. Comparison of the curtain plots and the selected wind profiles demonstrates the necessity of the azimuth correction. Due to the strong meridional wind especially in the upper range gates of the A2D at the beginning of the common leg, large wind speed differences $\Delta > 5 \text{ m}\cdot\text{s}^{-1}$ were present between Aeolus and the uncorrected A2D data (grey dots) which were compensated by the azimuth correction as explained above. Hence, the adapted A2D Rayleigh winds show much better agreement with both the Aeolus Rayleigh winds and the model data. The weighted standard deviation of the A2D winds, indicated by the error bars, represents a measure of the variability of the A2D winds within the compared Aeolus bin. The values are on the order of 2 to $4 \text{ m}\cdot\text{s}^{-1}$ and determined by both the random error of the A2D as well as the horizontal and vertical wind gradients within the respective Aeolus bin.

Comment #2.4:

The results of A2D-Aeolus intercomparison should be presented in a separate section devoted to lidar-lidar intercomparison. The key figures of Aeolus-A2D intercomparison statistics (which is the title of the paper) should be provided in the abstract and conclusions. The comparison against ECMWF should be reported in a specific subsection of the manuscript.

Response to Comment #2.4:

Following the reviewer's suggestion, we have separated the model comparisons (section 4.3) from the lidar-lidar intercomparison (section 4.4). For this purpose, the figures showing the scatterplots from the three-dataset comparison for the selected wind scene on 22 November 2018 (Fig. 10) and the entire campaign (Fig. 11) were re-sorted. In the revised manuscript, there are three figures with two scatterplots each, depicting the A2D-to-model, the Aeolus-to-model and the Aeolus-to-A2D statistical results for the selected wind scene and the entire campaign, respectively. The discussion of the mutual comparisons has been adapted to the new structure accordingly.

In addition, the key figures of the Aeolus-to-A2D comparison statistics were added to the abstract and conclusions. In particular, the abstract of the revised manuscript includes the following sentences:

The statistical comparison of the two instruments shows a positive bias of the Aeolus Rayleigh winds (measured along its LOS) with respect to the A2D Rayleigh winds of $2.6 \text{ m}\cdot\text{s}^{-1}$ and a standard deviation of $3.6 \text{ m}\cdot\text{s}^{-1}$. Considering the accuracy and precision of the A2D wind data which was determined from the comparison with a highly-accurate coherent wind lidar as well as with ECMWF model winds, the systematic and random error of the Aeolus LOS Rayleigh winds is determined to be $1.7 \text{ m}\cdot\text{s}^{-1}$ and $2.5 \text{ m}\cdot\text{s}^{-1}$, respectively.

In the conclusions section, the following sentences were added:

The statistical comparison revealed biases of $-0.9 \text{ m}\cdot\text{s}^{-1}$ and $+1.6 \text{ m}\cdot\text{s}^{-1}$ for the A2D and Aeolus LOS* Rayleigh wind speeds with respect to the ECMWF model, respectively. Intercomparison of the two wind lidars showed a positive bias of the Aeolus Rayleigh LOS* winds with respect to the A2D of $2.6 \text{ m}\cdot\text{s}^{-1}$, while the spreading between the two data sets of $3.6 \text{ m}\cdot\text{s}^{-1}$ results from the respective random errors that add up quadratically. Considering the systematic and random error of the A2D, the accuracy of the Aeolus Rayleigh LOS* winds is determined to be $+1.7 \text{ m}\cdot\text{s}^{-1}$ and $2.5 \text{ m}\cdot\text{s}^{-1}$ which is in line with the results from other validation studies performed for the commissioning phase of the Aeolus mission (Khaykin et al., 2019; Witschas et al., 2020).

Comment #2.5:

The discussion on the representability of the Aeolus cal/val results could be better developed in the context of the preliminary nature of L2B wind product.

Response to Comment #2.5:

The following paragraph was added to the discussion of the lidar-lidar-comparison:

In conclusion, due to the preliminary nature of the Aeolus L2B wind product, the Rayleigh winds exhibit relatively large systematic and random errors which are higher than the mission requirements (ESA, 2016). However, it should also be stated, that the representativity of the statistical results shown here is limited by the relatively small data set obtained from the WindVal III validation campaign. A strategy for increasing the number of compared winds, and hence the representativity of the Aeolus Cal/Val results in forthcoming campaigns is described in section 4.6.

Additional changes and corrections

Changes to the manuscript #3.1:

Figure 1 was replaced by a corrected version. In the original version, the arrow line along the optical path of the Mie spectrometer was missing.

Changes to the manuscript #3.2:

In the context of the applied azimuth correction in section 4.2, we argue why the ECMWF model winds are used for converting the A2D LOS winds to LOS* winds (along the Aeolus LOS). In addition to the better coverage of the model in comparison with the 2- μm DWL and the good agreement of the model data with the highly-accurate 2- μm DWL when averaged onto the coarse Aeolus measurement grid, another argument was added to the manuscript as follows:

Moreover, for typical azimuth angles of the two instruments, as mentioned above, the maximum error of the correction term Δ resulting from a potential model error of $1 \text{ m}\cdot\text{s}^{-1}$ for both the u and v components or a potential model error of the wind direction of 3° accounts for less than $0.2 \text{ m}\cdot\text{s}^{-1}$ which is acceptable given the A2D random error of about $2 \text{ m}\cdot\text{s}^{-1}$.

Changes to the manuscript #3.3:

A justification for the comparison of LOS* winds instead of HLOS* winds was added to section 4.3:

Note that the error of the LOS* wind speed is the actual instrument error of Aeolus which is also the reason why this parameter, and not the HLOS* wind included in the product, was chosen for the wind comparison.

Intercomparison of wind observations from ESA's satellite mission Aeolus and the ALADIN Airborne Demonstrator

Oliver Lux¹, Christian Lemmerz¹, Fabian Weiler¹, Uwe Marksteiner¹, Benjamin Witschas¹,
Stephan Rahm¹, Alexander ~~Geiss~~² ~~Geiß~~², Oliver Reitebuch¹

5 ¹ German Aerospace Center (Deutsches Zentrum für Luft- und Raumfahrt e.V., DLR), Institute of Atmospheric Physics,
Oberpfaffenhofen 82234, Germany

² Ludwig-Maximilians-University Munich, Meteorological Institute, 80333 Munich, Germany

Correspondence to: Oliver Lux (oliver.lux@dlr.de)

Abstract. Shortly after the successful launch of ESA's wind mission Aeolus, carried out by the European Space Agency,
10 collocated airborne wind lidar observations were performed in Central Europe, employing the prototype of the satellite
instrument, the ALADIN Airborne Demonstrator (A2D). Like the direct-detection Doppler wind lidar on-board Aeolus, the
A2D is composed of a frequency-stabilised ultra-violet laser, a Cassegrain telescope and a dual-channel receiver to measure
line-of-sight (LOS) wind speeds by analysing both Mie and Rayleigh backscatter signals. In the frame of the first airborne
validation campaign after the launch still during the commissioning phase of the mission, four coordinated flights along the
15 satellite swath were conducted in late autumn of 2018, yielding wind data in the troposphere with high coverage of the
Rayleigh channel. Owing to the different measurement grids and viewing directions of the satellite and airborne instrument,
intercomparison with the Aeolus wind product requires adequate averaging as well as conversion of the measured A2D LOS
wind speeds to the satellite LOS. The statistical comparison of the two instruments shows a positive bias of the Aeolus
Rayleigh winds (measured along its LOS) with respect to the A2D Rayleigh winds of $2.6 \text{ m}\cdot\text{s}^{-1}$ and a standard deviation of
20 $3.6 \text{ m}\cdot\text{s}^{-1}$. Considering the accuracy and precision of the A2D wind data which was determined from the comparison with a
highly-accurate coherent wind lidar as well as with ECMWF model winds, the systematic and random error of the Aeolus
LOS Rayleigh winds is determined to be $1.7 \text{ m}\cdot\text{s}^{-1}$ and $2.5 \text{ m}\cdot\text{s}^{-1}$, respectively. ~~The statistical comparison of the two
instruments with model wind data from the ECMWF shows biases of the A2D and Aeolus LOS wind speeds of $-0.9 \text{ m}\cdot\text{s}^{-1}$
and $+1.6 \text{ m}\cdot\text{s}^{-1}$, respectively, while the random errors are around $2.5 \text{ m}\cdot\text{s}^{-1}$.~~ The paper also discusses the influence of different
25 threshold parameters implemented in the comparison algorithm as well as an optimization of the A2D vertical sampling to be
used in forthcoming validation campaigns.

1 Introduction

On 22 August 2018, the fifth Earth Explorer mission of the European Space Agency (ESA) – Aeolus – has been launched to
space, marking an important milestone in the centennial history of atmospheric observing systems (Stith et al., 2018; Kanitz
30 et al., 2019; Reitebuch et al., 2019; Straume et al., 2019). Aeolus is the first mission to acquire atmospheric wind profiles

from the ground to the lower stratosphere on a global scale deploying the first-ever satellite-borne wind lidar system ALADIN (Atmospheric LAsEr Doppler INstrument) (ESA, 2008; Stoffelen et al., 2005; Reitebuch, 2012). Circling the Earth on a sun-synchronous orbit with a repeat cycle of one week, ALADIN provides one component of the wind vector along the instrument's line-of-sight (LOS) from ground up to 30 km altitude with a vertical resolution of 0.25 km to 2 km depending on altitude. The near-real-time wind observations from Aeolus contribute to improving the accuracy of numerical weather prediction (Rennie and Isaksen, 2019a; Isaksen and Rennie, 2019; Rennie and Isaksen, 2019b) and advance the understanding of atmospheric dynamics and processes relevant to climate variability. In particular, wind profiles acquired in the tropics and over the oceans help to close large gaps in the global wind data coverage which, before the launch of Aeolus, represented a major deficiency in the Global Observing System (Baker et al., 2014; Andersson, 2018; NAS, 2018). In addition to the wind data product, Aeolus provides information on cloud top heights and on the vertical distribution of aerosol and cloud properties such as backscatter and extinction coefficients (Flamant et al., 2008; Ansmann et al., 2007).

Already several years before the satellite launch, an airborne prototype of the Aeolus payload, the ALADIN Airborne Demonstrator (A2D), was developed at the German Aerospace Center (Deutsches Zentrum für Luft- und Raumfahrt e.V., DLR). Due to its representative design and operating principle, the A2D has since delivered valuable information on the wind measurement strategies of the satellite instrument as well as on the optimization of the wind retrieval and related quality-control algorithms. Broad vertical and horizontal coverage across the troposphere is achieved thanks to the complementary design of the A2D receiver which, like ALADIN, comprises a Rayleigh and a Mie channel for analysing both molecular and particulate backscatter signals. In addition to the A2D, a well-established coherent Doppler wind lidar (2- μm DWL) has been operated at DLR for many years. Being equipped with a double-wedge scanner the 2- μm DWL allows determining the wind vector with high accuracy and precision (Weissmann et al., 2005; Chouza et al., 2016; Witschas et al., 2017). Both wind lidar systems thus represent key instruments for the calibration and validation (Cal/Val) activities during the Aeolus mission.

Over the past years, both systems were deployed in several field experiments for the purpose of pre-launch validation of the satellite instrument and of performing wind lidar observations under various atmospheric conditions (Marksteiner et al., 2018; Lux et al., 2018). In autumn of 2018, the first airborne campaign after the launch of Aeolus was carried out from the airbase in Oberpfaffenhofen, Germany. Aside from extending the existing data set of wind observations, this field experiment aimed to perform several underflights of Aeolus in Central Europe in order to provide first comparative wind result between the airborne demonstrator and the satellite instrument during its commissioning phase. Moreover, the campaign had the objective to optimize the operational procedures, particularly in terms of flight planning, to be applied during the forthcoming Cal/Val campaigns in the operational phase of Aeolus.

This paper presents the results from the first airborne validation campaign of the Aeolus mission and demonstrates the methodology used to compare the different data sets from the airborne and satellite instrument. In this context, it intends to serve as a reference for later studies related to the airborne validation of Aeolus. [More specifically, it is shown how to take account of the different LOS directions in order to make the wind data sets comparable. This procedure is not only required](#)

65 | for the A2D, but any other Cal/Val instrument that measures only one component of the wind vector, such as e.g. the LEANDRE New Generation (LNG) (Bruneau et al., 2015) which is also foreseen to be deployed on airborne campaigns for the Aeolus validation.

The text is organized as follows. First, the design and operation principle of ALADIN and the airborne demonstrator are briefly described with a focus on the commonalities and differences of the two wind lidar instruments (chapter 2). The subsequent section gives an overview of the validation campaign including the flight planning procedures and A2D calibration. Afterwards, the wind observations from the research flight along the satellite swath performed on 22 November 2018 are presented (sections 3.2, 3.3), followed by an assessment of the A2D wind data accuracy and precision by means of the 2- μm coherent wind lidar (section 3.4). In a next step, the adaptation of the A2D wind data to the Aeolus measurement grid and viewing geometry is explained (sections 4.1, 4.2), which is prerequisite for the subsequent comparison of the two data sets with model wind data from the ECMWF (section 4.3) and with each other (section 4.4). ~~with each other and with model wind data from the ECMWF (section 4.3).~~ The influence of two selected threshold parameters incorporated in the comparison algorithm on the outcome of the statistical comparison is discussed as well (section 4.4~~5~~). Due to the sparse coverage of Mie wind data gained during the campaign, the analysis is restricted to the A2D and Aeolus Rayleigh channels. The comparison of the 2- μm DWL wind data with those of Aeolus is the subject of another publication (Witschas et al., ~~2019~~2020). Finally, an optimized range gate setting of the A2D is proposed which aims to improve the validation capabilities of the instrument in forthcoming airborne campaigns to be conducted during the Aeolus mission (section 4.~~5~~6).

2 ALADIN and its airborne demonstrator


The single payload of the Aeolus satellite, ALADIN, represents one of the most sophisticated instruments ever put into orbit. While it has been operating in space since its launch in August 2018, the ALADIN Airborne Demonstrator has already been employed on ground and in research flights since 2005. The design and measurement principle of the two direct-detection Doppler wind lidars have been extensively specified in previous publications, describing the satellite (ESA, 2008; Stoffelen et al., 2005; Reitebuch, 2012; Kanitz et al., 2019) and airborne instrument (Reitebuch et al., 2009; Paffrath et al., 2009; Lux et al., 2018), respectively. Therefore, only a reduced description of the A2D is presented in this section, followed by a short explanation of the Aeolus wind data product that was validated later in the text.

90 2.1 The A2D direct-detection wind lidar system

A simplified schematic of the airborne instrument is illustrated in Fig. 1. Like ALADIN, the system consists of a pulsed, frequency-stabilised, ultra-violet (UV) laser transmitter, a Cassegrain-type telescope, a configuration to combine a fraction of the emitted radiation with the atmospheric and ground return signals (front optics), and a dual-channel receiver including detectors.

95 The laser transmitter is realized by a frequency-tripled Nd:YAG master oscillator power amplifier (MOPA) system which generates UV laser pulses at 354.89 nm wavelength with duration of 20 ns (full width at half maximum (FWHM)) and energy of 60 mJ at 50 Hz repetition rate (3.0 W average power). Injection-seeding of the master oscillator in combination with an active frequency stabilization technique (Lemmerz et al., 2017) provides single-frequency operation with a pulse-to-pulse frequency stability of approximately 3 MHz (rms) and a spectral bandwidth of 50 MHz (FWHM). The near-
 100 diffraction-limited beam ($M^2 < 1.3$) is transmitted to the atmosphere via a piezo-electrically controlled mirror that is attached to the frame of a telescope in Cassegrain configuration. In contrast to the satellite instrument which uses a 1.5 m diameter telescope in transceiver configuration and operates at an off-nadir pointing angle of 35° , the A2D incorporates a 0.2 m diameter telescope which is oriented at an off-nadir angle of 20° . Owing to the structural design of the telescope, a range-dependent overlap function has to be considered in the wind retrieval as described in (Paffrath et al., 2009).

105

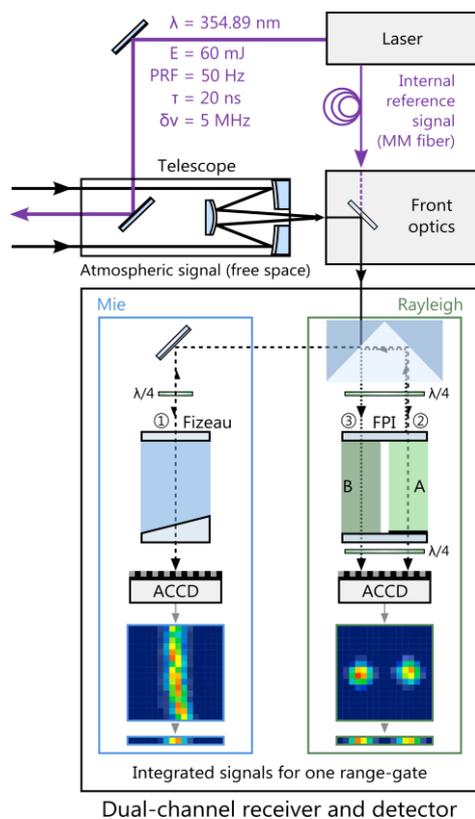

110 **Figure 1.** Schematic of the ALADIN Airborne Demonstrator (A2D) wind lidar instrument consisting of a frequency-stabilised, ultra-violet laser transmitter, a Cassegrain telescope, front optics and a dual-channel receiver. The latter is composed of a Fizeau interferometer and sequential Fabry-Pérot interferometers (FPI) for analysing the Doppler frequency shift from particulate and molecular backscatter signals, respectively. PRF: pulse repetition frequency, MM: multimode, ACCD: accumulation charge coupled device.

The backscattered radiation from the atmosphere and the ground is collected by the convex spherical secondary mirror of the telescope and directed to the front optics of the A2D receiver assembly. After passing through a narrowband UV bandpass

filter (FWHM: 1.0 nm) which blocks the broadband solar background spectrum, the return signal is spatially overlapped with a small portion of the outgoing laser radiation which is referred to as internal reference signal. The latter is analysed for determining the transmitted laser frequency before the atmospheric return and for calibrating the frequency-dependent transmission of the receiver spectrometers which are required for accurate wind retrieval. Unlike Aeolus where the internal reference signal is guided to the front optics on free optical path, a multimode fiber (200 μm core diameter) is employed in the A2D. Utilization of the multimode fiber introduces detrimental speckle noise affecting the precision of the internal reference frequency determination, as explained in Lux et al. (2018). Hence, a fiber scrambler was recently integrated between the laser transmitter and the front optics in order to reduce the speckle noise and, in turn, to significantly improve the stability of the internal reference frequency and signal intensity (Lux et al., 2019).

The design of the A2D receiver is almost identical to that of the satellite instrument comprising two complementary channels to separately analyse the return signals from both molecules (Rayleigh channel) and particles like clouds and aerosols (Mie channel) (see lower part of Fig. 1). A Fizeau interferometer is used for measuring the Doppler frequency shift of the narrowband Mie signal (FWHM \approx 50 MHz) that originates from cloud and aerosol backscattering, while two sequential Fabry-Pérot interferometers (FPIs) are employed for determining the Doppler shift of the broadband (FWHM \approx 3.8 GHz at 355 nm and 293 K) Rayleigh backscatter signal from molecules. The Mie channel is based on the fringe-imaging technique (McKay, 2002) which relies on the measurement of the spatial location of a linear interference pattern (fringe) that is vertically imaged onto the detector. A Doppler frequency shift $\Delta f_{\text{Doppler}} = 2 f_0/c \cdot v_{\text{LOS}}$ of the return signal ($f_0 = 844.75$ THz is the laser emission frequency, c is the speed of light) manifests as a spatial displacement of the fringe centroid position with an approximately linear relationship for typical wind speeds v_{LOS} along the laser beam LOS well below 100 $\text{m}\cdot\text{s}^{-1}$ ($\Delta f_{\text{Doppler}} < 563$ MHz).

Due to the much broader spectral bandwidth of the molecular backscatter signal which features a Rayleigh-Brillouin line shape (Witschas et al., 2010; Witschas, 2011a; Witschas, 2011b), a different technique is applied for deriving the Doppler frequency shift in the Rayleigh channel. Here, the measurement principle is based on the double-edge technique (Chanin et al., 1989; Garnier and Chanin, 1992; Flesia and Korb, 1999; Gentry et al., 2000) involving two bandpass filters (A and B) which are realized by the sequential FPIs. ~~The interferometers are specified such that the two transmission curves (free spectral range (FSR): 10.95 GHz, FWHM: 1.78 GHz, spacing: 6.18 GHz) are placed symmetrically around the frequency of the emitted laser pulse while the maxima are close to the inflexion points (edges) of the backscatter spectrum which exhibits a spectrally broadened Rayleigh Brillouin line shape (Witschas et al., 2010; Witschas, 2011a; Witschas, 2011b). The signals I_A and I_B transmitted through the two bandpass filters are proportional to the convolution of the line shape function of the atmospheric backscatter signal with the respective filter transmission function. Hence, measurement~~ Measurement of the contrast between I_A and I_B ($(I_A - I_B)/(I_A + I_B)$) the signals transmitted through the two filters allows determining the frequency shift between the emitted and backscattered laser pulse.

Detection of the Mie and Rayleigh signals is carried out by two accumulation charge-coupled devices (ACCDs) with an array size of 16 x 16 pixels (image zone) and high quantum efficiency of 85% at 355 nm. For both channels, the electronic

charges of all 16 rows in the image zone are binned together to one row and stored in 25 rows of a memory zone, each row representing one range gate. ~~Low readout noise is accomplished by directly accumulating charges in the memory zone within the CCD chip. In this way, the charges become sufficiently large that the noise contribution of the readout amplifier becomes negligible compared to the shot noise from the detected signal itself (Reitebuch et al., 2009).~~ From the 25 range gates, three range gates are used for detecting the background light, signals resulting from a the electric-voltage at the analogue-to-digital converter (detection chain offset, DCO) and the internal reference signal, respectively. Two following range gates act as buffers for the internal reference, so that atmospheric backscatter signals are collected in the remaining 20 range gates. Due to the transfer time from the image to the memory zone, the temporal resolution of one range gate is limited to 2.1 μs corresponding to a minimum range resolution of 315 m (height resolution of 296 m considering the 20°-off-nadir pointing of the instrument). The timing sequences of both ACCDs are flexibly programmable so that the vertical resolution within one wind profile can be varied from 296 m to about 1.2 km, individually for the Mie and Rayleigh channel. The horizontal resolution of the A2D is determined by the acquisition time of the detection unit where the signals from 18 successive laser pulses are accumulated to so-called *measurements* (duration 0.4 s). Summation of the signals obtained from 35 measurements, i.e. 630 laser pulses, forms one *observation* (duration 14 s). Taking account of the time required for data read out and transfer (4 s), two subsequent observations are separated by 18 s.

For the satellite instrument, one observation consists of 30 accumulations (also referred to as measurements) of 19 shots, whereby data is continuously read out without gaps of 4 s. Hence, one observation takes 12 s. However, due to the much higher ground speed of Aeolus of about 7200 $\text{m}\cdot\text{s}^{-1}$ compared to the Falcon aircraft (200 $\text{m}\cdot\text{s}^{-1}$), the horizontal resolution of about 86.4 km is much coarser than for the A2D (3.6 km). In the course of the Aeolus wind retrieval, different accumulation lengths are possible depending on the signal strength in the Rayleigh and Mie channel, as explained in the next section.

2.2 The Aeolus wind data product

ALADIN on-board Aeolus is, like its airborne demonstrator, a direct-detection Doppler wind lidar which incorporates a frequency-stabilized UV laser and a dual-channel optical receiver to determine the Doppler shift from the broadband Rayleigh-Brillouin backscatter from molecules and the narrowband Mie backscatter from aerosols and cloud particles (ESA, 2008; Reitebuch, 2012). The major technical differences to the airborne instrument are the larger telescope diameter (1.5 m), the larger slant angle (35°) and the free-path propagation of the internal reference signal, as explained above. An overview of the key instrument parameters of the two wind lidars is given in Table 1.

175 |

Table 1. Key instrument parameters of ALADIN and the ALADIN Airborne Demonstrator.

Parameter	ALADIN	ALADIN Airborne Demonstrator (A2D)
Laser wavelength, repetition rate, pulse energy, linewidth	354.8 nm 50.5 Hz 53...57 mJ (Nov. 2018) 30 MHz (FWHM)	354.89 nm 50 Hz 60 mJ 50 MHz (FWHM)
Telescope diameter	1.5 m	0.2 m
LOS slant angle	35°	20°
Lidar principle	Direct-detection with double-edge and fringe imaging technique	Direct-detection with double-edge and fringe imaging technique
Receiver	Sequential Fabry-Pérot interferometers for molecular backscatter (Rayleigh channel) and Fizeau interferometer for particulate backscatter (Mie channel)	Sequential Fabry-Pérot interferometers for molecular backscatter (Rayleigh channel) and Fizeau interferometer for particulate backscatter (Mie channel)
Horizontal resolution	86.4 km	3.6 km
Vertical resolution	250 m to 2000 m depending on range gate setting	300 m to 1200 m depending on range gate setting

180 The Aeolus Level 2B (L2B) product contains so-called horizontal line-of-sight (HLOS) winds for the Mie and Rayleigh channel. The L1B and L2B wind retrieval is described in detail in Algorithm Theoretical Basis Documents (Reitebuch et al., 2018; Tan et al., 2017). Thus, only a brief description is provided here. As a first step, Aeolus measurements (horizontal resolution of about 2.9 km corresponding to 0.4 s) are gathered together into groups where the length depends on the L2B parameter settings. During the analysed period in November 2018 the group length was set to 30 Aeolus measurements, and thus identical to the previously defined observation length, corresponding to a horizontal extent of about 86.4 km. Note that groups can also be shorter than observations in case the horizontal averaging is set differently in the L2B processor. The measurement bins within the group are then classified into “clear” and “cloudy” bins using estimates of the backscatter ratio which is defined as the ratio of the total backscatter coefficient (particles and molecules) to the molecular backscatter coefficient. “Clear” bins are usually those for which the backscatter ratio is below 1.2 to 1.4 depending on L2B processor settings, while bins with higher backscatter ratios are considered “cloudy”. scattering ratio. Before the wind retrieval is performed, the signals of the measurement bins from the same category are horizontally accumulated within the group.

185 Separate wind retrievals are performed for both channels and for both categories, whereby only Rayleigh winds classified as clear and Mie winds classified as cloudy are generally used for further analysis. In this manner, it is ensured that systematic errors introduced to the Rayleigh winds by contamination with particulate backscatter signals as well as low SNR of the Mie channel are avoided. Finally, to account for pressure and temperature effects in the Rayleigh wind retrieval (Dabas et al., 2008), a priori temperature and pressure information from ECMWF model results are interpolated along the Aeolus measurement track and used for correction.


190 The utilized meteorological data is also included in an auxiliary data product (AUX_MET). It should be mentioned that the Aeolus wind data obtained from the L2B product which is discussed here is in

a preliminary state, inasmuch as biases related to known error sources such as instrumental drifts are not corrected yet (Reitebuch et al., 2019; Rennie and Isaksen, 2019a). ~~Such~~ These error sources will be elaborated in section 4.3.

In addition to the L2B wind product, Aeolus provides an L2C wind product which results from background assimilation of the Aeolus HLOS winds in the ECMWF operational prediction model. It contains the u and v components of the wind vector vertical wind vector profiles (u and v components) and supplementary geophysical parameters.

3 Campaign overview, response calibration and wind observations

Only three months after the successful launch of Aeolus, the wind validation campaign (WindVal III) was conducted from the DLR airbase in Oberpfaffenhofen, Germany ~~in the~~ in the time frame from 5 November to 5 December 2018. The campaign represented a continuation of the previous field experiments WindVal I in 2015 (Marksteiner et al., 2018) and WindVal II (NAWDEX) in 2016 (Schäfler et al., 2018; Lux et al., 2018) which were performed from Keflavík, Iceland. The previous campaigns aimed at the pre-launch validation of the Aeolus mission by exploiting the high degree of commonality of the A2D with the satellite instrument to test its measurement principle and to refine its wind retrieval algorithms based on real atmospheric measurements. With Aeolus operating in space, the objectives of WindVal III went beyond those of the preceding campaigns. For the first time, collocated wind measurements of ALADIN and its airborne demonstrator could be performed offering the possibility to compare the performance of both instruments under various atmospheric conditions. In addition to the collocated wind observations shortly after launch, one goal of the WindVal III campaign was to rehearse the validation activities to be performed after the commissioning phase of the Aeolus mission. This included, first and foremost, the planning of the flights along the satellite measurement track which required a thorough consideration of the weather conditions along the swath within the reach of the DLR Falcon research aircraft, air traffic control limitations as well as the satellite status and operating hours of the Oberpfaffenhofen airport. For the purpose of high wind data coverage of Aeolus, target areas without high- or mid-level clouds were generally preferred for the underflights. Ideally, the flights included sections with cloud-free conditions, as this allowed for strong ground return signals which could be exploited for reducing potential wind biases by means of zero wind correction (Marksteiner, 2013; Lux et al., 2018).

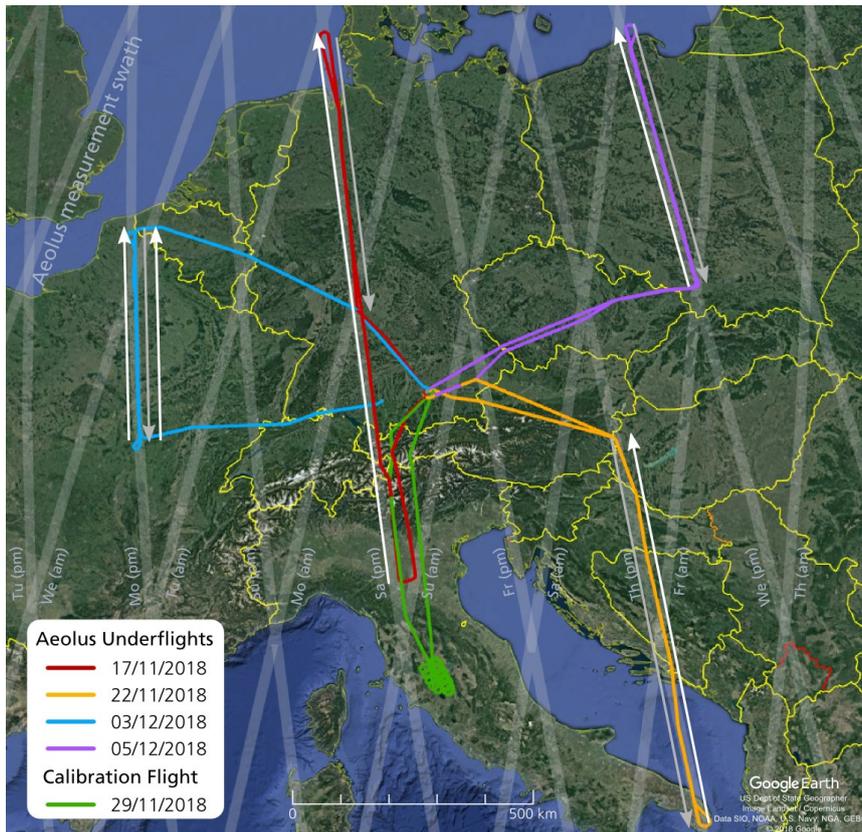

225 **Figure 2.** Flight tracks of the Falcon aircraft during the WindVal III campaign from 17 November to 5 December 2018 (background image: © 2018 Google). Each colour represents a single flight. The Aeolus measurement swath is shown in grey colour. The arrows indicate the Falcon flight direction along the swath on the different legs in (white arrows) and against (grey arrows) the satellite direction which was always from south to north during the probed evening satellite tracks. The A2D was not operable during the flight on 17 November 2018.

In the framework of the WindVal III campaign in autumn 2018, six flights were conducted including a test flight and a calibration flight. The corresponding flight tracks of the DLR Falcon aircraft are shown in Fig. 2 together with the swaths of the Aeolus satellite for one week. A total of 22 flight hours were carried out including the test flight performed a few hours before the first underflight on 17 November 2018. Adding up the lengths of the satellite swaths covered by the aircraft during the four underflights, the overall track length for which wind data was acquired for validation purposes is nearly 3000 km. The first underflight was also the longest flight along the Aeolus track (1155 km) covering the measurement swath from Northern Italy up to the North Frisian Islands. While the 2- μm DWL was operating without limitations during the entire campaign, the A2D was not operational during the first flight due to technical issues, so that A2D wind data is only available from the three other underflights. The data obtained along the Aeolus track is subdivided into seven wind scenes corresponding to the flight legs indicated by arrows in Fig. 2. An overview of these scenes including the number of A2D observations are presented in Table 2 together with the geolocations of the start and end points of the respective flight legs. The number of Aeolus observations for each scene is provided as well.

230

235

240 **Table 2.** Overview of the research flights of the Falcon aircraft in the frame of the WindVal III campaign and the wind scenes performed with the A2D along the Aeolus measurement track. The A2D was not operable during the flight on 17 November 2018.

Flight #	Date	Flight period (UTC)	Measurement period (UTC)	Number of A2D observations	Geolocation of DLR Falcon on Aeolus measurement track (start/stop)		Number of Aeolus observations
1	17/11/2018	15:14 – 19:14	A2D inoperable	No data	44.7°N, 10.6°E	54.9°N, 7.8°E	12
2	22/11/2018	14:29 – 17:56	15:11 – 15:48	122	46.7°N, 16.8°E	42.3°N, 17.7°E	7
			16:13 – 17:15	176	40.5°N, 18.1°E	47.2°N, 16.5°E	9
3	29/11/2018	09:56 – 14:00	Calibration flight				
4	03/12/2018	15:48 – 19:31	16:48 – 17:13	82	47.8°N, 3.5°E	50.5°N, 2.8°E	4
			17:22 – 17:48	87	50.1°N, 2.9°E	46.8°N, 3.7°E	4
5	05/12/2018	14:56 – 18:22	17:53 – 18:29	117	47.1°E, 3.6°E	50.6°N, 2.7°E	5
			15:53 – 16:45	173	50.3°N, 18.9°E	54.9°N, 17.6°E	7
			16:55 – 17:18	78	54.0°N, 17.9°E	50.8°N, 18.8°E	4

3.1 Response calibrations

The flight on 29 November 2018 was dedicated to the calibration of the A2D which is a prerequisite for the wind retrieval, since the relationship between the Doppler frequency shift of the backscattered light, i.e. the wind speed, and the response of the two spectrometers has to be known for the wind retrieval. ~~In particular, the frequency dependence of the Rayleigh response has to be determined for different altitudes, since the spectral shape of the Rayleigh Brillouin backscatter signal influencing the transmission through the two FPI filters significantly depends on temperature and pressure of the sampled atmospheric volume (Witschas et al., 2010; Dabas et al., 2008) and thus varies along the laser beam path.~~ Calibration of the Rayleigh and Mie channel involves a frequency scan of the laser transmitter over 1.4 GHz ($\pm 125 \text{ m}\cdot\text{s}^{-1}$) to simulate well-defined Doppler shifts of the atmospheric backscatter signal within the limits of the laser frequency stability. During this procedure the contribution of (real) wind related to molecular or particular motion along the instruments' LOS is virtually eliminated by flying curves at a roll angle of the Falcon aircraft of 20°, hence resulting in approximate nadir pointing of the instrument and, in case of negligible vertical wind, vanishing LOS wind speed. In the course of one frequency scan which takes about 24 minutes, unknown contributions to the Rayleigh and Mie response such as temperature variations of the spectrometers or frequency fluctuations of the laser transmitter have to be minimized, as they can introduce systematic errors or increase the random error of the derived wind speed. Above all, cloud- and aerosol-free ~~cloud free~~ conditions are necessary to avoid Mie backscatter signals which affect the backscatter spectrum, and thus contaminate the Rayleigh response in the respective range gates. Furthermore, ground visibility is required for calibrating the Mie channel. Additional information on the A2D calibration procedure and how it compares to the satellite mission are comprehensively described in Marksteiner et al. (2018), while details on the calibration and wind retrieval of Aeolus can be found in Tan et al. (2016) and Reitebuch et al. (2018).


The region between Rome and Florence with clear atmosphere and nearly zero vertical wind was chosen for the WindVal III calibration flight on 29 November 2018. The green track in Fig. 2 shows the characteristic circular flight pattern in Northern Italy which follows from the 20° roll angle of the aircraft for the purpose of nadir pointing of the A2D. In the period from 10:48 UTC to 12:51 UTC, four response calibrations, i.e. laser frequency scans, were performed to obtain four sets of calibration parameters. Based on several quality criteria which were identified during previous campaigns and are mostly related to instrument housekeeping data (Marksteiner et al., 2018), one of the four calibration sets was selected for Rayleigh and Mie wind retrieval, respectively. The chosen Rayleigh calibration was especially characterized by a high pointing stability of the laser transmitter which is of high importance for assuring a low random error of the Rayleigh channel, as even small variations in the incidence angle on the Rayleigh FPIs by a few μrad largely influence the Rayleigh response, potentially leading to wind errors of several $\text{m}\cdot\text{s}^{-1}$ (DLR, 2016). Moreover, the selected calibration showed the smallest residuals of the fifth-order polynomial fit applied to Rayleigh response curve, thus ensuring the lowest random wind error which may result from discrepancies between the calibration fit function and the actual frequency dependence of the spectrometer response. For the Mie channel, the four calibration results were very consistent which can be traced back to the integration of the fiber scrambler that considerably reduced the speckle noise of the internal reference signal (Lux et al., 2019). Hence, since there were no additional arguments in favour or against a certain calibration, the one with the lowest temperature variability of the Fizeau interferometer was selected for the Mie wind retrieval.

3.2 A2D wind results from the underflight on 22 November 2018

First collocated wind observations of the A2D and Aeolus were performed on 22 November when the Falcon flew along the satellite swath from Lecce in South Italy (40.5°N, 18.1°E) to the Austrian-Hungarian border (47.2°N, 16.5°E) (see Fig. 2). Aeolus covered this track between 16:34:14 UTC and 16:36:02 UTC, while it took the Falcon more than one hour from 16:13 UTC to 17:15 UTC to travel the distance of about 790 km. Cloud-free conditions and strong winds prevailed in the southern part of the leg, while mid-level clouds and weak winds occurred for the northern part in accordance with the weather prediction used for flight planning.

During the underflight, the A2D performed 176 wind observations while wind data from nine observations was acquired by Aeolus (see Table 2). The A2D wind scene was deliberately interrupted by a so-called MOUSR (Mie Out of Useful Spectral Range) measurement between 16:45 UTC and 16:54 UTC. This mode is used to detect the Rayleigh background signal distribution on the Mie channel which is important for quantifying the broadband molecular return signal transmitted through the Fizeau interferometer. For this purpose, the laser frequency was tuned away by 1.05 GHz from the Rayleigh filter cross point and Mie channel centre which defines the set frequency during the wind scenes. As a result, the laser frequency of the emitted pulses was outside of the useful spectral range of the Mie spectrometer, so that the fringe was not imaged onto the Mie ACCD and only the broadband Rayleigh signal was detected on the Mie channel. The range-dependent intensity levels per pixel were subsequently subtracted from the measured Mie raw signal in order to avoid systematic errors in the determination of the fringe centroid position and, in turn, in the Mie winds.


295 The Rayleigh and Mie signal intensities per observation are shown in Fig. 3. The raw signals were first corrected for the solar background and the DCO which are collected in two dedicated range gates, as explained above. Range correction (normalization to 1 km) was then applied taking into account that the intensity decreases as the inverse square of the distance between the scatterer and the detector. Finally, the integration times set for each range gate were considered for normalising the signal intensities per range gate to a bin size of 296 m (2.1 μ s integration time). While the intensity profile for the
 300 Rayleigh channel essentially follows the vertical distribution of the atmospheric molecule density, the Mie intensity profile displays the vertical distribution of atmospheric cloud and aerosol layers along the flight track. High Rayleigh signal intensities can be attributed to cloud layers at different altitudes along the flight track which also manifest in increased Mie signal intensities.

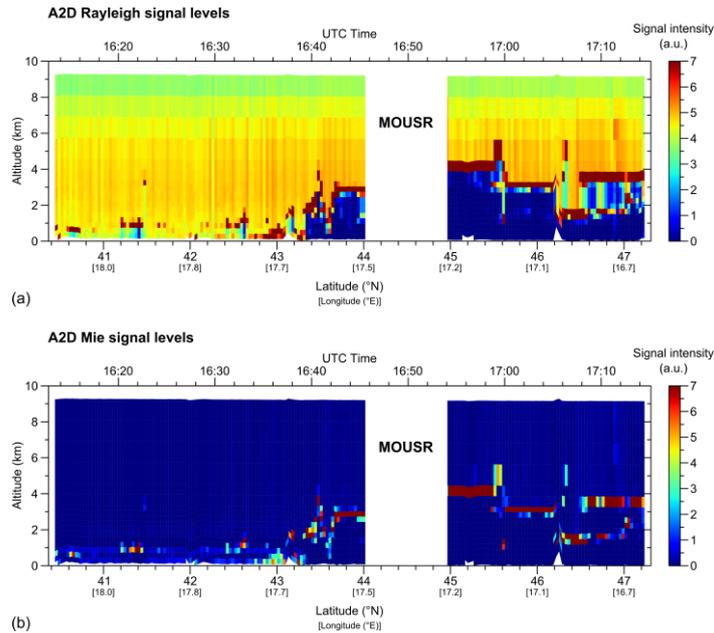

305

Figure 3. Background and DCO-corrected signal levels from (a) the A2D Rayleigh channel and (b) the Mie channel measured during the underflight on 22 November 2018 between 16:14 UTC and 17:14 UTC along the Aeolus measurement track. Between 16:45 UTC and 16:54 UTC the A2D was operated in a different mode (MOUSR) aiming at the detection of the Rayleigh background signal on the Mie channel.

310

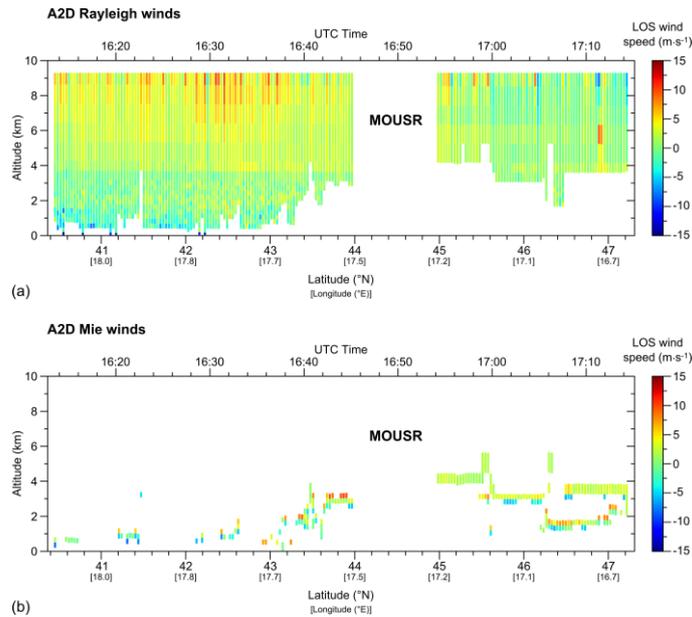

315 **Figure 4.** LOS wind profiles (positive if winds are blowing away from the instrument) measured during the underflight on 22 November 2018 between 16:13 UTC and 17:15 UTC along the Aeolus measurement track (white arrow in Fig. 2) using (a) the A2D Rayleigh and (b) the Mie channel. White colour represents missing or invalid data due to low signal, e.g. below dense clouds. The data gap between 16:45 UTC and 16:54 UTC is due to an interruption of the wind measurement during a different operation mode (MOUSR) of the A2D instrument aiming at the detection of the Rayleigh background signals on the Mie channel.

Figure 4 shows the processed LOS Rayleigh and Mie winds plotted versus latitude (and time) and altitude for the period of the Aeolus underflight on 22 November 2018. During the first section of the flight, cloud-free conditions led to nearly complete data coverage of the Rayleigh channel from ground up to 9 km altitude. In the second half of the flight, dense mid-level clouds limited the extension of the Rayleigh wind profiles to above 4 km to 5 km. The data gap in between is due to the
 320 MOUSR procedure mentioned above.

The range gate settings were identical for the Rayleigh and Mie channel and chosen to sample the lowermost 3.5 km of the troposphere with the highest possible vertical resolution. Therefore, the integration time of the ACCD was set to 8.4 μs in the range gates 7 to 10 (9.3 km to 4.5 km), 4.2 μs in the range gates 11 and 12 (4.5 km to 3.5 km) and 2.1 μs in all the remaining
 325 range gates towards the ground, corresponding to a height resolution of 1184 m, 592 m and 296 m, respectively. LOS wind speeds of up to 15 $\text{m}\cdot\text{s}^{-1}$ were measured with the Rayleigh channel at altitudes between 8 km and 9 km. Note that positive wind speeds are obtained when the A2D LOS unit vector points along the direction of the horizontal wind vector, i.e. the wind is blowing away from the instrument. This definition is in contrast to previous campaigns where winds blowing towards the instrument were defined positive in accordance with a positive Doppler frequency shift. It was inverted in order
 330 to follow the sign convention of Aeolus, thus allowing for a better comparison different wind data sets. In the shown case, northwesterly winds were present around the Adriatic Sea with horizontal wind speeds up to 50 $\text{m}\cdot\text{s}^{-1}$ at 9 km altitude according to the ECMWF model. However, as the A2D was pointing towards the northeast along the Aeolus track, the projection of the horizontal wind vector onto the instrument's LOS was small, resulting in low measured wind speeds with

positive sign. At lower altitudes, the wind direction was opposite, so that the wind was blowing towards the instrument,
335 leading to slightly negative wind speeds.


In contrast to the Rayleigh channel, the Mie data coverage is rather poor owing to the sparse cloud cover and low aerosol
load during the flight. Wind data is mainly obtained from the cloud tops along the track. Due to the high optical density of
the clouds, the laser was strongly attenuated, thus preventing sufficient backscatter signal and valid Mie wind data over
multiple range gates within and below~~across~~ the clouds. As a result, valid Mie wind data is often obtained for only one bin
340 per profile or, in case data from a subjacent range gate passes quality control, the wind data shows a large systematic error.
This is likely due to the skewness of the Mie fringe on the ACCD which influences the determination of the centroid position
depending on the position of the cloud within the range gates. The same characteristics were observed for the other two
Aeolus underflights, so that the number of valid and good quality Mie wind data is very low compared to the Rayleigh
channel. The scarce coverage of the Mie data and the high number of outliers due to the Mie fringe skewness in combination
345 with the presence of thick clouds prevented a meaningful comparison with the Aeolus data which showed similarly poor Mie
data coverage for the same reasons. Thus, the further analysis of the A2D and Aeolus wind data is restricted to the Rayleigh
channel.

3.3 Aeolus wind results from the underflight on 22 November 2018

When the Falcon aircraft was located at 42.8°N, 17.7°E at 16:34:56 UTC after about one third of the common leg from
350 Lecce to the Austrian-Hungarian border, Aeolus was just passing by, measuring winds in the same atmospheric volume
along its path. 66 seconds later, the satellite finished the common leg, while the Falcon arrived at the northern end of the
track at 17:15 UTC, resulting in a maximum temporal distance between the wind data acquisitions of the airborne and
satellite instruments of about 39 minutes. The wind data obtained with the Aeolus Rayleigh channel is depicted in Fig. 5.
The profiles span the range from the ground to the lower stratosphere (21 km) with vertical resolution of 0.25 km in the
355 lowermost range gates up to 2 km altitude. In the range between 2 km and 13 km altitude the bin thickness is 1 km, while it
is 2 km in the region above. Hence, a maximum of 15 range bins lie within the sampled altitude range of the A2D below
10 km. The selected range gate setting of Aeolus ensured accurate ground detection with the highest possible vertical
resolution which was crucial for determining potential wind biases during the commissioning phase of the mission. The data
plotted in Fig. 5 are the wind speeds measured along the satellite's LOS which is asterisked (LOS*) in the following in order
360 to avoid confusion with the A2D LOS. Due to the larger off-nadir angle of $\theta_{\text{Aeolus}} \approx 37^\circ$ relative to the normal direction at the
measurement swath (considering the Earth curvature) compared to the airborne demonstrator (20°), the projection of the
horizontal wind vector onto the satellite LOS is generally larger and the measured wind speeds are thus higher.

The HLOS wind speed $v_{\text{Aeolus, HLOS, Aeolus}}^*$ included in the L2B wind data product of Aeolus can be converted to the LOS*
wind speed $v_{\text{Aeolus, LOS, Aeolus}}^*$ via the off-nadir angle θ_{Aeolus} (see the Aeolus observational geometry in Fig. 5):

$$365 \quad v_{\text{Aeolus, LOS, Aeolus}}^* = v_{\text{Aeolus, HLOS, Aeolus}}^* \cdot \sin(\theta_{\text{Aeolus}}). \quad (1)$$

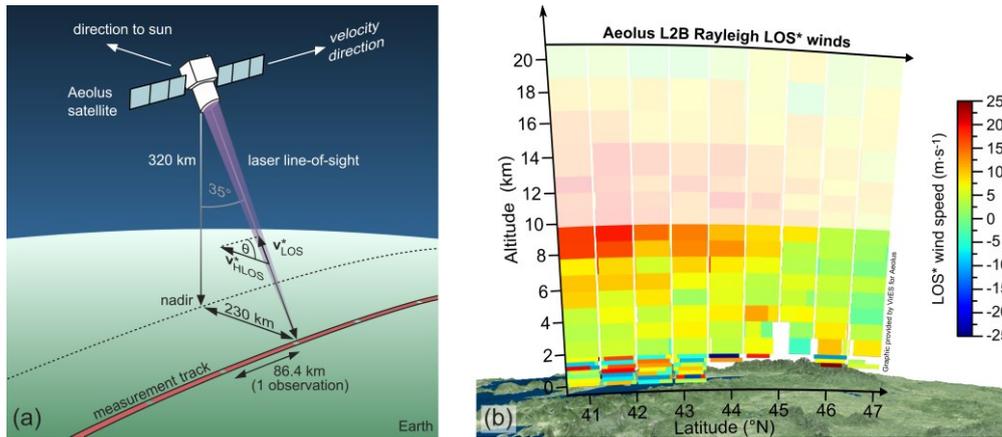


370 | **Figure 5. (a) Aeolus observational geometry (b) Aeolus L2B LOS* Rayleigh winds** (positive if winds are blowing away from the instrument) measured during the underflight on 22 November 2018 between 40.6°N and 47.2°N. Only winds with an estimated wind error of less than 12 m·s⁻¹ are shown. Winds at altitudes above 10 km are outside of the measurement range of the A2D and therefore shown greyed out. The figure was created based on a screenshot from the Aeolus visualization tool *VirES for Aeolus* (<https://aeolus.services/>).

The L2B product also contains the Rayleigh estimated wind error which is derived from the signal-to-noise level and the pressure and temperature sensitivity of the Rayleigh channel responses (Tan et al., 2017). Bins for which the estimated error is larger than 12 m·s⁻¹ are omitted in the diagram in Fig. 5. This leads to data gaps in the lower troposphere in the northern part of the common leg where dense low-level clouds strongly attenuated the laser beam and the backscattered signal from below the clouds, as also observed for the A2D. In accordance with the weather forecast, Aeolus measured strong winds in the southern part of the leg between 8 and 10 km, reaching LOS* wind speeds of up to 25 m·s⁻¹, whereas weaker winds were observed towards the north. Before comparing the A2D and Aeolus wind results from the selected underflight as well as the entire campaign, the quality of the A2D data during WindVal III will be discussed in the following.

3.4 Assessment of the A2D performance by comparison with the 2-μm DWL

380 The accuracy and precision of the A2D Rayleigh wind results were evaluated by comparing them to the wind data obtained from the coherent 2-μm DWL which was operated in parallel on the same aircraft and which is characterized by high accuracy of the horizontal wind speed of about 0.1 m·s⁻¹ and precision of better than 1 m·s⁻¹ (Weissmann et al., 2005; Chouza et al., 2016; Witschas et al., 2017). For this purpose, the three-dimensional wind vectors measured with the 2-μm DWL were projected onto the A2D LOS axis. Moreover, the 2-μm measurement grid was adapted to that of the A2D by means of a weighted aerial interpolation algorithm, as introduced in Marksteiner et al. (2011). The latter was, in a similar way, also utilized for the comparison of the A2D and Aeolus data and will be described in the next section. In analogy to the results presented for selected flights of the WindVal II campaign in 2016 (Lux et al., 2018), a statistical comparison was performed yielding the systematic and random error of the A2D Rayleigh winds for all underflights of the WindVal III campaign. The corresponding scatterplot is depicted in Fig. 6(a) together with the results from the previous campaign

390 WindVal II, while the respective statistical parameters are provided in Table 3.

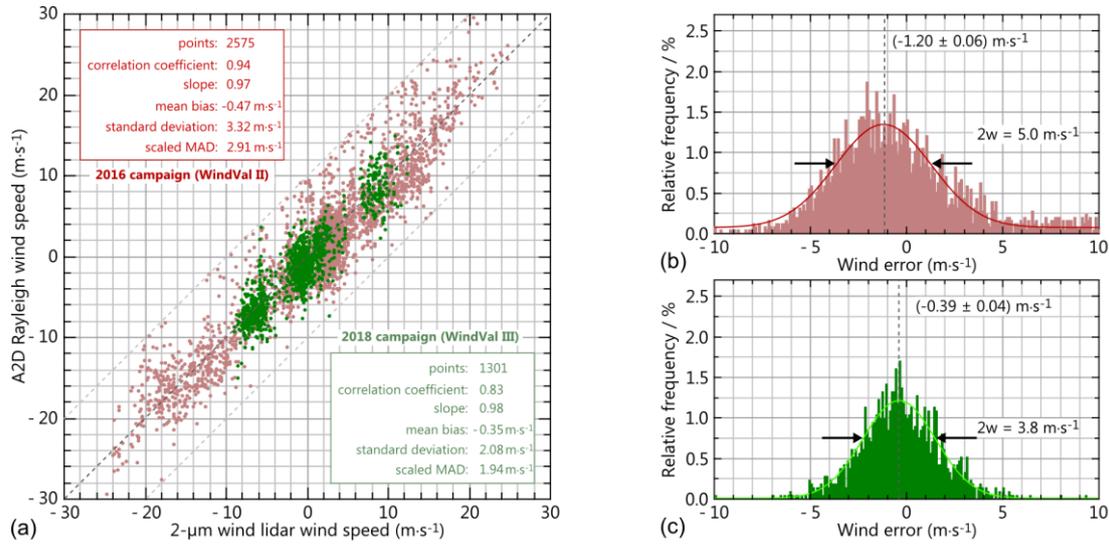

395 **Figure 6.** (a) Scatterplots comparing the A2D Rayleigh LOS winds with the 2- μm DWL winds for all Aeolus underflight legs from the WindVal III campaign in 2018 (green) and from all flights of the WindVal II campaign in 2016 (red). The corresponding probability density functions for the wind differences (A2D–2 μm), i.e. the A2D wind error, are shown in panels (b) and (c) for the two campaigns, respectively. The solid lines represent Gaussian fits with the given centres and $e^{-1/2}$ -widths $2w$.

In addition to the parameters provided in the insets of Fig. 6(a), the table also includes the slopes A and intercepts B from non-weighted linear fits $v_y = A \cdot v_x + B$ applied to the two scatterplots. Here, x and y represent the values plotted on the abscissa and ordinate, respectively. The standard error of the slope given in the table was calculated according to

400
$$S_A = \sqrt{\frac{\frac{1}{n-2} \sum_{i=1}^n \varepsilon_i^2}{\sum_{i=1}^n (v_{x,i} - \bar{v}_x)^2}}, \text{ with} \quad (2a)$$

$$\varepsilon_i = v_{y,i} - (A \cdot v_{x,i} + B) \quad (2b)$$

being the residuals of the linear regression.

405 **Table 3.** Results of the statistical comparison between the A2D Rayleigh channel and the 2- μm DWL wind data for all flights performed during the WindVal II campaign in 2016 and the WindVal III campaign in 2018. See corresponding scatterplots in Fig. 6. The values are given as wind speeds measured along the A2D LOS.

Statistical parameter	WindVal II	WindVal III
Number of compared bins	2575	1301
Correlation coefficient r	0.94	0.83
Slope A	0.97 ± 0.02	0.98 ± 0.02
Intercept B	$-0.4 \text{ m}\cdot\text{s}^{-1}$	$-0.4 \text{ m}\cdot\text{s}^{-1}$
Mean bias	$-0.5 \text{ m}\cdot\text{s}^{-1}$	$-0.4 \text{ m}\cdot\text{s}^{-1}$
Standard deviation	$3.3 \text{ m}\cdot\text{s}^{-1}$	$2.1 \text{ m}\cdot\text{s}^{-1}$
Scaled MAD	$2.9 \text{ m}\cdot\text{s}^{-1}$	$1.9 \text{ m}\cdot\text{s}^{-1}$

During the WindVal II campaign twelve research flights were performed with a primary focus on the sampling of high wind speeds and gradients related to the North Atlantic jet stream. Therefore, the number of compared wind results and the wind speed range are considerable larger compared to the WindVal III campaign where generally weaker winds were encountered during the four satellite underflights in Central Europe. Nevertheless, more than half as many A2D Rayleigh winds entered the statistical comparison with the 2- μm DWL winds, as the WindVal III flights were preferentially conducted in cloud-free regions for the purpose of large data overlap with Aeolus. It should be noted here that the 2- μm DWL is very sensitive to weak backscatter return from clouds and aerosols due to its small-bandwidth coherent detection principle, so that 2 μm DWL winds are even available for low scattering ratios (<-1.1), where insignificant Mie contamination of the A2D Rayleigh channel can be expected.

The WindVal III flight planning aimed to reduce the probability for heterogeneous cloud conditions which, in turn, increased the representativity of the scan-retrieved volume winds obtained from the 2- μm DWL to the A2D LOS winds. Furthermore, the risk for large systematic errors of the Rayleigh channel, e.g. introduced by cirrus clouds affecting the transmit-receive co-alignment feedback loop, was minimized. Consequently, the scatterplot for WindVal III in Fig. 6(a) features much less outliers compared to that of WindVal II. The more homogeneous atmospheric conditions in combination with the implementation of the fiber scrambler to diminish the internal reference frequency noise result in a significant reduction of the random error by more than 30% to less than $2 \text{ m}\cdot\text{s}^{-1}$, while the mean bias of $-0.4 \text{ m}\cdot\text{s}^{-1}$ is comparable to the previous campaign ($-0.5 \text{ m}\cdot\text{s}^{-1}$).

In addition to the standard deviation, the median absolute deviation (MAD) was determined for quantifying the random error of the A2D wind speed measurements. It is defined as the median of the absolute variations of the measured wind speeds from the median of the wind speed differences:

$$\text{MAD} = \text{median}\left[\left|v_{\text{A2D},i} - v_{\text{ECMWF},i}\right| - \text{median}\left(v_{\text{A2D},i} - v_{\text{ECMWF},i}\right)\right]. \quad (3)$$

Compared to the standard deviation, the MAD is more resilient to outliers and thus a more robust measure of the variability of the measured wind speeds. In case that the random wind error is normally distributed, the MAD value, multiplied by 1.4826 (scaled MAD), is identical to the standard deviation. The larger number of outliers in the scatterplot for the WindVal II campaign manifests in a larger discrepancy between the standard deviation ($3.3 \text{ m}\cdot\text{s}^{-1}$) and the scaled MAD value ($2.9 \text{ m}\cdot\text{s}^{-1}$) compared to WindVal III ($2.1 \text{ m}\cdot\text{s}^{-1}$, $1.9 \text{ m}\cdot\text{s}^{-1}$). The random error can also be approximated from probability density functions (PDFs) illustrating the frequency distribution of the wind speed differences $v_{\text{A2D}} - v_{2\mu\text{m}}$, i.e. the wind error (Fig. 6(b,c)). Since the wind error is not perfectly Gaussian-distributed for both campaigns, there is a deviation between the mean bias values and the center of the Gaussian fits. For the same reason, the width of the fits is narrower than twice the standard deviations which also consider the outliers.

4 Comparison of A2D and Aeolus wind data

For adequate comparison of the A2D wind profiles with the Aeolus wind data, two major aspects have to be considered. First, the different horizontal and vertical resolutions of the two instruments necessitate an adaptation of the A2D measurement grid to that of Aeolus. Second, the different viewing geometries of the wind lidars need to be taken into account. Since both instruments measure only one component of the horizontal wind vector along the respective LOS, information on the wind direction is required in order to determine the wind speed difference of the A2D and Aeolus resulting from the different LOS directions.

4.1 Adaptation of the measurement grid

Due to the fact that the horizontal resolution of Aeolus is much coarser than that of the A2D (see Table 1), interpolation of the A2D wind measurements onto the Aeolus measurement grid is required. In the framework of previous A2D campaigns, an aerial weighted averaging algorithm (Marksteiner et al., 2011; Marksteiner, 2013) was developed to compare the A2D wind results with the data obtained from the 2- μm reference wind lidar (Lux et al., 2018). The grid adaptation procedure used in this study is based on that algorithm. Each valid A2D range bin covering an Aeolus range bin is allocated both horizontal and vertical weights depending on the size of the contribution of the respective A2D bin to the total area of the Aeolus bin, as illustrated in Fig. 7.

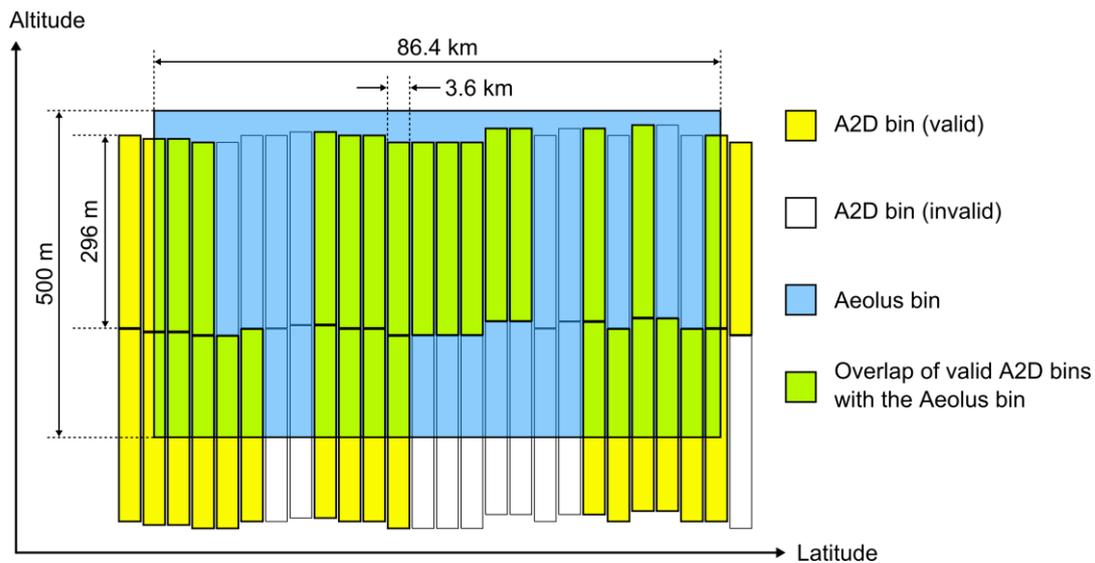


Figure 7. Schematic illustrating the different horizontal and vertical resolutions of Aeolus (blue bin) and the A2D (yellow bins) for typical range gate settings of the two instruments (Aeolus: 500 m vertical resolution, A2D: 296 m vertical resolution). White bins indicate invalid A2D observations while the green area represents the overlap of valid A2D bins with the Aeolus bin. For the aerial weighted averaging algorithm the contributions of each valid A2D wind value to the wind value allocated to the composite bin are weighted by the overlap of the respective A2D bins with the regarded Aeolus bin. The ratio of the green to the blue area is defined as coverage ratio and used as a quality control parameter (see section 4.4).

460 Hence, for each Aeolus range bin a weighted average from the A2D contributions can be calculated. Moreover, the coverage ratio which determines the coverage of an Aeolus range bin by valid A2D bins is calculated as a measure of the representativity of A2D winds within an Aeolus range bin. Especially in regions with strong wind shear within the area of an Aeolus range bin and sparse coverage, large representativity errors are possible, e.g. when the A2D bins only cover the area of an Aeolus bin where high wind speeds reside, while lower wind speeds within the Aeolus bin are not covered. The
 465 influence of the coverage ratio on the statistics of the wind comparisons is discussed in section 4.4. Additionally, the mean distance of the horizontal centers of the A2D bins covering an Aeolus bin to the latter's bin center was defined as a second adjustable parameter which potentially influences the outcome of the statistical comparison.

4.2 Consideration of the different viewing geometries


A visual comparison of the A2D Rayleigh winds in Fig. 4(a) measured during the underflight on 22 November 2018 with the
 470 corresponding Aeolus L2B Rayleigh wind curtain shown in Fig. 5 reveals large discrepancies. This is due to the fact that the viewing angles of the two instruments differ from each other. First of all, the off-nadir angles are different, as stated above ($\theta_{\text{Aeolus}} = 37^\circ$, $\theta_{\text{A2D}} = 20^\circ$). Additionally, depending on the wind speed and direction along the flight track, the heading angle of the aircraft deviates from the course angle (side-slip), resulting in a varying azimuth angle of the A2D. The situation is illustrated in Fig. 8 showing the flight track of the aircraft along the satellite measurement swath together with the respective
 475 horizontal pointing directions of the A2D and Aeolus at a selected position on the track. While the azimuth angle of the A2D was around 68° , it was 80° for Aeolus. As a result, the two instruments measured different components of the horizontal wind vector projected onto the respective LOS vectors. In order to convert the A2D LOS winds to A2D LOS* winds, i.e. A2D winds that would have been measured if the airborne demonstrator was pointing along the same direction as the satellite instrument, both the off-nadir and the azimuth angle need to be considered. In a first step, the A2D LOS winds are
 480 converted to A2D HLOS winds in analogy to Eq. (1). Then, the real wind speed difference Δ which results from the different azimuth angles of the two instruments has to be determined and added to the actual wind speed measured by the A2D:

$$v_{\text{A2D}}^* = v_{\text{A2D}} + \Delta. \quad (4)$$

The determination of Δ requires an additional source of information. For this purpose, model wind data from the ECMWF which is included in the Aeolus L2C data product was utilized. Knowledge of the zonal (u) and meridional (v) wind
 485 component allows calculating the wind speed difference introduced by the different azimuth angles of the A2D (φ_{A2D}) and Aeolus (φ_{Aeolus}) as follows:

$$\Delta = [\sin(\varphi_{\text{A2D}}) - \sin(\varphi_{\text{Aeolus}})] \cdot u + [\cos(\varphi_{\text{A2D}}) - \cos(\varphi_{\text{Aeolus}})] \cdot v. \quad (5)$$

Using the above mentioned azimuth angles for the two instruments ($\varphi_{\text{A2D}} = 68^\circ$ and $\varphi_{\text{Aeolus}} = 80^\circ$), the wind speed difference Δ can be larger than $5 \text{ m}\cdot\text{s}^{-1}$ for typical zonal and meridional wind speeds of $\pm 30 \text{ m}\cdot\text{s}^{-1}$, as shown in the inset of Fig. 8. Only
 490 in case that the horizontal wind vector bisects the angle between the A2D and the Aeolus azimuth angle, that is for a wind direction of $(\varphi_{\text{A2D}} + \varphi_{\text{Aeolus}})/2 = 74^\circ$ in the present example, the wind speed difference vanishes ($\Delta = 0$). On the contrary, the deviation is maximum when the horizontal wind vector is perpendicular to the case mentioned before (-16° or 164°).

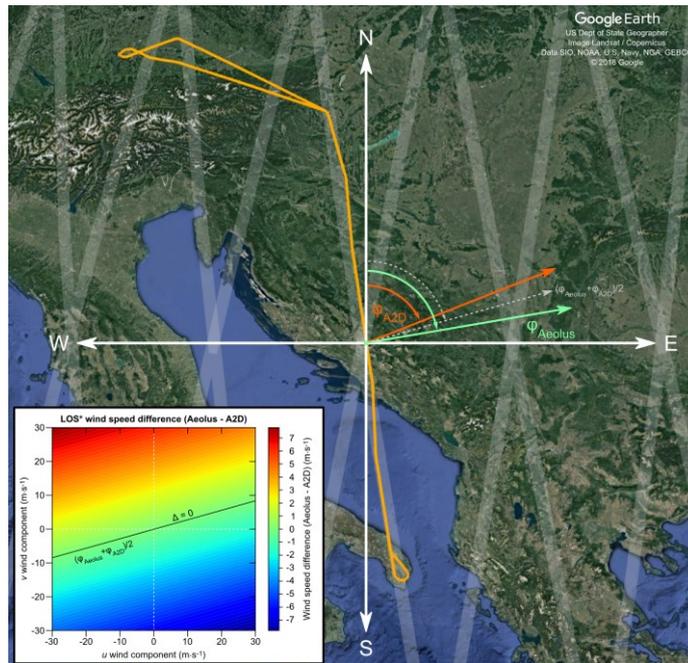


495 **Figure 8.** Diagram illustrating the different azimuth angles of Aeolus (green) and the A2D (orange) at the example of the underflight on 22 November 2018 indicated by the orange flight track (background image: © 2018 Google). The inset depicts the LOS* wind speed difference in dependence on the zonal (u) and meridional (v) wind component for azimuth angles of $\varphi_{A2D} = 68^\circ$ and $\varphi_{Aeolus} = 80^\circ$. In case the azimuth angle of the wind vector meets the condition $\varphi_{wind} = (\varphi_{Aeolus}/\varphi_{A2D})/2$, i.e. the wind direction is 74° (dashed grey arrow), the LOS* wind speed difference Δ is zero.

500 Since the Aeolus azimuth angle is generally around 80° in mid-latitudes on ascending orbits and the A2D azimuth angle is around 68° when flying on ascending satellite tracks, the plot is representative for all underflights of the WindVal III campaign. Thus, it can generally be stated, that the meridional wind component predominantly influences the wind speed difference Δ . In summary, it can be stated that the azimuth correction is essential for accurate comparison of the A2D and Aeolus winds.

505 Despite the high accuracy and precision of the 2- μm DWL, the model data was utilized for the azimuth correction because of its full coverage. In contrast, the coherent detection 2- μm DWL data exhibits gaps in clear air regions, thus preventing the correction of many wind results obtained with the A2D Rayleigh channel. It should be mentioned that, in principle, the adapted A2D wind results can be potentially impacted by a model error (Schäfler et al., 2019). However, the comparison of the ECMWF model winds, averaged onto the Aeolus grid, with the 2- μm DWL wind data showed excellent agreement (bias below $0.1 \text{ m}\cdot\text{s}^{-1}$, random error $\approx 2 \text{ m}\cdot\text{s}^{-1}$) without any significant outliers over the entire campaign (Witschas et al., 2019, 2020). Moreover, for typical azimuth angles of the two instruments, as mentioned above, the maximum error of the correction term Δ resulting from a potential model error of $1 \text{ m}\cdot\text{s}^{-1}$ for both the u and v components or a potential model error of the wind direction of 3° accounts for less than $0.2 \text{ m}\cdot\text{s}^{-1}$ which is acceptable given the A2D random error of about $2 \text{ m}\cdot\text{s}^{-1}$.

Finally, the azimuth-corrected A2D HLOS, i.e. the A2D HLOS*, wind speeds are multiplied by the factor $\sin(37^\circ) \approx 0.60$ (see Eq. (1)) to obtain the A2D LOS* winds. The resulting wind curtains are depicted in Fig. 9.

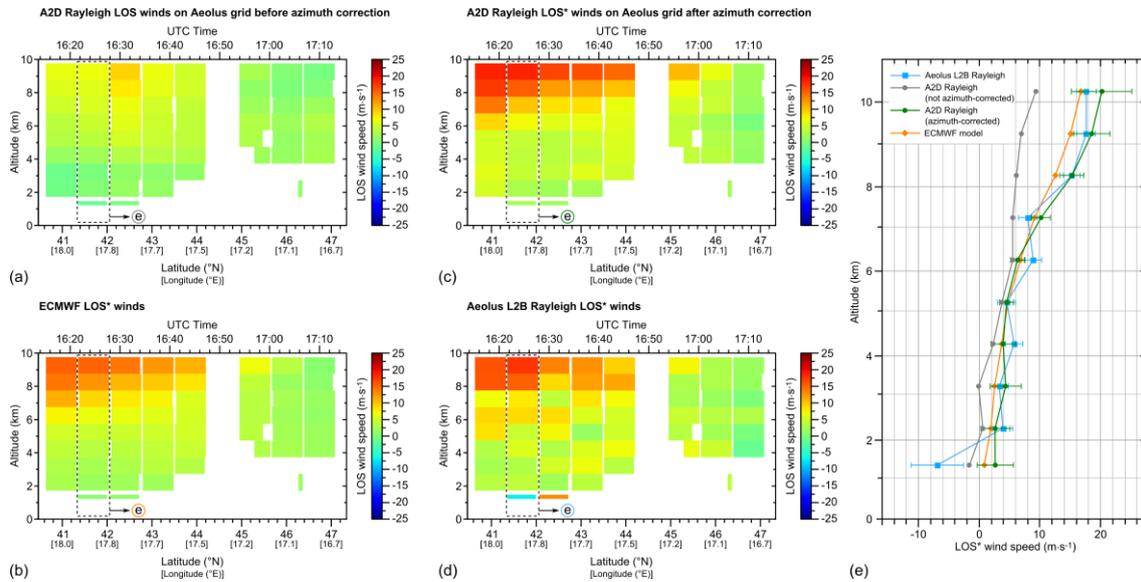

515

520

525

Figure 9. LOS* wind profiles obtained during the underflight on 22 November 2018 between 40.5°N and 47.2°N: (a) A2D Rayleigh winds averaged onto the Aeolus measurement grid and for an off-nadir angle of 37°, but without azimuth correction, (b) ECMWF model winds, (c) A2D Rayleigh winds with azimuth correction and (d) Aeolus L2B Rayleigh winds. White colour represents missing or invalid data of one of the two instruments, e.g. below dense clouds. Only Aeolus Rayleigh LOS* winds with an estimated error below 4.8 m s⁻¹ were considered valid. The wind profile for one selected Aeolus observation is shown in panel (e) together with the corresponding profiles of the other three datasets. The error bar for the Aeolus winds (blue squares) represents the estimated error included in the L2B product, while the error bar for the azimuth-corrected A2D winds (green dots) corresponds to the weighted standard deviation of all A2D bins contributing to the respective Aeolus bin. For the uncorrected A2D winds (grey dots), the error bars were omitted for the sake of clarity. LOS* wind profiles obtained during the underflight on 22 November 2018 between 40.5°N and 47.2°N: (a) Aeolus L2B Rayleigh winds, (b) A2D Rayleigh winds averaged onto the Aeolus measurement grid and for an off-nadir angle of 37°, but without azimuth correction, (c) A2D Rayleigh winds with azimuth correction and (d) ECMWF model winds. White colour represents missing or invalid data of one of the two instruments, e.g. below dense clouds. Only Aeolus Rayleigh LOS* winds with an estimated error below 4.8 m s⁻¹ were considered valid.

530

535

540

The left part of the figure shows the A2D Rayleigh winds averaged onto the Aeolus measurement grid and for an off-nadir angle of 37°, but without azimuth correction (panel (a)) and the Aeolus L2C Rayleigh winds, i.e. LOS* winds based on ECMWF model data (from the Aeolus L2C product) (b). The A2D Rayleigh winds after azimuth correction (A2D LOS* winds) (c) and the Aeolus L2B Rayleigh winds (d) are depicted in the middle of Fig. 9. Moreover, the wind profile for one selected Aeolus observation is shown in panel (e) together with the corresponding profiles of the other three datasets. Here, the error bar for the Aeolus winds (blue squares) represents the estimated error included in the L2B product, while the error bar for the azimuth-corrected A2D winds (green dots) corresponds to the weighted standard deviation of the A2D winds from those bins that overlap with the respective Aeolus bin. Only Aeolus LOS* winds with an estimated error below 4.8 m s⁻¹ (HLOS: 8 m s⁻¹) were considered valid. Comparison of the curtain plots and the selected wind profiles demonstrates the necessity of the azimuth correction. Due to the strong meridional wind especially in the upper range gates of the A2D at the beginning of the common leg, large wind speed differences $\Delta > 5 \text{ m s}^{-1}$ were present between Aeolus and the uncorrected A2D data (grey dots) which were compensated by the azimuth correction as explained above. Hence, the adapted A2D Rayleigh winds show much better agreement with both the Aeolus Rayleigh winds and the model data. The weighted

standard deviation of the A2D winds, indicated by the error bars, represents a measure of the variability of the A2D winds within the compared Aeolus bin. The values are on the order of 2 to 4 $\text{m}\cdot\text{s}^{-1}$ and determined by both the random error of the A2D as well as the horizontal and vertical wind gradients within the respective Aeolus bin. The figure shows the Aeolus L2B Rayleigh winds; the A2D Rayleigh winds averaged onto the Aeolus measurement grid and for an off nadir angle of 37° , but without azimuth correction; the A2D Rayleigh winds with azimuth correction (A2D LOS* winds) and the Aeolus L2C Rayleigh winds, i.e. LOS* winds based on ECMWF model data. Only Aeolus LOS* winds with an estimated error below $4.8 \text{ m}\cdot\text{s}^{-1}$ (HLOS: $8 \text{ m}\cdot\text{s}^{-1}$) were considered valid. Due to the strong meridional wind especially in the upper range gates of the A2D at the beginning of the common leg, large wind speed differences $\Delta > 5 \text{ m}\cdot\text{s}^{-1}$ were present between Aeolus and the A2D which were compensated by the azimuth correction as explained above. Hence, the adapted A2D Rayleigh winds show much better qualitative agreement with both the Aeolus Rayleigh winds and the model data.

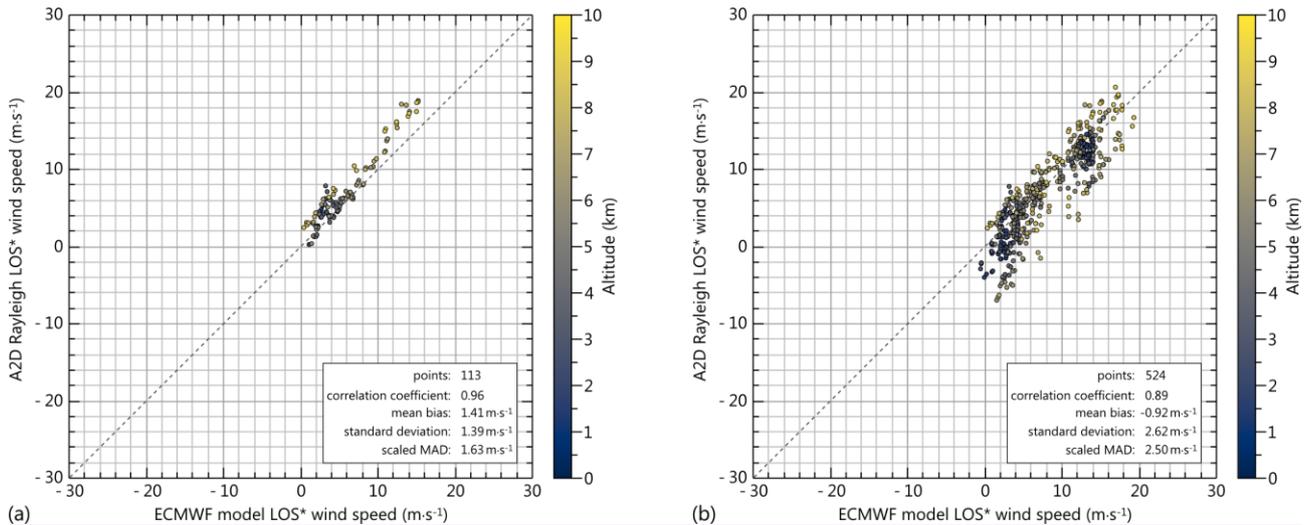


Figure 10. Scatterplots comparing the A2D Rayleigh LOS* winds with the ECMWF model LOS* winds (a) for the wind scene on 22/11/2018 between 16:13 UTC and 17:15 UTC and (b) for all underflights of the WindVal III campaign. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison.

4.3 Statistical comparison of A2D and Aeolus and with ECMWF data

The adaptation of the A2D data to the Aeolus measurement grid and LOS pointing direction allowed for a statistical comparison of the measured LOS* wind speeds with each other as well as with model wind data from the ECMWF. The latter will be presented in this section while the lidar-lidar comparison is subject of the next section. Note that the error of the LOS* wind speed is the actual instrument error of Aeolus which is also the reason why this parameter, and not the HLOS* wind included in the product, was chosen for the wind comparison. The scatterplots in Fig. 10(a) shows the correlation of the A2D Rayleigh winds with the ECMWF model data for the three wind data sets from the discussed underflight on 22 November 2018: the A2D Rayleigh winds, the Aeolus L2B Rayleigh winds and the ECMWF model data (Fig. 10a). The scatter points are colour-coded with respect to the bottom altitude of the bin used for comparison. The first plot shows good

565 correspondence of the A2D winds with the model data for altitudes below 7 km, but also reveals a positive mean bias of the
A2D winds of $1.4 \text{ m}\cdot\text{s}^{-1}$ which is evident over the entire wind speed range. Wind speed differences above $2 \text{ m}\cdot\text{s}^{-1}$ are
especially present at higher altitudes (light-brown scatters). Since the accuracy of the model data is assumed to be better than
that of the A2D with a nearly vanishing bias and low random error around $2 \text{ m}\cdot\text{s}^{-1}$ (Witschas et al., 2017; Witschas et al.,
2019,2020), it is used as the reference. The bias of the A2D winds is most likely related to the incomplete telescope overlap
570 close to the aircraft resulting in a reduced backscatter signal as well as a systematic wind error (Paffrath et al., 2009). For the
scatterplot shown in Fig. 10(a), the scaled MAD of $1.6 \text{ m}\cdot\text{s}^{-1}$ is significantly larger than the standard deviation ($1.4 \text{ m}\cdot\text{s}^{-1}$),
indicating that the wind speed differences are not normally distributed, primarily owing to the positively biased winds
measured at higher altitudes.

In analogy to the flight leg discussed above, the other collocated wind observations of the campaign listed in Table 2 were
575 analysed. When comparing the A2D to the model data from all Aeolus underflights (Fig. 10(b)), a mean bias of $-0.9 \text{ m}\cdot\text{s}^{-1}$ is
calculated which is in fair agreement with the bias determined from the $2\text{-}\mu\text{m}$ reference lidar ($-0.7 \text{ m}\cdot\text{s}^{-1}$ LOS*) considering
the smaller data overlap of the $2\text{-}\mu\text{m}$ DWL with the A2D compared to the model. The intercept of the linear regression
function is even below $-1 \text{ m}\cdot\text{s}^{-1}$, while the slope deviates from the ideal case ($A = 1$) by 3%. This slope error is most likely
related to an imperfect calibration of the Rayleigh channel. In particular, differences in atmospheric pressure and temperature
580 encountered during the calibration procedure and the wind scene give rise to a mismatch between the derived calibration
parameters and the actual Rayleigh channel behaviour during the underflight (Zhai et al., 2019). The scatterplot also shows
that most of the over- and underestimated A2D winds are measured either at high altitudes ($>8 \text{ km}$) or very close to the
ground ($<2 \text{ km}$). While the deviations close to the aircraft can be explained with the incomplete telescope overlap, the larger
wind speed differences at lower altitudes are probably related to the influence of aerosols in the planetary boundary layer
585 which cause Mie contamination of the Rayleigh signal and, in turn, introduce systematic errors of the winds measured in this
region. Note that, in contrast to the A2D, a so-called cross-talk correction is performed for the satellite instrument to
minimize such errors. Despite these error sources, the standard deviation of $2.6 \text{ m}\cdot\text{s}^{-1}$ and scaled MAD of $2.5 \text{ m}\cdot\text{s}^{-1}$ of the
A2D Rayleigh winds are considerably lower than observed during previous airborne campaigns, as discussed above. The fact
that the random error is even lower than the (LOS* converted) values obtained from the $2\text{-}\mu\text{m}$ DWL comparison ($3.4 \text{ m}\cdot\text{s}^{-1}$)
590 can be explained by the coarser horizontal and vertical resolution of the model winds included in the L2C product which is
provided on the same grid as the L2B product. Consequently, the number of A2D wind results which are averaged onto the
model grid is larger than for the finer $2\text{-}\mu\text{m}$ grid (by a factor of ≈ 2.5), thus reducing the variability in the bin-to-bin wind
comparison (by a factor of $\approx \sqrt{2.5}$).

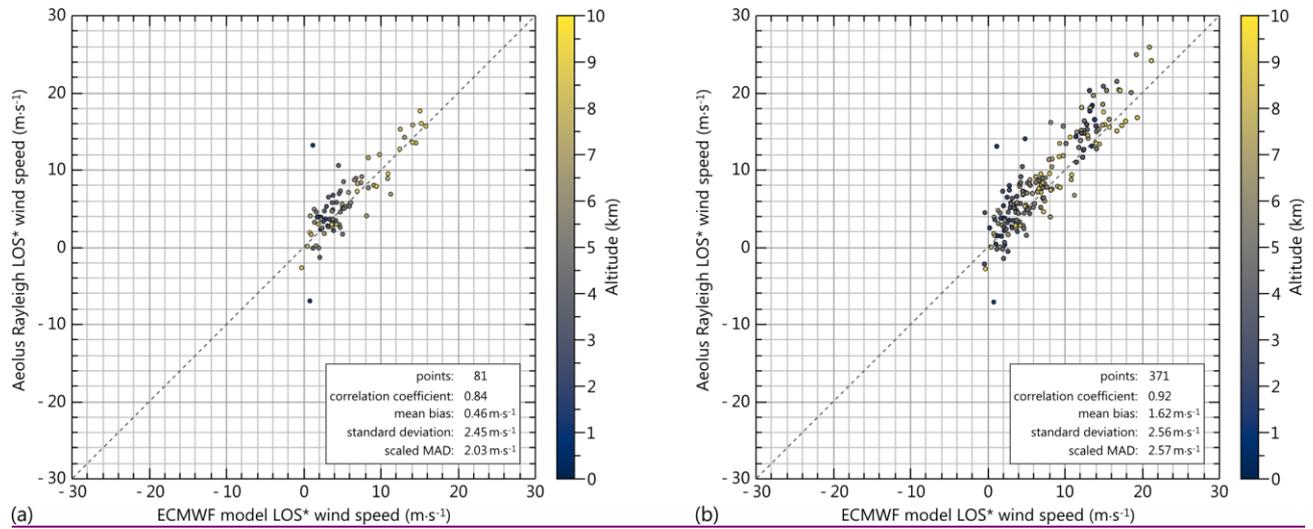


Figure 11. Scatterplots comparing the Aeolus L2B Rayleigh LOS* winds with the ECMWF model LOS* winds (a) for the wind scene on 22/11/2018 between 16:13 UTC and 17:15 UTC and (b) for all underflights of the WindVal III campaign. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison.


600 Figure 11 depicts the statistical comparison of the Aeolus Rayleigh winds with the ECMWF model data. Here, a positive mean bias of $0.5 \text{ m}\cdot\text{s}^{-1}$ is determined for the discussed wind scene on 22 November 2018, while the random error is larger (standard deviation: $2.5 \text{ m}\cdot\text{s}^{-1}$, scaled MAD: $2.0 \text{ m}\cdot\text{s}^{-1}$) compared to the A2D winds for that scene. For the comparison of the Aeolus Rayleigh winds with the ECMWF model data (Fig. 10(b)), the discrepancy is larger (standard deviation: $2.5 \text{ m}\cdot\text{s}^{-1}$; scaled MAD: $2.0 \text{ m}\cdot\text{s}^{-1}$) which
 605 This is mainly due to the two outliers that also become apparent in the Aeolus wind curtain (Fig. 9(ad)) at about 1.5 km altitude. Here, the small bin size of 250 m entails a poor signal-to-noise level, resulting in a large random wind error that is close to the estimated error threshold of $4.8 \text{ m}\cdot\text{s}^{-1}$ applied to the curtains in Fig. 9. Comparing the Aeolus LOS* winds with the model data for the entire campaign (Fig. 11(b)), a mean bias of $1.6 \text{ m}\cdot\text{s}^{-1}$ and a random error of $2.6 \text{ m}\cdot\text{s}^{-1}$ (scaled MAD) is derived.

4.4 Statistical comparison of A2D and Aeolus data

610 The scatterplots comparing the Aeolus and A2D Rayleigh winds are depicted in Fig. 12. For the underflight on 22 November 2018, a negative bias around $-0.8 \text{ m}\cdot\text{s}^{-1}$ of the Aeolus winds with respect to the A2D data is apparent (Fig. 12(a)). The mean bias of the Aeolus winds compared to the model is $0.5 \text{ m}\cdot\text{s}^{-1}$. Consequently, when comparing the Aeolus to the A2D winds (see Fig. 10(c)), a negative bias around $-0.8 \text{ m}\cdot\text{s}^{-1}$ is apparent. The small discrepancy of this value from the difference between the respective biases to the ECMWF model discussed in the previous section ($0.5 \text{ m}\cdot\text{s}^{-1} - 1.4 \text{ m}\cdot\text{s}^{-1} = -0.9 \text{ m}\cdot\text{s}^{-1}$) can

615 be explained with the dissimilar different wind data coverage of the airborne and satellite instrument which also results in a different numbers of scatter points for the respective comparisons of the three datasets. It should be noted that the statistical results from the mutual comparisons only slightly deviate from the shown values (by less than $0.2 \text{ m}\cdot\text{s}^{-1}$) when restricting the respective datasets to those bins where both instruments have valid wind data. The large spread between the Aeolus wind data in comparison with the A2D winds in Fig. 12(a) results from the fact that the random errors of the two lidar instruments
 620 with respect to the model winds approximately add up quadratically according to larger number of scatter points for the A2D to ECMWF comparison. Regarding the statistical dispersion in the Aeolus to A2D scatterplot, the random errors of the two lidar instruments with respect to the model winds approximately add up quadratically according to

$$\sigma_{\text{total}} \approx \sqrt{\sigma_{\text{A2D}}^2 + \sigma_{\text{Aeolus}}^2} \quad (6)$$

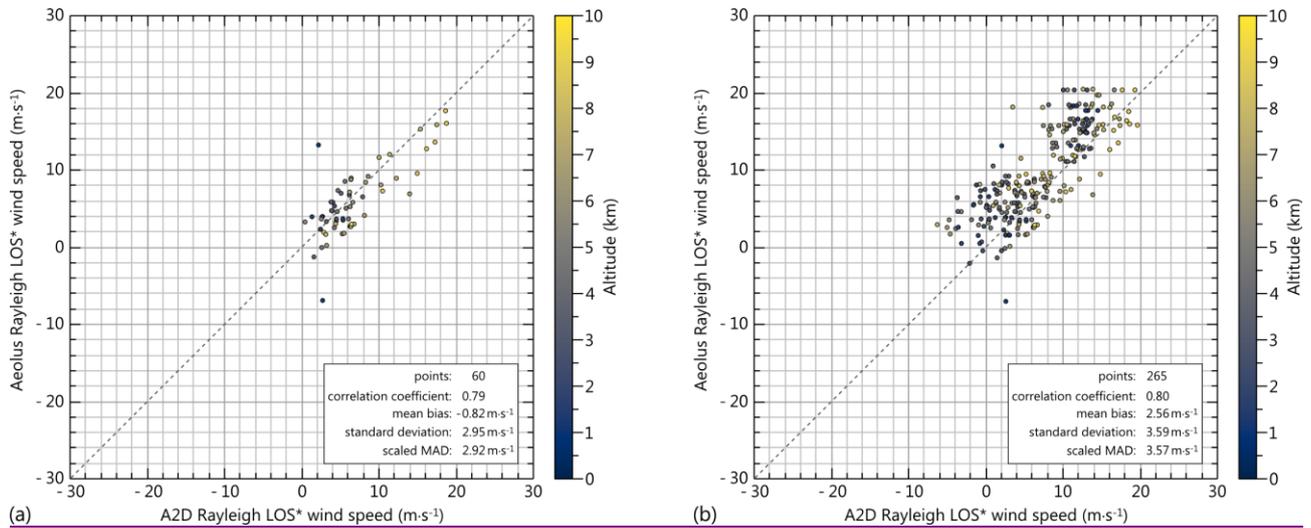

625 **Figure 12.** Scatterplots comparing the Aeolus L2B Rayleigh LOS* winds with the A2D Rayleigh LOS* winds (a) for the wind scene on 22/11/2018 between 16:13 UTC and 17:15 UTC and (b) for all underflights of the WindVal III campaign. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison.

This leads to a standard deviation of $3.0 \text{ m}\cdot\text{s}^{-1}$ and a slightly smaller scaled MAD of $2.9 \text{ m}\cdot\text{s}^{-1}$. Even larger variances are observed when comparing the data from all underflights (Fig. 12(b)), where both the standard deviation and the scaled MAD are around $3.6 \text{ m}\cdot\text{s}^{-1}$. The actual systematic and random error of Aeolus can be estimated from the Aeolus-to-A2D comparison under consideration of the A2D accuracy and precision. Following this approach, the observed bias of $2.6 \text{ m}\cdot\text{s}^{-1}$ translates to an actual bias of $2.6 \text{ m}\cdot\text{s}^{-1} - 0.6 \text{ m}\cdot\text{s}^{-1} = 2.0 \text{ m}\cdot\text{s}^{-1}$ or $2.6 \text{ m}\cdot\text{s}^{-1} - 0.9 \text{ m}\cdot\text{s}^{-1} = 1.7 \text{ m}\cdot\text{s}^{-1}$ when considering the negative bias of the A2D Rayleigh channel with respect to the 2- μm DWL and the model, respectively. Using Eq. (6), the random error of the Aeolus winds is approximated to be $[(3.6 \text{ m}\cdot\text{s}^{-1})^2 - (2.6 \text{ m}\cdot\text{s}^{-1})^2]^{1/2} = 2.5 \text{ m}\cdot\text{s}^{-1}$. Hence, the A2D and Aeolus Rayleigh channels show very similar precision of about $2.5 \text{ m}\cdot\text{s}^{-1}$, albeit the underlying reason for the Aeolus random error is of different nature as explained below. The derived Aeolus Rayleigh accuracy and precision are in fair agreement with the results from the Aeolus-to-2- μm comparison described in Witschas et al. (2020) where a positive bias of $2.1 \text{ m}\cdot\text{s}^{-1}$ (HLOS) and scaled MAD of $4.0 \text{ m}\cdot\text{s}^{-1}$ (HLOS) was determined, corresponding to LOS* values of $1.3 \text{ m}\cdot\text{s}^{-1}$ and $2.4 \text{ m}\cdot\text{s}^{-1}$, respectively. A positive bias of the L2B Rayleigh winds ($1.5 \text{ m}\cdot\text{s}^{-1}$ HLOS) was also verified by comparative measurements using a ground-based wind lidar located in southern France in January 2019 (Khaykin et al., 2019).

645 For the campaign time and region the bias of the L2B Rayleigh winds is beyond the mission requirements of Aeolus which should provide an accuracy of $0.7 \text{ m}\cdot\text{s}^{-1}$ in HLOS winds ($0.4 \text{ m}\cdot\text{s}^{-1}$ LOS*) on a global scale, while the HLOS random error is required to be below $1 \text{ m}\cdot\text{s}^{-1}$ ($0.6 \text{ m}\cdot\text{s}^{-1}$ LOS*) in the planetary boundary layer, $2.5 \text{ m}\cdot\text{s}^{-1}$ ($1.5 \text{ m}\cdot\text{s}^{-1}$ LOS*) in the troposphere and 3 to $5 \text{ m}\cdot\text{s}^{-1}$ (1.8 to $3.0 \text{ m}\cdot\text{s}^{-1}$ LOS*) in the stratosphere in order to ensure a positive impact on the weather forecast by assimilating the wind data in numerical weather prediction models (ESA, 2016). The wind bias is owed to the fact that the mission was still in the commissioning phase at the time of the campaign. In this period instrumental drifts were observed resulting in a long-term change of the incidence angle on the Rayleigh spectrometer and thus systematic Rayleigh wind

errors. Also, the emit energy of the laser of 60 mJ was below the target value of 80 mJ which together with presumed losses in the receive path led to significantly lower signal-to-noise levels as expected (by about a factor of 2.5 to 3) (Reitebuch et al., 2019). As a consequence, the random error did not meet the system requirements for the troposphere in the early phase of the mission. Considerable improvement of the accuracy and precision of the Aeolus data is foreseen by correction for instrumental drifts and by increasing the laser output energy via system adjustments, respectively.

The statistical values derived from the comparison of the different data sets are summarised in Table 4. The latter also includes the parameters from the A2D-to-2 μm comparison discussed in section 3.4 after conversion to LOS* wind speeds. For the results from the comparison of the 2- μm DWL data with Aeolus and the ECMWF model winds please refer to Witschas et al. (2020). In conclusion, due to the preliminary nature of the Aeolus L2B wind product, the Rayleigh winds exhibit relatively large systematic and random errors which are higher than the mission requirements (ESA, 2016). However, it should also be stated, that the representativity of the statistical results shown here is limited by the relatively small data set obtained from the WindVal III validation campaign. A strategy for increasing the number of compared winds, and hence the representativity of the Aeolus Cal/Val results in forthcoming campaigns is described in section 4.6. The systematic and random error of Aeolus can also be estimated from the Aeolus to A2D comparison depicted in Fig. 11(c). Here, the bias of $2.6 \text{ m}\cdot\text{s}^{-1}$ translates to an actual bias of $2.6 \text{ m}\cdot\text{s}^{-1} - 0.6 \text{ m}\cdot\text{s}^{-1} = 2.0 \text{ m}\cdot\text{s}^{-1}$ and $2.6 \text{ m}\cdot\text{s}^{-1} - 0.9 \text{ m}\cdot\text{s}^{-1} = 1.7 \text{ m}\cdot\text{s}^{-1}$ when considering the negative bias of the A2D Rayleigh channel with respect to the 2 μm DWL and the model, respectively. Using Eq. (6), the random error of the Aeolus winds are approximated to be $\{(3.6 \text{ m}\cdot\text{s}^{-1})^2 - (2.6 \text{ m}\cdot\text{s}^{-1})^2\}^{1/2} = 2.5 \text{ m}\cdot\text{s}^{-1}$. Hence, the A2D and Aeolus Rayleigh channels show very similar precision of about $2.5 \text{ m}\cdot\text{s}^{-1}$, albeit the underlying reasons are of different nature.


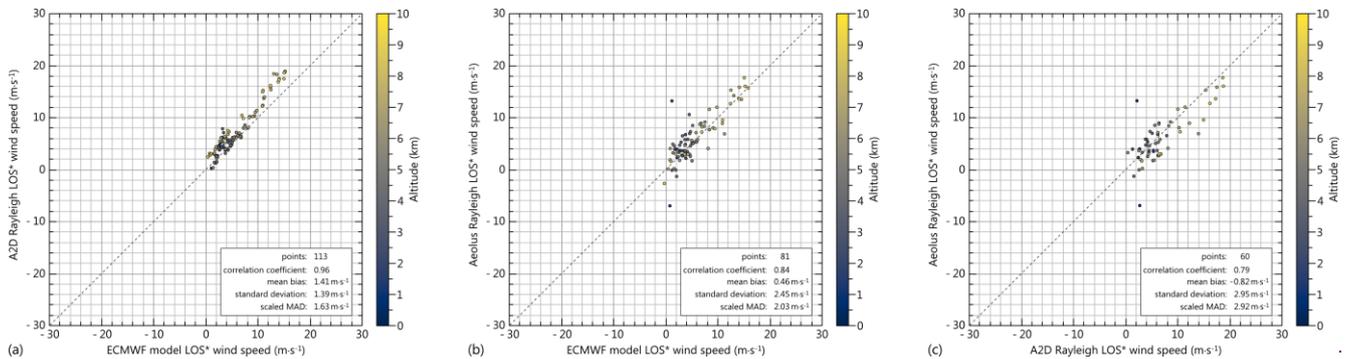


Figure 10. Scatterplots comparing (a) the A2D Rayleigh LOS* winds with the ECWME model LOS* winds, (b) the Aeolus L2B Rayleigh LOS* winds with the ECWME model LOS* winds and (c) the Aeolus L2B Rayleigh LOS* winds with the A2D Rayleigh LOS* winds for the wind scene on 22/11/2018 between 16:13 UTC and 17:15 UTC. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison. In analogy to the flight leg discussed above, the other collocated wind observations of the campaign listed in Table 2 were analysed. The resulting statistical comparison of the data sets from all underflights is shown in Fig. 11 and the statistical values derived from each scatterplot are summarised in Table 4. The latter also includes the parameters from the A2D to 2 μm comparison

675 discussed in section 3.4 after conversion to LOS* wind speeds. For the results from the comparison of the 2- μm DWL data with Aeolus and the ECMWF model winds please refer to Witschas et al. (2019). When comparing the A2D to the model data from all flights (Fig. 11(a)), a mean bias of $-0.9\text{ m}\cdot\text{s}^{-1}$ is calculated which is in fair agreement with the bias determined from the 2- μm reference lidar ($-0.7\text{ m}\cdot\text{s}^{-1}$ LOS*) considering the smaller data overlap of the 2- μm DWL with the A2D compared to the model. The intercept of the linear regression function is even below $-1\text{ m}\cdot\text{s}^{-1}$, while the slope deviates from the ideal case ($A=1$) by 3%. This slope error is most likely related to an imperfect calibration of the Rayleigh channel. In particular, differences in atmospheric pressure and temperature encountered during the calibration procedure and the wind scene give rise to a mismatch between the derived calibration parameters and the actual Rayleigh channel behaviour during the underflight (Zhai et al., 2019).

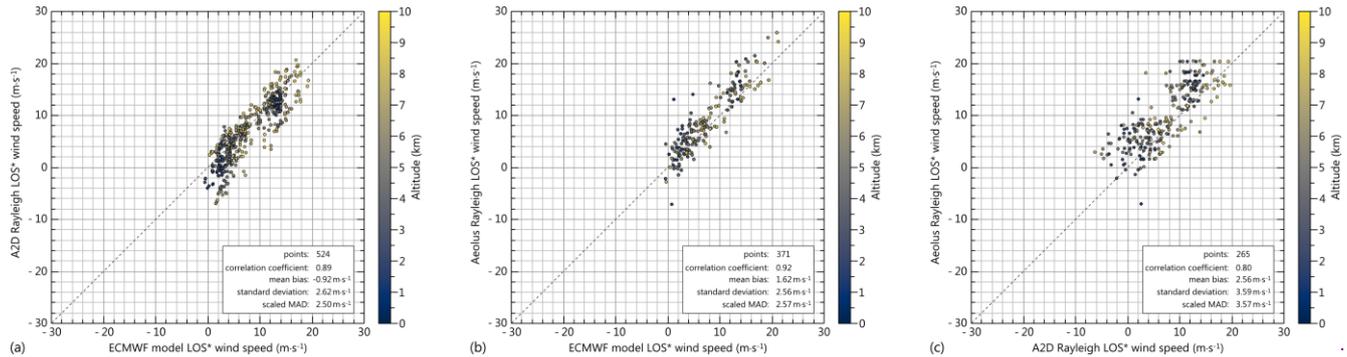

685 **Figure 11. Scatterplots comparing (a) the A2D Rayleigh LOS* winds with the ECMWF model LOS* winds, (b) the Aeolus L2B Rayleigh LOS* winds with the ECMWF model LOS* winds and (c) the Aeolus L2B Rayleigh LOS* winds with the A2D Rayleigh LOS* winds for all underflights of the WindVal III campaign. The data points are colour-coded with respect to the bottom altitude of the respective bins used for comparison.**

690 **Table 4.** Results of the statistical comparison between the A2D Rayleigh, the Aeolus Rayleigh and the ECMWF LOS* wind speeds for all underflights performed during the WindVal III campaign. See corresponding scatterplots in Fig. 11 (only last three columns). The first column includes the data from Table 3 after conversion of the wind speeds to the satellite's LOS* (37° off-nadir angle). Please note that different horizontal and vertical averaging lengths apply to the different comparisons (see text for details).

Statistical parameter	A2D Rayleigh vs. 2- μm DWL	A2D Rayleigh vs. ECMWF	Aeolus Rayleigh vs. ECMWF	Aeolus Rayleigh vs. A2D Rayleigh
Number of compared bins	1301	524	371	265
Correlation coefficient r	0.83	0.89	0.92	0.80
Slope A	0.98 ± 0.02	1.03 ± 0.03	1.08 ± 0.02	0.83 ± 0.04
Intercept B	$-0.7\text{ m}\cdot\text{s}^{-1}$	$-1.2\text{ m}\cdot\text{s}^{-1}$	$0.9\text{ m}\cdot\text{s}^{-1}$	$3.8\text{ m}\cdot\text{s}^{-1}$
Mean bias	$-0.6\text{ m}\cdot\text{s}^{-1}$	$-0.9\text{ m}\cdot\text{s}^{-1}$	$1.6\text{ m}\cdot\text{s}^{-1}$	$2.6\text{ m}\cdot\text{s}^{-1}$
Standard deviation	$3.7\text{ m}\cdot\text{s}^{-1}$	$2.6\text{ m}\cdot\text{s}^{-1}$	$2.6\text{ m}\cdot\text{s}^{-1}$	$3.6\text{ m}\cdot\text{s}^{-1}$
Scaled MAD	$3.4\text{ m}\cdot\text{s}^{-1}$	$2.5\text{ m}\cdot\text{s}^{-1}$	$2.6\text{ m}\cdot\text{s}^{-1}$	$3.6\text{ m}\cdot\text{s}^{-1}$

The scatterplot also shows that most of the over- and underestimated A2D winds are measured either at high altitudes (>8 km) or very close to the ground (<2 km). While the deviations close to the aircraft can be explained with the incomplete telescope overlap, the larger wind speed differences at lower altitudes are probably related to the influence of aerosols in the planetary boundary layer which cause Mie contamination of the Rayleigh signal and, in turn, introduce systematic errors of the winds measured in this region. Note that, in contrast to the A2D, a so-called cross talk correction is performed for the satellite instrument to minimize such errors. Despite these error sources, the standard deviation of $2.6 \text{ m}\cdot\text{s}^{-1}$ and scaled MAD of $2.5 \text{ m}\cdot\text{s}^{-1}$ of the A2D Rayleigh winds are considerably lower than observed during previous airborne campaigns, as discussed above. The fact that the random error is even lower than the (LOS* converted) values obtained from the $2 \text{ }\mu\text{m}$ DWL comparison ($3.4 \text{ m}\cdot\text{s}^{-1}$) can be explained by the coarser horizontal and vertical resolution of the model winds included in the L2C product which is provided on the same grid as the L2B product. Consequently, the number of A2D wind results which are averaged onto the model grid is larger than for the finer $2 \text{ }\mu\text{m}$ grid (by a factor of ≈ 2.5), thus reducing the variability in the bin to bin wind comparison (by a factor of $\approx \sqrt{2.5}$).


Comparing the Aeolus LOS* winds with the model data (Fig. 11(b)), a mean bias of $1.6 \text{ m}\cdot\text{s}^{-1}$ and a random error of $2.6 \text{ m}\cdot\text{s}^{-1}$ (scaled MAD) is derived. These values are in fair agreement with the results from the Aeolus to $2 \text{ }\mu\text{m}$ comparison described in Wittechas et al. (2019) where a positive bias of $2.1 \text{ m}\cdot\text{s}^{-1}$ (HLOS) and scaled MAD of $4.0 \text{ m}\cdot\text{s}^{-1}$ (HLOS) was determined, corresponding to LOS* values of $1.3 \text{ m}\cdot\text{s}^{-1}$ and $2.4 \text{ m}\cdot\text{s}^{-1}$, respectively. A positive bias of the L2B Rayleigh winds ($1.5 \text{ m}\cdot\text{s}^{-1}$ HLOS) was also verified by comparative measurements using a ground-based wind lidar located in southern France in January 2019 (Khaykin et al., 2019).

4.4.5 Influence of coverage ratio and mean distance thresholds

The aerial weighted averaging algorithm described in section 4.1 holds the risk of large discrepancies between the averaged A2D wind and the compared Aeolus L2B or ECMWF model wind from the L2C product in case that the measurement bin from the respective Aeolus data product is only sparsely covered by A2D bins, especially in regions with strong wind shear.

An additional potential representativity error may arise from too large spatial separation between the A2D bins covering an Aeolus bin and the bin center of the latter. Therefore, two settable threshold parameters were defined for the statistical comparisons described in the previous section. While the minimum overlap of the compared bins (coverage ratio threshold, CR) was chosen to be 25%, the upper threshold of the mean distance d_{max} between the Aeolus bin center and the bin centers of all overlapping A2D bins was set to 40 km. The influence of the two parameters on the statistical parameters retrieved from the A2D-to-ECMWF comparison and the Aeolus-to-A2D comparison are shown in Fig. 4213. The plots (a) and (c) illustrate that the choice of the coverage ratio has no significant effect on the bias and random error ($<0.2 \text{ m}\cdot\text{s}^{-1}$) for values below 50%. At higher thresholds the number of compared winds becomes considerably lower, resulting in stronger dependence of the statistical values on the coverage ratio. Therefore, the results of the respective wind comparisons for which the number of compared bins is below 200 are considered statistically insignificant and indicated as grey-shaded areas in Fig. 4213.

Regarding the maximum mean distance between the Aeolus L2B/L2C bin and the covering A2D bins (see Fig. 12(a) and (c)), a strong impact is observed for $d_{\max} < 30$ km, as the number of compared winds is drastically decreased. Given the horizontal length of the Aeolus bin of about 86 km, the statistical parameters remain constant for distances from the bin center above ≈ 40 km. From the above considerations, relaxed threshold parameters of CR = 25% and $d_{\max} = 40$ km were found to provide an optimal trade-off between comparability and an acceptable number of representative composite A2D bins used for comparison. In this respect, the second threshold parameter d_{\max} was effectively switched-off to maximize the number of data points. However, adaptation of the two parameters is advisable for wind scenes exhibiting more heterogeneous atmospheric conditions, as these are more prone to large representativity errors in case of sparse A2D data coverage. The same holds true for the comparison of Mie winds which is envisaged for future campaigns.

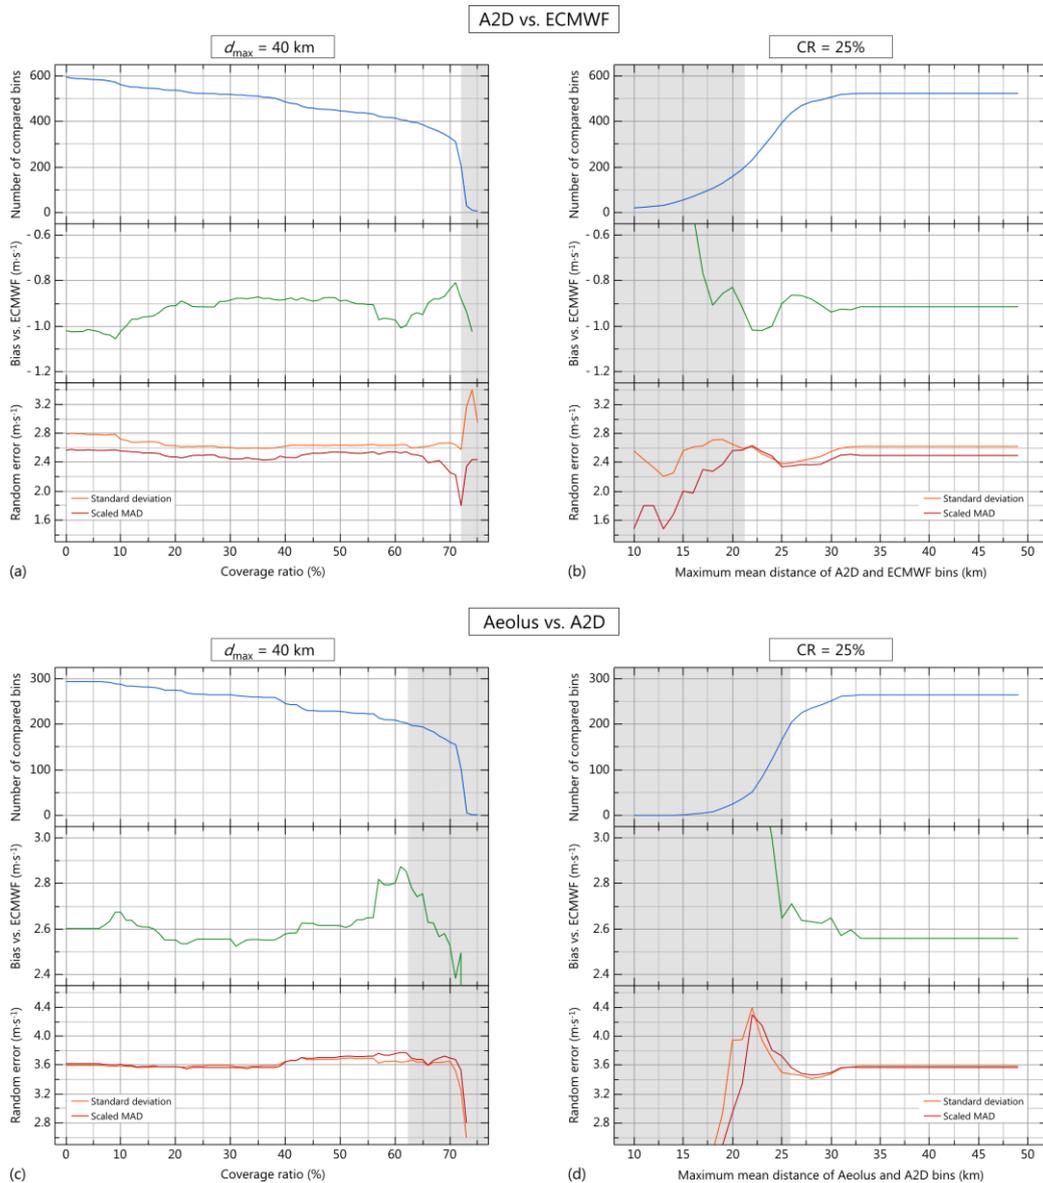

735

740

Figure 1213. Influence of the (a,c) coverage ratio and (b,d) horizontal distance threshold on the statistical parameters resulting from the A2D-to-ECMWF comparison (top) and the Aeolus-to-A2D comparison (bottom). The top panels of each subfigure depict the number of bins entering the statistical comparison; the middle panels show the bias and the bottom panels illustrate the random error (standard deviation and scaled MAD) depending on the respective threshold parameter. Results for which the number of compared bins is below 200 are considered statistically insignificant and thus indicated as grey-shaded areas.

4.5.6 Optimization of A2D range gate settings

It has to be stated that ~~the statistical significance of the shown comparisons is rather limited, as~~ there is only a relatively small number of compared bins, especially for the Aeolus-to-A2D comparison (265). This is primarily due to the used vertical sampling of the A2D and Aeolus which had many small range gates in the lower troposphere (Fig. 1314(a)), where

745 Aeolus winds often exhibit large estimated wind errors above the threshold useable for comparison. The overlap of valid
wind data from the two instruments was thus limited to the range between 2 km and 9 km where the vertical resolution of
both wind lidars was set to be coarser. With a view to the upcoming campaigns during the operational phase of the Aeolus
mission, ~~a more meaningful~~ an extended statistical comparison and hence ~~better~~ more detailed validation can be
750 accomplished by adapting the vertical sampling strategy such that a higher number of ~~more~~ small and medium-sized range
gates are located at altitudes between 4 km and 8 km at the expense of lower resolution towards the ground. A proposed
optimized A2D range gate setting is illustrated in Fig. 13.14(b) depicting exemplary Aeolus Rayleigh wind curtains from
November 2018 and April 2019 with overlaid bin borders of the A2D (dashed lines) for an aircraft flight altitude of 10675 m
(35,000 feet, flight level 350). The diagram shows that the Aeolus range gate settings were already modified after the end of
the commissioning phase in January 2019, providing higher resolution in the upper troposphere. By using range gates with
755 296 m and 592 m thickness for the A2D in the same region, the number of compared bins can be significantly increased.
Furthermore, vertical sampling with higher resolution at altitudes close to the tropopause allows resolving jet streams that
often reside in this region, thus delivering wind data over a wider wind speed range to enter the statistical comparison. This
will additionally improve the significance of the statistical comparison, as the error in the fit parameters derived from the
linear regression will be reduced according to Eq. (2a). The tropopause region is of particular interest, as increased ECMWF
760 model errors with respect to the 2- μ m DWL were observed in recent studies (Schäfler et al., 2019).
In addition to the validation of the L2B wind speeds, the comparative analysis of the A2D and Aeolus wind results from
forthcoming airborne campaigns will rather be dedicated to case studies of special scenes. In this context, it is foreseen to
investigate the different data coverage of the respective Rayleigh and Mie channels under various atmospheric conditions.
Moreover, future studies will focus on the origin of large outliers in the L2B wind product that show a low estimated error
765 but large deviations from the ~~model~~ airborne measurements. Here, the quality control mechanisms that have been developed
and refined for the A2D over the past years can potentially be used to optimize the L2B processor algorithms.

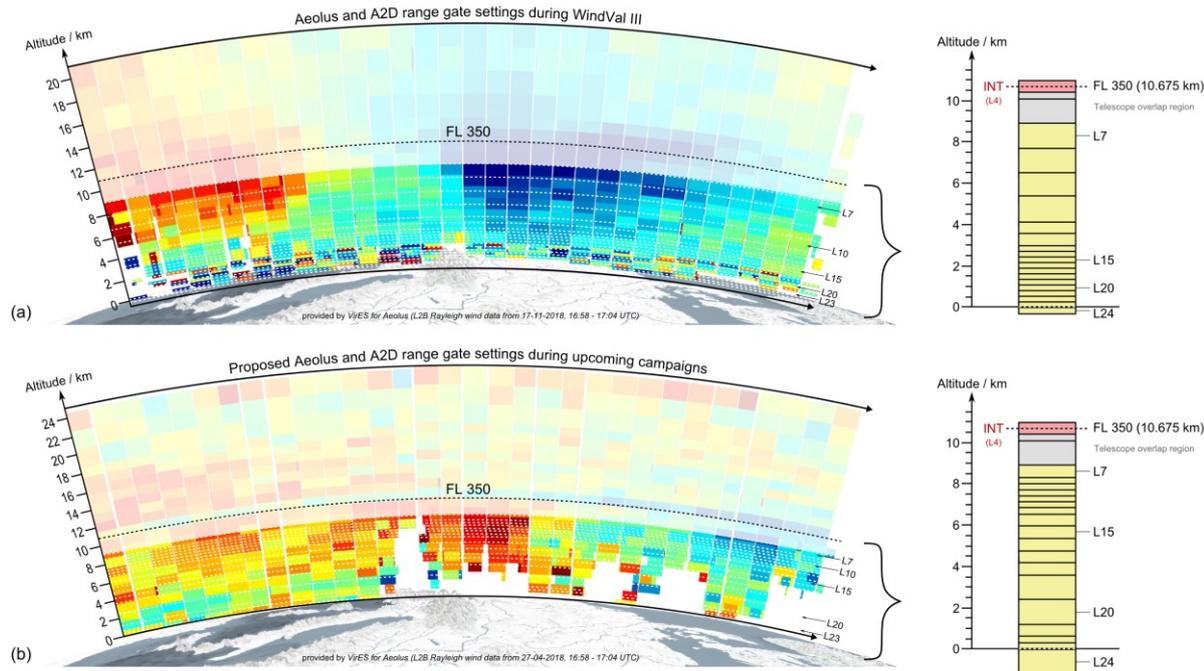


Figure 14. Diagram illustrating (a) the A2D range gate setting used during the WindVal III campaign and (b) an optimized range gate setting planned to be used in forthcoming airborne validation campaigns. The left part of the figure shows exemplary Aeolus L2B Rayleigh wind curtains with indicated bin altitudes of the A2D range gates (white dashed lines) assuming a flight altitude of about 10675 m (FL 350). The corresponding vertical range gates are additionally depicted on the right. Due to the incomplete telescope overlap, the wind data from the first 1.5 km below the aircraft shows increased wind errors and is thus not used. The figure was created based on screenshots from the Aeolus data visualization tool *VirES for Aeolus* (<https://aeolus.services/>).

5 Summary and Conclusion

The airborne wind validation campaign WindVal III was carried out in Central Europe only three months after the launch of ESA's Earth Explorer mission Aeolus in August 2018. More than 3000 km of the Aeolus measurement swath were covered during four underflights with the DLR Falcon aircraft carrying the airborne demonstrator of the Aeolus payload as well as a coherent Doppler wind lidar. A2D data is available from three underflights adding up to more than 11 hours of wind measurements to be compared with the satellite data. Due to the sparse data coverage of the A2D and Aeolus Mie channels which was accepted in the flight planning for the benefit of better coverage of the respective Rayleigh channels, only the latter were further investigated in this study.

The WindVal III campaign has provided several lessons learned which will be considered in the forthcoming Cal/Val campaigns. Above all, it is envisaged to conduct dedicated flights with higher aerosol loading and larger cloud cover to allow for an assessment of the Mie channel performance. In particular, wind measurements in thin cirrus clouds are expected to yield valid Mie data over multiple range bins across the wind profile, as observed during flights in the North Atlantic region in the frame of the NAWDEX campaign in 2016 (Lux et al., 2016). Proper comparison of the A2D and Aeolus wind

790 results required adequate averaging and consideration of the different viewing geometries. An aerial interpolation algorithm was used for the adaptation of the A2D data to the Aeolus measurement grid, while conversion of the measured A2D LOS winds to the satellite LOS was realized with the aid of model wind data. This procedure is not only of relevance for future validation campaigns employing the A2D, but also other wind lidars without the capability to retrieve the entire wind vector.

795 The harmonized data sets were then compared to each other as well as to ECMWF model wind data which was used as a reference. Two settable threshold parameters were introduced to the algorithm and their influence on the correlation of the data sets was studied. The statistical comparison revealed biases of $-0.9 \text{ m}\cdot\text{s}^{-1}$ and $+1.6 \text{ m}\cdot\text{s}^{-1}$ for the A2D and Aeolus LOS* Rayleigh wind speeds with respect to the ECMWF model, respectively. Intercomparison of the two wind lidars showed a positive bias of the Aeolus Rayleigh LOS* winds with respect to the A2D of $2.6 \text{ m}\cdot\text{s}^{-1}$, while the spreading between the two data sets of $3.6 \text{ m}\cdot\text{s}^{-1}$ results from the respective random errors that add up quadratically. Considering the systematic and random error of the A2D, the accuracy of the Aeolus Rayleigh LOS* winds is determined to be $+1.7 \text{ m}\cdot\text{s}^{-1}$ and $2.5 \text{ m}\cdot\text{s}^{-1}$ which is in line with the results from other validation studies performed for the commissioning phase of the Aeolus mission (Khaykin et al., 2019; Witschas et al., 2020).

800 ~~The statistical comparison revealed biases of $-0.9 \text{ m}\cdot\text{s}^{-1}$ and $+1.6 \text{ m}\cdot\text{s}^{-1}$ for the A2D and Aeolus LOS* Rayleigh wind speeds, respectively. The random errors were determined to be around $2.5 \text{ m}\cdot\text{s}^{-1}$ on observation level for both direct detection wind lidar instruments.~~ The accuracy and precision of the A2D winds was significantly better compared to previous campaigns, whereas the Aeolus performance did not meet the formulated requirements of the mission for the studied wind scenes that took place during its commissioning phase. However, improvement of the satellite data quality is expected by a refinement
805 the Aeolus processor taking into account instrumental drift as well as by an enhancement of the laser output power. For future airborne validation campaigns an optimized range gate setting of the A2D will be implemented to increase the overlap with valid Aeolus wind data from the two instruments as well as to ensure a better sampling of strong wind gradients and higher wind speeds in the upper troposphere. Furthermore, a larger number of underflights will be performed for increasing the validity of the wind data comparison. This will also allow for various case studies which aim at the optimization of the
810 Aeolus processor algorithms.

Data availability. The A2D and 2- μm DWL data used in this paper can be provided upon request by email to Christian Lemmerz (Christian.Lemmerz@dlr.de). Aeolus data was obtained from the tool *VirES for Aeolus* (<https://aeolus.services/>).

815 *Competing interests.* The authors declare that they have no conflict of interest.

Author contribution. OL and CL conducted the A2D wind observations. CL was the PI of the WindVal III campaign. OL, FW and UM analysed the A2D data and developed the methodology to compare the data sets. BW conducted the 2- μm DWL measurements. SR processed the 2- μm DWL data. CL, OR and AG managed the WindVal III campaign and
820 conducted the flight planning. The paper was written by OL with contributions from all co-authors.

Acknowledgements. The development of the ALADIN Airborne Demonstrator and the work carried out during the WindVal III campaign were supported by the German Aerospace Center (Deutsches Zentrum für Luft- und Raumfahrt e.V., DLR) and the European Space Agency (ESA), providing funds related to the preparation of Aeolus (WindVal III, contract no. 4000114053/15/NL/FF/gp). The presented work includes preliminary data (not fully calibrated/validated and not yet publicly released) of the Aeolus mission that is part of the European Space Agency (ESA) Earth Explorer Programme. Further data quality improvements, including in particular a significant product bias reduction, will be achieved before the public data release. The analysis has been performed in the frame of the Aeolus Scientific Calibration & Validation Team (ACVT). We thank Thorsten Fehr (Aeolus Campaign Coordinator) as well as Anne Grete Straume (Aeolus Mission Scientist) and Jonas von Bismarck (Aeolus Data Quality Manager) for their support of the study. The first author was partly funded by a young scientist grant by ESA within the DRAGON 4 program (contract no. 4000121191/17/I-NB). Finally, the authors are especially grateful to Engelbert Nagel for his constant technical assistance throughout the campaign. The support of the DLR flight facility for the realization of the airborne campaign is greatly acknowledged as well.

References

- Andersson, E.: Statement of Guidance for Global Numerical Weather Prediction (NWP), World Meteorological Organisation, 2018, <https://www.wmo.int/pages/prog/www/OSY/SOG/SoG-Global-NWP.pdf> (accessed on 23 July 2019)
- Ansmann, A., Wandinger, U., Le Rille, O., Lajas, D., and Straume, A. G.: Particle backscatter and extinction profiling with the spaceborne high-spectral-resolution Doppler lidar ALADIN: Methodology and simulations, *Appl. Opt.*, 46, 6606, doi:10.1364/AO.46.006606, 2007.
- Baker, W. E., Atlas, R., Cardinali, C., Clement, A., Emmitt, G. D., Gentry, B. M., Hardesty, R. M., Källén, E., Kavaya, M. J., Langland, R., Ma, Z., Masutani, M., McCarty, W., Pierce, R. B., Pu, Z., Riishojgaard, L. P., Ryan, J., Tucker, S., Weissmann, M., and Yoe, J. G.: Lidar-Measured Wind Profiles: The Missing Link in the Global Observing System, *Bull. Amer. Meteor. Soc.*, 95, 543–564, doi:10.1175/BAMS-D-12-00164.1, 2014.
- Bruneau, D., Pelon, J., Blouzon, F., Spatazza, J., Genau, P., Buchholtz, G., Amarouche, N., Abchiche, A., and Aouji, O.: [355-nm high spectral resolution airborne lidar LNG: System description and first results, *Appl Opt.* 54, 8776–8785, doi:10.1364/AO.54.008776, 2015.](https://doi.org/10.1364/AO.54.008776)
- Chanin, M. L., Garnier, A., Hauchecorne, A., and Porteneuve, J.: A Doppler lidar for measuring winds in the middle atmosphere, *Geophys. Res. Lett.*, 16, 1273–1276, doi:10.1029/GL016i011p01273, 1989.
- Chouza, F., Reitebuch, O., Jähn, M., Rahm, S., and Weinzierl, B.: Vertical wind retrieved by airborne lidar and analysis of island induced gravity waves in combination with numerical models and in situ particle measurements, *Atmos. Chem. Phys.*, 16, 4675–4692, doi:10.5194/acp-16-4675-2016, 2016.

- 855 Dabas, A., Denneulin, M. L., Flamant, P., Loth, C., Garnier, A., and Dolfi-Bouteyre, A.: Correcting winds measured with a Rayleigh Doppler lidar from pressure and temperature effects, *Tellus A*, 60, 206–215, doi:10.1111/j.1600-0870.2007.00284.x, 2008.
- Deutsches Zentrum für Luft- und Raumfahrt e.V. (DLR): Final Report: “Analysis of enhanced noise in A2D observations”, AE.FR.DLR.A2D.CN11.110716, V 2.0, 110 p., 2016.
- European Space Agency (ESA): “ADM-Aeolus Science Report,” ESA SP-1311, 121 p., http://esamultimedia.esa.int/docs/SP-1311_ADM-Aeolus_FINAL_low-res.pdf, 2008.
- 860 European Space Agency (ESA): “ADM-Aeolus Mission Requirements Document”, ESA EOP-SM/2047, 57 p., http://esamultimedia.esa.int/docs/EarthObservation/ADM-Aeolus_MRD.pdf, 2016.
- Flamant, P., Cuesta, J., Denneulin, M. L., Dabas, A., and Huber, D.: ADM-Aeolus retrieval algorithms for aerosol and cloud products, *Tellus A*, 60, 273–288, doi:10.1111/j.1600-0870.2007.00287.x, 2008.
- Flesia, C. and Korb, C. L.: Theory of the double-edge molecular technique for Doppler lidar wind measurement, *Appl. Opt.*, 865 38, 432, doi:10.1364/AO.38.000432, 1999.
- Garnier, A. and Chanin, M. L.: Description of a Doppler Rayleigh LIDAR for measuring winds in the middle atmosphere, *Appl. Phys. B*, 55, 35–40, doi:10.1007/BF00348610, 1992.
- Gentry, B. M., Chen, H., and Li, S. X.: Wind measurements with 355-nm molecular Doppler lidar, *Opt. Lett.*, 25, 1231–1233, doi:10.1364/OL.25.001231, 2000.
- 870 Isaksen, L. and Rennie, M.: A preliminary evaluation of using Aeolus L2B Winds in ECMWF’s NWP system, with focus on the tropical region, Living Planet Symposium, Milan, Italy, May 13-17, 2019.
- Kanitz, T., Lochard, J., Marshall, J., McGoldrick, P., Lecrenier, O., Bravetti, P., Reitebuch, O., Rennie, M., Wernham, D., and Elfving, A.: Aeolus First Light – First Glimpse, *Proc. SPIE*, 11180, 111801R, doi: 10.1117/12.2535982, 2019.
- Lemmerz, C., Lux, O., Reitebuch, O., Witschas, B., and Wührer, C.: Frequency and timing stability of an airborne injection-seeded Nd: YAG laser system for direct-detection wind lidar, *Appl. Opt.*, 56, 9057, doi:10.1364/ao.56.009057, 2017.
- 875 Khaykin, S. M., Hauchecorne, A., Wing, R., Keckhut, P., Godin-Beekmann, S., Porteneuve, J., Mariscal, J.-F., and Schmitt, J.: Doppler lidar at Observatoire de Haute Provence for wind profiling up to 75 km altitude: performance evaluation and observations, *Atmos. Meas. Tech. Discuss.*, <https://doi.org/10.5194/amt-2019-385>, in review, 2019.
- Lux, O., Lemmerz, C., Weiler, F., Marksteiner, U., Witschas, B., Rahm, S., Schäfler, A., and Reitebuch, O.: Airborne wind lidar observations over the North Atlantic in 2016 for the pre-launch validation of the satellite mission Aeolus, *Atmos. Meas. Tech.*, 11, 3297–3322, doi:10.5194/amt-11-3297-2018, 2018.
- 880 Lux, O., Lemmerz, C., Weiler, F., Marksteiner, U., Witschas, B., Nagel, E., and Reitebuch, O.: Speckle Noise Reduction by Fiber Scrambling for Improving the Measurement Precision of an Airborne Wind Lidar System, in: 2019 Conference on Lasers and Electro-Optics Europe & European Quantum Electronics Conference (CLEO/Europe-EQEC), CLEO Europe, 885 Munich, Germany, June 23-27, OSA Technical Digest, paper ch_2_2, 2019.

- Marksteiner, U., Reitebuch, O., Rahm, S., Nikolaus, I., Lemmerz, C., and Witschas, B.: Airborne direct-detection and coherent wind lidar measurements along the east coast of Greenland in 2009 supporting ESA's Aeolus mission, *Proc. SPIE*, 8182, 81820J, doi:10.1117/12.897528, 2011.
- 890 Marksteiner, U.: Airborne Wind Lidar Observations for the Validation of the ADM-Aeolus Instrument, PhD thesis, Technische Universität München, 180 p., <http://mediatum.ub.tum.de?id=1136781>, 2013.
- Marksteiner, U., Lemmerz, C., Lux, O., Rahm, S., Schäfler, A., Witschas, B., and Reitebuch, O.: Calibrations and Wind Observations of an Airborne Direct-Detection Wind LiDAR Supporting ESA's Aeolus Mission, *Remote Sensing*, 10, 2056, doi:10.3390/rs10122056, 2018.
- 895 McKay, J. A.: Assessment of a multibeam Fizeau wedge interferometer for Doppler wind lidar, *Appl. Opt.*, 41, 1760, doi:10.1364/AO.41.001760, 2002.
- NAS: Thriving on Our Changing Planet: A Decadal Strategy for Earth Observation from Space. The National Academies Press, 700 p., doi: 10.17226/24938, 2018
- Paffrath, U., Lemmerz, C., Reitebuch, O., Witschas, B., Nikolaus, I., and Freudenthaler, V.: The Airborne Demonstrator for the Direct-Detection Doppler Wind Lidar ALADIN on ADM-Aeolus. Part II: Simulations and Rayleigh Receiver Radiometric Performance, *J. Atmos. Oceanic Technol.*, 26, 2516–2530, doi:10.1175/2009JTECHA1314.1, 2009.
- 900 Reitebuch, O., Lemmerz, C., Nagel, E., Paffrath, U., Durand, Y., Endemann, M., Fabre, F., and Chaloupy, M.: The Airborne Demonstrator for the Direct-Detection Doppler Wind Lidar ALADIN on ADM-Aeolus. Part I: Instrument Design and Comparison to Satellite Instrument, *J. Atmos. Oceanic Technol.*, 26, 2501–2515, doi:10.1175/2009JTECHA1309.1, 2009.
- 905 Reitebuch, O.: The Spaceborne Wind Lidar Mission ADM-Aeolus, in: *Atmospheric physics: Background, methods, trends*, Schumann, U. (Ed.), *Research Topics in Aerospace*, Springer, Berlin, London, 815–827, 2012.
- Reitebuch, O., Huber, D., and Nikolaus, I.: “ADM-Aeolus Algorithm Theoretical Basis Document (ATBD) Level-1B Products,” AE-RP-DLR-L1B-001, V. 4.4, 117 p., 2018.
- 910 Reitebuch, O., Lemmerz, C., Lux, O., Marksteiner, U., Rahm, S., Weiler, F., Witschas, B., Meringer, M., Schmidt, K., Huber, D., Nikolaus, I., Geiss, A., Dabas, A., Flament, T., Stieglitz, H., Isaksen, L., Rennie, M., de Kloe, J., Marseille, G.-J., Stoffelen, A., Wernham, D., Kanitz, T., Straume, A. G., Fehr, T., von Bismarck, J., Floberghagen, R., and Parrinello, T.: Initial Assessment of the Performance of the First Wind Lidar in Space on Aeolus, *Proc. 29th International Laser-Radar Conference*, Hefei, China, June 24-28, 2019.
- Rennie, M. and Isaksen, L.: Investigations into the Quality of Aeolus L2B Winds Using the ECMWF Model and Initial NWP Impact Assessment, *Living Planet Symposium*, Milan, Italy, May 13-17, 2019.
- 915 Rennie, M. and Isaksen, L.: Aeolus L2B status, monitoring and NWP impact assessment at ECWMF, Aeolus NWP Impact Assessment Workshop, Darmstadt, Germany, September 12, 2019.
- Schäfler, A., Craig, G., Wernli, H., Arbogast, P., Doyle, J. D., McTaggart-Cowan, R., Methven, J., Rivière, G., Ament, F., Boettcher, M., Bramberger, M., Cazenave, Q., Cotton, R., Crewell S., Delanoë, J., Dörnbrack, A., Ehrlich, A., Ewald, F.,

- 920 Fix, A., Grams, C. M., Gray, S. L., Grob, H., Groß, S., Hagen, M., Harvey, B., Hirsch, L., Jacob, M., Kölling, T., Konow, H., Lemmerz, C., Lux, O., Magnusson, L., Mayer, B., Mech, M., Moore, R., Pelon, J., Quinting, J., Rahm, S., Rapp, M., Rautenhaus, M., Reitebuch, O., Reynolds, C. A., Sodemann, H., Spengler, T., Vaughan, G., Wendisch, M., Wirth, M., Witschas, B., Wolf, K., and Zinner, T.: The North Atlantic Waveguide and Downstream Impact Experiment, *Bull. Amer. Meteor. Soc.*, 99, 1607–1637, doi: 10.1175/BAMS-D-17-0003.1, 2018.
- 925 Schäfler, A., Harvey, B., Methven, J., Rahm, S., Reitebuch, O., Weiler, F., and Witschas, B.: Observation of jet stream winds during NAWDEX and systematic meteorological analysis errors, *under review in Mon. Weather Rev.*, 2019.
- Stith, J. L., Baumgardner, D., Haggerty, J., Hardesty, R. M., Lee, W.-C., Lenschow, D., Pilewskie, P., Smith, P. L., Steiner, M., and Vömel, H.: 100 Years of Progress in Atmospheric Observing Systems, *Meteorological Monographs*, 59, 2.1–2.55, doi:10.1175/amsmonographs-d-18-0006.1, 2018.
- 930 Stoffelen, A., Pailleux, J., Källen, E., Vaughan, M., Isaksen, L., Flamant, P., Wergen, W., Andersson, E., Schyberg, H., Culoma, A., Meynard, R., Endemann, M., and Ingmann, P.: The Atmospheric Dynamics Mission for Global Wind Field Measurement, *Bull. Amer. Meteor. Soc.* 86, 73–87, doi:10.1175/BAMS-86-1-73, 2005.
- Straume, A. G., Rennie, M., Isaksen, M., de Kloe, J., Marseille, G.-J., Stoffelen, A., Flament, T., Stieglitz, H., Dabas, A., Huber, D., Reitebuch, O., Lemmerz, C., Lux, O., Marksteiner, U., Rahm, S., Weiler, F., Witschas, B., Meringer, M.,
- 935 Schmidt, K., Nikolaus, I., Geiss, A., Flamant, P., Kanitz, T., Wernham, D., von Bismarck, J., Bley, S., Fehr, T., Floberghagen, R., and Parinello, T.: ESA’s Space-based Doppler Wind Lidar Mission Aeolus – First Wind and Aerosol Product Assessment Results, *Proc. 29th International Laser-Radar Conference*, Hefei, China, June 24–28, 2019.
- Tan, D. G. H., Andersson, E., Kloe, J. D., Marseille, G.-J., Stoffelen, A., Poli, P., Denneulin, M.-L., Dabas, A., Huber, D., Reitebuch, O., Flamant, P., Le Rille, O., and Nett, H.: The ADM-Aeolus wind retrieval algorithms, *Tellus A: Dynamic*
- 940 *Meteorology and Oceanography*, 60, 191–205, doi:10.1111/j.1600-0870.2007.00285.x, 2016.
- Tan, D. G. H., Rennie, M., Andersson, E., Poli, P., Dabas, A., de Kloe, J., Marseille, G.-J., and Stoffelen, A.: Aeolus Level-2B Algorithm Theoretical Basis Document (Mathematical Description of the Aeolus Level-2B Processor), AE-TN-ECMWF-L2BP-0023, V. 3.0, 109 p., 2017.
- Weissmann, M., Busen, R., Dörnbrack, A., Rahm, S., and Reitebuch, O.: Targeted Observations with an Airborne Wind
- 945 Lidar, *J. Atmos. Oceanic Technol.*, 22, 1706–1719, doi:10.1175/JTECH1801.1, 2005.
- Witschas, B., Vieitez, M. O., van Duijn, E.-J., Reitebuch, O., van de Water, W., and Ubachs, W.: Spontaneous Rayleigh–Brillouin scattering of ultraviolet light in nitrogen, dry air, and moist air, *Appl. Opt.*, 49, 4217, doi:10.1364/AO.49.004217, 2010.
- Witschas, B.: Analytical model for Rayleigh–Brillouin line shapes in air, *Appl. Opt.*, 50, 267, doi:10.1364/AO.50.000267,
- 950 2011.
- Witschas, B.: Analytical model for Rayleigh–Brillouin line shapes in air: Errata, *Appl. Opt.*, 50, 5758, doi:10.1364/AO.50.005758, 2011.

- Witschas, B., Lemmerz, C., and Reitebuch, O.: Daytime measurements of atmospheric temperature profiles (2–15 km) by lidar utilizing Rayleigh–Brillouin scattering, *Opt. Lett.*, 39, 1972–1975, doi:10.1364/OL.39.001972, 2014.
- 955 Witschas, B., Rahm, S., Dörnbrack, A., Wagner, J., and Rapp, M.: Airborne Wind Lidar Measurements of Vertical and Horizontal Winds for the Investigation of Orographically Induced Gravity Waves, *J. Atmos. Oceanic Technol.*, 34, 1371–1386, doi:10.1175/JTECH-D-17-0021.1, 2017.
- 960 Witschas, B., Lemmerz, C., [GeissGeiß](#), A., Lux, O., Marksteiner, U., Rahm, S., Reitebuch, O., and Weiler, F.: First validation of Aeolus wind observations by airborne Doppler wind lidar measurements, *in review, Atmos. Meas. Tech.* ~~2020~~*in preparation for Atmos. Meas. Tech., 2019.*
- Zhai, X., Marksteiner, U., Weiler, F., Lemmerz, C., Lux, O., Witschas, B., and Reitebuch, O.: Rayleigh wind retrieval for the ALADIN airborne demonstrator of the Aeolus mission using simulated response calibration, *Atmos. Meas. Tech. Discuss.*, 1–33, doi:10.5194/amt-2019-274, 2019.