



Improving GOES Advanced Baseline Imager (ABI) Aerosol Optical Depth (AOD) Retrievals using an Empirical Bias Correction Algorithm

Hai Zhang¹, Shobha Kondragunta², Istvan Laszlo², Mi Zhou¹

5 ¹I.M. Systems Group, 5825 University Research Ct, Suite 3250, College Park, MD 20740, USA.

²NOAA/NESDIS, 5825 University Research Ct, Suite 3250, College Park, MD 20740, USA.

Correspondence to: Hai Zhang (hai.zhang@noaa.gov)

Abstract. The Advanced Baseline Imager (ABI) on board the Geostationary Operational Environmental Satellite-R (GOES-R) series enables retrieval of aerosol optical depth (AOD) from geostationary satellites using a multi-band algorithm similar to those of polar-orbiting satellites' sensors, such as the Moderate Resolution Imaging Spectroradiometer (MODIS) and Visible Infrared Imaging Radiometer Suite (VIIRS). Therefore, ABI AOD is expected to have accuracy and precision comparable to MODIS AOD and VIIRS AOD. However, this work demonstrates that the current version of GOES-16 (GOES-East) ABI AOD has diurnally varying biases due to errors in the land surface reflectance relationship between the bands used in the ABI AOD retrieval algorithm, which vary with respect to the Sun-satellite geometry. To reduce these biases, an empirical bias correction algorithm has been developed based on the lowest observed ABI AOD of an adjacent 30-day period and the background AOD at each time step and at each pixel. The bias correction algorithm improves the performance of ABI AOD compared to AEROSOL ROBOTIC NETWORK (AERONET) AOD, especially for the high and medium (top 2) quality ABI AOD. AOD data for the period August 6 to December 31, 2018 are used to validate the bias correction algorithm. For the top 2 qualities ABI AOD, after bias correction, the correlation between ABI AOD and AERONET AOD improves from 0.87 to 0.91, the mean bias improves from 0.04 to 0.00, and root mean square error (RMSE) improves from 0.09 to 0.05. These results for the bias corrected top 2 qualities ABI AOD are comparable to those of the uncorrected high-quality ABI AOD. Thus, by using the top 2 qualities of ABI AOD in conjunction with the bias correction algorithm, the area coverage of ABI AOD is substantially increased without loss of data accuracy.

25 1 Introduction

Aerosols in the atmosphere such as dust, smoke, pollutants, volcanic ash and sea spray can affect climate through scattering and absorbing radiation directly, and through interaction with clouds indirectly (McCormick and Ludwig, 1967; Charlson and Pilat, 1969; Atwater, 1970; Mitchell Jr., 1971; Coakley et al., 1983; Twomey, 1977; Albrecht, 1989; Rosenfeld and Lensky, 1998). In addition, aerosols impact air quality and thus affect human health (Pope and Dockery 2006). Satellite retrieved



30 aerosol optical depth (AOD), a quantitative measure of the amount of aerosols present in the atmosphere, is useful for
evaluating aerosols' effect on climate change (e.g. Yu et al. 2006) and for estimating and forecasting ambient PM_{2.5}
concentrations (particulate matter with diameters $\leq 2.5 \mu\text{m}$; e.g. Hoff and Christopher, 2009).

AOD from polar-orbiting satellite sensors, such as the Moderate Resolution Imaging Spectroradiometer (MODIS) and Visible
35 Infrared Imaging Radiometer Suite (VIIRS), is retrieved using multi-channel algorithms (Levy et al., 2007; Levy et al. 2010;
Jackson et al., 2013; Liu et al., 2014). As a result, AOD from MODIS and VIIRS has high accuracy, but the low temporal
resolution of polar-orbiting satellites limits the availability of observations for a given location. In contrast, geostationary
satellites such as the United States' Geostationary Operational Environmental Satellites (GOES) provide an opportunity for
nearly continuous AOD retrievals during daylight over a hemispheric domain. The GOES Aerosol and Smoke Product (GASP)
40 retrieved at the National Oceanic and Atmospheric Administration (NOAA) from the legacy GOES imagers, however, was
not as accurate as the MODIS or VIIRS AOD due to limitations imposed by a single channel retrieval (Prados et al., 2007;
Green et al., 2009). The Advanced Baseline Imager (ABI) on the new generation GOES-R series of satellites provides AOD
retrievals with accuracies similar to MODIS and VIIRS due to similar instrument design and algorithm science, combined with
high temporal resolution. NOAA launched the first satellites in the GOES-R series, GOES-16 and GOES-17, in 2016 and
45 2018, respectively (Schmit et al., 2017; [https://www.nesdis.noaa.gov/content/goes-17-now-operational-here%E2%80%99s-
what-it-means-weather-forecasts-western-us](https://www.nesdis.noaa.gov/content/goes-17-now-operational-here%E2%80%99s-what-it-means-weather-forecasts-western-us) accessed 6/12/2019). Each satellite carries an ABI, which has 16 spectral bands
ranging from the visible to infrared wavelengths. GOES-16 is located at 75.2°W and GOES-17 is located at 137.2 °W. Both
satellites observe the continental United States (CONUS) region every 5 minutes and the full hemispheric disk every 10
minutes, depending on the scan mode (Schmit et al., 2017).

50 The ABI AOD product has a spatial resolution of 2 km at nadir, compared to 3 km from MODIS Collection 6 and 750 m from
VIIRS. The GOES-16 ABI AOD product, deemed having a quality sufficient to be used in applications and research
(provisional maturity), was released on July 25, 2018, while the GOES-17 ABI AOD product reached provisional maturity on
January 1, 2019.

55 The accuracy and precision of VIIRS and MODIS AOD is well documented for use in various decision support systems (Laszlo
and Liu, 2016; Levy et al., 2013). The geometries of observations from a geostationary satellite are quite different from those
from a polar-orbiting satellite; this can lead to differences in the quality of retrieved AOD despite the similarity of the AOD
retrieval algorithms. It is therefore very important to evaluate the new ABI AOD product and demonstrate its accuracy and
precision at daily and sub-daily time scales. This should allow users to interpret the ABI AOD product correctly and apply it
60 appropriately in research and operational applications.

In this study, we compare GOES-16 ABI AODs to AERONET AODs for a five-month period in 2018 and document a diurnal
bias in the ABI AOD due to deficiencies in the land surface reflectance relationship currently applied in the retrieval algorithm.



The presence of the bias is consistent across the CONUS but its magnitude varies by location and aerosol composition. We describe a novel method that corrects the bias for each AOD pixel and time step. The resultant corrected ABI AOD shows little to no diurnal bias over a variety of surface types (e.g., urban, rural).

2 Data

2.1 GOES-16 ABI AOD

The GOES-16 ABI AOD data used in this work is from the period of August 6 to December 31, 2018, over the CONUS region. The ABI AOD data have 2 km spatial resolution at nadir and 5 minutes temporal resolution. Similar to MODIS and VIIRS AOD, ABI AOD are retrieved using separate algorithms over ocean and over land, due to the different surface characteristics of ocean and land (Kondragunta et al., 2020; GOES-R AOD ATBD, 2012, 2018). Over land, three ABI channels are used in the retrieval, i.e. 0.47 μm , 0.64 μm , and 2.2 μm . The 2.2 μm channel is transparent to most aerosols, so it is used to estimate the surface reflectance in the visible bands using prescribed functions. The algorithm assumes linear relationships exist between the surface reflectances in these three channels. With the help of LUT, AODs are retrieved using 0.47 μm and 2.2 μm for four types of aerosol models, i.e. dust, smoke, urban, and generic. The aerosol model is then selected using 0.64 μm channel by looking for the aerosol model that gives closest top of the atmosphere (TOA) reflectance at the channel. The algorithm does not make retrievals over bright land pixels, pixels covered by cloud or snow, sun-glint pixels over water, etc. The valid AOD retrieval range is [-0.05,5].

The surface reflectance relationships between the three bands are derived through studies of surfaces close to AERONET sites, where AOD are accurately measured from the ground and are considered as ground truth. Surface reflectances at the three channels are first retrieved with the help of AERONET AOD for the ABI pixels if AOD is less than 0.2. The relationships are then parameterized as functions of the solar zenith angle for different ranges of the normalized difference vegetation index (NDVI, between 0.86 and 0.64 μm channel) through linear regression analysis of the spectral surface reflectances.

The retrieval algorithm assigns the pixel level AOD to one of three qualities: high, medium and low. AOD quality is determined on conditions of the pixels, such as solar/satellite zenith angle, cloud/shadow adjacency, standard deviation of measured reflectance at a specific band; the full set of criteria is listed in Table 1. High quality AOD is the most accurate and most recommended for scientific applications. However, the ABI AOD retrieval algorithm uses such strict criteria to remove potential erroneous pixels that the number of pixels with high quality AOD is usually very small. Several criteria can cause a pixel be degraded to medium quality instead of high quality: (1) adjacent to a cloudy pixel; (2) adjacent to a snow pixel within 3 pixels distance; (3) 3x3 standard deviation of 2 km 0.47 μm TOA reflectance is greater than 0.006; (4) retrieval residual is greater than 0.4; (5) external cloud mask is “probably clear”. Out of these five criteria, the standard deviation test tends to remove a large number of pixels that are potentially high quality. This test is used to remove pixels that are inhomogeneous in TOA reflectance due to the existence of undetected cloud or snow by the cloud mask algorithm. A similar test is used in the VIIRS AOD algorithm but with the 0.41 μm band instead of the 0.47 μm band (e.g. Huang et al., 2018). The surface



reflectance in the 0.41 μm channel is usually low and therefore does not have much influence in the standard deviation at the TOA for VIIRS AOD. However, the ABI does not have a 0.41 μm channel and the algorithm must use the 0.47 μm channel instead. The surface can have a noticeable influence on the standard deviation in the 0.47 μm channel, especially in urban regions where surface reflectance variations are large. To include more retrieval pixels that are otherwise omitted due to the very conservative screening process for high quality pixels, both high quality and medium quality pixels are included in this analysis.

2.2 AERONET AOD

The AERosol RObotic NETwork (AERONET) is a global ground-based aerosol remote sensing network (Holben et al., 1998). It uses CIMEL sun photometers to measure spectral sun irradiance and sky radiances. The measurements are then used to calculate and retrieve aerosol properties. Among them, AOD is one of the main products; it is measured at 22 different wavelengths from ultraviolet to infrared, i.e. 340, 380, 400, 412, 440, 443, 490, 500, 510, 531, 532, 551, 555, 560, 620, 667, 675, 779, 865, 870, 1020, and 1640 nm. Angstrom Exponent (AE) can be calculated from the multiband AOD. Besides AOD, AERONET also retrieves other aerosol properties, such as volume size distribution, refractive index, phase function, and single scattering albedo (SSA). AERONET AOD is considered ground truth for satellite AOD (Holben et al., 1998) and is used to evaluate the ABI AOD retrievals. AERONET AOD at 550 nm is obtained through interpolation from other spectral bands so that it can be compared against ABI AOD, which is reported at 550 nm. In this work, AERONET AOD version 3 level 1.5 is used. Although level 2.0 data have higher quality, they have time delays such that the latest data were not available during the analysis period.

115 3 GOES-16 ABI AOD Diurnal Bias

The diurnal bias of ABI AOD is evident when it is compared to coincident measurements of AERONET AOD. The diurnal bias is most apparent on “clear” days, when AERONET AOD is ≤ 0.05 during an entire day. Comparisons are made on clear days at six representative AERONET sites, listed in Table 2. These sites include a range of geographic locations across the CONUS and different surface types (e.g., urban, suburban, rural), most of which are urban or surfaces with little vegetation. Matchups at the AERONET sites were made by averaging ABI AOD pixels within a circle of 27.5-km radius surrounding the site; a minimum of 120 pixels are required to have an effective matchup, which is about 20% of all the pixels within the circle. These criteria are adopted from the traditional satellite and AERONET AOD matchup procedure through the consideration of the air mass movements (e.g. Ichoku et al., 2002; Huang et al., 2016).

125 To illustrate the problem of the diurnal bias of ABI AOD the time series of ABI AOD and AERONET AOD for clear days are plotted at the representative AERONET sites in Figure 1. As demonstrated in the figure, the number of the ABI top 2 qualities



(high and medium quality) data points are much larger than that of the high quality AOD. For example, on October 18, 2018 at the CCNY site (Figure 1a), which is located in New York City, New York, no high quality ABI AOD data matchup data are available, but top 2 quality AOD matchup points exist at nearly all time steps.

130 The diurnal variation of the ABI AOD bias is observed at all six sites, but the magnitude of the bias varies, with higher bias observed at the urban/suburban sites (Figures 1a, 1c, 1d, and 1e) compared to the rural sites (Figures 1b and 1f). For all sites, the bias peaks around 17:00 UTC, when the Sun moves from the east of the satellite to the west of the satellite, as determined by the location of the satellite, i.e. 75.2°W for GOES-16. The bias curves are nearly symmetric at the two sites with longitudes close to that of the satellite (Figures 1a, 1b, and 1c), while the bias curves are asymmetric at the sites to the west of the satellite

135 (Figures 1d, 1e, and 1f).

There are several potential causes of the diurnal bias observed in ABI AOD, including known sources of uncertainty associated with calibration, cloud/snow contaminations, aerosol models, and errors in surface reflectance retrievals (Li, et al., 2009). In the cases shown in Figure 1, all days have low AOD values and continuous AOD measurements from AERONET, indicating

140 that the influences of the aerosol model selection and cloud contamination are small. Snow contamination is not an issue because the analysis days are mostly in September and October, before it was cold enough for widespread snowfall. The one case in December (University of Houston) was not contaminated by snow through visual inspection of the true color (RGB) images of VIIRS or GOES, which are available on the AerosolWatch website (<https://www.star.nesdis.noaa.gov/smcd/spb/aq/AerosolWatch/>). It is not likely that the diurnal patterns of biases are caused

145 by calibration error, because calibration errors are constant and do not change as a function of time of day. Therefore, the most probable reason for the observed diurnal patterns of the ABI AOD biases is errors in surface reflectance retrievals. In the ABI AOD retrieval algorithm, the land surface reflectance relationships between the 0.47 μm , 0.64 μm and 2.2 μm bands were parameterized, as described in Section 2.1, and assumed to be functions of solar zenith angle and NDVI. Errors in these parameterizations are most likely responsible for the observed diurnal pattern of the ABI AOD biases. They can cause errors

150 in surface reflectance retrieval, and therefore influence the retrieval of AOD. When the deviation of parameterization from the actual relationship is large, the AOD retrieval error will also be large. One reason that causes the land surface relation error is that current surface relationships were derived from the dataset when GOES-16 was located at the test position (89.5°W) instead of the current operational position (75.2 °W), and so the relationship does not adequately represent the current observation geometry. The other reason is that the relationships are derived using pixels that have high AOD quality

155 and therefore the medium quality pixels are not represented by the training set.

The diurnal pattern of biases is also found to be different on different days. As an example, Figure 2 shows the diurnal bias at GSFC on two additional days in October 2018, the 18th and the 30th. Although the peak of the bias occurs at approximately the same time on both days, around 17:00 UTC, the magnitudes of the peaks are different. On October 12 (Figure 1a) the

160 maximum ABI AOD is about 0.25, while it is 0.2 on October 15 (Figure 2a) and only 0.1 on October 30 (Figure 2b). The



magnitude difference of the peaks is caused by the difference in the geometry between the two days. Because surface reflectance relationships depend on the geometry, if the surface reflectance relationships are not correctly parameterized for the geometry dependence, they can cause the retrieval error in AOD as observed.

165 **4 Bias Correction Algorithm**

Now that the diurnal bias in ABI AOD has been identified, the next step is to develop an algorithm to correct it by taking advantage of the special characteristics of geostationary satellites. Because the GOES-16 satellite is stationary, the locations of the image pixels are fixed and the satellite zenith azimuthal angles remain unchanged. In addition, the solar zenith azimuthal angles at a given time of day change little during a relatively short time period, on the order of one month. These features, common to geostationary satellites, were used to design an AOD retrieval algorithm for the legacy GOES, e.g. the GOES aerosol/smoke product (GASP) (Knapp, 2002a; Knapp et al., 2002b; Knapp et al., 2005; Prados, et al., 2007). Unlike the GOES-R series satellites, the legacy GOES had only one visible channel that could be used for AOD retrieval. In the GASP retrieval algorithm, to obtain the surface reflectance at the visible channel at each time step, a composite TOA reflectance was generated such that the second lowest reflectance was chosen from a time period of the previous 28 days. This reflectance was then used to retrieve the surface reflectance assuming a background AOD of 0.02.

We designed a GOES-16 ABI AOD bias correction algorithm similar to the GASP AOD retrieval algorithm. However, instead of the reflectance space, the composite bias correction algorithm works in the AOD space. The flowchart of the algorithm is shown in Figure 3. GOES-16 ABI AOD top 2 qualities, i.e. high quality and medium quality, are used to generate the bias curves in the algorithm, because they have much larger area coverage than the high quality data alone. For example, it is not possible to build a bias curve for pixels near CCNY using high quality AOD data as there are too few data points, as seen in Figure 1.

In the algorithm, ABI AOD (top 2 qualities) over the CONUS with 5 minutes temporal resolution are first aggregated into 15 minutes temporal resolution. This is because that GOES can operate in different modes and the observation times are different for different modes, even though the time interval between the time steps stays the same for CONUS region. Averaging AOD into 15 minutes interval reorganizes the AOD data into regular time steps. In addition, averaging AOD also increases data coverage at each time step. At each time step, the algorithm loops through a 30-day period to look for the lowest AOD for each pixel. In this work, the 30-day time period was selected based on experience developing the GASP algorithm. For real-time bias correction, the most recent past 30 days are used, because future AOD observations, after the date of interest, are not yet available. If the bias correction is being done as part of reprocessing, such that all the AOD data after the date of interest are available, a 30-day period is used with the date of interest placed at the center; this period may estimate the AOD bias more



accurately. As shown in Knapp et al. (2005), the optimal time period to obtain a clear day background is not fixed and is dependent on seasons.

195 Once the optimum 30-day period has been selected, the bias at each pixel and at each time step is estimated using the lowest
AOD during the 30-day period minus the background AOD. The background AOD over the CONUS area is obtained through
an analysis of multi-year AERONET AOD data using the method described in Zhang et al. (2016). The main steps are
summarized here for reference. At each AERONET site i , the lowest 5th percentile of AOD over a 5-year (2012-2016) period
is obtained and is set as the estimate of the background AOD (τ_i) at the site. Then the background AOD at each site is
200 interpolated to provide continuous values across the globe using:

$$\tau_b = \frac{\sum_i w_i \tau_i}{\sum_i w_i}, \quad (1)$$

where τ_b is the interpolated background AOD, and τ_i is the background AOD at site i . The weighting factor w_i is defined as a
function of the distance (d_i) between the site i and the interpolation point as:

$$w_i = \exp(-d_i/d_0), \quad (2)$$

205 where the constant d_0 is set as 500 km. Using this method, a global map of background AOD is obtained. The background
AOD over the CONUS is found to be low and the variation is also small, i.e. the average background AOD over CONUS is
0.025 and the range is [0.019, 0.033]. Therefore, instead of using various background AOD values at different places in the
bias correction algorithm, a constant background AOD of 0.025 is used, which is similar in magnitude as that used in GASP
algorithm. After the bias at each 15-minute time step is obtained for each pixel, the bias data are fitted to two curves of
210 polynomial of second order, separated at 17:00 UTC, which is about the time when the bias peaks. This step is used to obtain
estimates of the bias at each 5-minute AOD observation time step and also helps to further smooth the diurnal curve of the
bias. The use of a smoothed curve removes potential random noise from factors such as cloud shadow contamination and
deviations from background AOD at the lowest AOD retrieval. Subsequently, the bias corrected AOD is calculated by
subtracting the bias at each pixel for each time step from the original AOD.

215 The basic idea to derive the ABI AOD bias is that the minimum of the 30-day ABI AOD at each time step should be close to
the background AOD. Therefore, deviation of the minimum of ABI AOD retrievals during the 30-day period from the
AERONET-derived background AOD are assumed to represent a systematic bias. Background AOD may change over time
in case some extreme events happen, in which the bias correction algorithm may not work well.

220 5 Bias Correction Algorithm Validation

GOES-16 ABI AOD data and AERONET AOD data for the time period from August 6, 2018 to December 31, 2018 are used
to validate the bias correction algorithm. The diurnal bias of ABI AOD data across the CONUS domain was corrected using
the algorithm described in Section 4 and compared to coincident AERONET AOD. The original ABI AOD and the bias



corrected ABI AOD were matched with AERONET AOD using the following criteria: (1) ABI AOD are averaged within the
225 circle of 27.5 km radius around an AERONET site, requiring at least 120 valid AOD pixels within the circle; (2) AERONET
AOD are averaged within ± 30 minutes of the satellite observation time and at least 2 AERONET AOD data points exist within
the hour. These are the same criteria that were used to validate the VIIRS AOD product (Liu, et al., 2014; Zhang et al., 2016).

For the first 30 days of the validation period (August 6 to September 4), the bias correction curves are derived from the same
230 30 day period. For the remainder of the validation period, the bias correction curves are derived from the 30-day period
immediately prior to the day of interest.

Figure 4 shows scatter plots of GOES-16 ABI AOD vs AERONET AOD for high quality and top 2 qualities of ABI AOD,
before and after bias correction, averaged over the entire validation period and across the CONUS domain. Scatter plots for
235 both high quality and top 2 qualities are shown, although the bias curves were derived using the top 2 qualities data. In order
for a valid comparison, the AOD pixels in the plots have one-to-one correspondence before and after bias corrections, i.e. the
quality flag does not change and all the pixels are kept even though some of them may be below the lower bound of the
operational GOES-16 ABI AOD product (-0.05) after bias correction. As seen in the scatter plots, the bias correction improves
the performance of the top 2 qualities ABI AOD more than the high-quality ABI AOD, which indicates that the ABI AOD
240 algorithm does a good job identifying high quality retrievals. Therefore, the ABI AOD retrieval algorithm does a good job
identifying high quality retrievals, but with too few data coverage comparing to the top 2 qualities. For the top 2 qualities ABI
AOD, after bias correction, the correlation between ABI AOD and AERONET AOD improves from 0.87 to 0.91, the total bias
improves from 0.04 to 0.00, and RMSE improves from 0.09 to 0.05. The high-quality ABI AOD shows a small decrease in
RMSE, which improves from 0.06 to 0.05 after bias correction. The results in Figure 4 demonstrate that by applying the
245 simple bias correction, the top 2 qualities ABI AOD perform as well as the high-quality ABI AOD, but with twice the number
of matchups. In this way, the area coverage of ABI AOD is substantially increased, without loss of data accuracy, by using
top 2 qualities in conjunction with the bias correction.

Table 3 shows validation statistics for GOES-16 ABI AOD vs AERONET AOD at the 6 representative AERONET sites listed
250 in Table 2. After applying the bias correction, most of the statistics for ABI AOD improve at the six sites, demonstrating the
success of the bias correction algorithm. For example, 5 out of 6 sites have RMSE improved to 0.05 or below. The exception
is the University of Houston site, where the RMSE is still as high as 0.08 after correction, although it is improved from 0.19.
This result may indicate there is still some bias left uncorrected at this site due to its complicated surface with respect to
geometries. The sites in the eastern US have a geometry symmetric to the local noon and therefore the AOD biases are
255 symmetric to the local noon. The sites in the western US do not have such symmetry and therefore the splitting of
parameterization at noon and using second order polynomials may introduce larger errors. The complexity of surfaces over
University of Houston can be seen in Figure 1 (e), where two AOD bias peaks are observed, one in the morning and the other



at noon, indicating that the diurnal variation of surface reflectance relationship is different from the other sites, such as GSFC, CCNY, etc, where AOD biases only peak at noon.

260

Figure 5, analogous to Figure 1, shows the time series comparisons between bias corrected ABI AOD and AERONET AOD for clear days at the same representative AERONET sites used in Figure 1. Almost all of the large biases in Figure 1 are reduced to a magnitude < 0.05 after the bias correction procedure. The exception is in the early morning at the University of Houston site, where large biases remain. This is probably because the second order polynomial fit of the bias correction does not accurately describe the shape of the AOD biases in this area, which may be the reason why the RMSE of the bias-corrected ABI AOD is still high at the University of Houston site (Table 3).

265

Figure 6 shows maps of the top 2 qualities of ABI AOD over the Northeast US at 17:42 UTC on October 18, 2018 before (Figure 6a) and after (Figure 6b) bias correction, illustrating the effects of the bias correction on observed ABI AOD. The black areas in the figures are locations where no AOD was retrieved, primarily caused by cloud coverage. This is a clear day, with no major sources of ambient atmospheric aerosols. However, before the bias correction, Figure 6a shows that the ABI AOD field is noisy, due to the effects of the surface reflectance on the AOD retrievals. For example, over New York City, NY area, uncorrected ABI AOD values are as high as 0.5, while the coincident AERONET AOD measurement at the CCNY site is only 0.02. After the bias correction, Figure 6b shows that the ABI AOD field is mostly cleared from the surface effects. Some isolated pixels of slightly higher AOD are still observed in the bias corrected ABI AOD map, which are likely originated from cloud contamination, with a few due to incomplete bias correction caused by outliers in fitting the bias correction with a second order polynomial.

270

275

Figure 7 shows histograms of original (uncorrected) and bias corrected ABI AOD pixels over the areas within a 27.5 km radius circle around the CCNY AERONET site (Figure 7a) and the Wallops AERONET site (Figure 7b) at 17:42 UTC on October 18, 2018 (the same observation time as the AOD data shown in Figure 6). At the urban CCNY site, ABI AOD before bias correction ranges from 0 to 0.5, with an average of 0.25, which is much higher than the AERONET AOD value of 0.02. After correction, the ABI AOD distribution narrows down to a very small range with a peak and average at 0.02 - the same value as AERONET. Wallops is a rural site and therefore its surface is darker and more favorable for AOD retrievals. Figure 7b shows that uncorrected ABI AOD at the Wallops site ranges from -0.05 to 0.2, with an average of 0.05, much closer to AERONET AOD (0.03) compared to the matchups at the CCNY site. After the bias correction, the average ABI AOD is 0.03, identical to the AERONET AOD measurement, and the distribution of AOD is narrower than before the bias correction.

285

The results in Figures 1 and 5 suggest that the surface reflectance parameterizations in the ABI AOD algorithm is the main source of the diurnal bias when ABI AOD is close to zero. When AOD is higher, such as during periods of high aerosol concentration, the aerosol model in the ABI AOD algorithm becomes a larger source of bias. As an example, a case with a moderate aerosol load is examined. On August 15-16, 2018, smoke aerosols were transported to the New York City, NY

290



metropolitan area from wildfires burning in the western US and Canada, resulting in AERONET AODs in the range of 0.4-0.7 at the CCNY site. As shown in Figure 8, the bias corrected ABI AOD is very close to the AERONET AOD on August 15 (Figure 8a), but much lower than the AERONET AOD on August 16 (Figure 8b). To investigate the reason for this discrepancy in the bias corrected ABI AOD, the statistics of the ABI AOD retrievals were examined for the 18:12 UTC time step. These statistics are listed in Table 4 for the original ABI AOD pixels within a 27.5 km radius circle of the CCNY AERONET site, which are involved in the average of the matchup with AERONET AOD. AERONET AOD increases from 0.35 on August 15 to 0.55 on August 16, but the uncorrected ABI AOD decreases from 0.82 on August 15 to 0.80 on August 16. The reason for this discrepancy is that the ABI AOD algorithm used different aerosol models in different percentages on each day. Table 4 indicates that on August 15, the dust model was used primarily (46%), but on August 16, the urban aerosol was predominant. This aerosol event in August 2018 was dominated by smoke, so it is surprising that the ABI AOD algorithm did not select the smoke model a majority of the time on these days. The results for ABI AOD in this case are not unprecedented. The selection of the aerosol model in AOD retrievals over land has been known to perform poorly in the VIIRS AOD retrieval too (Huang et al., 2016). The ABI retrieval uses only four aerosol models for retrieval over land and the real model may be different from every one of them.

Uncertainties in the bias correction algorithm can also be caused by the geometry change within the 30 day period. During 30-day period, the position of the Sun and therefore the solar geometry does change for a given time step. Hence, the surface reflectance relationship and AOD bias are not constant in the time period. The magnitude of AOD bias variation during the time period determines the magnitude of the uncertainty of the algorithm. Besides the change in solar geometry, the surface vegetation color change during seasonal variation may also be a source of uncertainty through its influence on surface reflectance relationship between bands.

The bias correction of ABI AOD can also improve its correlation with measurements of fine particles, $PM_{2.5}$ (particulate matter with diameter $\leq 2.5 \mu m$). $PM_{2.5}$ is a “criteria” pollutant designated by the US Environmental Protection Agency (EPA) as harmful to public health and the environment. Satellite AOD can be used to estimate ambient $PM_{2.5}$ concentrations at the surface. Figure 9 shows scatter plots of the correlation between hourly $PM_{2.5}$ concentration measurements from EPA’s ground-based monitor station at Queens College in New York City and GOES-16 ABI AOD before (Figure 9a) and after (Figure 9b) bias correction. The correlation between $PM_{2.5}$ and ABI AOD improves from 0.58 to 0.68 after the bias correction. These results suggest that applying the bias correction to ABI AOD data will improve its use in air quality monitoring and research applications.



6 Summary and Conclusions

In this paper, a diurnal bias in the GOES-16 ABI AOD bias is identified. Analysis shows that the bias is caused by errors in the land surface reflectance relationship between the spectral bands used in the ABI AOD retrieval algorithm. To remove the
325 biases, an empirical algorithm is developed that utilizes the lowest AOD in a recent 30-day period in conjunction with the background AOD to derive a smooth bias curve at each ABI AOD pixel. ABI AOD are then corrected by subtracting the derived bias curves at each time step.

The bias correction algorithm is validated for five months of GOES-16 ABI AOD data through comparison against coincident AERONET AOD. The results demonstrate that the bias correction algorithm works successfully: for the top 2 qualities of
330 ABI AOD, the correlation with AERONET AOD, average bias, and RMSE all improve. As a result of the bias correction, top 2 qualities ABI AOD performs as well as uncorrected high-quality ABI AOD. Therefore, bias corrected top 2 qualities ABI AOD data are recommend for use in research and operations, since they cover twice the area as high-quality ABI AOD data alone with the same accuracy.

335 The ABI AOD bias correction process is most effective when AOD is low because under those conditions, the surface reflectance relationship is the main source of uncertainty in the ABI AOD retrieval. When AOD is higher, the uncertainty from the aerosol model selection in the ABI AOD retrieval algorithm becomes as large as or larger than that from the surface reflectance relationship, and therefore the bias correction for high AOD conditions is not as effective as that for low AOD conditions.

340 The surface reflectance relationships in the ABI AOD retrieval algorithm will be improved when more GOES-16 data are accumulated and analyzed. However, these relationships are based on AERONET sites and they are statistical models. Therefore, individual AOD pixels will always suffer to some degree from deviation in the statistical relationship and some bias will always exist, although it may be reduced by a more accurate surface reflectance relationship. Hence, future versions
345 of the GOES ABI AOD product may still benefit by applying the bias correction algorithm, unless the AOD retrieval algorithm uses pixel level surface reflectance relationships. On the other hand, in the bias correction algorithm, background AOD assumption may also fail in some extreme cases, even with small likelihood.

GOES-17 is located at 137.2°W, observing the western US. A lot of areas in the western US with low quality AOD in GOES-
350 16 due to high satellite zenith angle can be retrieved with high or medium quality with GOES-17 data. Therefore, ABI AOD from GOES-17 can complement those from GOES-16. ABI AOD from GOES-17 will be analyzed and the bias correction algorithm will be applied. The results are expected to be similar to those from GOES-16.



Acknowledgements

- 355 The authors thank the AERONET principal investigators and site managers for providing the data used in this work and Amy Huff (IM Systems Group) for providing internal review. The contents of this paper are solely the opinions of the authors and do not constitute a statement of policy, decision, or position on behalf of NOAA or the U. S. Government.

References

- 360 Albrecht, B. A.: Aerosols, cloud microphysics, and fractional cloudiness, *Science*, 245, 1227–1230, 1989.
Atwater, M. A.: Planetary albedo changes due to aerosols, *Science*, 170(3953), 64–66, 1970.
Charlson, R. J. and Pilat, M. J.: Climate: The influence of aerosols, *J. Appl. Meteorol.*, 8, 1001–1002, 1969.
Coakley Jr., J. A., Cess, R. D., and Yurevich, F. B.: The effect of tropospheric aerosols on the earth's radiation budget: A parameterization for climate models, *J. Atmos. Sci.*, 40, 116–138, 1983.
- 365 GOES-R Advanced Baseline Imager (ABI) Algorithm Theoretical Basis Document For Suspended Matter/Aerosol Optical Depth and Aerosol Size Parameter, NOAA/NESDIS/STAR, Version 3.0, July 30, 2012, <https://www.star.nesdis.noaa.gov/goesr/docs/ATBD/AOD.pdf>, accessed 12/17/2019.
GOES-R Advanced Baseline Imager (ABI) Algorithm Theoretical Basis Document For Suspended Matter/Aerosol Optical Depth and Aerosol Size Parameter, NOAA/NESDIS/STAR, Version 4.2, February 14, 2018,
370 https://www.star.nesdis.noaa.gov/smcd/spb/aq/AerosolWatch/docs/GOES-R_ABI_AOD_ATBD_V4.2_20180214.pdf, accessed 02/24/2020.
Green, M., Kondragunta, S., Ciren, P., and Xu, C. Y.: Comparison of GOES and MODIS aerosol optical depth (AOD) to aerosol robotic network (AERONET) AOD and IMPROVE PM_{2.5} mass at Bondville, Illinois, *J. Air Waste Manag. Assoc.*, 59, 1082–1091, 2009.
- 375 Hoff, R.M. and Christopher, S.A.: Remote Sensing of Particulate Pollution from Space: Have We Reached the Promised Land?, *Journal of the Air & Waste Management Association*, 59:6, 645–675, DOI: 10.3155/1047-3289.59.6.645, 2009.
Holben, B. N., Eck, T. F., Slutsker, I., Tanre, D., Buis, J.P., Setzer, A., Vermote, E., Reagan, J.A., Kaufman, Y.J., Nakajima, T., Lavenu, F., Jankowiak, I., and Smirnov, A.: AERONET—A federated instrument network and data archive for aerosol characterization, *Remote Sens. Environ.*, 66, 1–16, doi:10.1016/S0034-4257(98)00031-5, 1998.
- 380 Huang, J., Kondragunta, S., Laszlo, I., Liu, H., Remer, L.A., Zhang, H., Superczynski, S., Ciren, P., Holben, B.N., and Petrenko, M.: Validation and expected error estimation of Suomi-NPP VIIRS aerosol optical thickness and Ångström exponent with AERONET, *J. Geophys. Res. Atmos.*, 121, 7139–7160, doi:10.1002/2016JD024834, 2016.
Huang, J., Laszlo, I., Remer, L. A., Liu, H., Zhang, H., Ciren, P., and Kondragunta, S.: Screening for snow/snowmelt in SNPP VIIRS aerosol optical depth algorithm, *Atmos. Meas. Tech.*, 11, 5813–5825, <https://doi.org/10.5194/amt-11-5813-2018>, 2018.




- 385 Ichoku, C., Chu, D.A., Mattoo, S., Kaufman, Y.J., Remer, L.A., Tanré, D., Slutsker, I. and Holben, B.N.: A spatio-temporal approach for global validation and analysis of MODIS aerosol products, *Geophys. Res. Lett.*, 29(12), 8006, doi:10.1029/2001GL013206, 2002.
- Jackson, J. M., Liu, H., Laszlo, I., Kondragunta, S., Remer, L.A., Huang, J., and Huang, H.-C.: Suomi-NPP VIIRS aerosol algorithms and data products, *J. Geophys. Res. Atmos.*, 118, 12,673–12,689, doi:10.1002/2013JD020449, 2013.
- 390 Knapp, K. R.: Quantification of aerosol signal in GOES-8 visible imagery over the U.S., *J. Geophys. Res.*, 107(D20), 4426, doi:10.1029/2001JD002001, 2002a.
- Knapp, K. R., Vonder Haar, T.H., and Kaufman, Y.J.: Aerosol optical depth retrieval from GOES-8: Uncertainty study and retrieval validation over South America, *J. Geophys. Res.*, 107(D7), 4055, doi:10.1029/2001JD000505, 2002b.
- Knapp, K. R., Frouin, R., Kondragunta, S., and Prados, A.I.: Towards aerosol optical depth retrievals over land from GOES
- 395 visible radiances: Determining surface reflectance, *Int. J. Remote Sens.*, 26(18), 4097 – 4116, 2005.
- Laszlo, I. and Liu, H.: EPS Aerosol Optical Depth (AOD) Algorithm Theoretical Basis Document, version 3.0.1, June 28, 2016, NOAA NESDIS, 2016.
- Levy, R. C., Remer, L. A., Mattoo, S., Vermote, E. F., and Kaufman, Y. J.: Second-generation operational algorithm: Retrieval of aerosol properties over land from inversion of Moderate Resolution Imaging Spectroradiometer spectral reflectance, *J.*
- 400 *Geophys. Res.*, 112, D13211, doi:10.1029/2006JD007811, 2007.
- Levy, R. C., Remer, L. A., Kleidman, R. G., Mattoo, S., Ichoku, C., Kahn, R., and Eck, T. F.: Global evaluation of the Collection 5 MODIS dark-target aerosol products over land, *Atmos. Chem. Phys.*, 10, 10399–10420, doi:10.5194/acp-10-10399-2010, 2010.
- Levy, R. C., Mattoo, S., Munchak, L. A., Remer, L. A., Sayer, A. M., Patadia, F., and Hsu, N. C.: The Collection 6 MODIS
- 405 aerosol products over land and ocean, *Atmos. Meas. Tech.*, 6, 2989–3034, <https://doi.org/10.5194/amt-6-2989-2013>, 2013.
- Li, Z., Zhao, X., Kahn, R., Mishchenko, M., Remer, L., Lee, K.-H., Wang, M., Laszlo, I., Nakajima, T., and Maring, H.: Uncertainties in satellite remote sensing of aerosols and impact on monitoring its long-term trend: a review and perspective, *Ann. Geophys.*, 27, 2755-2770, <https://doi.org/10.5194/angeo-27-2755-2009>, 2009.
- Liu, H., Remer, L.A., Huang, J., Huang, H.-C., Kondragunta, S., Laszlo, I., Oo, M., and Jackson, J.M.: Preliminary evaluation
- 410 of s-NPP VIIRS aerosol optical thickness. *J. Geophys. Res. Atmos.*, 119, 3942–3962, 2014.
- McCormick, R. A. and Ludwig, J. H.: Climate modification by atmospheric aerosols, *Science*, 156(3780), 1358–1359, 1967.
- Mitchell Jr., J. M.: The effect of atmospheric aerosols on climate with special reference to temperature near the Earth's surface, *J. Appl. Meteorol.*, 10, 703–714, 1971.
- Pope, C.A. III, and Dockery, D.W.: Health effects of fine particulate air pollution: lines that connect. *J Air Waste Manage*
- 415 *Assoc* 56:709–742, 2006.
- Prados, A. I., Kondragunta, S., Ciren, P., and Knapp, K.R.: GOES Aerosol/Smoke Product (GASP) over North America: Comparisons to AERONET and MODIS observations, *J. Geophys. Res.*, 112, D15201, doi:10.1029/2006JD007968, 2007.




- Rosenfeld, D. and Lensky, I. M.: Satellite-based insights into precipitation formation processes in continental and maritime convective clouds, *Bull. Amer. Meteorol. Soc.*, 79, 2457–2476, 1998.
- 420 Schmit, T.J., Griffith, P., Gunshor, M.M., Daniels, J.M., Goodman, S.J., and Lebar, W.J.: A Closer Look at the ABI on the GOES-R Series, *Bull. Amer. Meteor. Soc.*, 98(4), 681-698, 2017.
- Twomey, S.: The influence of pollution on the shortwave albedo of clouds, *J. Atmos. Sci.*, 34, 1149–1152, 1977.
- Yu, H., Kaufman, Y. J., Chin, M., Feingold, G., Remer, L. A., Anderson, T. L., Balkanski, Y., Bellouin, N., Boucher, O., Christopher, S., DeCola, P., Kahn, R., Koch, D., Loeb, N., Reddy, M. S., Schulz, M., Takemura, T., and Zhou, M.: A review
425 of measurement-based assessments of the aerosol direct radiative effect and forcing, *Atmos. Chem. Phys.*, 6, 613-666, <https://doi.org/10.5194/acp-6-613-2006>, 2006.
- Zhang, H., Kondragunta, S., Laszlo, I., Liu, H., Remer, L.A., Huang, J., Superczynski, S. and Ciren, P.: An enhanced VIIRS aerosol optical thickness (AOT) retrieval algorithm over land using a global surface reflectance ratio database, *J. Geophys. Res. Atmos.*, 121, 10,717–10,738, doi:10.1002/2016JD024859, 2016.

430


435

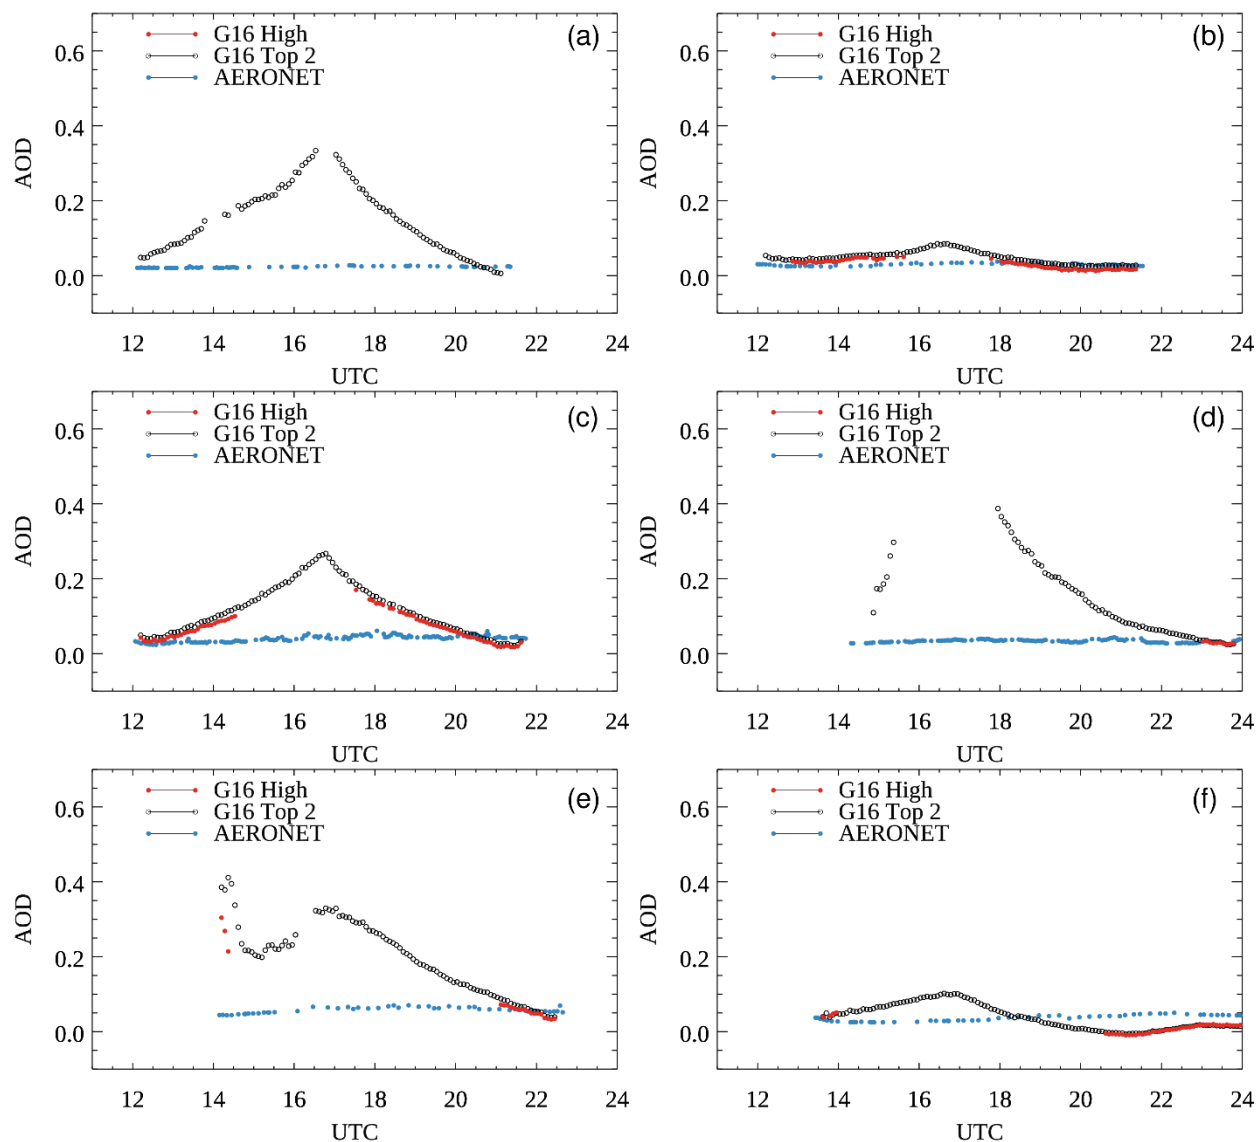

440 **Figure 1:** Time series of GOES-16 ABI AOD and AERONET AOD at 6 representative AERONET sites: (a) CCNY on October 18, 2018, (b) Wallops on October 18, 2018, (c) GSFC on October 12, 2018, (d) Tucson on October 25, 2018, (e) University of Houston on December 12, 2018, and (f) Table Mountain on September 12, 2018, showing the diurnal variations in the ABI AOD bias. Details about the AERONET sites are listed in Table 2. Clear days are selected such that AERONET AOD are ≤ 0.05 throughout the entire day. “G16 High” represents GOES-16 high quality AOD and “G16 Top 2” represents GOES-16 high quality and medium quality AOD.

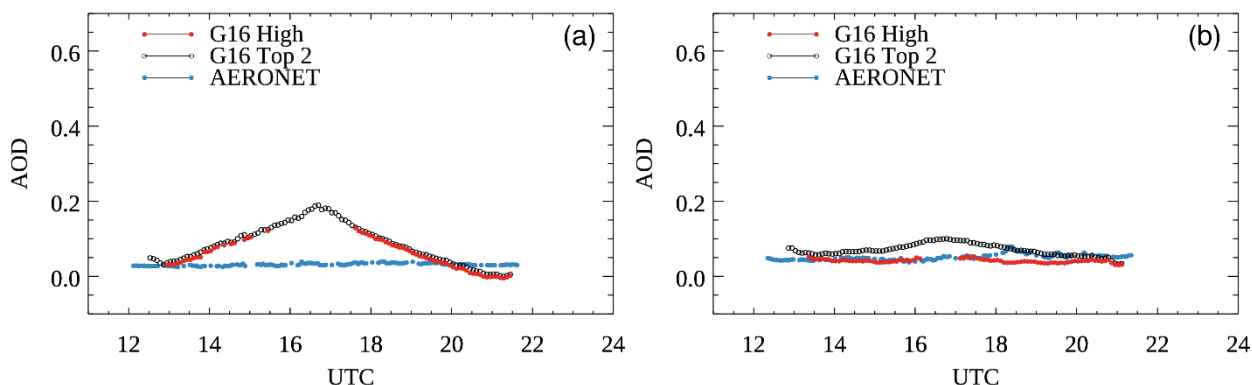


445 **Figure 2.** The diurnal pattern of biases in GOES-16 ABI AOD at GSFC on two additional clear days: (a) October 18, 2018 and (b) October 30, 2018, showing the difference in the magnitude of the bias.

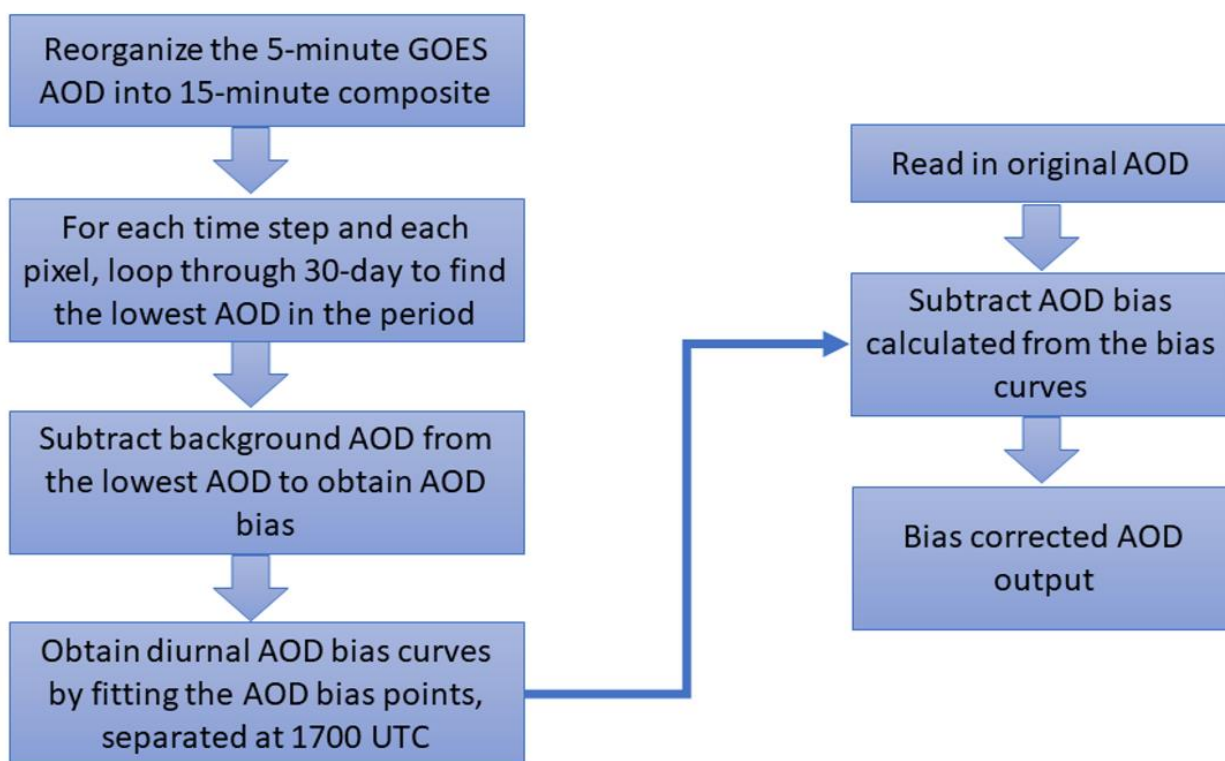

450

Figure 3. Flow chart of the ABI AOD bias correction algorithm.

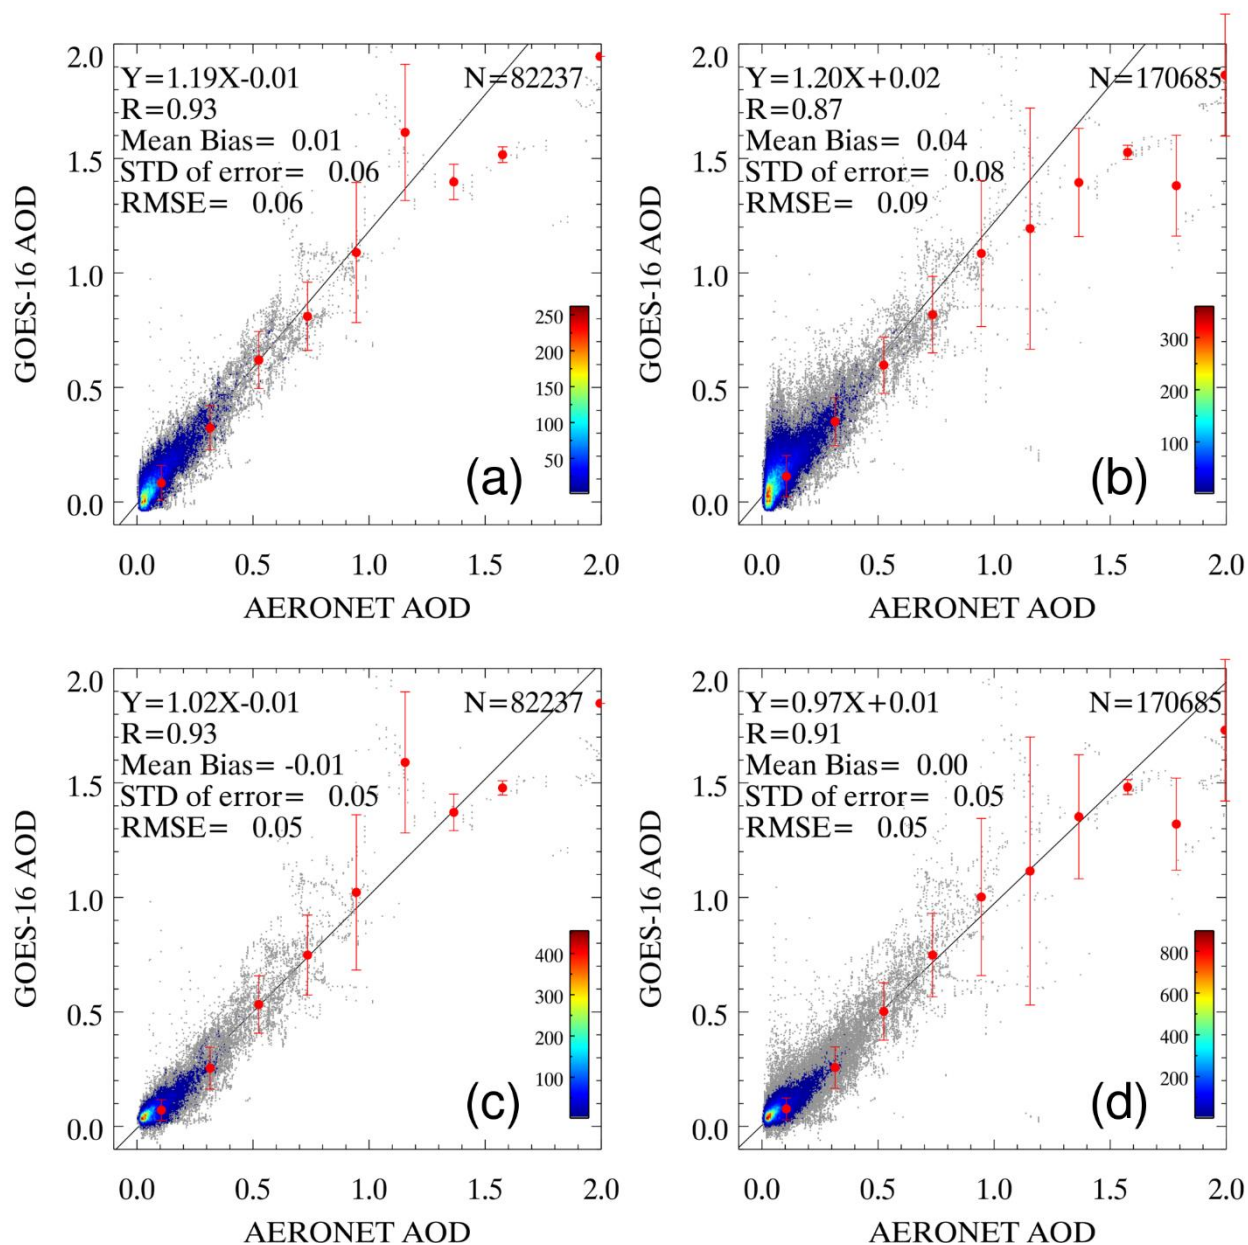

455 **Figure 4.** Scatter plots of GOES-16 ABI AOD vs AERONET AOD for August 6, 2018 to December 31, 2018 across the CONUS domain: (a) high quality ABI AOD before bias correction, (b) top 2 qualities ABI AOD before bias correction, (c) high quality ABI AOD after bias correction, and (d) top 2 qualities ABI AOD after bias correction. The red circles and vertical bars are the mean ABI AOD and the standard deviation of errors of data points falling in the bins with size of 0.2. In the plots, N is the number of matchups, R is the correlation coefficient, and RMSE is the root mean square error.

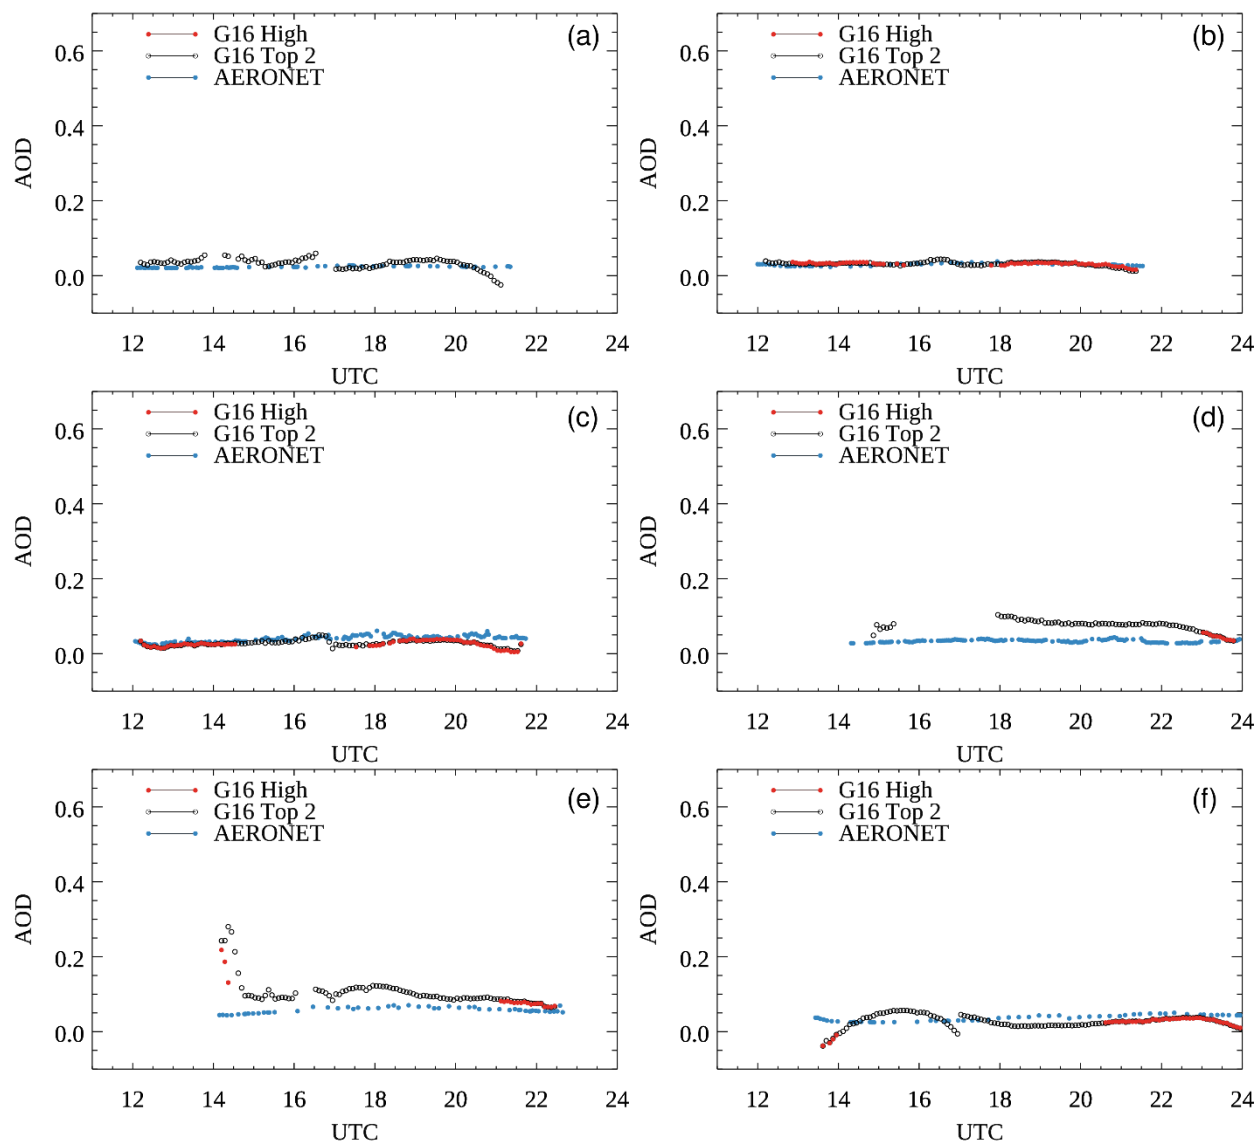


Figure 5. Same as in Figure 1, but after correcting the GOES-16 ABI AOD for the diurnal bias.



465

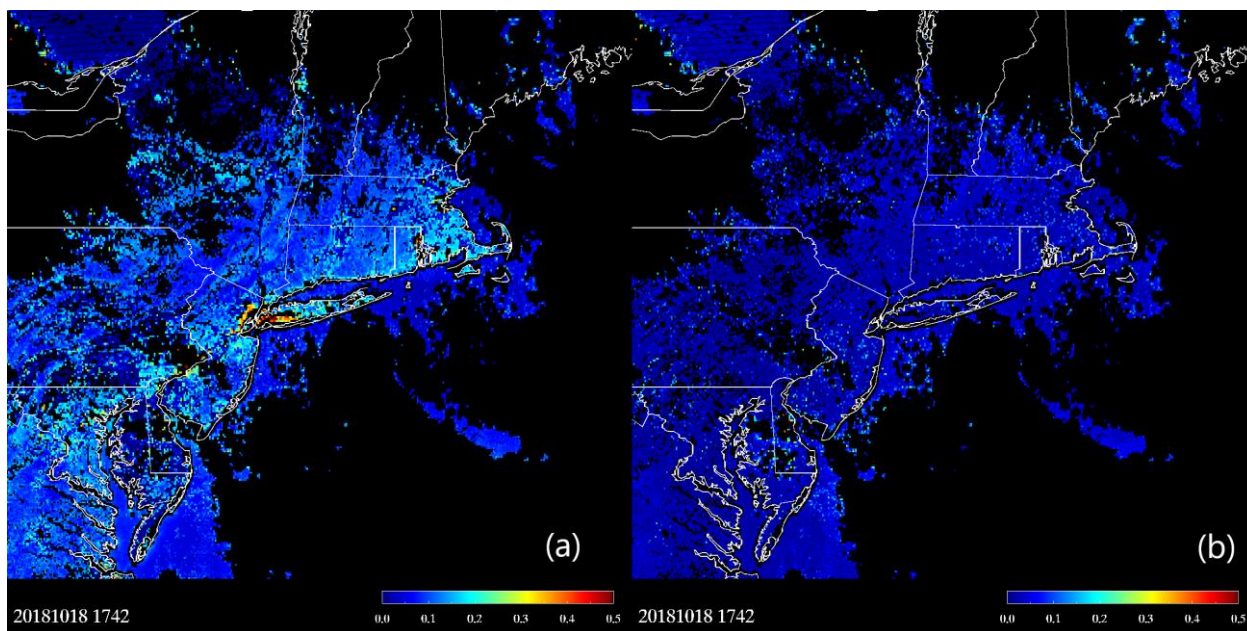


Figure 6. Maps of GOES-16 ABI AOD, top 2 qualities (high and medium), over the Northeast US at 1742 UTC on October 18, 2018: (a) before bias correction and (b) after bias correction.

470



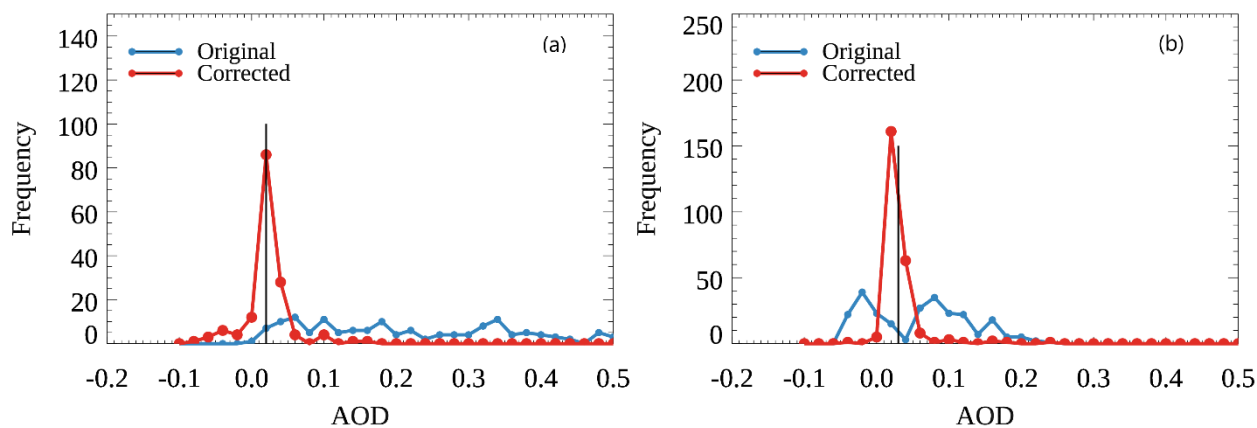


Figure 7. Histograms of original (uncorrected) and bias corrected GOES-16 ABI AOD at the (a) CCNY and (b) Wallops AERONET sites, at 17:42 UTC on October 18, 2018. The black vertical lines in the figures represent AERONET AODs.

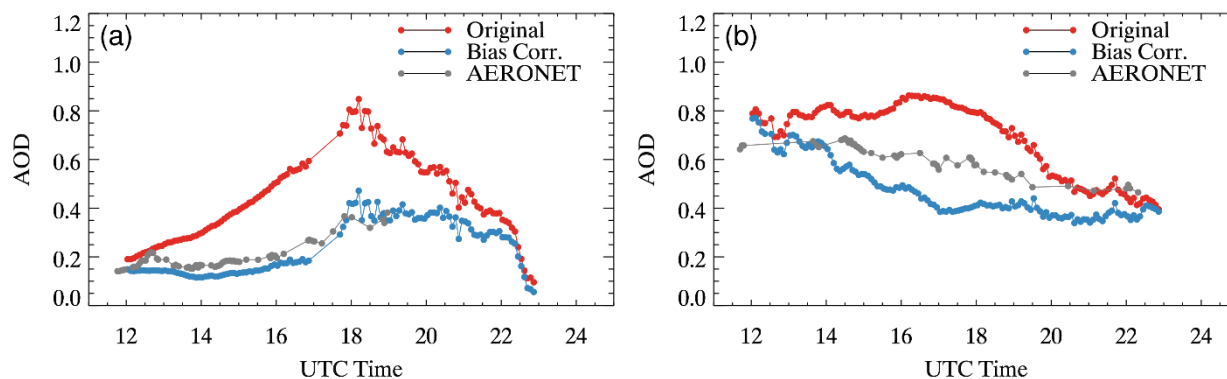

475 **Figure 8.** Time series of original (uncorrected) GOES-16 ABI AOD, bias corrected ABI AOD, and AERONET AOD at the CCNY AERONET site on (a) August 15, 2018 and (b) August 16, 2018, showing the difference in bias corrected ABI AOD relative to AERONET AOD on two consecutive days with moderate aerosol loading.

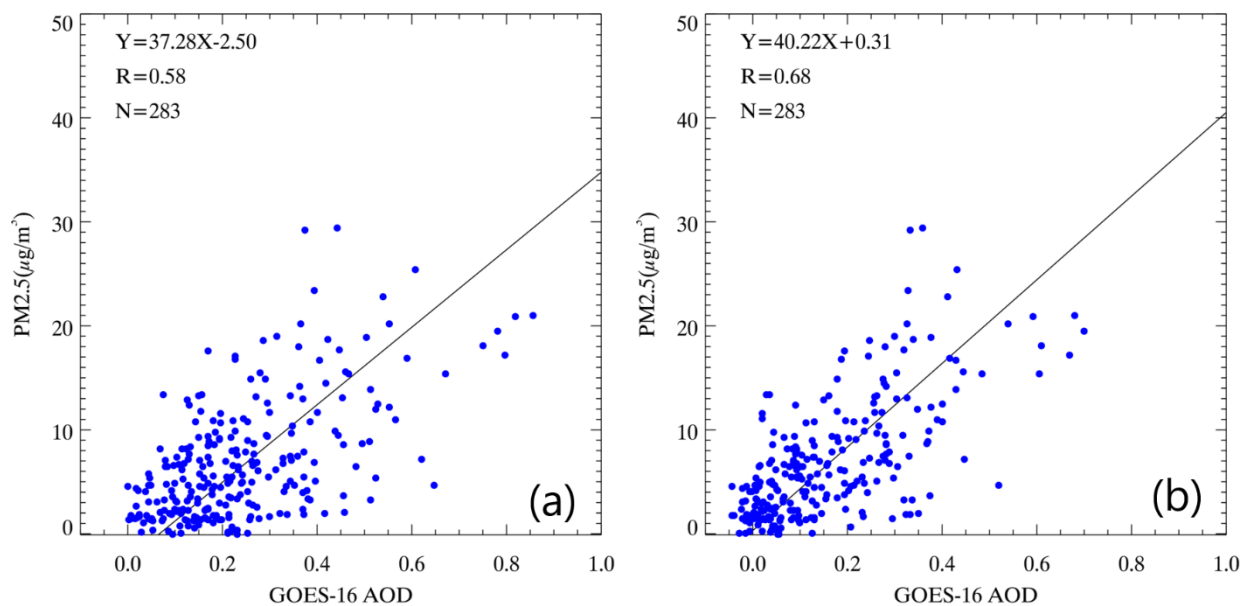

480 **Figure 9.** Scatter plots of hourly $PM_{2.5}$ vs GOES-16 ABI AOD at an EPA station at Queens College in New York City during August 6 – December 31, 2018: (a) GOES-16 ABI AOD before bias correction; (b) GOES-16 ABI AOD after bias correction.

485



Quality Level	Condition
No retrieval	Invalid input data, Cloud, Snow/ice, Bright land surface, Sun glint over ocean
Low	External and internal cloud tests contradict, Low satellite (satellite zenith angle > 60°), Low sun (solar zenith angle > 80°), AOD out of range, Coastal, Shallow inland water, High residual, High inhomogeneity
Medium	Cloud/Snow adjacency, Shallow ocean, Probably clear, Medium inhomogeneity, Medium residual
High	Remaining

Table 1. Conditions for quality levels of ABI AOD pixels.

Site Name	Location	Coordinates	Type
City College of New York (CCNY)	New York City, NY, USA	40.821°N, 73.949°W	Urban
Wallops	Wallops, MD, USA	37.933°N, 75.472°W	Rural
Goddard Space Flight Center (GSFC)	Greenbelt, MD, USA	38.992°N, 76.839°W	Suburban
Tucson	Tucson, AZ, USA	32.233°N, 110.953°W	Urban
University of Houston	Houston, TX, USA	29.717°N, 95.341°W	Urban
Table Mountain	Longmont, CO, USA	40.125°N, 105.237°W	Rural

490

Table 2. Details about the representative AERONET sites used as examples to illustrate the range of the observed diurnal bias in GOES-16 ABI AOD.

495

500



Site	N	R		Slope		Intercept		Bias		RMSE	
		Before	After	Before	After	Before	After	Before	After	Before	After
City College of New York (CCNY)	2810	0.81	0.89	1.40	0.78	0.07	0.01	0.12	-0.01	0.15	0.05
Wallops	4267	0.95	0.89	1.16	0.74	0.02	0.02	0.04	-0.01	0.05	0.04
Goddard Space Flight Center (GSFC)	3972	0.86	0.90	1.33	0.91	0.02	0.00	0.06	-0.01	0.09	0.04
Tucson	4507	0.47	0.66	3.64	1.22	-0.01	0.02	0.11	0.03	0.16	0.04
University of Tucson	2197	0.57	0.52	1.95	1.10	0.05	-0.02	0.15	-0.01	0.19	0.08
Table Mountain	3695	0.92	0.94	1.19	1.06	0.01	0.01	0.03	0.02	0.07	0.05

Table 3. Validation statistics for comparisons between GOES-16 ABI AOD (top 2 qualities) and AERONET AOD at the 6 representative AERONET sites listed in Table 2 for August 6, 2018 to December 31, 2018 across the CONUS domain, both before and after bias correction. N is the number of matchups, R is the correlation coefficient, and RMSE is the root mean square error.

505

	Average GOES-16 AOD	Total number of pixels	AERONET AOD	Dust		Generic		Urban		Heavy smoke	
				N (%)	AOD	N (%)	AOD	N (%)	AOD	N (%)	AOD
20180815	0.82	41	0.35	19 (46%)	0.87	3 (7%)	0.84	10 (24%)	0.51	9 (21%)	1.05
20180816	0.80	246	0.55	50(20%)	1.04	28 (11%)	0.74	101 (41%)	0.60	67 (27%)	0.94

Table 4. Statistics of original (uncorrected) ABI AOD and AERONET AOD retrievals at the CCNY AERONET site on August 15 and 16, 2018 for the 4 aerosol models used in the ABI AOD algorithm.