

Manuscript: Title: Suitability of fiber-optic distributed temperature sensing to reveal mixing processes and higher-order moments at the forest-air interface

Author(s): Olli Peltola et al.

MS No.: amt-2020-260

MS type: Research article

We thank both referees for their comments. Please find below point-by-point responses to the presented critique. Referee comments are in **bold**, responses with **red** and changes to the manuscript with **blue**.

#### Anonymous Referee #2

The manuscript entitled “**Suitability of fiber-optic distributed temperature sensing to reveal mixing processes and higher-order moments at the forest-air interface**” by Peltola et al. discusses the applicability of distributed temperature sensing (DTS) at a forest site for evaluating the mixing and higher-order moments across the forest canopy and above the vegetation. The distributed temperature sensing technique is a very interesting, relatively new, approach to get more insights into the mentioned topics, consequently, this paper is definitely answering relevant scientific questions within the scope of AMT. The experiment description is sufficient, methods and assumptions are valid and clearly outlined and the paper comes to substantial conclusions. The title reflects the content and the abstract gives a concise and complete summary of the work presented. The paper is clearly structured and well written, hence, it is possible to follow the drawn conclusions. Before this work will be published, however, I would like to ask the authors to address the following list of specific comments on their work

**RESPONSE:** We thank the referee for this positive comment.

**Abstract, L6:** replace “quantified” with “assessed”.

**CHANGES TO THE MANUSCRIPT:** Done

**P4L26:** what is the range of the Lidar? From which height until which height it is giving measurements?

**RESPONSE:** The Doppler lidar provides data from 75 m to 9585 m in range with 30 m spatial resolution and the clearest signal typically originates from the boundary layer where the aerosol loading is the highest. The instrument is situated on the roof of a 5 m high building so that the first measurement height is at 80 m above ground.

**P7section2.2.1:** the noise is quite high, I would say. Frequencies of noise and turbulence can overlap; how do you separate the signals then? Elaborate this maybe a bit more here in the manuscript to give proof to the reader that the procedure you are applying yields the presented results.

**RESPONSE:** The noise level can indeed be quite high when compared to the signal. The technique to separate signal variance from noise variance is based on the assumption that the noise is white and uncorrelated with the signal. In such case power spectra of noisy measurements contain two

independent components (see Fig. 3 in the manuscript) and noise contributes to the autocovariance only at lag zero, which enable the separation of the effect of these two components (noise and signal) on different statistics (variance, skewness). Ability of the technique to estimate the noise contribution decreases as signal-to-noise ratio decreases (see Fig. 6 in the manuscript). Based on referee suggestion we will add a note about prior studies utilizing the technique, but opt not to dwell on the issue since the technique is already discussed and validated in several other papers (Langford et al., 2015; Mauder et al., 2013; Nakai et al., 2020; Nemitz et al., 2018; Peltola et al., 2014; Rannik et al., 2016). Hence addition of short text and reference to some of the prior studies should suffice.

**CHANGES TO THE MANUSCRIPT:** Added the following sentence on p7l13: "The method has been shown to reliably estimate the influence of noise on second- and third-order statistics in turbulence measurements in prior studies (e.g. Lenschow et al., 2000; Rannik et al., 2016; Nakai et al., 2020)."

**P12L11 and P14L3:** at the first place you are stating that organized slow motions are dominating within the canopy, at the second place you are saying that small eddies are dominating since the coherency is broken up: this is contradictory, please revise.

**RESPONSE:** Thanks for noting this inconsistency. Please note that the attenuation factors in Sect. 3.2 refer to the attenuation of temperature variance measured with DTS, whereas text on P14L3 refer to the below-canopy vertical turbulent transfer of temperature. In general different size of eddies contribute differently to scalar variance and vertical turbulent flux (compare scalar power spectra and cospectra e.g. in (Kaimal and Finnigan, 1994)) and this discrepancy between scalar power spectra and cospectra is likely accentuated in below-canopy flows (Vickers and Thomas, 2013, 2014). In order to clarify the text, we will add a note on P12L11 that this part refers to variability of scalars only (and hence variance) and emphasize on P14L3 the influence of horizontal sensor separation rather than the characteristics of below-canopy turbulent transfer.

**CHANGES TO THE MANUSCRIPT:** changed "variability" on p12l11 to "scalar variability (and hence variance)" and changed the order of 1) and 2) on p14 and modified the text related to former 1) as "forest floor is close which suppresses the size of eddies dominating heat transfer which is also influenced by the canopy elements breaking the coherency of large eddies (spectral short circuit; Finnigan 2000; Launiainen et al. 2007) and DTS cannot capture the small scale turbulence". Furthermore, we continue the sentence ending at p14l10 with "and large horizontal sensor separation".

**Fig6 and other places:** you are using the temperature from the sonic anemometers. I guess you converted sonic temperature in "real" temperature before use, state this somewhere. General question to the use of temperatures derived via sonic anemometer: they are not very accurate when it comes to absolute numbers, how did you deal with this? For prospective studies it might be more feasible to use profiles of e.g. thermocouples for comparison with the DTS. I also wonder about the Gill sonic anemometer: did you have any issues with this sonic regarding noise? I heard from several cases that the Gill sonic type you used has a problem with noise, also have personal experience with that issue. How did you deal with noise in the sonic data, if you observed it?

**RESPONSE:** In fact sonic temperature was not converted to air temperature since the H<sub>2</sub>O concentration fluctuations needed for this conversion were not available at most heights (sonic temperature is almost equal to virtual temperature, which requires vapor and barometric pressures for computation of dry bulb 'normal' temperature). We failed to mention this deficiency in our measurements but will add it to Sect. 2.2 and also to Sect. 3.3 where DTS statistics are compared

against 3D sonics. This causes a minor bias in temperature variance (mainly depending on H<sub>2</sub>O variance) and w'T' covariance (depending on w'H<sub>2</sub>O' covariance) calculated from the sonic data (Foken et al., 2012). The referee is right the absolute numbers from sonic anemometers are not accurate, but fluctuations around the means are precise. However, please note that we did not use absolute temperatures from the sonics in DTS validation, but the mean T profiles from DTS were compared against slow-response thermometers (see Sect. 2.1) which should be accurate. We did not estimate noise in sonic data with the method presented in Sect. 2.2.1. However, based on power spectra (Fig. 3 in the manuscript) and visual evaluation of sonic raw data (see examples in Figs. 8 & 10 in the manuscript) the noise was only a minor component of the sonic anemometer measurements.

**CHANGES TO THE MANUSCRIPT:** Added the following sentence to p5l31: "Note that as H<sub>2</sub>O fluctuations were not measured at most heights, it was not possible to convert the sonic temperature to actual temperature (Schotanus, 1983; Foken et al., 2012). This caused a slight H<sub>2</sub>O variance and H<sub>2</sub>O flux dependent bias in temperature variance and  $\overline{w'T'}$  covariance, respectively.". The following sentence was added to p12l15: "Note that statistics derived from 3D sonic anemometers were calculated from sonic temperature and hence slightly biased by H<sub>2</sub>O fluctuations (see Sect. 2.2)."

**Fig7: reformulate the figure caption in such way that it gets very clear that you applied the Cava parameterization only for unstable conditions: i.e., "For unstable conditions, was also calculated based on Monin-Obukhov.....".**

**RESPONSE:** Thanks, will be modified.

**CHANGES TO THE MANUSCRIPT:** replaced " $\sigma_T / |T^*|$  was also calculated based on Monin-Obukhov similarity theory (dashed lines) for unstable stratification using  $\sigma_T / |T^*| = 2.3 (1+9.5 |\zeta|)^{-1/3}$  (Cava et al., 2008)" with "For unstable conditions  $\sigma_T / |T^*|$  was also calculated based on Monin-Obukhov similarity theory (dashed lines) using  $\sigma_T / |T^*| = 2.3 (1+9.5 |\zeta|)^{-1/3}$  (Cava et al., 2008)"

**Fig8: the arrows are very hard to identify.**

**RESPONSE:** Thanks, we will try to improve the figure. However, we struggled with the arrows already before submission and the figures in the manuscript were the best that we were able to come up with. Hence, big improvements in the figure are not likely, but we will try our best. The arrows help to illustrate the connection between the observed large temperature structures and wind fluctuations at different heights and hence we would like to keep them in the figure despite being somewhat unclear.

**P17: regarding vertical coupling: I would love to see here a comparison between the conclusions regarding coupling/decoupling which you derive with DTS and other approaches, e.g. the correlation of standard deviation of vertical wind (cf. Thomas et al., 2013). This does not have to be a complete analysis, this is beyond the scope of your paper, but a figure comparing coupling/decoupling conclusions derived via DTS and the mentioned correlation of sigma(w) would be very valuable, also for prospective work in this area. You have the required instrumentation there, a couple of 3-D sonics in profile.**

**RESPONSE:** Thank you for this comment, this is an interesting idea which we are exploring in a follow-up study. This manuscript deals with validating DTS measurements against conventional measurements at the forest-air interface and the suggested analyses on vertical coupling/decoupling are beyond the scope of this study.

**Conclusions: you touch very briefly the topic advection there; can you write to this a bit more? A vertical profile would not be sufficient for approaching advection issues, but a 3-D array could. How would such a setup in your opinion have to look like to approach advection sufficiently?**

**RESPONSE:** Yes, for properly addressing the question related to advection one likely needs to resolve the whole 3-D flow field within the forest. This is a formidable task for experimentalists and hence the problem related to advection has eluded a complete answer. Due to the spatially continuous measurements along the cables, horizontally and vertically distributed DTS cables would be able to resolve the mean temperature field and turbulent (up to 1 Hz) temperature fluctuations within the canopy. If these would be accompanied with actively heated fibre optics measuring wind (Sayde et al., 2015), the spatial variation of horizontal and vertical heat fluxes could be presumably approximated. This setup would of course miss the spatial variability of gases such as CO<sub>2</sub>, but should still be one step closer to closing the ecosystem mass balance since it would shed light on the spatial variability of turbulent mixing within the canopy. Work is on its way regarding this aspect. We will add a note about this to the conclusions.

**CHANGES TO THE MANUSCRIPT:** Added the following sentence on p22l19: "This issue could be explored with DTS measurements utilising horizontally and vertically distributed fibre optic cables"

### **Anonymous Referee #3**

**Overall, the manuscript presents the usefulness of a new and increasingly important tool with respect to spatial measurements of turbulence and atmosphere-ecosphere interactions. The manuscript is generally well put together but are a few places where some clarification is needed (see minor/technical comments below) to improve the message being presented. It is an interesting concept that adds to the toolbox of measurement techniques beyond the traditional flux tower setup to investigate the underlying turbulence that drives scalar fluxes in different landscapes and glad to see if developed further. Across the manuscript, the spatial extent/direction of the measurement needs to be clear. My only broader comment is in relation to the connection between the flow and temperature variability; the connection between these two values needs to be better supported; there are places where it appears the two variables are used interchangeably and it can lead to a little confusion for the reader (Sections 3.4). This is primarily an organizational issue, not a science issue.**

**RESPONSE:** We thank the referee for acknowledging the value of our study.

**Pg2l6: "practical point-of-view" meaning a sufficient amount of spatially distributed tower measurements?**

**RESPONSE:** Yes, exactly. Constructing an array of measurement devices that capture all the relevant spatial details of the flow is a big and expensive undertaking. We argue that DTS measurements could help in this respect.

**Pg2l6: "Hence..." Not sure how many spatial stats are being derived directly from time series observations at a single point; this needs to be clarified; its point is a little convoluted. I will agree that eddy structure, particularly in the vertical, is assumed from time series using Taylor's hypothesis but I don't necessarily agree that spatial statistics are being derived through Taylor's hypothesis.**

**RESPONSE:** Thanks for this comment, this needs clarification, since our wording was not accurate. What we mean with this part is that spatial details (eddy structures etc) of the flow are often evaluated from time series based on Taylor's frozen turbulence hypothesis, like the referee suggests. At the same time, it is often assumed that temporal and spatial statistics converge to ensemble statistics, i.e. the ergodic hypothesis is valid (Higgins et al., 2013) without having the experimental/observational means to verify this assumption. We will modify this part of the manuscript based on this, the previous and the next comment.

**CHANGES TO THE MANUSCRIPT:** The first paragraph of the manuscript (p2l2...p2l10) was rewritten as "The majority of the interaction between the atmosphere and Earth's surface takes place in a shallow air layer termed the atmospheric boundary layer (ABL). Insights on the atmospheric mixing processes in this layer are required in order to gain a better understanding on ecosystem-atmosphere feedbacks, air quality and weather forecasting related issues. Studies near the surface typically rely on time series analysis, since spatial details of the mixing close to the ground are difficult to measure with conventional instrumentation. However, similarity theories underlying the analysis of observations and models are posed in length scales calling for spatially explicit sampling. In addition, turbulence statistics or spatial details of different flow structures are typically derived from a time series of observations by assuming ergodic hypothesis or Taylor's frozen turbulence hypothesis (Taylor, 1938), respectively, yet it is recognised that these hypotheses are not universally valid (Mahrt et al., 2009; Thomas, 2011; Higgins et al., 2012; Higgins et al., 2013; Cheng et al., 2017)."

**Pg2Ln8:** "Another motivation..." feels tacked on; could be better framed to fit within the overall context of the need for more spatially explicit measurements.

**RESPONSE:** Thanks, we will try to improve this part, see above.

**Pg3Ln23:** "Furthermore, we evaluate..." remove "also" from this sentence.

**CHANGES TO THE MANUSCRIPT:** done

**Pg3Ln25:** "Deviations from Gaussian distribution are..."; assuming distribution of temperature? Clarify.

**RESPONSE:** This refers to turbulence variables in general (e.g. wind components, temperature, gases), since their distribution typically deviates from Gaussian in the presence of large scale coherent patterns. See e.g. profiles for third-order statistics in canopy flows in LES study by (Patton et al., 2015).

**Pg5Ln19-23:** "When comparing the results..." Not sure these two sentences are needed; there isn't that strong of a comparison back to the Thomas et al., 2012 paper within the manuscript. Though this work is based off the Thomas et al., work, unless a direct comparison within this paper is going to be made, the differences in the instrument variant is does not need to be explicitly stated.

**CHANGES TO THE MANUSCRIPT:** This part was removed from the manuscript in response to this comment.

**Pg6Ln16-19:** "After determining the differential attenuation..." I suggest splitting this into two sentences at the semicolon instead of keeping it as one longer, complex sentence since it is detailing two distinct processing steps.

**CHANGES TO THE MANUSCRIPT:** Text was modified as the referee suggests.

**Pg6Ln23: "After quality filtering..." Out of how many potential 30-minute periods, either as a percent or total measurement periods?**

RESPONSE: 89 % of the total 30-min periods were available for analysis after quality filtering. We noticed that there was a typo in the amount of data available for analysis. It was 1513, not 1353 as previously mentioned in the manuscript.

CHANGES TO THE MANUSCRIPT: Modified the sentence as "After quality filtering, 1513 (89 % of the whole period) 30-min periods of DTS data were available for further analysis."

**Figure 3: Put the height of the sonic anemometer within the figure caption; easy to miss being the title of the graph.**

RESPONSE: Thanks, will be added.

CHANGES TO THE MANUSCRIPT: Changed the first sentence of Fig. 3 caption as "Ensemble-averaged, frequency weighted and normalised temperature power spectrum estimated from the DTS data and colocated 3D sonic anemometer (reference) at 25 m height above ground (1.5h<sub>c</sub>, where h<sub>c</sub> is canopy height)."

**Pg12Ln16: "The temperature variance was dominated..." This feels out of place; there isn't any direct support for this comment near this sentence and think it should be later in the paragraph/section after the discussion of Figure 5/Table 2 or in the previous section with the discussion of the power spectra comparisons. Also strikes me as being a statement that applies to above the canopy and not as much within the canopy due to the general size of eddies closer to the ground and surrounded by obstacles (trees).**

RESPONSE: OK, we will remove this sentence and modify the next sentence so that it discusses only the power spectra and not the large coherent eddies.

CHANGES TO THE MANUSCRIPT: Removed the sentence and modified the next sentence as "Bulk of the time series variance was related to fluctuations close to the peak of the power spectra and DTS system was able to resolve the variability at these frequencies (Fig. 3)"

**Pg14Ln5: "size eddies dominating..." should be "size of eddies dominating..."**

CHANGES TO THE MANUSCRIPT: Thanks, modified as suggested.

**Pg15Ln7: Remove the "but" from "The mean potential temperature gradients from DTS bug exhibited..." .**

CHANGES TO THE MANUSCRIPT: Thanks, removed.

**Pg16Ln4: "For comparison, the unbiased median temperature gradients...", Gradient between which heights; across canopy?**

RESPONSE: Between the heights mentioned in the previous sentence (27 m and 5.8 m).

CHANGES TO THE MANUSCRIPT: Modified the sentence as "For comparison, the unbiased median temperature gradients during these periods calculated from the reference measurements at heights mentioned above were 0.34 K and -0.29 K at night and daytime, respectively.".

**Pg16Ln15: Remove "already" in "hence a smaller..." sentence.**

CHANGES TO THE MANUSCRIPT: Removed

Pg16Ln33: The word “almost is misspelled.

CHANGES TO THE MANUSCRIPT: Thanks, fixed.

Pg17Ln6-8: “The measured skewness profiles...” There is little to no context for this sentence as it requires the reader to look up these papers or be very familiar with them to understand the similarities in the skewness profiles. Clarify or add context to the sentence or remove.

CHANGES TO THE MANUSCRIPT: OK, removed this sentence.

Pg18Ln8-9: It might be better to mention of the caveat using Taylor’s frozen turbulence hypothesis on this analysis at the beginning of the section instead of in the middle of the paragraph, or break the paragraph in half to be clear which pieces of the analyses are relying on Taylor’s hypothesis.

RESPONSE: Thanks, good suggestion.

CHANGES TO THE MANUSCRIPT: Replaced “eddy size” with “turbulence time scale” on p18I2. Split the paragraph into two starting from p18I4 and added in the beginning of the new paragraph the following sentence: “By relying on Taylor’s frozen turbulence hypothesis, two dimensional spatial details of the coherent motions can be delineated from the vertical DTS measurements.”. Removed the sentence about Taylor’s hypothesis on p18I6...p18I8.

Pg18Ln32: “Flow patterns...” This sentence is not saying anything new that the next sentence is not already saying and is not a very useful sentence. Maybe combine the two.

CHANGES TO THE MANUSCRIPT: OK, removed this sentence.

## REFERENCES

Foken, T., Leuning, R., Oncley, S. R., Mauder, M. and Aubinet, M.: Corrections and Data Quality Control BT - Eddy Covariance: A Practical Guide to Measurement and Data Analysis, edited by M. Aubinet, T. Vesala, and D. Papale, pp. 85–131, Springer Netherlands, Dordrecht., 2012.

Higgins, C. W., Katul, G. G., Froidévaux, M., Simeonov, V. and Parlange, M. B.: Are atmospheric surface layer flows ergodic?, *Geophys. Res. Lett.*, 40(12), 3342–3346, doi:Doi 10.1002/GrL.50642, 2013.

Kaimal, J. C. and Finnigan, J. J.: Atmospheric boundary layer flows : their structure and measurement, Oxford University Press, New York. [online] Available from: <http://helka.linneanet.fi/cgi-bin/Pwebrecon.cgi?BBID=636956>, 1994.

Langford, B., Acton, W., Ammann, C., Valach, A. and Nemitz, E.: Eddy-covariance data with low signal-to-noise ratio: time-lag determination, uncertainties and limit of detection, *Atmos. Meas. Tech.*, 8(10), 4197–4213, doi:10.5194/amt-8-4197-2015, 2015.

Mauder, M., Cuntz, M., Druee, C., Graf, A., Rebmann, C., Schmid, H. P., Schmidt, M. and Steinbrecher, R.: A strategy for quality and uncertainty assessment of long-term eddy-covariance measurements, *Agric. For. Meteorol.*, 169, 122–135, doi:10.1016/j.agrformet.2012.09.006, 2013.

Nakai, T., Hiyama, T., Petrov, R. E., Kotani, A., Ohta, T. and Maximov, T. C.: Application of an open-path eddy covariance methane flux measurement system to a larch forest in eastern Siberia, *Agric.*

For. Meteorol., 282–283, 107860, doi:<https://doi.org/10.1016/j.agrformet.2019.107860>, 2020.

Nemitz, E., Mammarella, I., Ibrom, A., Aurela, M., Burba, G. G., Dengel, S., Gielen, B., Grelle, A., Heinesch, B., Herbst, M., Hörtnagl, L., Klemedtsson, L., Lindroth, A., Lohila, A., McDermitt, D. K., Meier, P., Merbold, L., Nelson, D., Nicolini, G., Nilsson, M. B., Peltola, O., Rinne, J. and Zahniser, M.: Standardisation of eddy-covariance flux measurements of methane and nitrous oxide, *Int. Agrophysics*, 32(4), doi:10.1515/intag-2017-0042, 2018.

Patton, E. G., Sullivan, P. P., Shaw, R. H., Finnigan, J. J. and Weil, J. C.: Atmospheric Stability Influences on Coupled Boundary Layer and Canopy Turbulence, *J. Atmos. Sci.*, 73(4), 1621–1647, doi:10.1175/JAS-D-15-0068.1, 2015.

Peltola, O., Hensen, A., Helfter, C., Belelli Marchesini, L., Bosveld, F. C., van den Bulk, W. C. M., Elbers, J. A., Haapanala, S., Holst, J., Laurila, T., Lindroth, A., Nemitz, E., Röckmann, T., Vermeulen, A. T. and Mammarella, I.: Evaluating the performance of commonly used gas analysers for methane eddy covariance flux measurements: the InGOS inter-comparison field experiment, *Biogeosciences*, 11(12), 3163–3186, doi:10.5194/bg-11-3163-2014, 2014.

Rannik, Ü., Peltola, O. and Mammarella, I.: Random uncertainties of flux measurements by the eddy covariance technique, *Atmos. Meas. Tech.*, 9(10), 5163–5181, doi:10.5194/amt-9-5163-2016, 2016.

Sayde, C., Thomas, C. K., Wagner, J. and Selker, J.: High-resolution wind speed measurements using actively heated fiber optics, *Geophys. Res. Lett.*, 42(22), 10,10-64,73, doi:10.1002/2015GL066729, 2015.

Vickers, D. and Thomas, C. K.: Some aspects of the turbulence kinetic energy and fluxes above and beneath a tall open pine forest canopy, *Agric. For. Meteorol.*, 181, 143–151, doi:<https://doi.org/10.1016/j.agrformet.2013.07.014>, 2013.

Vickers, D. and Thomas, C. K.: Observations of the scale-dependent turbulence and evaluation of the flux–gradient relationship for sensible heat for a closed Douglas-fir canopy in very weak wind conditions, *Atmos. Chem. Phys.*, 14(18), 9665–9676, doi:10.5194/acp-14-9665-2014, 2014.

# Suitability of fiber-optic distributed temperature sensing to reveal mixing processes and higher-order moments at the forest-air interface

Olli Peltola<sup>1</sup>, Karl Lapo<sup>2,3</sup>, Ilkka Martinkauppi<sup>4</sup>, Ewan O'Connor<sup>1,5</sup>, Christoph K. Thomas<sup>2,3</sup>, and Timo Vesala<sup>6,7</sup>

<sup>1</sup>Climate Research Programme, Finnish Meteorological Institute, P.O. Box 503, 00101 Helsinki, Finland

<sup>2</sup>Micrometeorology Group, University of Bayreuth, Bayreuth, Germany

<sup>3</sup>Bayreuth Center for Ecology and Environmental Research, Bayceer, University of Bayreuth, Bayreuth, Germany

<sup>4</sup>Geological survey of Finland, Kokkola, Finland

<sup>5</sup>Department of Meteorology, University of Reading, Reading, UK

<sup>6</sup>Institute for Atmosphere and Earth System Research/Physics, Faculty of Science, University of Helsinki, P.O. Box 68, 00014 Helsinki, Finland

<sup>7</sup>Institute for Atmospheric and Earth System Research/Forest Sciences, Faculty of Agriculture and Forestry, University of Helsinki, P.O. Box 27, 00014, Helsinki, Finland

**Correspondence:** Olli Peltola (olli.peltola@fmi.fi)

**Abstract.** Suitability of fibre-optic distributed temperature sensing (DTS) technique to observe atmospheric mixing profiles within and above forest was quantified, and these profiles were analysed. The spatially continuous observations were made at a 125 m tall mast in a boreal pine forest. Air flows near forest canopies diverge from typical boundary layer flows due to the influence of roughness elements (i.e. trees) on the flow. Ideally these complex flows should be studied with spatially continuous measurements, yet such measurements are not feasible with conventional micrometeorological measurements with e.g. sonic anemometers. Hence the suitability of DTS measurements for studying canopy flows was ~~quantified~~assessed.

The DTS measurements were able to discern continuous profiles of turbulent fluctuations and mean values of air temperature along the mast providing information about mixing processes (e.g. canopy eddies, evolution of inversion layers at night) and up to third order turbulence statistics across the forest-atmosphere interface. Turbulence measurements with 3D sonic anemometers and Doppler lidar at the site were also utilised in this analysis. The continuous profiles for turbulence statistics were in line with prior studies made at wind tunnels and large eddy simulations for canopy flows. The DTS measurements contained a significant noise component which was however quantified and its effect on turbulence statistics was accounted for. Underestimation of air temperature fluctuations at high frequencies caused 20...30 % underestimation of temperature variance at typical flow conditions. Despite these limitations, the DTS measurements should prove useful also in other studies concentrating on flows near roughness elements and/or non-stationary periods, since the measurements revealed spatio-temporal patterns of the flow which were not possible to discern from single point measurements fixed in space.

## 1 Introduction

The majority of the interaction between the atmosphere and Earth's surface takes place in a shallow air layer termed the atmospheric boundary layer (ABL). Insights on the atmospheric mixing processes in this layer are required in order to gain a better understanding on ecosystem-atmosphere feedbacks, air quality and weather forecasting related issues. Studies near the surface typically rely on time series analysis, since spatial details of the mixing close to the ground are difficult to measure ~~from a practical point of view. Hence, spatial statistics with conventional instrumentation. However, similarity theories underlying the analysis of observations and models are posed in length scales calling for spatially explicit sampling. In addition, turbulence statistics or spatial details of different flow structures~~ are typically derived from a time series of observations by assuming ~~ergodic hypothesis or~~ Taylor's frozen turbulence hypothesis ~~Taylor (1938), (Taylor, 1938), respectively,~~ yet it is recognised that ~~this assumption is these hypotheses are~~ not universally valid ~~(Mahrt et al., 2009; Thomas, 2011; Higgins et al., 2012; Cheng et al., 2017)~~. ~~This discrepancy calls for spatially explicit measurements. Another motivation arises from the fact that similarity theories underlying the analysis of observations and models are posed in length scales.~~ ~~(Mahrt et al., 2009; Thomas, 2011; Higgins et al., 2012, 2013)~~.

Atmospheric boundary layer flows feature other flow modes besides turbulence and these flow modes exhibit spatial patterns

which are not directly related to their temporal counterparts. For instance, transient submeso-scale motions may occur in the weak-wind stable boundary layer (Mahrt, 2014), which can travel in the opposite direction of the mean flow (Zeeman et al., 2015) and interact with turbulence (Kang et al., 2015; Sun et al., 2015; Mahrt and Thomas, 2016; Vercauteren et al., 2016) inflicting intermittent mixing and transport of gases, heat and momentum. Mechanistic understanding of these non-turbulent motions and related processes are limited, partly due to the missing spatial information of the flow.

Besides submeso motions in stable conditions, the flow in the roughness sublayer (RSL) by definition exhibits spatial patterns that call for spatial sampling. For instance, flows within and above forest canopies are dominated by large coherent structures (Finnigan, 2000; Thomas and Foken, 2007a, b; Thomas et al., 2008; Finnigan et al., 2009) that are in continuous interaction with the surface roughness elements; this interaction can cause persistent spatial variability in the flow and turbulent transport (Bohrer et al., 2009; Schlegel et al., 2015) raising questions about the experimental approach deployed in global measurement networks monitoring the turbulent transport of gases above ecosystems (Baldocchi, 2014). Surface spatial heterogeneities dominate the flow properties also in urban RSL, with urban surfaces exhibiting large variability in the surface heat flux and hence the thermal production of turbulence (Barlow, 2014). In general, the analysis of the effect of abrupt edges, or irregular discontinuities in surface characteristics, on the flow requires spatially explicit sampling.

Remote sensing instrumentation is capable of resolving the spatial detail of the flow (e.g. Newsom et al., 2008; TRÄUM-NER et al., 2012), yet small-scale features close to the ground are typically missing and measurements near obstacles such as trees and buildings are not feasible. On the other hand, conventional precise in-situ measurements circumvent these limitations yet are fixed in space (e.g. at measurement towers) and hence spatial details of the flow can be deduced only by assuming Taylor's frozen turbulence hypothesis. Hence there is an evident observational gap between the conventional measurement techniques (remote sensing vs. in-situ) which results in limited understanding of flow processes falling in this observational

gap. In-situ measurements on moving platforms, such as tethered balloons or unmanned aerial vehicles (UAVs) (Poulos et al., 2002; Frehlich et al., 2008; Higgins et al., 2018; Egerer et al., 2019), may partly fill the gap, yet with these techniques only non-continuous campaign type measurements are possible resulting in low temporal coverage and representativeness. Furthermore, measurements close to or in-between roughness elements (trees, buildings) are typically not possible with these mobile 5 platforms.

Distributed temperature sensing (DTS) has been utilised in environmental research since the first studies of Selker et al. (2006) and Tyler et al. (2009). The measurement method provides spatially continuous profiles along a fibre-optic cable which can be freely distributed in the measurement domain. The DTS data are provided at similar temporal and spatial resolution along the cable as conventional in-situ measurements lending direct comparison between the measurement techniques and 10 complementary analyses of joint measurements with multiple techniques. The measurement technique relies on optical time-domain reflectometry and measurement of Raman back-scattering of a light pulse traveling in the fibre-optic cable (Dakin et al., 1985; Selker et al., 2006). Due to its ability to provide spatio-temporal information at scales (down to 1 s and 25 cm) that are commensurate with the scales prevalent near the surface, the measurement method shows promise in answering many persistent unanswered questions related to near surface flow.

15 A growing body of research has already utilised DTS measurements in atmospheric studies (Keller et al., 2011; Thomas et al., 2012; Euser et al., 2014; de Jong et al., 2015; Sayde et al., 2015; Zeeman et al., 2015; Pfister et al., 2017; Higgins et al., 2018; Schilperoort et al., 2018; Higgins et al., 2019; Izett et al., 2019; Mahrt et al., 2019; Pfister et al., 2019). Bulk of the studies have concentrated on nocturnal flows near the surface (Keller et al., 2011; Thomas et al., 2012; Zeeman et al., 2015; Pfister et al., 2017; Izett et al., 2019; Mahrt et al., 2019; Pfister et al., 2019) and a few have concentrated on transition periods 20 (Higgins et al., 2018, 2019). By utilising different DTS measurement configurations, some studies have done distributed wind speed (heated cables) (Sayde et al., 2015; Pfister et al., 2017) or humidity (wetted cables) measurements (Euser et al., 2014; Schilperoort et al., 2018), whereas others have examined the radiation error of the cables (de Jong et al., 2015; Sigmund et al., 2017). However, thorough and critical analysis on the feasibility of DTS system to measure atmospheric scalar mixing has not been done since the pioneering study of Thomas et al. (2012). We complement the analysis made by Thomas et al. (2012) by 25 comparing the DTS measurements against conventional in-situ analysers within and above an aerodynamically rough forest canopy from the ground up to 120 m aloft. Furthermore, we evaluate whether ~~also~~-third-order statistics could be discerned from the DTS data revealing important transport process information of the sweep-ejection cycles created by the coherent structures. Deviations from Gaussian distribution are typically related to large coherent eddies or submeso air motions, whereas isotropic turbulence follows more closely Gaussian distribution and hence higher order statistics are needed for studying these more 30 organised flow patterns. We also assess the random uncertainties in the DTS measurements and their effect on the derived statistics. Finally we demonstrate how a combination of vertical DTS measurements together with 3D sonic anemometers and upward pointing Doppler lidar measurements can be used to obtain continuous turbulence profiles starting from canopy sublayer all the way up to boundary layer top and how DTS system bridges the scales between individual in-situ measurement devices and remote sensing with lidar.

## 2 Materials and methods

### 2.1 Measurement site and instrumentation

The measurement campaign took place from 3 June to 8 July 2019 at the Hyytiälä SMEAR II station (Hari and Kulmala, 2005) located in central Finland ( $61.845^{\circ}\text{N}$ ,  $24.289^{\circ}\text{E}$ ). The station is a member of several measurement networks, including 5 ICOS (Integrated Carbon Observing System; Franz et al. (2018)) and ACTRIS (Aerosols, Clouds, and Trace gases Research Infrastructure), and thus a wide range of atmospheric and biospheric measurements are conducted continuously. The site is dominated by a Scots pine (*Pinus Sylvestris*) stand with average tree height ( $h$ ) of approximately 17 m resulting in zero-plane displacement height ( $d$ ) of 14 m. The forest canopy is between 10 and 17 m and the all-sided leaf area index (LAI) was approximately  $8 \text{ m}^2 \text{ m}^{-2}$  in 2015. Below 10 m height there is relatively open trunk space. The terrain is undulating with the 10 main slope ( $2^{\circ}$ ) directed roughly in the north-south direction. More details on the in-canopy turbulence and canopy structure are given in Launiainen et al. (2007) and on the terrain undulation in Alekseychik et al. (2013).

The measurements utilized in this study were conducted on the SMEAR II station 125 m tall main mast. 3D ultrasonic anemometers are installed at five heights on the mast (5.5, 24.6, 27, 68.3 and 125 m above ground) providing turbulent fluctuations of ~~air~~-temperature and three wind speed components at 10 Hz sampling frequency. Different anemometers are present 15 at different heights (USA-1 manufactured by METEK GmbH, Germany, at 5.5, 68.3 and 125 m; Solent Research 1012R2 by Gill Ltd., UK, at 24.6 m; HS-50 by Gill Ltd., UK, at 27 m). The anemometer at 27 m height is part of the eddy covariance (EC) flux measurement setup for ICOS measurements (Rebmann et al., 2018). Measurements at 5.5 m height started on 18 June 2019, all other 3D sonic anemometers were measuring continuously throughout the study period. The air temperature vertical profile below the ICOS EC measurement level was measured following ICOS procedures (Montagnani et al., 2018). 20 Radiation shielded and ventilated platinum-wire thermistors (PT-100) were located at 3.3, 5.8, 8.8, 12.5, 16.8, 21.6 and 27 m heights above the ground. These measurements provide suitable data for comparison against the temperature data measured with DTS. Radiation components were measured with a four-component net radiometer (Model CNR4, Kipp & Zonen, Delft, Netherlands) mounted on the mast at 67 m height.

Besides conventional in-situ measurements on the mast, the atmospheric boundary layer was profiled with a scanning 25 Doppler wind lidar (Halo Photonics Streamline) (Pearson et al., 2009) located on the roof of a building approximately 400 m South-West from the mast. The wind lidar operates at  $1.5 \mu\text{m}$  wavelength and, when pointing vertically, is configured to provide a profile of radial velocities approximately every 14 seconds with 30 m range resolution at Hyytiälä (Hirsikko et al., 2014).

#### 2.1.1 DTS measurement setup

30 The DTS instrument (Ultima-S, 5 km variant, Silixa Ltd., Hertfordshire, UK) was housed in a wooden cabin located approximately 30 m away from the measurement mast. Two 50 l calibration baths were filled with water, equipped with reference thermometers (PT-100; supplied with the DTS instrument and logged with the DTS instrument at  $0.01^{\circ}\text{C}$  precision) and the fibre-optic cable was guided twice through both baths. The baths were also equipped with aquarium pumps to ensure continu-

ous mixing and prevent stratification of the water. Water temperature in the baths was controlled with two thermostats (RC 6 CS, LAUDA DR. R. WOBSER GMBH & CO. KG, Lauda-Königshofen, Germany) and the bath temperatures were set to 5 °C and 30 °C so that the temperatures bracketed the ambient air temperatures during the campaign. The baths were located next to the wooden cabin which housed the DTS instrument.

5 The measurements were conducted in double-ended mode with signals from both directions stored separately (see Sect. 2.2 for processing). The path of the fibre-optic cable began by running through both calibration baths, then up and down the 125 m tall mast, and returning through the calibration baths again to finish. The cable was fastened to approximately 0.5 m long horizontal booms located every 5 to 10 meters along the mast by squeezing the cable gently between two metallic plates covered with rubber slabs and soft electrical tape. Despite careful mounting of the cable, the cable holders caused disturbances  
10 in the data and consequently data points close to the holders were removed from subsequent analysis. Horizontal separation between the cable and the 3D sonic anemometers was 3.5 m at all levels. The vertical DTS measurements extended from 2 m to 120 meters above the ground. This setup enabled the provision of reference measurement locations at both the beginning and end of the cable from the calibration baths, and provide a double measurement of the DTS vertical air temperature profile at 12.7 cm spatial and 1 Hz temporal resolution. Note, however, that in double-ended mode, each direction along the cable is  
15 measured sequentially, so that the temperature data was available at 0.5 Hz resolution. A white, thin (outer diameter 0.9 mm) aramid reinforced 50  $\mu$ m multimode fibre-optic cable (AFL Telecommunications, Duncan, SC 29334, US) was utilised in this study in order to minimise the impact of solar heating on the measurements (de Jong et al., 2015; Sigmund et al., 2017) and to maximise the high frequency response of the setup.

20 ~~When comparing the results from this study to Thomas et al. (2012) it is important to note that they used a different variant of the Ultima-S instrument, which was an older model optimised for shorter cable lengths (2 km) utilising different laser and detector components. The noise floor of this older variant used in Thomas et al. (2012) is smaller by a factor of 2 to 3. Hence, differences in instrument performance are to be expected, foreshadowing the results.~~

## 2.2 Data processing

25 All high frequency time series (3D sonic anemometers and DTS) were separated into the slowly varying mean and fluctuations around the mean:

$$T = T' + \bar{T}, \quad (1)$$

where  $T$  is the measured high frequency time series, overbar denotes averaging in time, and prime ( $'$ ) fluctuations around the mean calculated as a residual ( $T' = T - \bar{T}$ ). Processing of 3D sonic anemometer data followed commonly applied procedures. The data were despiked in order to remove spurious outliers from the time series (Mauder et al., 2013) and the wind vectors were  
30 aligned with the long-term mean wind field following the planar-fit coordinate rotation method (Wilczak et al., 2001). Turbulent fluxes and statistics (variance, skewness) were calculated with 30-min resolution throughout this study, unless otherwise noted. Note that as  $H_2O$  fluctuations were not measured at most heights, it was not possible to convert the sonic temperature to actual temperature (Schotanus et al., 1983; Foken et al., 2012). This caused a slight  $H_2O$  variance and  $H_2O$  flux dependent bias in

temperature variance and  $\overline{w'T'}$  covariance, respectively. The stability of the atmospheric surface layer was evaluated based on the stability parameter:

$$\zeta = \frac{z - d}{L}, \quad (2)$$

where  $z$  denotes height,  $d$  displacement height, and  $L$  Obukhov length. Negative values for  $\zeta$  denote unstable stratification (buoyancy increases turbulence), positive values denote stable stratification (buoyancy diminishes turbulence) and zero denotes neutral stratification. A scaling parameter for temperature was used to describe the temperature variability in the atmospheric surface layer, and was defined as

$$T_* = \frac{\overline{w'T'}}{u_*}, \quad (3)$$

where  $u_*$  is friction velocity. This value was calculated using data from the EC system at 27 m height throughout the study.

10 DTS measurements were post-field calibrated using the measurements in the calibration baths and the following equation (e.g. van de Giesen et al. (2012)):

$$T(x, t) = \frac{\gamma}{\ln \left( \frac{P_s(x, t)}{P_{as}(x, t)} \right) + C(t) + \int_0^x \Delta \alpha(x') dx'}, \quad (4)$$

where  $T$  is the calibrated temperature at a function of position along the fibre ( $x$ ) and time ( $t$ ),  $\gamma$  is a DTS system specific constant,  $P_s$  and  $P_{as}$  are the measured Stokes and anti-Stokes signals,  $C$  is a time-dependent calibration parameter, and the integral in the denominator is related to the differential attenuation of the anti-Stokes and Stokes signals along the cable. The double-ended configuration allowed the determination of the differential attenuation at each location along the cable separately, which was calculated following van de Giesen et al. (2012) separately for each 30-min averaging period. However, measurements from only one direction were utilised to calculate the temperature along the cable, i.e. measurements from the two directions were not averaged. After determining the differential attenuation, the calibration parameters  $\gamma$  and  $C$  were first determined by fitting Eq. 4 to the reference measurements made in the calibration baths for each time step separately producing time series for both; ~~then~~. Then, during the second processing stage, the data were calibrated again by fixing the value of  $\gamma$  to 476 K (mean of values obtained during the first processing stage) and letting  $C$  vary between time steps. We opted to process the data with this three-step procedure since 1) it resulted in less noisy calibration parameters, 2) theoretically  $\gamma$  should be constant and 3) a reduction of fit parameters is desirable given the number of calibration baths. The calibration parameter  $C$  showed only a slight variation in time ( $1.460 \pm 0.003$  (mean  $\pm$  SD) which resulted from a parabolic dependence on indoor temperature of the cabin housing the DTS instrument. After quality filtering, ~~1353-1513 (89 % of the whole period)~~ 30-min periods of DTS data were available for further analysis.

30 The high frequency response of the DTS system was evaluated by transforming the temperature time series to frequency domain with Fourier transform and comparing the power spectra against reference power spectra measured with the sonic anemometers using the EC technique. Following EC data processing procedures (e.g. Ibrom et al. (2007)) the noise in the power spectra was subtracted from the signal prior to the comparison. By assuming that the DTS system as a whole behaves

as a first-order response sensor, then, after normalisation, the ratio between the power spectra from DTS and the reference can be approximated to follow

$$T_H(f) = \frac{1}{1 + (2\pi f \tau)^2}, \quad (5)$$

where  $f$  is frequency and  $\tau$  is a first-order response time describing the high-frequency response of the system. An estimate for the attenuation of the DTS-derived temperature variance due to imperfect high frequency response and lower sampling frequency was estimated using

$$AF = \frac{\int_{f_1}^{f_2} T_H S_{TT,low} df}{\int_{f_1}^{f_3} S_{TT} df}, \quad (6)$$

where  $AF$  is the attenuation factor,  $S_{TT}$  is the power spectrum measured with the EC system,  $S_{TT,low}$  is the power spectrum calculated from EC data that was averaged in the time domain to match the temporal resolution of DTS prior to Fourier transform, and  $T_H$  was calculated using a value for  $\tau$  obtained experimentally with Eq. (5) (see Sect. 3.2). The integration limits  $f_1$ ,  $f_2$  and  $f_3$  are set by the length of the averaging period and the Nyquist frequency for DTS and 3D sonic anemometer data, respectively. By definition,  $AF = 1$  for a perfect sensor ( $\tau = 0$  s) with high sampling frequency (i.e.  $f_2 = f_3$ ) and  $AF = 0$  for a fully damped signal ( $\tau \rightarrow \infty$  s).

### 2.2.1 Determination of instrument noise

Instrument noise can significantly hinder the analysis of measurements if the signal to noise ratio is small. Here we utilised the methodology developed by Lenschow et al. (2000) to extract turbulent statistics from noisy data. The method originally developed for lidar data has been used also for EC data (Mauder et al., 2013; Rannik et al., 2016) and is part of ICOS EC data processing routines (Nemitz et al., 2018). The method has been shown to reliably estimate the influence of noise on second- and third-order statistics in turbulence measurements in prior studies (e.g. Lenschow et al., 2000; Rannik et al., 2016; Nakai et al., 2020). The fluctuating part of the time series  $T'(t)$  can be thought to consist of signal  $T'_s(t)$  and noise  $\epsilon(t)$  ( $T' = T'_s + \epsilon$ ). All the time series  $T'$ ,  $T'_s$  and  $\epsilon$  have zero means. The second-order autocovariance ( $M_{11}$ ) can then be written as

$$M_{11}(t_l) = \overline{(T'_s + \epsilon)(T'_{s,l} + \epsilon_l)}, \quad (7)$$

where overbar denotes time averaging and subscript  $l$  denotes that the time series has been lagged with time lag  $t_l$  (Lenschow et al., 2000). Assuming  $\epsilon$  and  $T'_s$  are uncorrelated with each other, it can be found that

$$M_{11}(0) = \overline{T'^2_s} + \overline{\epsilon^2}, \quad (8)$$

meaning that the time series variance  $M_{11}(0)$  is a sum of signal variance  $\overline{T'^2_s}$  and noise variance  $\overline{\epsilon^2}$ . Since noise is assumed to be uncorrelated, noise only contributes to the autocovariance at lag zero; hence the signal variance can be estimated by extrapolating the autocovariance values to zero lag and the noise variance can be estimated from the residual:

$$\overline{T'^2_s} = M_{11}(t_l \rightarrow 0) \quad (9)$$

$$\overline{\epsilon^2} = M_{11}(0) - M_{11}(t_l \rightarrow 0). \quad (10)$$

Similarly the effect of noise on third-order moments can be estimated using third-order autocovariance  $M_{21}$ :

$$\overline{T_s'^3} = M_{21}(t_l \rightarrow 0) \quad (11)$$

$$\overline{\epsilon^3} = M_{21}(0) - M_{21}(t_l \rightarrow 0), \quad (12)$$

where it was further assumed that the product of  $T_s'$  to any power and  $\epsilon$  to an odd power are zero (Lenschow et al., 2000). The

5 time series skewness (Sk) was then estimated using the second- and third-order moments calculated with the equations above

( $Sk = \frac{\overline{\epsilon^3}}{(\overline{T_s'^2})^{3/2}}$ ). Signal-to-noise ratio was used to estimate the magnitude of noise relative to the signal:


$$SNR = \frac{\overline{T_s'^2}}{\overline{\epsilon^2}}. \quad (13)$$

### 3 Results and discussion

#### 3.1 DTS instrument noise determination


10 DTS measurements at high spatial and temporal resolution contain a significant noise contribution due to the small number of backscattered Raman-photons, hence, duplicate or triplicate measurements are often conducted. In this study, the instrument noise was estimated using Lenschow et al. (2000) (see Sect. 2.2.1) for each location along the fibre for each 30-min averaging period. Figure 1 shows the average dependence of the noise standard deviation,  $\sigma_{noise}$ , with length along the fibre, LAF, together with the variability observed in the calibration baths. The noise increases exponentially with LAF as expected since  
15 the number of photons available for backscattering decreases along the fibre. After taking the mean of the up-mast and down-mast measurements, and then averaging over four consecutive points, the average noise decreased from 0.62 K to 0.26 K, and was, in practise, independent of position along the fiber and thus height. This decrease is similar to what would be expected for fully independent measurements (i.e.  $0.62K/\sqrt{8} = 0.22K$ ). This averaging procedure was applied to all further analysis in this study and provides a temperature profile with approximately 0.5 m resolution from 2 m up to 120 m above the ground. No  
20 temporal averaging was applied in order to preserve the temporal resolution of the signal. The noise level after averaging was below the typical temperature variability measured above the forest canopy during the campaign.

Based on the fit shown in Fig. 1, the noise at zero LAF was approximately 0.57 K, close to the instrument specifications. However,  $\sigma_{noise}$  increased faster as a function of LAF than expected, likely due to experimental setup which may have caused mechanical strain onto the fibre (cable holders, wind load) and hence loss of signal. There were a few step losses (i.e. sudden  
25 decreases of  $P_s$  and  $P_{as}$ , see also Eq. 4) along the cable caused by the support structures and these step losses added to the increases in the noise. The latter was linearly proportional to the magnitude of the step loss (Fig. 2). In addition to the mechanical stresses on the light-conducting glass core, the increase of noise as a function of LAF depends on the characteristics of the glass core in the cable and how it is coupled to the outer cable (sheath, protection) and these are specific to the batch of the light-conducting glass core used during manufacturing of the cable. Nevertheless, the estimates obtained for instrument  
30 noise along the fibre can be used as a first order estimates when designing future DTS measurement campaigns with inevitable signal artifacts to the fibre-optic cable.

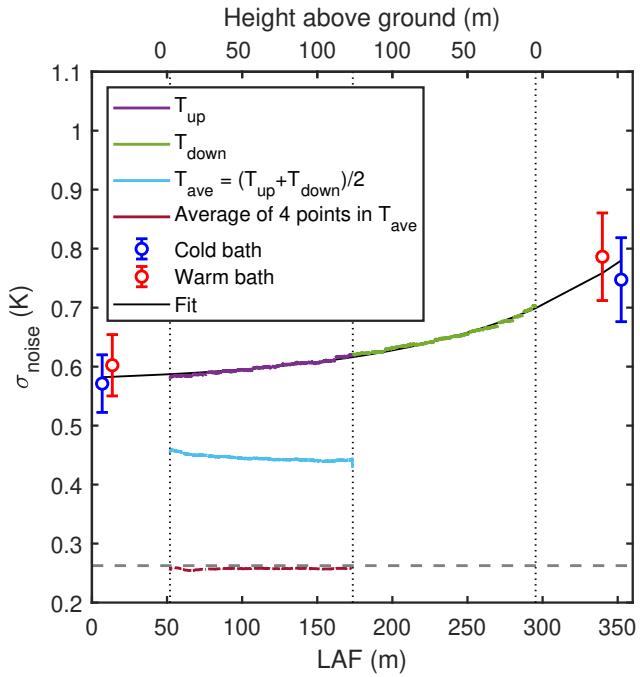

**Figure 1.** Average dependence of noise ( $1-\sigma$ ) estimated with Eq. 10 for length along the fibre (LAF) and height above ground (top x-axis). Circles show  $T$  variability in the calibration baths (mean  $\pm$  SD). Dashed grey line shows the mean  $T$  standard deviation measured with 3D sonic anemometer at 27 m height during the measurement campaign. The vertical dotted black lines show the limits (bottom and top) of the vertical DTS measurements on the mast. The black line is a fit ( $\sigma_{noise} = 0.57K + 0.01e^{8.6*10^{-3}LAF}$ ,  $R^2=0.99$ ) to the noise estimates calculated from the cable going up ( $T_{up}$ ) and down the mast ( $T_{down}$ ). The noise level decreased after averaging the up and down portions of the measurements ( $T_{ave}$ , cyan line) and fell below the typical sonic  $T$  variability level if further four spatially consecutive measurements were averaged.

The value for  $\sigma_{noise}$  at zero LAF is an intrinsic property of the measurement device and describes the noise level independently of fibre type or the measurement conditions. The variability in the instrument noise at zero LAF was evaluated using a similar fit as in Fig. 1 for each 30-min measurement period. The obtained zero LAF noise estimates varied between 0.50 K and 0.66 K (5th and 95th percentiles of the obtained values) during the measurement campaign; the variability was not fully random as a systematic temporal component was also evident. Considering Eq. 4, the zero LAF noise in  $T$  is likely related to the variability in laser intensity or detector sensitivity. The DTS instrument contains an internal reference coil of fibre-optic cable used for a first instrument-based calibration using the variability of the Stokes signal ( $P_{s,in}$ ) from this reference coil. We used this as a joint proxy for both the variability in emitted light and detector sensitivity, since the signal has not yet experienced any attenuation. The zero LAF noise displayed a linear dependence on this proxy ( $y = (0.10 \pm 0.001K/dB)x - (0.44 \pm 0.001)K$ ,  $R^2=0.87$ , where  $y$  equals  $\sigma_{noise}$  at LAF=0 m and  $x$ , decrease in  $P_{s,in}$  (in dB) from its maximum value). Interestingly, the gradient is similar to that obtained for  $\sigma_{noise}$  increases at step losses (Fig. 2) indicative of a more general dependence between

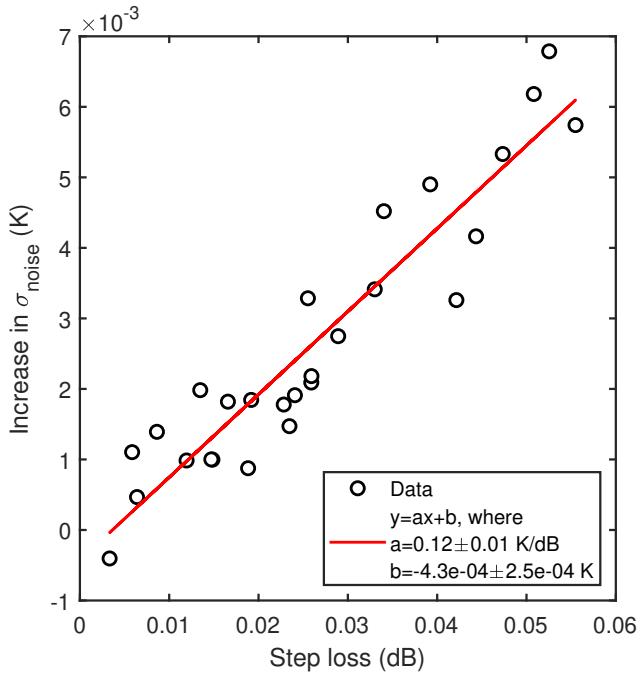


**Figure 2.** Increase of noise at step losses (i.e. sudden decreases of  $P_s$  and  $P_{as}$ ) along the cable versus step loss magnitude.

signal intensity and  $\sigma_{noise}$ . It is known that laser intensity and detector responsivity can be sensitive to changes in temperature; the zero LAF noise did show a non-monotonic dependence on instrument internal temperature (calculated from data originating from the internal coil), and displayed additional changes when the instrument was cooling down or warming up (not shown). The dependence was not fully explained by the instrument internal temperature alone and further studies are necessary

5 to investigate this [furthermore deeply](#).

### 3.2 High-frequency response of the DTS system

The high-frequency response of the DTS system was evaluated by comparing the power spectra of DTS measurements against those of the co-located sonic anemometers as a reference (Fig. 3). The DTS power spectrum was dominated by white noise in the high frequency part of the spectrum, whereas the reference followed the canonical inertial subrange slope. Following 10 the [commonly commonly](#) applied procedures for EC data processing (e.g. Ibrom et al. (2007)) the noise was removed from the DTS power spectrum by assuming that it was not correlated with the signal (see Sect. 2.2.1) and that the high frequency response could be estimated from the ratio between the noise-removed power spectrum and the EC reference (see Sect. 2.2). Comparing DTS measurements to sonic anemometers at different heights (Table 1) provided slightly different values for the 15 response time  $\tau$  (Eq. 5), likely due to the uncertainty of the noise removal procedure. For reference, the values obtained are in the same range as found for water vapour EC flux measurements in high relative humidity conditions (Ibrom et al., 2007; Mammarella et al., 2009; Runkle et al., 2012), and are significantly higher than for carbon dioxide (Mammarella et al., 2009)

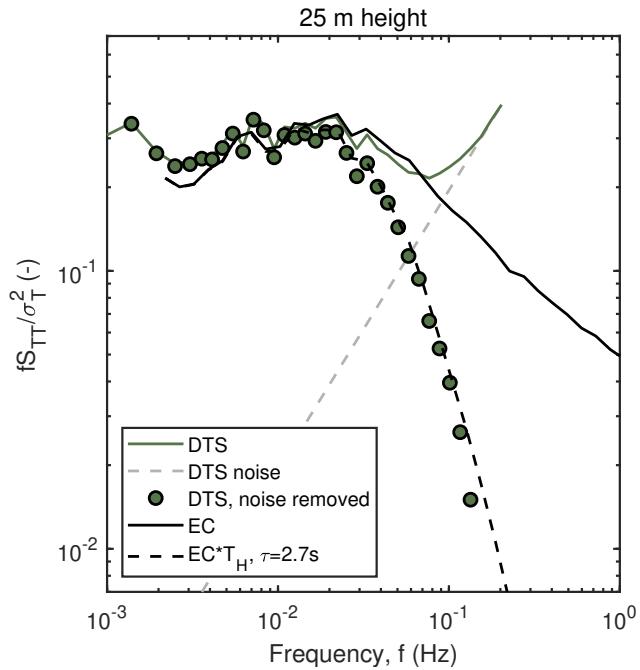

**Figure 3.** Ensemble-averaged, frequency weighted and normalised temperature power spectrum estimated from the DTS data and colocated 3D sonic anemometer (reference) at 25 m height above ground (1.5 $h_c$ , where  $h_c$  is canopy height). Only periods with high DTS SNR and moderate wind speed (between 1.7 and 3.3 m s<sup>-1</sup>) were selected for the ensemble. The DTS power spectrum is shown before and after the noise removal procedure and the high frequency attenuation is demonstrated by multiplying the reference power spectrum with a transfer function (Eq. 5).

or methane (Peltola et al., 2014) EC flux measurements. When comparing the DTS power spectra to EC power spectra it is important to recognise that the instruments were sampling at different rates (DTS with 0.5 Hz and EC with 10 Hz) and hence the power spectra cannot fully be compared across all frequencies. The estimated response times and Eq. (5) should only be considered as a function for matching DTS and EC spectra, and not as a transfer function describing the functioning of the

5 DTS system.

Theoretically, the high frequency response of the DTS system depends on 1) heat conduction across the quasi-laminar boundary layer surrounding the fibre cable, 2) heat conduction within the cable and 3) the spatial and temporal sampling resolution of the DTS instrument (Thomas et al., 2012). The latter two can be approximated to be independent of environmental conditions, whereas the first one depends on the depth of the boundary layer surrounding the cable which is inversely dependent  
10 on wind speed. The DTS system high frequency response time  $\tau$  was calculated for different wind speed conditions at different heights and no clear dependency on wind speed was found. This indicates that it is likely that the sampling resolution of the DTS instrument dominates the high frequency response and, hence,  $\tau$  can be assumed to be constant for this particular fibre cable and DTS instrument combination.


**Table 1.** Response times ( $\tau$ ) describing the high frequency response of the DTS system derived through comparison with EC measurement systems at different heights above ground (cf. Eq. 5) and attenuation factors ( $AF$ ) describing the attenuation of temperature variance due to the high frequency loss of the signal. 200 estimates for  $\tau$  were estimated by bootstrap sampling the available data for each height and the reported values are the medians (interquartile range) of the 200 estimates.  $AF$  was estimated for both height-dependent and constant  $\tau$  for each 30-min time period during the measurement campaign with Eq. 6 and the reported values are the medians (interquartile range) of the  $AF$  time series.

| Height above ground (m) | $\tau$ (s)      | $AF$ (-)           | $AF, \tau = 2.5\text{ s}$ (-) |
|-------------------------|-----------------|--------------------|-------------------------------|
| 5.5                     | 2.9 (2.4...3.5) | 0.86 (0.80...0.91) | 0.88 (0.83...0.92)            |
| 25                      | 2.3 (2.1...2.4) | 0.78 (0.70...0.84) | 0.76 (0.69...0.83)            |
| 27                      | 3.1 (2.8...3.3) | 0.74 (0.67...0.82) | 0.76 (0.70...0.83)            |
| 68                      | 2.0 (1.6...2.3) | 0.78 (0.66...0.85) | 0.78 (0.66...0.85)            |
| 126                     | 1.4 (1.0...2.1) | 0.85 (0.73...0.90) | 0.81 (0.68...0.89)            |

The attenuation of the temperature variance due to the limited high frequency response of the DTS system was estimated using the obtained values for  $\tau$  and Eq. 6. The median values of the calculated  $AF$  values for different heights ranged between 0.74 and 0.86 indicating that the DTS temperature variances were typically underestimated by 20–30 % (Table 1). The signal attenuation is, in effect, a combination of attenuation ( $\tau$ ) and turbulent time scales (Horst, 1997), hence  $AF$  was not constant 5 while  $\tau$  was. Turbulent time scales were estimated using roughness sublayer scaling,  $U/h_c$  (Thomas and Foken, 2007a). The turbulent time scales are modulated by atmospheric stability, hence  $AF$  should also depend on stability. When calculated with fixed value for  $\tau$  for each height,  $AF$  showed both an approximately linear decrease with  $U/h_c$  and a dependence on stability 10 (Fig. 4). However, the estimates of  $AF$  at different heights did not follow the same linear dependence, with clear differences between the dependence at 68 m and 126 m (Figs. 4d and 4e) compared to lower heights, which may indicate that  $h_c$  was not the physically meaningful length scale at these heights. The dependence of signal attenuation on turbulent time scales did cause 15 the median  $AF$  to increase weakly with height above the canopy indicating smaller signal attenuation well-above the canopy (Table 1). However,  $AF$  values from different heights were typically within 5 % of each other, indicating that the whole profile was attenuated in a similar fashion and the reported values for  $AF$  serve as first-order estimates for the signal attenuation throughout the profile. Values of  $AF$  were higher below the canopy, indicating a reduction in the high frequency attenuation 20 of the signal; this was expected since organised (slow) motions have been previously found to dominate the variability scalar variability (and hence variance) within forests (Thomas and Foken, 2007a, b).

### 3.3 Second- and third-order statistics

Figure 5 and Table 2 show the agreement between temperature variances derived from DTS and the colocated 3D sonic anemometers. Note that statistics derived from 3D sonic anemometers were calculated from sonic temperature and hence slightly biased by  $\text{H}_2\text{O}$  fluctuations (see Sect. 2.2). The DTS temperature variance was estimated using Eq. 9, where the noise

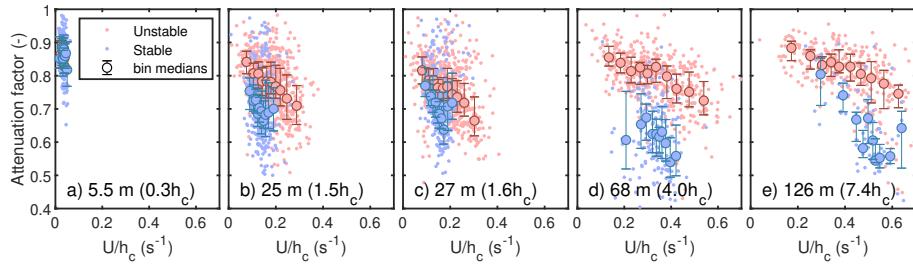


**Figure 4.** Dependence of  $AF$  on  $U/h_c$  at different mast heights. 30-min values (points), bin medians (filled circles) and the bin interquartile range (error bars) are shown. Data were screened based on flux stationarity (Foken and Wichura, 1996) and values for temperature variance and  $\overline{w'T'}$  before plotting ( $|\sigma_T^2| > 0.02\text{K}^2$  and  $|\overline{w'T'}| > 0.015\text{Km/s}$ ).

**Table 2.** Linear regression statistics between DTS and 3D sonic anemometers at different heights ( $y = ax+b$ , where  $y$  equals DTS and  $x$  3D sonic anemometer). The fits between datasets were performed using robust regression in order to minimise the effect of outliers on the regression coefficients. Standard errors for the coefficients are given in parentheses and  $N$  shows the number of 30-min data points used in the fit. For skewness, only periods when the signal to noise ratio for DTS data was above 0.5 were utilised, for other statistics all available data were used. Note that no corrections for sensor separation effects (Horst and Lenschow, 2009) or signal attenuation (Sect. 3.2) were made prior to comparison.

| Height (m) | Variance     |                    | Covariance, $\overline{w'T'}$ |              |               |      | Skewness     |                |     |
|------------|--------------|--------------------|-------------------------------|--------------|---------------|------|--------------|----------------|-----|
|            | a (-)        | b ( $\text{K}^2$ ) | N                             | a (-)        | b (Km/s)      | N    | a (-)        | b (-)          | N   |
| 5.5        | 1.03 (0.003) | <0.001             | 886                           | 0.34 (0.005) | 0.001 (0.001) | 894  | 0.90 (0.035) | -0.036 (0.016) | 505 |
| 25         | 0.80 (0.004) | <0.001             | 1336                          | 0.60 (0.005) | 0.001 (0.001) | 1353 | 0.92 (0.041) | 0.036 (0.019)  | 885 |
| 27         | 0.85 (0.005) | 0.006 (0.001)      | 1333                          | 0.76 (0.003) | 0.003 (0.001) | 1353 | 0.77 (0.071) | 0.062 (0.037)  | 853 |
| 68         | 0.87 (0.001) | <0.001             | 1332                          | 0.73 (0.004) | 0.002 (0.001) | 1353 | 0.86 (0.036) | 0.010 (0.025)  | 720 |
| 126        | 0.90 (0.007) | <0.001             | 1325                          | 0.83 (0.003) | <0.001        | 1353 | 0.76 (0.143) | 0.043 (0.087)  | 651 |


variance has been compensated for prior to the comparison. The temperature variance was dominated by large coherent eddies connected to the low-frequency end of the spectrum. Hence, the DTS measurements were able to capture the variability of this most important canopy flow mode accurately, in other words, the bulk of the time series variance was related to fluctuations close to the peak of the power spectra and DTS system was able to resolve the variability at these frequencies (Fig. 3). Note that the gradient of the linear fits between the temperature variance estimates (Table 2) were close to the values obtained for the attenuation factors describing the high frequency loss (Sect. 3.2) suggesting that the systematic mismatch between DTS and EC temperature variances was solely related to the limited high frequency response of the DTS system.

Following Thomas et al. (2012), the kinematic heat fluxes (i.e.  $\overline{w'T'}$ ) were calculated using the vertical wind speed from 3D sonic anemometer and temperature either from the same 3D sonic anemometer or colocated DTS signal. Above the canopy, heat fluxes calculated from both systems showed relatively good agreement (Fig. 5e), indicating that the DTS system was

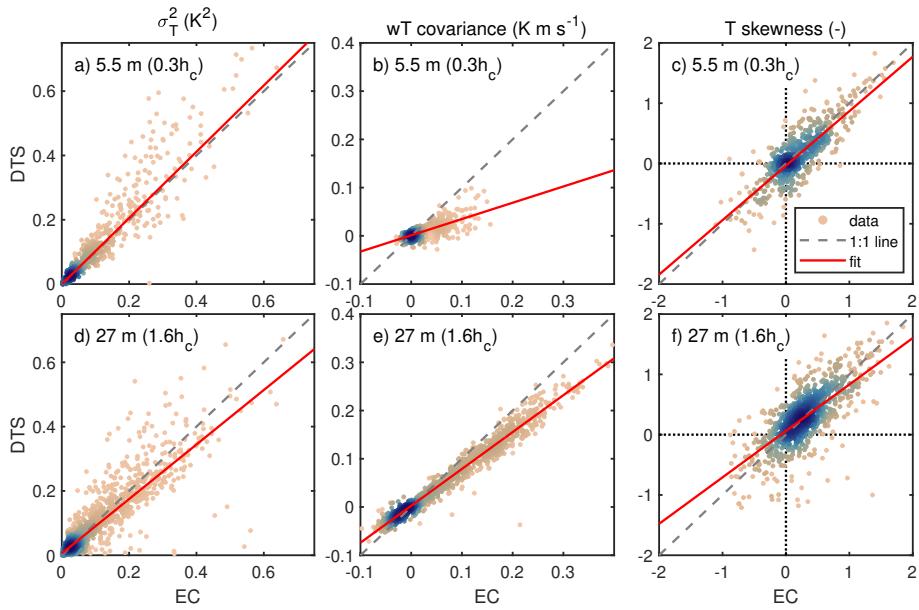

**Figure 5.** Comparison of DTS and EC 30-min values for temperature variance (left column),  $\overline{w'T'}$  covariance (centre column) and skewness (right column) at two different heights on the mast. Upper panels a)–c) show below-canopy ( $0.3h_c$ ) and lower panels d)–f) show above-canopy ( $1.6h_c$ ). For skewness, only periods with  $\text{SNR} > 0.5$  (Eq. 13) were used, otherwise all available data was included. Coefficients related to the linear fits are given in Table 2. Colour denotes the density of the point cloud. Note that no corrections for sensor separation effects (Horst and Lenschow, 2009) or signal attenuation (Sect. 3.2) were made prior to comparison.

able to resolve most of the eddies contributing to the vertical turbulent flux. However, within the forest canopy the agreement was worse (Table 2 and Fig. 5b). There are at least two reasons for this: 1) ~~within the forest heat transport is dominated by small eddies since the coherency of large eddies typically dominating surface layer heat transfer is broken up by the canopy elements (spectral short circuit; Finnigan (2000); Launiainen et al. (2007)) and forest floor is close which also suppresses the size eddies dominating heat transfer and DTS cannot capture the small scale turbulence; and 2)~~ there was a 3.5 m horizontal sensor separation between the 3D sonic anemometers and DTS fibre cable which significantly contributed to dampening the high-frequency response of the joint anemometer-DTS flux calculation, especially close to the ground (Horst and Lenschow, 2009); and 2) ~~forest floor is close which suppresses the size of eddies dominating heat transfer which is also influenced by the canopy elements breaking the coherency of large eddies (spectral short circuit; Finnigan (2000); Launiainen et al. (2007)) and DTS cannot capture the small scale turbulence.~~ This is supported by the finding that the in-canopy temperature variance was captured accurately, while the heat flux was not, meaning that the temperature fluctuations related to the large eddies sweeping into the in-canopy were captured accurately yet their signal was decorrelated with respect to the vertical wind speed (i.e. vertical turbulent flux) by the canopy elements ~~and large horizontal sensor separation~~. This is evident, for instance, in the comparison between within and above forest canopy power spectra in Launiainen et al. (2007) measured at the same site. In general, scalars (e.g. temperature) behave very differently to the vectors within the canopy (Vickers and Thomas, 2014).

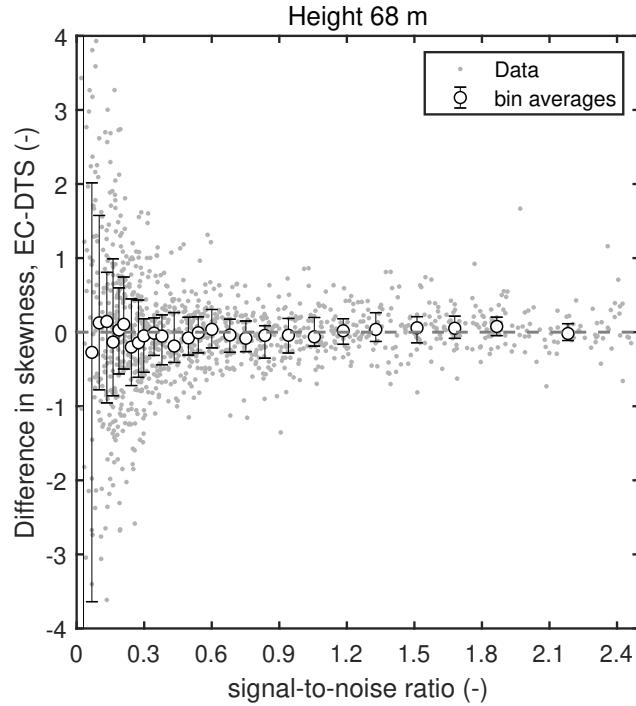

**Figure 6.** Difference in temperature skewness calculated from 3D sonic anemometer and DTS as a function of DTS signal-to-noise ratio (Eq. 13). Individual 30-min values (grey dots), bin medians (circles) and the interquartile range (error bars) are shown.

Third-order statistics such as temperature skewness were also compared. Again, the effect of noise was removed following the method by Lenschow et al. (2000) and the temperature skewness values were calculated using Eq. 11. Additionally, all data with  $\text{SNR} < 0.5$  was discarded for the comparison presented in Fig. 5 and Table 2. The reason for this additional filtering can be seen in Fig. 6, where the discrepancy between DTS and EC temperature skewness increases rapidly as DTS SNR decreases 5 below 0.5. The dependence of DTS SNR on height meant that better estimates of temperature skewness were available closer to the canopy than at higher elevations above. Imposing a DTS SNR threshold of 0.5 still left 54 % of all DTS data measured during the campaign and 63 % of DTS data measured below 50 m height available for generating third-order statistics, hence we conclude that this DTS system can still be used after SNR filtering to monitor higher-order statistics and the non-Gaussian character of the flow despite the higher noise floor of this instrument relative to the older 2 km variant used in Thomas et al. 10 (2012).


### 3.4 Profiles of first- through third-order statistics

A comparison of the profiles of turbulence statistics in different stability regimes are shown in Fig. 7. DTS provides continuous profiles, whereas conventional measurements provided point estimates; this is the unique strength of the spatially continuous DTS measurements. The mean potential temperature gradients from DTS **but** exhibited some bias when compared against

reference instrumentation (Fig. 7a), especially in mildly stable and strongly unstable cases. The fibre-optic cable was not radiation-shielded and hence it was exposed to shortwave and longwave radiation transfer with its surroundings. 30-min mean temperature values were found to be biased by solar heating during daytime and longwave radiative cooling at night in accordance with prior studies (de Jong et al., 2015; Sigmund et al., 2017). Due to the forest canopy, these radiation-induced biases 5 differ below and above the canopy, introducing biases into the temperature gradient. In general, during night, DTS showed a greater decrease in temperature with height within the canopy than the reference profile and the bias in the gradient depended on the amount of longwave radiative cooling (not shown). During daytime, DTS showed a weaker decrease in temperature with height due to canopy shading; this was particularly evident during morning and evening but less during the middle of the day. The biases in across-canopy temperature differences were 0.07 K (median bias in temperature difference between 27 m 10 and 5.8 m heights) at night and 0.04 K at daytime, indicating that the DTS profile overestimated the across-canopy temperature gradient at night and underestimated the gradient during daytime. For comparison, the unbiased median temperature gradients during these periods calculated from the reference measurements [at heights mentioned above](#) were 0.34 K and -0.29 K at night and daytime, respectively.

As shown above, DTS measurements and 3D sonic anemometers showed good agreement in different mixing conditions 15 within the canopy sublayer, slightly above the canopy and well above the forest. As expected, the temperature variance peaked at the canopy top due to 1) strong turbulence production originating from wind shear, and 2) canopy heat source/sink related to solar heating (daytime) or radiative cooling (night time) of the canopy. The scaled temperature variability ( $\sigma_T / |T_*|$ , where  $T_*$  was calculated based on Eq. 3 and data from 27 m height) followed Monin-Obukhov (M-O) similarity scaling in the unstable and near-neutral regime above about 50 m height, indicating that surface layer scaling was valid between this height and the 20 mast top. As expected, at lower heights (between 50 m height and ground floor), the measured values for  $\sigma_T / |T_*|$  departed from the M-O predictions. This is typical for the roughness sublayer, where the turbulence resembles more mixing layer than boundary layer turbulence (Raupach et al., 1996; Finnigan, 2000; Finnigan et al., 2009) meaning that the turbulent mixing is more efficient than in the surface layer and hence a smaller  $\sigma_T$  will [already](#) yield the same turbulent flux. In other words, the correlation between  $w$  and  $T$  is higher in the roughness sublayer than in the surface layer (Patton et al., 2010) and hence M-O 25 scaling is no longer valid. These results suggest that the height of the roughness sublayer at this sites is about 50 m, which corresponds to approximately three times the height of the roughness elements (i.e. trees). This is in line with previous study at this site (Rannik, 1998) and other studies made in wind tunnels or at other forest sites, where estimates for the roughness sublayer height typically range between  $2h_c$  to  $5h_c$  ( $3h_c$  being the most common estimate) where  $h_c$  is the height of the roughness elements (Garratt, 1980; Coppin et al., 1986; Mölder et al., 1999; Poggi et al., 2004; Thomas et al., 2006).

30 In near-neutral situations the scaled temperature variability exceeded the predictions made with M-O scaling, since the heat fluxes (and hence also  $|T_*|$ ) decreased with  $\zeta$  yet the temperature variability ( $\sigma_T$ ) did not decrease at the same rate; i.e. heat transfer efficiency approached zero at the neutral limit (e.g. Rannik, 1998). Under stable stratification the scaled temperature variability showed consistent z-dependence between the displacement height and approximately 30 m height, whereas above 30 m it was relatively independent of height following z-less stratification and any variability above this height was most likely 35 related to flow processes other than interaction with the surface. These observations are in line with previous findings (e.g.

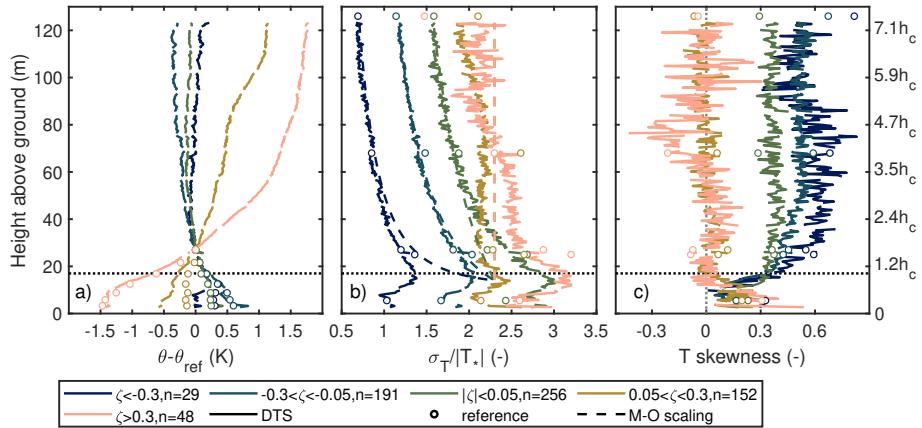

**Figure 7.** Profiles of potential temperature gradient ( $\theta_{\text{ref}}$ =potential temperature at 27 m), normalised temperature variability ( $\sigma_T / |T_*|$ ) and temperature skewness derived from DTS (continuous lines) and reference (dots) measurements. The data were binned based on the stability parameter  $\zeta$  estimated from EC measurements at 27 m height. For unstable conditions  $\sigma_T / |T_*|$  was also calculated based on Monin-Obukhov similarity theory (dashed lines) for unstable stratification using  $\sigma_T / |T_*| = 2.3 (1 + 9.5 |\zeta|)^{-1/3}$  (Cava et al., 2008). Note that local scaling was not utilised, i.e.  $|T_*|$  was calculated using measurements at a fixed height (27 m). Only periods with high SNR were used and n denotes the number of 30-min periods in each stability bin. The right-hand axis displays height as a fraction of canopy height ( $h_c$ ) and the canopy height is denoted with a horizontal dashed line.

Pahlow et al., 2001). Note that here,  $|T_*|$  was calculated using measurements at a fixed height (27 m), i.e. local scaling was not utilised. The profiles shown in Fig. 7b for unstable and neutral periods could be expected to show similar pattern even if local scaling would be used since turbulent fluxes can be conjectured to be constant with height in the bottom part of the ABL. However, for stable situations the  $\sigma_T / |T_*|$  calculated based on local scaling might depart from what is shown here since  $|T_*|$  varies with z.

Temperature skewness was ~~almost~~ almost independent of height (approx. 0.5–0.6) in unstable conditions above 30–50 m ( $2h_c$ – $3h_c$ ) which corresponded to the roughness sublayer height found above. Skewness increased as the instability increased. Skewness decreased when moving to the canopy sublayer, but stayed positive throughout the profile, indicating non-Gaussian flow. Non-zero skewness is often connected to an imbalance between the transport of scalar in question by ejective and sweep-10 ing air motions (Katul et al., 2018). Hence, based on these results the ejections and sweeps were not in balance and the ejective motions dominate heat transport in the unstable conditions throughout the air column. Non-zero skewness of scalar time series has been also linked to the influence of atmospheric boundary layer (ABL) scale large eddies entraining air from the free troposphere and transporting it in downdrafts close to the ground (Mahrt, 1991; Couvreux et al., 2007; van de Boer et al., 2014). The measured skewness profiles are qualitatively similar to those from the wind tunnel study of Coppin et al. (1986) and large eddy simulations (LES) of Patton et al. (2015) obtained with canopy-resolving LES coupled with a multi-level canopy model. In contrast to the profiles in unstable conditions, in stable conditions above the forest canopy the flow was Gaussian (zero

skewness), whereas skewness was positive below the canopy due to the sweeping motions penetrating through the canopy and bringing pulses of warm air from aloft into the cold below-canopy air.

### 3.5 Examples of organised flow patterns observed with the DTS system across vertical coupling regimes


The spatially-continuous measurements of the DTS system enabled the detection and analysis of spatial patterns in the flow.

5 Figure 8 shows a measurement example during a daytime unstable regime. Large coherent eddies dominated the variability (Fig. 8b) and their detailed vertical structure was captured with the DTS measurements. Positive temperature perturbations were correlated with upward vertical air motions and negative with downward motions, indicating upward-directed sensible heat flux due to the unstable stratification. The entire 120 m measurement domain was coupled due to large coherent eddies effectively mixing the air throughout the vertical. The temporal extent and amplitude of the temperature fluctuations changed 10 with height, corresponding to changes in the dominant eddy size turbulence time scale and flux magnitude with height.

By relying on Taylor's frozen turbulence hypothesis, two dimensional spatial details of the coherent motions can be delineated from the vertical DTS measurements. The patterns with low temperatures (downward air motions called sweeps) occasionally reached the forest floor, but did not always penetrate the whole canopy layer (between 10 and 17 m) since they were likely disrupted by the canopy passage. The patterns with high temperatures representing upward motions called ejections typically 15 originated from the forest floor, traversed the forest canopy and continued moving upward (compare Fig. 8a and 8b). However, note that these analyses rely on Taylor's frozen turbulence hypothesis, i.e. on the assumption that the two-dimensional spatial details of the coherent motions can be delineated from the vertical DTS measurements. Ramp-cliff patterns connected to the ejection-sweep cycle were evident in the time series collected just above the canopy (Figs. 8e and 8f), but not so clearly at higher levels or below the canopy (Figs. 8c, 8d and 8g). These patterns have been previously suggested to be connected to the 20 wind shear and corresponding inflection point instability close to the canopy top (Raupach et al., 1996; Finnigan, 2000; Cava et al., 2004; Thomas and Foken, 2007b; Göckede et al., 2007). For this reason the signatures of ejections would not be expected to reach very high above the canopy. Mean potential temperature profile (Fig. 9a) showed unstable stratification, except below canopy and in the upper parts of the profile where the stratification was close to neutral.


The patterns observed with the DTS system and the 3D sonic anemometer at the mast top agreed qualitatively with the 25 vertical-pointing windlidar (Fig. 8), yet quantitative analysis on the agreement was hindered by the fact that the lidar instrument was located approximately 400 m upwind from the measurement mast. While the temporal lag caused by this horizontal displacement was taken into account by shifting the lidar time series in time to maximise the correlation with the mast-top 3D sonic anemometer, the eddies may have already been deformed during advection from the lidar measurement location to the measurement mast, in addition to changes in wind direction. Hence, a direct comparison between the lidar in its current 30 position and the mast measurements is not possible. Nevertheless, these observations do demonstrate the capabilities of joint measurements with lidar and DTS in capturing continuous vertical profile of turbulent motions from forest floor up to boundary layer top.

In contrast to the daytime example, during the night time example the air temperature patterns suggested a decoupling caused by the strong thermal stratification of the air (Fig. 9a and 10b) resulting from radiative cooling of the surface (net radiative

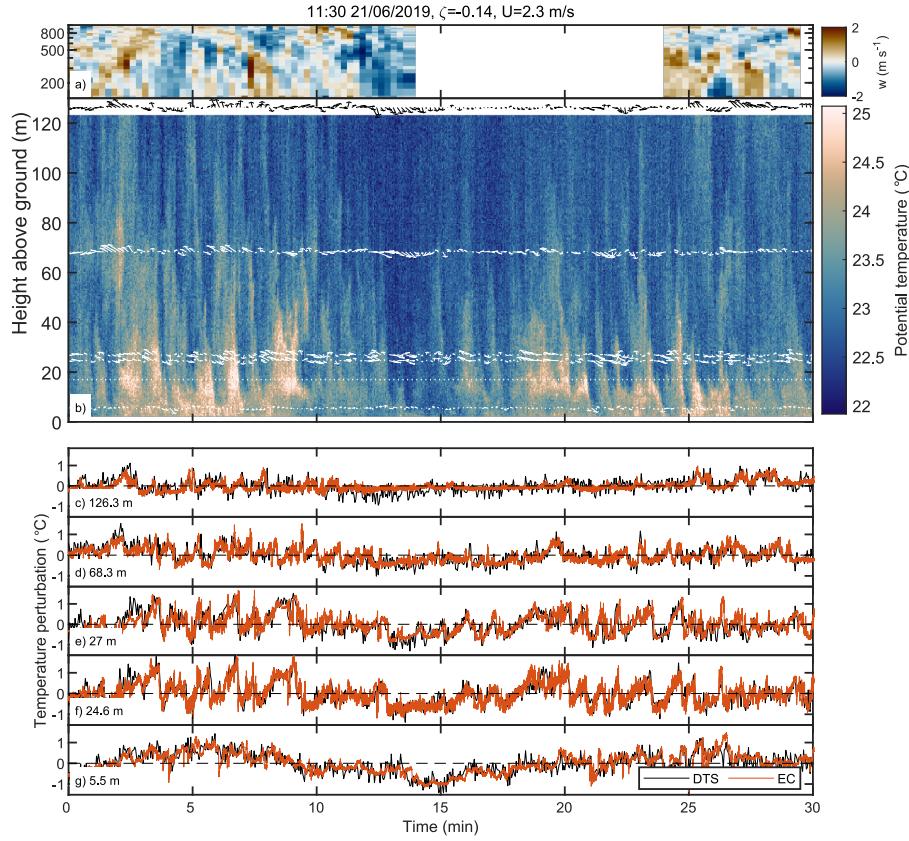


**Figure 8.** Example of simultaneous lidar, DTS and 3D sonic anemometer measurements during daytime convective conditions. Panel a): lidar vertical wind velocity component (gap is due to non-vertical operation during scanning sequence). Panel b): temperature profiles measured with the DTS system (color) and wind speed fluctuations (arrows) measured with 3D sonic anemometers. For illustration purposes the wind speed fluctuations were averaged over 10 s and the vertical wind component was multiplied by 10 prior to plotting. Length of the arrows denote the magnitude of the wind speed fluctuations and direction is determined by the sign of vertical ( $w'$ ) and horizontal ( $u'$ ) wind speed fluctuations (up:  $w' > 0$ , down:  $w' < 0$ , left:  $u' < 0$ , right:  $u' > 0$ ). Panels c)-g): temperature perturbations ( $T - \bar{T}$ ) measured with DTS and sonic anemometers at different heights on the mast. Local time (UTC+2), the corresponding stability parameter ( $\zeta$ ) and mean wind speed ( $U$ ) measured at 27 m height are given in the figure title. Canopy height was approximately 17 m and is highlighted with a white dotted line in panel b). For illustration purposes the data gaps from cable holder locations were filled with linear interpolation prior to plotting.

loss of  $51 \text{ W/m}^2$ ) and low mechanical production of turbulence (i.e. weak wind shear). Two strong temperature inversion layers were evident: one at the canopy top between 12 m and 25 m heights and one at 80 m which descended down to 60 m height during the latter part of the period (Fig. 11a). Vertical movement of these inversion layers resulted in a bimodal vertical profile for  $\sigma_T$  during this period (Fig. 9b). These inversion layers decoupled the air column into three layers: below canopy air space (below 10 m height), canopy layer with organised motions (between 10 and 80 m) and a residual layer with slowly

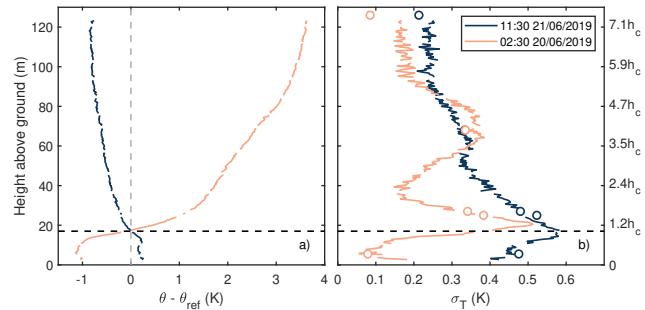


**Figure 9.** Mean potential temperature gradient (subplot a)) and standard deviation (subplot b)) profiles for the two example periods shown in Figs. 8 and 10. Dots in subplot b) show the  $\sigma_T$  values estimated with the 3D sonic anemometers at different heights.

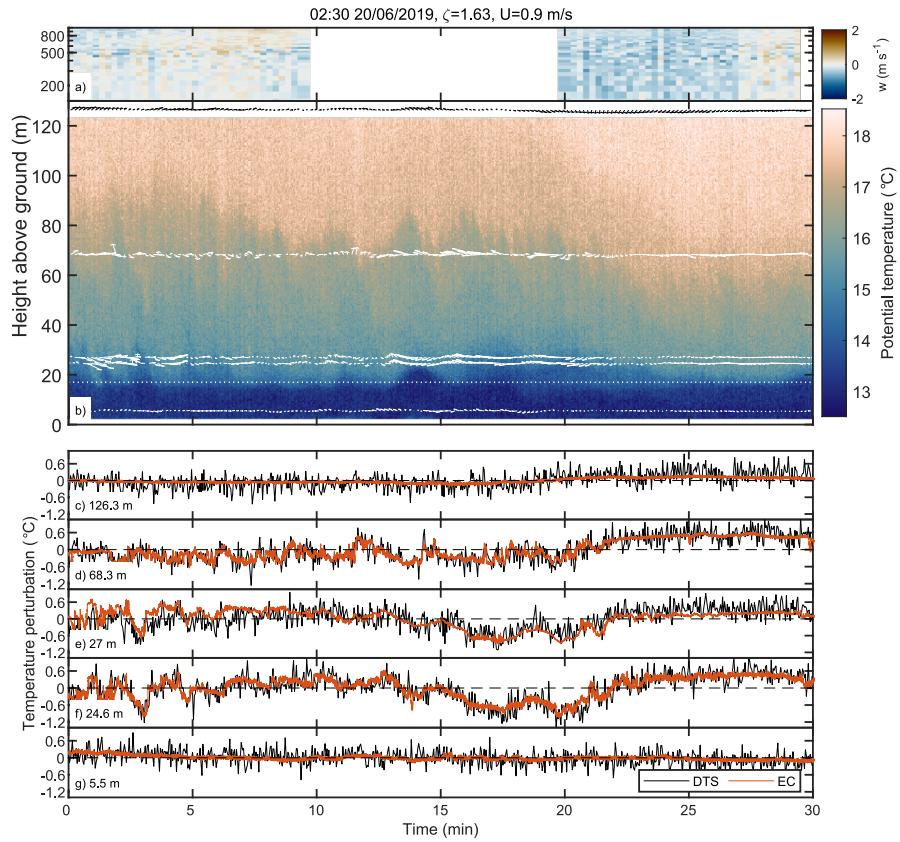

**Figure 10.** Same as Fig. 8 but for a strongly stable situation at night.

varying non-turbulent motions (above 80 m). The maximum potential temperature gradient resided at the canopy height due to radiative cooling of the canopy (Fig. 9a and 11a). ~~Flow patterns were evident, in particular close to the canopy top.~~ Inverted ramp patterns were observed in the temperature time series at the beginning of the example period (Fig. 10) and a canopy wave

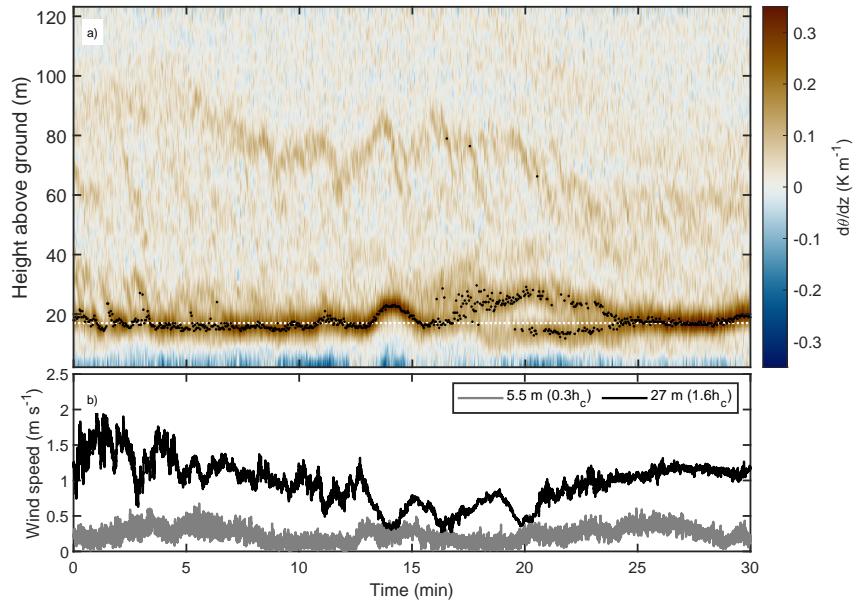

**Figure 11.** Evolution of potential temperature gradient ( $d\theta/dz$ ) (subplot a) for the period shown in Fig. 10 and concurrent wind speed time series from two heights (subplot b). The black dots in subplot a) highlight the location of the maximum gradient at each time step. The gradient was calculated using spline fit for each time step and estimating the gradient for each height from the first derivative of the fit. White dotted line shows the canopy height.

was observed in the middle of the period (Fig. 11a). By following the evolution of the maximum temperature gradient (Fig. 11a), the amplitude of the canopy wave was estimated to be about 8 m. The switch from inverted ramps to canopy waves was likely due to a decrease in wind shear and, hence, a decrease in turbulence production (Fig. 11b).

These two examples from contrasting mixing regimes illustrate the unique observational capabilities of the DTS to analyse  
5 the spatial structure of the organised flow patterns, which can only be guessed at individual heights from classical sonic anemometry (compare e.g. Figs. 8b and 8e). In principle similar results could have been obtained with an array of several in-situ instruments (Gao et al., 1989; Lee et al., 1997; Poulos et al., 2002; Horst et al., 2004; Mahrt and Vickers, 2005; Mahrt et al., 2009; Patton et al., 2010; BOU-ZEID et al., 2010; Feigenwinter et al., 2010; Thomas, 2011; Serafimovich et al., 2011; Mahrt et al., 2014), yet such measurement setups do not provide spatially continuous measurements with the same spatial resolution  
10 as the DTS system and are labour-intensive and require careful cross-instrument calibration. Furthermore, continuous profiles are required for following the evolution of e.g. inversion layers (see Fig. 11) and hence not easily detectable with arrays of in-situ instruments.

#### 4 Conclusions and outlook

This study demonstrated the unique observational potential of DTS measurements to capture the salient features of atmospheric flow within and above forest canopies across contrasting flow regimes. Despite the fact that these results were obtained with a different DTS machine compared to Thomas et al. (2012) and that different cable suspension techniques were used, these 5 results are in line with, and complement their findings. In spite of the higher noise floor in the measurements and the limited high-frequency response compared to sonic anemometers, we found the DTS technique to accurately capture the second- and third-order moments, which allows for detection of the spatial structure of coherent air motions dominating the temperature variability at the forest-air interface. In accordance with Thomas et al. (2012), the measurements performed best when either 10 large variability (high heat fluxes) or strong stratification (low mixing and clear skies) was present. Therefore, DTS measurements can provide the missing spatial details of atmospheric mixing close to the surface which cannot be acquired with conventional in-situ or remote sensing methods.

A combination of DTS and conventional in-situ instrumentation has been shown to be advantageous when studying low-mixing nocturnal air flows (Thomas et al., 2012; Zeeman et al., 2015; Pfister et al., 2017; Mahrt et al., 2019; Pfister et al., 2019) and morning transitions (Higgins et al., 2018) over smooth surfaces. In this study it was shown that the DTS measurements can 15 be used in a wide range of mixing conditions throughout the day, both above and within rough forest canopies. When affixed to a tall mast, DTS measurements can capture coherent motions up to heights of  $7h_c$  (Fig. 8b) or more. Hence, observations with different DTS measurement configurations should prove useful in locations where the flow exhibits persistent spatial patterns which are not transported with the mean flow and, thus, cannot be studied with standard point-based in-situ instrumentation. These locations include, but are not limited to, flows within and just above forest canopies and street canyons, and flows over 20 edges and other spatial discontinuities in the surface characteristics.

Together with aiding the analysis of different flow modes, DTS measurements show potential for investigating the spatial details of atmosphere-ecosystem interactions and gas transfer between these two domains. For instance, the vertical profile of temperature fluctuations can help separate the canopy and forest floor contributions to above-canopy scalar fluxes (Thomas et al., 2008; Klosterhalfen et al., 2019) since the measurements allow tracking the temperature signal related to coherent ejection 25 and sweep air motions through the forest canopy (Fig. 8b). The measurements can also aid in trying to decipher the persistent problem related to advection at the EC flux measurement sites when trying to close the mass balance of e.g. CO<sub>2</sub> for a given target ecosystem (Aubinet et al., 2010), since part of this issue is likely to be related to the unresolved horizontal variability of turbulent mixing within the forest (Feigenwinter et al., 2010). This issue could be explored with DTS measurements utilising horizontally and vertically distributed fibre optic cables.

30 Ultimately the DTS measurements enable studies to go beyond the typical time series from isolated point-measurements, yet at the same time provide measurements at the same temporal and spatial scale as conventional in-situ instruments. Many topical open questions in the field of ecosystem-atmosphere interactions require spatio-temporal information on the processes involved, and DTS has been shown here to be a suitable tool for gathering such information.

*Data availability.* Data has been uploaded to open data repository Zenodo (Peltola et al., 2020).

*Author contributions.* OP designed the experiment and did the data processing and analysis. KL and CKT supported the DTS data analysis work. IM provided technical support in the field. EO maintained the Doppler lidar instrument and provided the data. OP wrote the first version of the manuscript and all authors provided input.

5 *Competing interests.* The authors declare that they have no conflict of interest.

*Acknowledgements.* Technical staff at the Hyttiälä research station is acknowledged for their help during the measurement campaign. OP is supported by the postdoctoral researcher project (decision 315424) funded by the Academy of Finland. KL and ~~CT~~CKT received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation program (grant agreement No 724629, project DarkMix). ICOS-Finland and Atmospheric Mathematics (AtMath) projects by University of Helsinki are also acknowledged.

## References

Alekseychik, P., Mammarella, I., Launiainen, S., Rannik, , and Vesala, T.: Evolution of the nocturnal decoupled layer in a pine forest canopy, *Agricultural and Forest Meteorology*, 174–175, 15–27, <https://doi.org/10.1016/j.agrformet.2013.01.011>, <http://www.sciencedirect.com/science/article/pii/S0168192313000257>, 2013.

5 Aubinet, M., Feigenwinter, C., Heinesch, B., Bernhofer, C., Canepa, E., Lindroth, A., Montagnani, L., Rebmann, C., Sedlak, P., and Van Gorsel, E.: Direct advection measurements do not help to solve the night-time CO<sub>2</sub> closure problem: Evidence from three different forests, *Agricultural and Forest Meteorology*, 150, 655–664, <https://doi.org/10.1016/j.agrformet.2010.01.016>, 2010.

Baldocchi, D.: Measuring fluxes of trace gases and energy between ecosystems and the atmosphere – the state and future of the eddy covariance method, *Global Change Biology*, 20, 3600–3609, <https://doi.org/10.1111/gcb.12649>, <https://doi.org/10.1111/gcb.12649>, 2014.

10 Barlow, J. F.: Progress in observing and modelling the urban boundary layer, *Urban Climate*, 10, 216–240, <https://doi.org/10.1016/j.uclim.2014.03.011>, <http://www.sciencedirect.com/science/article/pii/S2212095514000558>, 2014.

Bohrer, G., Katul, G. G., Walko, R. L., and Avissar, R.: Exploring the Effects of Microscale Structural Heterogeneity of Forest Canopies Using Large-Eddy Simulations, *Boundary-Layer Meteorology*, 132, 351–382, <https://doi.org/10.1007/s10546-009-9404-4>, <https://doi.org/10.1007/s10546-009-9404-4>, 2009.

15 BOU-ZEID, E., HIGGINS, C., HUWALD, H., MENEVEAU, C., and PARLANGE, M. B.: Field study of the dynamics and modelling of subgrid-scale turbulence in a stable atmospheric surface layer over a glacier, *Journal of Fluid Mechanics*, 665, 480–515, <https://doi.org/10.1017/S0022112010004015>, <https://www.cambridge.org/core/article/field-study-of-the-dynamics-and-modelling-of-subgrid-scale-turbulence-in-a-stable-atmospheric-surface-layer-over-a-glacier/3042977AD4A8FD4FF125A299A0BAC383>, 2010.

20 Cava, D., Giostra, U., Siqueira, M., and Katul, G.: Organised Motion and Radiative Perturbations in the Nocturnal Canopy Sublayer above an Even-Aged Pine Forest, *Boundary-Layer Meteorology*, 112, 129–157, <https://doi.org/10.1023/B:BOUN.0000020160.28184.a0>, <http://dx.doi.org/10.1023/B:BOUN.0000020160.28184.a0>, 2004.

Cava, D., Katul, G. G., Sempreviva, A. M., Giostra, U., and Scrimieri, A.: On the Anomalous Behaviour of Scalar Flux–Variance Similarity Functions Within the Canopy Sub-layer of a Dense Alpine Forest, *Boundary-Layer Meteorology*, 128, 33, <https://doi.org/10.1007/s10546-008-9276-z>, <https://doi.org/10.1007/s10546-008-9276-z>, 2008.

25 Cheng, Y., Sayde, C., Li, Q., Basara, J., Selker, J., Tanner, E., and Gentine, P.: Failure of Taylor's hypothesis in the atmospheric surface layer and its correction for eddy-covariance measurements, *Geophysical Research Letters*, 44, 4287–4295, <https://doi.org/10.1002/2017GL073499>, <http://dx.doi.org/10.1002/2017GL073499>, 2017.

30 Coppin, P. A., Raupach, M. R., and Legg, B. J.: Experiments on scalar dispersion within a model plant canopy part II: An elevated plane source, *Boundary-Layer Meteorology*, 35, 167–191, <https://doi.org/10.1007/BF00117307>, <https://doi.org/10.1007/BF00117307>, 1986.

Couvreux, F., Guichard, F., Masson, V., and Redelsperger, J.-L.: Negative water vapour skewness and dry tongues in the convective boundary layer: observations and large-eddy simulation budget analysis, *Boundary-Layer Meteorology*, 123, 269–294, <https://doi.org/10.1007/s10546-006-9140-y>, <https://doi.org/10.1007/s10546-006-9140-y>, 2007.

35 Dakin, J. P., Pratt, D. J., Bibby, G. W., and Ross, J. N.: Distributed optical fibre Raman temperature sensor using a semiconductor light source and detector, *Electronics Letters*, 21, 569–570, <https://doi.org/10.1049/el:19850402>, 1985.

de Jong, S. A. P., Slingerland, J. D., and van de Giesen, N. C.: Fiber optic distributed temperature sensing for the determination of air temperature, *Atmos. Meas. Tech.*, 8, 335–339, <https://doi.org/10.5194/amt-8-335-2015>, <https://www.atmos-meas-tech.net/8/335/2015/>, 2015.

Egerer, U., Gottschalk, M., Siebert, H., Ehrlich, A., and Wendisch, M.: The new BELUGA setup for collocated turbulence and radiation measurements using a tethered balloon: first applications in the cloudy Arctic boundary layer, *Atmos. Meas. Tech.*, 12, 4019–4038, <https://doi.org/10.5194/amt-12-4019-2019>, <https://www.atmos-meas-tech.net/12/4019/2019/https://www.atmos-meas-tech.net/12/4019/2019/amt-12-4019-2019.pdf>, 2019.

Euser, T., Luxemburg, W. M. J., Everson, C. S., Mengistu, M. G., Clulow, A. D., and Bastiaanssen, W. G. M.: A new method to measure Bowen ratios using high-resolution vertical dry and wet bulb temperature profiles, *Hydrol. Earth Syst. Sci.*, 18, 2021–2032, <https://doi.org/10.5194/hess-18-2021-2014>, <https://www.hydrol-earth-syst-sci.net/18/2021/2014/https://www.hydrol-earth-syst-sci.net/18/2021/2014/hess-18-2021-2014.pdf>, 2014.

Feigenwinter, C., Mölder, M., Lindroth, A., and Aubinet, M.: Spatiotemporal evolution of CO<sub>2</sub> concentration, temperature, and wind field during stable nights at the Norunda forest site, *Agricultural and Forest Meteorology*, 150, 692–701, <https://doi.org/https://doi.org/10.1016/j.agrformet.2009.08.005>, <http://www.sciencedirect.com/science/article/pii/S016819230900197X>, 2010.

Finnigan, J.: Turbulence in Plant Canopies, *Annual Review of Fluid Mechanics*, 32, 519–571, <https://doi.org/10.1146/annurev.fluid.32.1.519>, <https://doi.org/10.1146/annurev.fluid.32.1.519>, 2000.

Finnigan, J., Shaw, R. H., and Patton, E. G.: Turbulence structure above a vegetation canopy, *Journal of Fluid Mechanics*, 637, 387–424, <https://doi.org/DOI: 10.1017/S0022112009990589>, <https://www.cambridge.org/core/article/turbulence-structure-above-a-vegetation-canopy/575D5DD5B6CFD8837D3C765E04216E41>, 2009.

Foken, T. and Wichura, B.: Tools for quality assessment of surface-based flux measurements, *Agricultural and Forest Meteorology*, 78, 83–105, 1996.

Foken, T., Leuning, R., Oncley, S. R., Mauder, M., and Aubinet, M.: Corrections and Data Quality Control BT - Eddy Covariance: A Practical Guide to Measurement and Data Analysis, pp. 85–131, Springer Netherlands, Dordrecht, [https://doi.org/10.1007/978-94-007-2351-1\\_4](https://doi.org/10.1007/978-94-007-2351-1_4), [https://doi.org/10.1007/978-94-007-2351-1\\_4](https://doi.org/10.1007/978-94-007-2351-1_4), 2012.

Franz, D., Acosta, M., Altimir, N., Arriga, N., Arrouays, D., Aubinet, M., Aurela, M., Ayres, E., López-Ballesteros, A., Barbaste, M., Berveiller, D., Biraud, S., Boukir, H., Brown, T., Brömmmer, C., Buchmann, N., Burba, G., Carrara, A., Cescatti, A., Ceschia, E., Clement, R., Cremonese, E., Crill, P., Darenova, E., Dengel, S., D'Odorico, P., Filippa, G., Fleck, S., Fratini, G., Fuß, R., Gielen, B., Gogo, S., Grace, J., Graf, A., Grelle, A., Gross, P., Grönwald, T., Haapanala, S., Hehn, M., Heinesch, B., Heiskanen, J., Herbst, M., Herschlein, C., Hörtnagl, L., Hufkens, K., Ibrom, A., Jolivet, C., Joly, L., Jones, M., Kiese, R., Klemmedsson, L., Kljun, N., Klumpp, K., Kolari, P., Kolle, O., Kowalski, A., Kutsch, W., Laurila, T., De Ligne, A., Linder, S., Lindroth, A., Lohila, A., Longdoz, B., Mammarella, I., Manise, T., Jiménez, S., Matteucci, G., Mauder, M., Meier, P., Merbold, L., Mereu, S., Metzger, S., Migliavacca, M., Mölder, M., Montagnani, L., Moureaux, C., Nelson, D., Nemitz, E., Nicolini, G., Nilsson, M., De Beeck, M., Osborne, B., Löfvenius, M., Pavelka, M., Peichl, M., Peltola, O., Pihlatie, M., Pitacco, A., Pokorný, R., Pumppanen, J., Ratié, C., Rebmann, C., Roland, M., Sabbatini, S., Saby, N., Saunders, M., Schmid, H., Schrumpf, M., Sedláček, P., Ortiz, P., Siebicke, L., Šigut, L., Silvennoinen, H., Simioni, G., Skiba, U., Sonnentag, O., Soudani, K., Soulé, P., Steinbrecher, R., Tallec, T., Thimonier, A., Tuittila, E.-S., Tuovinen, J.-P., Vestin, P., Vincent, G., Vincke, C., Vitale, D., Waldner, P., Weslien, P., Wingate, L., Wohlfahrt, G., Zahniser, M., and Vesala, T.: Towards long-Term standardised carbon and greenhouse

gas observations for monitoring Europe's terrestrial ecosystems: A review, *International Agrophysics*, 32, <https://doi.org/10.1515/intag-2017-0039>, 2018.

5 Frehlich, R., Meillier, Y., and Jensen, M. L.: Measurements of Boundary Layer Profiles with In Situ Sensors and Doppler Lidar, *Journal of Atmospheric and Oceanic Technology*, 25, 1328–1340, <https://doi.org/10.1175/2007JTECHA963.1>, <https://doi.org/10.1175/2007JTECHA963.1>, 2008.

Gao, W., Shaw, R. H., and Paw U, K. T.: Observation of organized structure in turbulent flow within and above a forest canopy, *Boundary-Layer Meteorology*, 47, 349–377, <https://doi.org/10.1007/BF00122339>, <https://doi.org/10.1007/BF00122339>, 1989.

Garratt, J. R.: Surface influence upon vertical profiles in the atmospheric near-surface layer, *Quarterly Journal of the Royal Meteorological Society*, 106, 803–819, <https://doi.org/10.1002/qj.49710645011>, <https://doi.org/10.1002/qj.49710645011>, 1980.

10 Göckede, M., Thomas, C., Markkanen, T., Mauder, M., Ruppert, J., and Foken, T.: Sensitivity of Lagrangian Stochastic footprints to turbulence statistics, *Tellus B*, 59, 577–586, <https://doi.org/10.1111/j.1600-0889.2007.00275.x>, <https://doi.org/10.1111/j.1600-0889.2007.00275.x>, 2007.

Hari, P. and Kulmala, M.: Station for measuring ecosystem-atmosphere relations (SMEAR II), *Boreal Environment Research*, 10, 315–322, %3CGoto, 2005.

15 Higgins, C. W., Froidevaux, M., Simeonov, V., Vercauteren, N., Barry, C., and Parlange, M. B.: The Effect of Scale on the Applicability of Taylor's Frozen Turbulence Hypothesis in the Atmospheric Boundary Layer, *Boundary-Layer Meteorology*, 143, 379–391, <https://doi.org/10.1007/s10546-012-9701-1>, <https://doi.org/10.1007/s10546-012-9701-1>, 2012.

Higgins, C. W., Katul, G. G., Froidevaux, M., Simeonov, V., and Parlange, M. B.: Are atmospheric surface layer flows ergodic?, *Geophysical Research Letters*, 40, 3342–3346, <https://doi.org/10.1002/GrL.50642>, %3CGoto, 2013.

20 Higgins, C. W., Wing, M. G., Kelley, J., Sayde, C., Burnett, J., and Holmes, H. A.: A high resolution measurement of the morning ABL transition using distributed temperature sensing and an unmanned aircraft system, *Environmental Fluid Mechanics*, 18, 683–693, <https://doi.org/10.1007/s10652-017-9569-1>, <https://doi.org/10.1007/s10652-017-9569-1>, 2018.

Higgins, C. W., Drake, S. A., Kelley, J., Oldroyd, H. J., Jensen, D. D., and Wharton, S.: Ensemble-Averaging Resolves Rapid Atmospheric Response to the 2017 Total Solar Eclipse , <https://www.frontiersin.org/article/10.3389/feart.2019.00198>, 2019.

25 Hirsikko, A., O'Connor, E. J., Komppula, M., Korhonen, K., Pfüller, A., Giannakaki, E., Wood, C. R., Bauer-Pfundstein, M., Poikonen, A., Karppinen, T., Lonka, H., Kurri, M., Heinonen, J., Moisseev, D., Asmi, E., Aaltonen, V., Nordbo, A., Rodriguez, E., Lihavainen, H., Laaksonen, A., Lehtinen, K. E. J., Laurila, T., Petäjä, T., Kulmala, M., and Viisanen, Y.: Observing wind, aerosol particles, cloud and precipitation: Finland's new ground-based remote-sensing network, *Atmos. Meas. Tech.*, 7, 1351–1375, <https://doi.org/10.5194/amt-7-1351-2014>, <https://www.atmos-meas-tech.net/7/1351/2014/https://www.atmos-meas-tech.net/7/1351/2014/amt-7-1351-2014.pdf>, 2014.

30 Horst, T. W.: A simple formula for attenuation of eddy fluxes measured with first-order-response scalar sensors, *Boundary-Layer Meteorology*, 82, 219–233, 1997.

Horst, T. W. and Lenschow, D. H.: Attenuation of Scalar Fluxes Measured with Spatially-displaced Sensors, *Boundary-Layer Meteorology*, 130, 275–300, <https://doi.org/10.1007/s10546-008-9348-0>, <http://dx.doi.org/10.1007/s10546-008-9348-0>, 2009.

35 Horst, T. W., Kleissl, J., Lenschow, D. H., Meneveau, C., Moeng, C.-H., Parlange, M. B., Sullivan, P. P., and Weil, J. C.: HATS: Field Observations to Obtain Spatially Filtered Turbulence Fields from Crosswind Arrays of Sonic Anemometers in the Atmospheric Surface Layer, *Journal of the Atmospheric Sciences*, 61, 1566–1581, [https://doi.org/10.1175/1520-0469\(2004\)061<1566:HFOTOS>2.0.CO;2](https://doi.org/10.1175/1520-0469(2004)061<1566:HFOTOS>2.0.CO;2), [https://doi.org/10.1175/1520-0469\(2004\)061%3C1566:HFOTOS%3E2.0.COhttp://0.0.0.2](https://doi.org/10.1175/1520-0469(2004)061%3C1566:HFOTOS%3E2.0.COhttp://0.0.0.2), 2004.

Ibrom, A., Dellwik, E., Flyvbjerg, H., Jensen, N. O., and Pilegaard, K.: Strong low-pass filtering effects on water vapour flux measurements with closed-path eddy correlation systems, *Agricultural and Forest Meteorology*, 147, 140–156, <https://doi.org/10.1016/j.agrformet.2007.07.007>, 2007.

Izett, J. G., Schilperoort, B., Coenders-Gerrits, M., Baas, P., Bosveld, F. C., and van de Wiel, B. J. H.: Missed Fog?, *Boundary-Layer Meteorology*, 5 <https://doi.org/10.1007/s10546-019-00462-3>, <https://doi.org/10.1007/s10546-019-00462-3>, 2019.

Kang, Y., Belusic, D., and Smith-Miles, K.: Classes of structures in the stable atmospheric boundary layer, *QUARTERLY JOURNAL OF THE ROYAL METEOROLOGICAL SOCIETY*, 141, 2057–2069, <https://doi.org/10.1002/qj.2501>, 2015.

Katul, G., Peltola, O., Grönholm, T., Launiainen, S., Mammarella, I., and Vesala, T.: Ejective and Sweeping Motions Above a Peatland and Their Role in Relaxed-Eddy-Accumulation Measurements and Turbulent Transport Modelling, *Boundary-Layer Meteorology*, 169, 10 163–184, <https://doi.org/10.1007/s10546-018-0372-4>, 2018.

Keller, C. A., Huwald, H., Vollmer, M. K., Wenger, A., Hill, M., Parlange, M. B., and Reimann, S.: Fiber optic distributed temperature sensing for the determination of the nocturnal atmospheric boundary layer height, *Atmos. Meas. Tech.*, 4, 143–149, <https://doi.org/10.5194/amt-4-143-2011>, <https://www.atmos-meas-tech.net/4/143/2011/><https://www.atmos-meas-tech.net/4/143/2011/amt-4-143-2011.pdf>, 2011.

Klosterhalfen, A., Graf, A., Brüggemann, N., Drüe, C., Esser, O., González-Dugo, M. P., Heinemann, G., Jacobs, C. M. J., Mauder, M., 15 Moene, A. F., Ney, P., Pütz, T., Rebmann, C., Ramos Rodríguez, M., Scanlon, T. M., Schmidt, M., Steinbrecher, R., Thomas, C. K., Valler, V., Zeeman, M. J., and Vereecken, H.: Source partitioning of H<sub>2</sub>O and CO<sub>2</sub> fluxes based on high-frequency eddy covariance data: a comparison between study sites, *Biogeosciences*, 16, 1111–1132, <https://doi.org/10.5194/bg-16-1111-2019>, <https://www.biogeosciences.net/16/1111/2019/><https://www.biogeosciences.net/16/1111/2019/bg-16-1111-2019.pdf>, 2019.

Launiainen, S., Vesala, T., Mölder, M., Mammarella, I., Smolander, S., Rannik, , Kolari, P., Hari, P., Lindroth, A., and Katul, G.: Vertical variability and effect of stability on turbulence characteristics down to the floor of a pine forest, *Tellus B: Chemical and Physical Meteorology*, 59, 919–936, <https://doi.org/10.1111/j.1600-0889.2007.00313.x>, <https://doi.org/10.1111/j.1600-0889.2007.00313.x>, 2007.

Lee, X., Neumann, H. H., Hartog, G., Mickle, R. E., Fuentes, J. D., Black, T. A., Yang, P. C., and Blanken, P. D.: Observation of gravity waves in a boreal forest, *Boundary-Layer Meteorology*, 84, 383–398, <https://doi.org/10.1023/A:1000454030493>, <https://doi.org/10.1023/A:1000454030493>, 1997.

Lenschow, D. H., Wulfmeyer, V., and Senff, C.: Measuring second- through fourth-order moments in noisy data, *Journal of Atmospheric and 25 Oceanic Technology*, 17, 1330–1347, [https://doi.org/10.1175/1520-0426\(2000\)017<1330:MSTFOM>2.0.CO;2](https://doi.org/10.1175/1520-0426(2000)017<1330:MSTFOM>2.0.CO;2), 2000.

Mahrt, L.: Boundary-layer moisture regimes, *Quarterly Journal of the Royal Meteorological Society*, 117, 151–176, <https://doi.org/10.1002/qj.49711749708>, <https://doi.org/10.1002/qj.49711749708>, 1991.

Mahrt, L.: Stably Stratified Atmospheric Boundary Layers, *Annual Review of Fluid Mechanics*, 46, 23–45, <https://doi.org/10.1146/annurev-fluid-010313-141354>, <http://www.annualreviews.org/doi/abs/10.1146/annurev-fluid-010313-141354>, 2014.

Mahrt, L. and Thomas, C. K.: Surface Stress with Non-stationary Weak Winds and Stable Stratification, *Boundary-Layer Meteorology*, 159, 3–21, <https://doi.org/10.1007/s10546-015-0111-z>, <https://doi.org/10.1007/s10546-015-0111-z>, 2016.

Mahrt, L. and Vickers, D.: Boundary-Layer Adjustment Over Small-Scale Changes of Surface Heat Flux, *Boundary-Layer Meteorology*, 116, 313–330, <https://doi.org/10.1007/s10546-004-1669-z>, <https://doi.org/10.1007/s10546-004-1669-z>, 2005.

Mahrt, L., Thomas, C. K., and Prueger, J. H.: Space–time structure of mesoscale motions in the stable boundary layer, *Quarterly Journal of 35 the Royal Meteorological Society*, 135, 67–75, <https://doi.org/10.1002/qj.348>, <https://doi.org/10.1002/qj.348>, 2009.

Mahrt, L., Sun, J., Oncley, S. P., and Horst, T. W.: Transient Cold Air Drainage down a Shallow Valley, *Journal of the Atmospheric Sciences*, 71, 2534–2544, <https://doi.org/10.1175/JAS-D-14-0010.1>, <https://doi.org/10.1175/JAS-D-14-0010.1>, 2014.

Mahrt, L., Pfister, L., and Thomas, C. K.: Small-Scale Variability in the Nocturnal Boundary Layer, *Boundary-Layer Meteorology*, <https://doi.org/10.1007/s10546-019-00476-x>, <https://doi.org/10.1007/s10546-019-00476-x>, 2019.

Mammarella, I., Launiainen, S., Gronholm, T., Keronen, P., Pumpanen, J., Rannik, U., and Vesala, T.: Relative Humidity Effect on the High-Frequency Attenuation of Water Vapor Flux Measured by a Closed-Path Eddy Covariance System, *Journal of Atmospheric and Oceanic Technology*, 26, 1856–1866, <https://doi.org/10.1175/2009JTECHA1179.1>, 2009.

Mauder, M., Cuntz, M., Druee, C., Graf, A., Rebmann, C., Schmid, H. P., Schmidt, M., and Steinbrecher, R.: A strategy for quality and uncertainty assessment of long-term eddy-covariance measurements, *Agricultural and Forest Meteorology*, 169, 122–135, <https://doi.org/10.1016/j.agrformet.2012.09.006>, 2013.

Mölder, M., Grelle, A., Lindroth, A., and Halldin, S.: Flux-profile relationships over a boreal forest — roughness sublayer corrections, *Agricultural and Forest Meteorology*, 98-99, 645–658, [https://doi.org/https://doi.org/10.1016/S0168-1923\(99\)00131-8](https://doi.org/https://doi.org/10.1016/S0168-1923(99)00131-8), <http://www.sciencedirect.com/science/article/pii/S0168192399001318>, 1999.

Montagnani, L., Grünwald, T., Kowalski, A., Mammarella, I., Merbold, L., Metzger, S., Sedlák, P., and Siebicke, L.: Estimating the storage term in eddy covariance measurements: the ICOS methodology, *International Agrophysics*, 32, 551–567, <https://doi.org/10.1515/intag-2017-0037>, <http://dx.doi.org/10.1515/intag-2017-0037>, 2018.

Nakai, T., Hiyama, T., Petrov, R. E., Kotani, A., Ohta, T., and Maximov, T. C.: Application of an open-path eddy covariance methane flux measurement system to a larch forest in eastern Siberia, *Agricultural and Forest Meteorology*, 282–283, 107 860, <https://doi.org/https://doi.org/10.1016/j.agrformet.2019.107860>, <http://www.sciencedirect.com/science/article/pii/S0168192319304769>, 2020.

Nemitz, E., Mammarella, I., Ibrom, A., Aurela, M., Burba, G., Dengel, S., Gielen, B., Grelle, A., Heinesch, B., Herbst, M., Hörtnagl, L., Klemedtsson, L., Lindroth, A., Lohila, A., McDermitt, D., Meier, P., Merbold, L., Nelson, D., Nicolini, G., Nilsson, M., Peltola, O., Rinne, J., and Zahniser, M.: Standardisation of eddy-covariance flux measurements of methane and nitrous oxide, *International Agrophysics*, 32, <https://doi.org/10.1515/intag-2017-0042>, 2018.

Newsom, R., Calhoun, R., Ligon, D., and Allwine, J.: Linearly Organized Turbulence Structures Observed Over a Suburban Area by Dual-Doppler Lidar, *Boundary-Layer Meteorology*, 127, 111–130, <https://doi.org/10.1007/s10546-007-9243-0>, <https://doi.org/10.1007/s10546-007-9243-0>, 2008.

Pahlow, M., Parlange, M. B., and Porté-Agel, F.: On Monin–Obukhov Similarity In The Stable Atmospheric Boundary Layer, *Boundary-Layer Meteorology*, 99, 225–248, <https://doi.org/10.1023/A:1018909000098>, <https://doi.org/10.1023/A:1018909000098>, 2001.

Patton, E. G., Horst, T. W., Sullivan, P. P., Lenschow, D. H., Oncley, S. P., Brown, W. O. J., Burns, S. P., Guenther, A. B., Held, A., Karl, T., Mayor, S. D., Rizzo, L. V., Spuler, S. M., Sun, J., Turnipseed, A. A., Allwine, E. J., Edburg, S. L., Lamb, B. K., Avissar, R., Calhoun, R. J., Kleissl, J., Massman, W. J., Paw U, K. T., and Weil, J. C.: The Canopy Horizontal Array Turbulence Study, *Bulletin of the American Meteorological Society*, 92, 593–611, <https://doi.org/10.1175/2010BAMS2614.1>, <https://doi.org/10.1175/2010BAMS2614.1>, 2010.

Patton, E. G., Sullivan, P. P., Shaw, R. H., Finnigan, J. J., and Weil, J. C.: Atmospheric Stability Influences on Coupled Boundary Layer and Canopy Turbulence, *Journal of the Atmospheric Sciences*, 73, 1621–1647, <https://doi.org/10.1175/JAS-D-15-0068.1>, <https://doi.org/10.1175/JAS-D-15-0068.1>, 2015.

Pearson, G., Davies, F., and Collier, C.: An Analysis of the Performance of the UFAM Pulsed Doppler Lidar for Observing the Boundary Layer, *Journal of Atmospheric and Oceanic Technology*, 26, 240–250, <https://doi.org/10.1175/2008JTECHA1128.1>, <https://doi.org/10.1175/2008JTECHA1128.1>, 2009.

Peltola, O., Hensen, A., Helfter, C., Belelli Marchesini, L., Bosveld, F. C., van den Bulk, W. C. M., Elbers, J. A., Haapanala, S., Holst, J., Laurila, T., Lindroth, A., Nemitz, E., Röckmann, T., Vermeulen, A. T., and Mammarella, I.: Evaluating the performance of commonly used gas analysers for methane eddy covariance flux measurements: the InGOS inter-comparison field experiment, *Biogeosciences*, 11, 3163–3186, <https://doi.org/10.5194/bg-11-3163-2014>, <http://www.biogeosciences.net/11/3163/2014/>, 2014.

5 Peltola, O., Lapo, K., Martinkauppi, I., O'Connor, E., Thomas, C. K., and Vesala, T.: Dataset for "Suitability of fiber-optic distributed temperature sensing to reveal mixing processes and higher-order moments at the forest- air interface", <https://doi.org/10.5281/zenodo.3822027>, <https://doi.org/10.5281/zenodo.3822027>, 2020.

Pfister, L., Sigmund, A., Olesch, J., and Thomas, C. K.: Nocturnal Near-Surface Temperature, but not Flow Dynamics, can be Predicted by Microtopography in a Mid-Range Mountain Valley, *Boundary-Layer Meteorology*, 165, 333–348, <https://doi.org/10.1007/s10546-017-0281-y>, <https://doi.org/10.1007/s10546-017-0281-y>, 2017.

10 Pfister, L., Lapo, K., Sayde, C., Selker, J., Mahrt, L., and Thomas, C. K.: Classifying the nocturnal atmospheric boundary layer into temperature and flow regimes, *Quarterly Journal of the Royal Meteorological Society*, 145, 1515–1534, <https://doi.org/10.1002/qj.3508>, <https://doi.org/10.1002/qj.3508>, 2019.

Poggi, D., Porporato, A., Ridolfi, L., Albertson, J. D., and Katul, G. G.: The Effect of Vegetation Density on Canopy Sub-Layer Turbulence, *Boundary-Layer Meteorology*, 111, 565–587, <https://doi.org/10.1023/B:BOUN.0000016576.05621.73>, <https://doi.org/10.1023/B:BOUN.0000016576.05621.73>, 2004.

15 Poulos, G. S., Blumen, W., Fritts, D. C., Lundquist, J. K., Sun, J., Burns, S. P., Nappo, C., Banta, R., Newsom, R., Cuxart, J., Terradellas, E., Balsley, B., and Jensen, M.: CASES-99: A Comprehensive Investigation of the Stable Nocturnal Boundary Layer, *Bulletin of the American Meteorological Society*, 83, 555–582, [https://doi.org/10.1175/1520-0477\(2002\)083<0555:CACIOT>2.3.CO;2](https://doi.org/10.1175/1520-0477(2002)083<0555:CACIOT>2.3.CO;2), [https://doi.org/10.1175/1520-0477\(2002\)083%3C0555:CACIOT%3E2.3.CO;2](https://doi.org/10.1175/1520-0477(2002)083%3C0555:CACIOT%3E2.3.CO;2), 2002.

20 Rannik, : On the surface layer similarity at a complex forest site, *Journal of Geophysical Research: Atmospheres*, 103, 8685–8697, <https://doi.org/10.1029/98JD00086>, <http://dx.doi.org/10.1029/98JD00086><http://onlinelibrary.wiley.com/store/10.1029/98JD00086/asset/jgrd5720.pdf?v=1&t=ih1q7hsr&s=703c9aae6ec8c9a09cb898dfd275f8299c980887>, 1998.

Rannik, , Peltola, O., and Mammarella, I.: Random uncertainties of flux measurements by the eddy covariance technique, *Atmospheric Measurement Techniques*, 9, 5163–5181, <https://doi.org/10.5194/amt-9-5163-2016>, 2016.

25 Raupach, M. R., Finnigan, J. J., and Brunei, Y.: Coherent eddies and turbulence in vegetation canopies: The mixing-layer analogy, *Boundary-Layer Meteorology*, 78, 351–382, <https://doi.org/10.1007/BF00120941>, <https://doi.org/10.1007/BF00120941>, 1996.

Rebmann, C., Aubinet, M., Schmid, H., Arriga, N., Aurela, M., Burba, G., Clement, R., De Ligne, A., Fratini, G., Gielen, B., Grace, J., Graf, A., Gross, P., Haapanala, S., Herbst, M., Hörtnagl, L., Ibrom, A., Joly, L., Kljun, N., Kolle, O., Kowalski, A., Lindroth, A., Loustau, D., 30 Mammarella, I., Mauder, M., Merbold, L., Metzger, S., Mölder, M., Montagnani, L., Papale, D., Pavelka, M., Peichl, M., Roland, M., Serrano-Ortiz, P., Siebicke, L., Steinbrecher, R., Tuovinen, J.-P., Vesala, T., Wohlfahrt, G., and Franz, D.: ICOS eddy covariance flux-station site setup: a review, *International Agrophysics*, 32, 471–494, <https://doi.org/10.1515/intag-2017-0044>, <http://dx.doi.org/10.1515/intag-2017-0044>, 2018.

Runkle, B. R. K., Wille, C., Gazovic, M., and Kutzbach, L.: Attenuation Correction Procedures for Water Vapour Fluxes from Closed-Path 35 Eddy-Covariance Systems, *Boundary-Layer Meteorology*, 142, 401–423, <https://doi.org/10.1007/s10546-011-9689-y>, 2012.

Sayde, C., Thomas, C. K., Wagner, J., and Selker, J.: High-resolution wind speed measurements using actively heated fiber optics, *Geophysical Research Letters*, 42, 10–64, <https://doi.org/10.1002/2015GL066729>, <http://dx.doi.org/10.1002/2015GL066729>, 2015.

Schilperoort, B., Coenders-Gerrits, M., Luxemburg, W., Jiménez Rodríguez, C., Cisneros Vaca, C., and Savenije, H.: Technical note: Using distributed temperature sensing for Bowen ratio evaporation measurements, *Hydrol. Earth Syst. Sci.*, 22, 819–830, <https://doi.org/10.5194/hess-22-819-2018>, <https://www.hydrol-earth-syst-sci.net/22/819/2018/>, 2018.

5 Schlegel, F., Stiller, J., Bienert, A., Maas, H.-G., Queck, R., and Bernhofer, C.: Large-Eddy Simulation Study of the Effects on Flow of a Heterogeneous Forest at Sub-Tree Resolution, *Boundary-Layer Meteorology*, 154, 27–56, <https://doi.org/10.1007/s10546-014-9962-y>, 2015.

Schotanus, P., Nieuwstadt, F. T. M., and Debruin, H. A. R.: Temperature-Measurement with a Sonic Anemometer and its Application to Heat and Moisture Fluxes, *Boundary-Layer Meteorology*, 26, 81–93, 1983.

10 Selker, J. S., Thévenaz, L., Huwald, H., Mallet, A., Luxemburg, W., van de Giesen, N., Stejskal, M., Zeman, J., Westhoff, M., and Parlange, M. B.: Distributed fiber-optic temperature sensing for hydrologic systems, *Water Resources Research*, 42, n/a–n/a, <https://doi.org/10.1029/2006WR005326>, <http://dx.doi.org/10.1029/2006WR005326>, 2006.

Serafimovich, A., Thomas, C., and Foken, T.: Vertical and Horizontal Transport of Energy and Matter by Coherent Motions in a Tall Spruce Canopy, *Boundary-Layer Meteorology*, 140, 429, <https://doi.org/10.1007/s10546-011-9619-z>, <https://doi.org/10.1007/s10546-011-9619-z>, 2011.

15 Sigmund, A., Pfister, L., Sayde, C., and Thomas, C. K.: Quantitative analysis of the radiation error for aerial coiled-fiber-optic distributed temperature sensing deployments using reinforcing fabric as support structure, *Atmos. Meas. Tech.*, 10, 2149–2162, <https://doi.org/10.5194/amt-10-2149-2017>, <https://www.atmos-meas-tech.net/10/2149/2017/>, 2017.

20 Sun, J., Nappo, C. J., Mahrt, L., Belušić, D., Grisogono, B., Stauffer, D. R., Pulido, M., Staquet, C., Jiang, Q., Pouquet, A., Yagüe, C., Galperin, B., Smith, R. B., Finnigan, J. J., Mayor, S. D., Svensson, G., Grachev, A. A., and Neff, W. D.: Review of wave-turbulence interactions in the stable atmospheric boundary layer, *Reviews of Geophysics*, 53, 956–993, <https://doi.org/10.1002/2015RG000487>, <http://dx.doi.org/10.1002/2015RG000487>, 2015.

Taylor, G. I.: The Spectrum of Turbulence, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 164, 476–490, <https://doi.org/10.1098/rspa.1938.0032>, <https://doi.org/10.1098/rspa.1938.0032>, 1938.

25 Thomas, C. and Foken, T.: Organised Motion in a Tall Spruce Canopy: Temporal Scales, Structure Spacing and Terrain Effects, *Boundary-Layer Meteorology*, 122, 123–147, <https://doi.org/10.1007/s10546-006-9087-z>, <https://doi.org/10.1007/s10546-006-9087-z>, 2007a.

Thomas, C. and Foken, T.: Flux contribution of coherent structures and its implications for the exchange of energy and matter in a tall spruce canopy, *Boundary-Layer Meteorology*, 123, 317–337, <https://doi.org/10.1007/s10546-006-9144-7>, <https://doi.org/10.1007/s10546-006-9144-7>, 2007b.

30 Thomas, C., Mayer, J.-C., Meixner, F. X., and Foken, T.: Analysis of Low-Frequency Turbulence Above Tall Vegetation Using a Doppler Sodar, *Boundary-Layer Meteorology*, 119, 563–587, <https://doi.org/10.1007/s10546-005-9038-0>, <https://doi.org/10.1007/s10546-005-9038-0>, 2006.

Thomas, C., Martin, J. G., Goeckede, M., Siqueira, M. B., Foken, T., Law, B. E., Loescher, H. W., and Katul, G.: Estimating daytime subcanopy respiration from conditional sampling methods applied to multi-scalar high frequency turbulence time series, *Agricultural and Forest Meteorology*, 148, 1210–1229, <https://doi.org/10.1016/j.agrformet.2008.03.002>, <http://www.sciencedirect.com/science/article/pii/S0168192308000737>, 2008.

Thomas, C. K.: Variability of Sub-Canopy Flow, Temperature, and Horizontal Advection in Moderately Complex Terrain, *Boundary-Layer Meteorology*, 139, 61–81, <https://doi.org/10.1007/s10546-010-9578-9>, <https://doi.org/10.1007/s10546-010-9578-9>, 2011.

Thomas, C. K., Kennedy, A. M., Selker, J. S., Moretti, A., Schroth, M. H., Smoot, A. R., Tufillaro, N. B., and Zeeman, M. J.: High-Resolution Fibre-Optic Temperature Sensing: A New Tool to Study the Two-Dimensional Structure of Atmospheric Surface-Layer Flow, *Boundary-Layer Meteorology*, 142, 177–192, <https://doi.org/10.1007/s10546-011-9672-7>, <http://dx.doi.org/10.1007/s10546-011-9672-7>, 2012.

TRÄUMNER, K., WIESER, A., RUCK, B., FRANK, C., RÖHNER, L., and KOTTMEIER, The suitability of Doppler lidar for characterizing the wind field above forest edges, *Forestry: An International Journal of Forest Research*, 85, 399–412, <https://doi.org/10.1093/forestry/cps038>, <https://doi.org/10.1093/forestry/cps038>, 2012.

Tyler, S. W., Selker, J. S., Hausner, M. B., Hatch, C. E., Torgersen, T., Thodal, C. E., and Schladow, S. G.: Environmental temperature sensing using Raman spectra DTS fiber-optic methods, *Water Resources Research*, 45, n/a–n/a, <https://doi.org/10.1029/2008WR007052>, <http://dx.doi.org/10.1029/2008WR007052>, 2009.

van de Boer, A., Moene, A. F., Graf, A., Schüttemeyer, D., and Simmer, C.: Detection of Entrainment Influences on Surface-Layer Measurements and Extension of Monin–Obukhov Similarity Theory, *Boundary-Layer Meteorology*, 152, 19–44, <https://doi.org/10.1007/s10546-014-9920-8>, <https://doi.org/10.1007/s10546-014-9920-8>, 2014.

van de Giesen, N., Steele-Dunne, S. C., Jansen, J., Hoes, O., Hausner, M. B., Tyler, S., and Selker, J.: Double-ended calibration of fiber-optic Raman spectra distributed temperature sensing data, *Sensors (Basel, Switzerland)*, 12, 5471–5485, <https://doi.org/10.3390/s120505471>, <https://www.ncbi.nlm.nih.gov/pubmed/22778596><https://www.ncbi.nlm.nih.gov/pmc/articles/PMC3386695/>, 2012.

Vercauteren, N., Mahrt, L., and Klein, R.: Investigation of interactions between scales of motion in the stable boundary layer, *Quarterly Journal of the Royal Meteorological Society*, 142, 2424–2433, <https://doi.org/10.1002/qj.2835>, <http://dx.doi.org/10.1002/qj.2835>, 2016.

Vickers, D. and Thomas, C. K.: Observations of the scale-dependent turbulence and evaluation of the flux–gradient relationship for sensible heat for a closed Douglas-fir canopy in very weak wind conditions, *Atmos. Chem. Phys.*, 14, 9665–9676, <https://doi.org/10.5194/acp-14-9665-2014>, <https://www.atmos-chem-phys.net/14/9665/2014/><https://www.atmos-chem-phys.net/14/9665/2014/acp-14-9665-2014.pdf>, 2014.

Wilczak, J. M., Oncley, S. P., and Stage, S. A.: Sonic Anemometer Tilt Correction Algorithms, *Boundary-Layer Meteorology*, 99, 127–150, <https://doi.org/10.1023/A:1018966204465>, <http://dx.doi.org/10.1023/A%3A1018966204465>, 2001.

Zeeman, M. J., Selker, J. S., and Thomas, C. K.: Near-Surface Motion in the Nocturnal, Stable Boundary Layer Observed with Fibre-Optic Distributed Temperature Sensing, *Boundary-Layer Meteorology*, 154, 189–205, <https://doi.org/10.1007/s10546-014-9972-9>, <http://dx.doi.org/10.1007/s10546-014-9972-9>, 2015.