

Thank you to the Reviewers for providing constructive and thoughtful feedback, which have helped us to improve the manuscript. Our point-by-point responses are provided below in blue text following each of the Reviewer's comments, reproduced in black.

## **Review 1 Comments (RC1)**

This manuscript describes and analyzes results from the De-Icing Comparison Experiment (D-ICE), which aims to provide information to mitigate the long-lasting issue of radiation measurements in polar regions, ice on sensor domes. By comparing 20 pyranometers and 5 pyrgeometers side-by-side during one cold season of the Arctic, the authors present biases in shortwave and longwave radiation measurements caused by icing under different environmental conditions and find that ventilation alone is an effective way to mitigate the issue. They further explain the physical processes of how ventilation reduces icing and provide “the best estimates” (icing free) of radiation measurements for developing quality control procedures to improve retrospective data. The experiment design is appropriate; the findings are novel and practical; the flow and languages are clear. I recommend publishing on AMT with minor revisions.

Line 102: semi-colon → colon?

We replaced the semi-colon with a comma and split the statement into two sentences.

Line 104: it is not clear if “The operational stations” refer to D-ICE stations or ARM stations or all stations used in this study.

We refer to the radiometric stations at NOAA-GML (BSRN), ARM-NSA, and ARM-OLI, which are similarly configured. We have clarified this in the text.

Line 193: Did you guys try any machine learning methods to help detect icing situations?

We considered machine learning and prior to carrying out the manual classifications we discussed the possibility with a machine learning expert at a DoE Atmospheric Systems Research (ASR) conference. In the end we decided not to attempt to implement it out of concern for a large number of potential false positives and negatives due to irregularity in the shape and texture of ice in the images. Additionally, the size of the training set would have likely been similar in size to the base data set of images.

Line 226: repeating section numbering

Thank you for identifying this error. We have corrected it.

Line 291: why the latter data set is “verifiably ice-free”?

These were the data that were monitored directly using the cameras and were visually verified as ice-free as described in Section 2.3.1. We have clarified the text.

Line 297: it is not clear whether this “1σ” is over time or over different instruments

It is the latter. We have clarified this in the text.

Line 309: “When this occurs” meaning  $> 1$  cm or  $\leq 1$  cm?

It is the latter. We have clarified this in the text.

Line 319 and 320: panel a → Panel a; panel b → Panel b

Based on AMT's author guide, we think the change actually needs to be panel a → panel (a); panel b → panel (b). We have made this change, as well as similar changes elsewhere in the text.

Line 320: it shows 14-15 April in Fig. 4. Which is it?

Thank you for catching this error. It is 14-15. We have corrected the text.

Line 378: it would be nice to have a mini-summary of shortwave biases here, something similar to Line 344-345 in the longwave section

We have added the following sentence at the end of the section: "These cases demonstrate that errors from ice in SWD can be large and that the sign of the bias is dependent on the amount of coverage of ice on the pyranometer dome, as well as the presence, and likely also the angle, of irradiance from the direct beam."

S1: Since some of the sensors are heated, will this extra heat affect the longwave measurements of surrounding sensors?

We concede that we cannot rule out this possibility. However, as described in section 2.1, the orientation and layout of the instruments was designed so that each instrument was exposed to the predominant winds. We expanded this discussion including specific reference to the wind direction, citing an earlier study we conducted that reported on those winds.

S1: Does icing ever occur on the camera lenses? How often? How much could it affect your results?

It can, but rarely. We designed the camera installation to minimize this problem and were successful. In section 2.1 we state that "All systems on the D-ICE table were monitored using three 720p low-light (0.1 lux) cameras in heated enclosures. ... They were installed facing west (away from the predominant wind direction). ... The cameras were functional and unobscured by ice for 97.6% of the campaign." Indeed, only a portion of the small amount of downtime is attributable to ice, while the rest was due to a power outage.

S1: the color of model details (shortwave as blue and longwave as red). The number 17 is red but the 17th model name is blue.

Thank you for point this out. There were actually two other similar color-coding errors. We made the corrections.

S2: To confirm, is there any human interference other than in Jan 2018?

We reviewed our notes and found several additional instances of minor modifications, which we have added to S2:

October 13: added putty to radiometer 6 and 8

October 26: removed intake screens from 2-5, 15-17, 12-14

February 8: repaired fan at #14 20:54Z

March 20: instrument levels checked and corrected

We have also explicitly noted (in text) the relevant dates when ice was cleaned from radiometers that was discussed generally in Section 2.1.

## Review 2 Comments (RC2)

### General comments:

The manuscript presents results from “The De-Icing Comparison Experiment” (D-ICE) which was conducted from August 2017 to July 2018 at the NOAA Atmospheric Baseline Observatory in Utqiagvik, Alaska (71.3°N). In addition, data from the DoE ARM NSA (also Utqiagvik) and Oliktok Point (250 km east of Utqiagvik) sites were used. Main objective was to study existing ventilation and heating technologies developed to mitigate radiometer icing. D-ICE comprised 20 pyranometers and 5 pyrgeometers operating in ventilator housings from various vendors alongside operational systems such as BSRN and ARM. Ventilator/heater performance was high with an average ice mitigation at 77% and many being 90 % effective or even better. In addition, a record of ice- free radiative fluxes was compiled. This data set was used to quantify short- and long-term biases in iced sensors. While biases in instantaneous 1-minute records can be up to +60 and -211 to +188 Wm<sup>-2</sup> for long-wave and shortwave fluxes, respectively, the corresponding biases in the monthly means were substantially smaller at less than approximately 2 Wm<sup>-2</sup> except for some few systems with insufficient ice mitigation. Finally, observed ice mitigation processes were verified in the laboratory: ventilators without heaters were postulated to be effective by providing heat through waste energy from the fan and adiabatic heating.

The Earth's radiation fluxes play a fundamental role in the climate system, thus accurate ground based observations of shortwave and longwave radiative fluxes are essential for long term monitoring and validation of corresponding satellite products and climate model outputs. Therefore, such experiments are of great importance. D-ICE is an impressive and comprehensive experiment, conducted and documented very carefully. It is unique with respect to its extent providing very useful and novel results.

The manuscript is very well structured and clearly written. The literature has been selected and cited carefully. Graphics and tables are clear and the captions self-explanatory. This work is a very interesting and a valuable contribution to the atmospheric science community and is in my opinion absolutely suited for publication in AMT. I recommend publishing with minor revisions and/or technical corrections.

### Specific comments:

The heater in the 480 unit from Eigenbrodt is operated at 25 W. I expect a substantial warming of the radiometer's body as shown in Fig.1a (on the next page). While the long-wave irradiance is interestingly not necessarily affected (Fig. 1b), the overheating reduces the stability of the pyranometer measurements considerably (see Fig.2). Thus, a high power heating system may boost ice mitigation but it can affect the observations negatively. Did you also observe higher case temperatures of systems operated at 15 W or higher with respect to heaters running at 10 W?

Your question is important and we recognize this issue. It was in fact one of our motivations, though we approached the problem differently beginning with the hypothesis put forward by the

BSRN working group that “aspiration of ambient air without additional heat is sufficient to mitigate ice”. Because the experimental design was built around explaining how this could be achieved, the D-ICE data have limited potential for studying the negative effects of heating. The campaign did not feature enough configurations of heaters using the same models of ventilator and radiometer, and most systems housed pyranometers, many of which do not have case thermistors. As it were, the nighttime offsets (and so the signal we would be looking for) observed during D-ICE were small, in part due to the models of pyranometers, as well as environmental conditions (like frequent cloud cover) and happenstance. We concluded that “...while heating elements were found to be effective, they are not required for successful ice mitigation” alongside details explaining this observation.

Some technical corrections:

- Line 310: add ‘with respect to windowless long-wave radiometers’

We have added this phrase to the text.

- Line 320: SWD on 13-14 April (but the x-axis of the figure is labelled as 14-15 April)

Thank you for pointing this out. The figure is correct. We have changed the text.

- Line 383: aggregate means  $\diamond$  mean of all sensors? BE product?

Yes, it is the composite mean of the mean errors from the individual sensors. The calculation is relative to the BE product. We have added clarity to the text.

- Line 459: Another reasonable explanation would be a different fan speed. However, fan speed was apparently monitored at D-ICE as pointed out later in line 542. You may place this statement already here.

The statements at line 542 are specific to the Eppley VEN experiments, but we agree that they apply also here. Based on your suggestion, we reviewed the fan speed data from the ventilators discussed at line 459 and we found that the fan speeds agreed with one another within about 1% for the duration of the experiment, though interestingly they were about 7% lower than the same fans in KZ ventilators housing pyrgeometers for most of the winter into the spring. Your suggestion was a good one but does not appear to be the explanation so we have not made changes to the text. Notably, the conclusions from section 4.2 (Fig 9c) indicate that small differences in fan speed – assuming these differences are expressions of variability in fan efficiency – actually do not necessarily cause much net difference in dome heating, but rather exchange the source of the heating between adiabatic heating and waste heat.

- Line 898 (Caption of Fig. 6): Panel a, c represent LWD (not SWD) and panel b, d SWD (not LWD). Even though the dots in panels c, d may be inferred intuitively from the respective panels a, b, a legend in panels c, d might be helpful to identify the sensors with higher biases highlighted in panels a, b.

Thank you for identifying this error, which we have corrected. After consideration of your suggestion for additional labeling, we have decided that we prefer it as is because we cannot think of a way to do this without making the graphic very busy and, as you say, it would not add any new information to the figure.

### Review 3 Comments (RC3)

This is a review of Cox et al., "The De-Icing Comparison Experiment (D-ICE): A study of broadband radiometric measurements under icing conditions in the Arctic." The authors present a study of the effects of the accumulation of various types of ice (snow, frost or rime) on radiometer domes and of the performance of distinct mitigation systems designed to remove or prevent ice accumulation via ventilation and/or heating. The topic is appropriate AMT.

The study is well-organized and the presentation is clear and well-written. The results are likely to be of significant value to the radiometric measurement community. They will be of use in shaping the selection and design of instruments for future field projects and in quantifying uncertainties in measurements from instruments currently in use. I am suggesting only a few minor revisions to help with clarity.

Lines 26-27: It's not clear what "mitigating 77%" and "90+% effective" mean, given the limited details available in the abstract. Could these be expressed more concretely here?

We have clarified the statement, which now reads as follows: "Ventilator and ventilator/heater performance overall was skilful with the average of the systems mitigating ice formation 77% (many > 90%) of the time during which icing conditions were present."

Lines 34-36: Could you clarify here whether this is for both shortwave and longwave fluxes?

Yes, we added "in both the shortwave and longwave."

Line 100: Is there a need here to explain briefly what is meant by "global" downwelling shortwave flux?

Yes, we have clarified the jargon.

Line 170-171: What is meant by "rime or frost was observed to be present in the vicinity of the D-ICE systems"? This and the associated paragraph are a bit unclear. In particular, what is meant by "sublimation period" and by "duration of the presence of ice"? Does this mean ice on the radiometer domes, or ice evident elsewhere?

In Section 2.2 we are characterizing the natural icing events that were observed and so we are referring to ice appearing on surfaces other than the domes. We have added an introductory sentence at the beginning of the section to clarify. We have also clarified this again in the first sentence of the section's second paragraph. When ice is present, it may be developing (e.g., deposition) or disappearing (sublimation since the temperatures were almost always below freezing). We referred to the latter condition as a "sublimation period", but there really is no reason to define such a term since it is only used once. Therefore, we have replaced the term with a descriptive statement, "portion of time the ice was present and sublimating". We have also added clarity to the statement of duration as "... duration of presence of ice on surfaces surrounding the experiment."

Lines 285-286: Note that in ARM parlance, "NSA" encompasses both BRW and OLI. Are the included NSA radiometers at BRW?

You are correct that "north slope Alaska" is a definition that encompasses the broader area. Unfortunately, the term "NSA" as used by the ARM community has become ambiguous during

the development of the ARM observatories at Barrow, Atqasuk, and Oliktok. Atqasuk and Barrow for example are designated the C1 and C2 facilities of NSA (with E\* subsites), but the addition of Oliktok in 2013 did not create a C3 NSA facility. Rather, ARM considers Oliktok to be a separate deployment, in part because of the fact that it is a mobile facility (AMF-3) and not a permanent installation. We have spoken with the site scientist for Oliktok, who has confirmed that while NSA refers to Barrow and surrounding, OLI is separate. Our choice of NSA and OLI as reference identifiers is consistent with the file naming conventions used in ARM's data streams that we analyze (Atqasuk = atq and Barrow = nsa), which we believe is convenient for readers or those who want to have a look at the data themselves. We agree that the conventions can be confusing but we were explicit in the geographical descriptions at the top of Section 2.1 where we define our use of initialisms. We would prefer to keep these conventions.

Line 300: No relationship was observed between "the number of radiometers included in estimated uncertainty" and what?

A limitation of the uncertainty calculation is that removal of data during quality control screening means that at some times fewer measurements are available for the calculation than at other times. We were concerned that this could affect the robustness of the metric. We found that the calculated uncertainty is uncorrelated with the number of values that were used to calculate it, which is evidence that our concern was not significantly impactful. We have rewritten the statement in a way that we hope is clearer.

Line 352: This goes back to my question about "sublimation period" for Lines 170-171. As far as I can determine, this is the first use of the term "deposition period." It would be helpful to clearly define this and "sublimation period" earlier in the paper.

As before, there is no reason for us to define such a term since it is only used once so we have replaced it with a descriptive statement, "...time during which the frost was observed to be growing through deposition."

Line 422 and elsewhere: Ditto my earlier comment re. "NSA" vs. "BRW" vs. "OLI".  
Please refer to our response to the earlier comment.

Line 425: So is  $t_{\text{icing}}$  the same as the length of the "deposition period"? Maybe try to standardize a bit (e.g., "icing period" instead of "deposition period").

No,  $t_{\text{icing}}$  is the "amount of time icing conditions occurred", which would be the total length of time of deposition followed by sublimation. The distinction is not important for  $t_{\text{icing}}$  and since the confusing terms "sublimation/deposition period" have already been removed from the text, we have not made any additional changes with respect to this comment.

Line 476: "When outside of the ventilator", this means when the \*fan\* is operated outside of a ventilator?

Correct. We have clarified the statement.

Lines 499-508: It would be interesting to see the results of a similar experiment but with the flow direction of the fan reversed. There would be no fan waste heat warming the air flowing over the dome and no adiabatic compression effects near the dome.

This is an excellent suggestion! We would like to try this right now if it weren't for the fact that COVID-19 protocols prevent us from accessing the lab. In thinking about it, we suspect there might actually be adiabatic processes occurring within the ventilator chamber because the air pressure within the chamber would likely be lowered by the action of the fan. This would cause some cooling that could affect the case. It is less clear what would happen at the dome because the air flow around the dome with air being drawn in instead of forced out of the vent would probably follow a different path.

Line 529: Should this be "specific volume \*at\* the total pressure"?

Yes, something is amiss. It should be "...specific volume *of the air at* total pressure...". We have made this change.

Line 560-561: Maybe be more specific than "amount of ice", since this could be confused with mass of deposited ice.

Yes, this was ambiguous. We have added clarity to the text.



# The De-Icing Comparison Experiment (D-ICE): A study of broadband radiometric measurements under icing conditions in the Arctic

Christopher J. Cox<sup>1</sup>, Sara M. Morris<sup>1</sup>, Taneil Uttal<sup>1</sup>, Ross Burgener<sup>2</sup>, Emiel Hall<sup>2,3,4</sup>, Mark Kutchenreiter<sup>5</sup>, Allison McComiskey<sup>6</sup>, Charles N. Long<sup>2,3,4,\*</sup>, Bryan D. Thomas<sup>2</sup>, and James Wendell<sup>2</sup>

<sup>1</sup>NOAA Physical Sciences Laboratory (PSL), Boulder, Colorado, 80305, USA

<sup>2</sup>NOAA Global Monitoring Laboratory (GML), Boulder, Colorado, 80305, USA

<sup>3</sup>Cooperative Institute for Research in Environmental Sciences (CIRES), Boulder, Colorado, 80305, USA

<sup>4</sup>University of Colorado, Boulder, Colorado, 80305, USA

<sup>5</sup>National Renewable Energy Laboratory (NREL), Golden, Colorado, 80401, USA

<sup>6</sup>Brookhaven National Laboratory (BNL), Upton, New York, 11973, USA

\*retired, deceased

**Correspondence:** Christopher J. Cox (christopher.j.cox@noaa.gov)

**Abstract.** Surface-based measurements of broadband shortwave (solar) and longwave (infrared) radiative fluxes using thermopile radiometers are made regularly around the globe for scientific and operational environmental monitoring. The occurrence of ice on sensor windows in cold environments – whether snow, rime, or frost – is a common problem that is difficult to prevent as well as difficult to correct in post-processing. The Baseline Surface Radiation Network (BSRN) community recognizes radiometer icing as a major outstanding measurement uncertainty. Towards constraining this uncertainty, the De-Icing Comparison Experiment (D-ICE) was carried out at the NOAA Atmospheric Baseline Observatory in Utqiagvik (formerly Barrow), Alaska, from August 2017 to July 2018. The purpose of D-ICE was to evaluate existing ventilation and heating technologies developed to mitigate radiometer icing. D-ICE consisted of 20 pyranometers and 5 pyrgeometers operating in various ventilator housings alongside operational systems that are part of NOAA’s Barrow BSRN station and the U.S. Dept. of Energy Atmospheric Radiation Measurement (ARM) Program North Slope of Alaska and Oliktok Point observatories. To detect icing, radiometers were monitored continuously using cameras, with a total of more than 1 million images of radiometer domes archived. Ventilator and ventilator/heater performance overall was skilful with the average of the systems mitigating ice formation 77% (many > 90%) of the time during which icing conditions were present. Ventilators without heating elements were also effective and capable of providing heat through roughly equal contributions of waste energy from the ventilator fan and adiabatic heating downstream of the fan. This provided ~0.6 C of warming, enough to subsaturate the air up to a relative humidity (w.r.t. ice) of ~105%. Because the mitigation technologies performed well, a near complete record of verified ice-free radiometric fluxes were assembled for the duration of the campaign. This well-characterized data set is suitable for model evaluation, in particular for the Year of Polar Prediction (YOPP) first Special Observing Period (SOP1). We used the data set to calculate short- and long-term biases in iced sensors, finding that biases can

Deleted:

Deleted: icing

Deleted: and many being 90+% effective



be up to  $+60 \text{ W m}^{-2}$  (longwave) and  $-211$  to  $+188 \text{ W m}^{-2}$  (shortwave). However, because of the frequency of icing, mitigation of ice by ventilators, cloud conditions, and the timing of icing relative to available sunlight, the biases in the monthly means were generally less than the aggregate uncertainty attributed to other conventional sources in both the shortwave and longwave.

Deleted: .

## 1. Introduction

Radiative fluxes are fundamental environmental observations made regularly from the earth's surface using thermopile radiometers. In cold climates, ice from vapor deposition (frost), contact freezing of supercooled droplets (rime) and accumulation of snow are all commonly observed by station personnel to obscure sensors and manual cleaning of sensor domes is a routine activity. Icing is the source of one of the least constrained, outstanding uncertainties in broadband radiometry in cold climates. For radiometers mounted facing upwards, ice generally increases the measured longwave downwelling (LWD) flux because the brightness temperature of the contaminating ice is typically larger than that of the sky. The relatively cold background of the sky also facilitates radiative cooling of the sensor window, which exacerbates icing relative to instruments pointed towards the ground. Biases can be both negative or positive in affected shortwave downwelling (SWD) fluxes by attenuation or scattering of incident light, respectively. The magnitude of the instantaneous errors has been reported to be up to  $80 \text{ W m}^{-2}$  in LWD (Persson et al., 2018) and more than  $100 \text{ W m}^{-2}$  in SWD (van den Broke et al., 2004; Matsui et al., 2013). Despite these large biases, post-processing of data is hampered by the fact that the signal from data contaminated by ice is difficult to distinguish from the signal caused by clouds. This is particularly problematic for LWD (Lanconelli et al., 2011). Since icing occurs under specific meteorological conditions, even if affected data are successfully removed, the lost data constitutes a climatological bias in the record. Therefore, the standard procedure of daily cleaning (McArthur, 2005) is insufficient and it is sometimes necessary to fill data gaps caused by icing with surrogate values (e.g., Persson et al., 2018). It is desirable to identify a solution that prevents the formation of ice in the first place as well as to quantify the biases in contaminated measurements to advance interpretation of data already collected.

Recognition of the problem and mitigation attempts have been reported since the earliest era of polar radiometric observations more than five decades ago (e.g., Koerner et al., 1963). Since then, engineering solutions have been pursued by research institutes and industry, largely independently and in parallel. In practice, because the nature of the measurement is sensitive to thermal instabilities within the instruments (e.g., Michalsky et al., 2017), the application of heat as an ice-mitigation technique has limitations. While progress has been made, to this day there is still no agreed-upon approach. The needs of the scientific community also increasingly require high-quality measurements from stations capable of being autonomous for weeks or months at a time. Thus, an automated, low-power solution to the icing problem is sorely needed.

The Baseline Surface Radiation Network (BSRN) (Ohmura et al., 1998; Driemel et al., 2018), under the auspices of the World Meteorological Organization (WMO), is a global network for surface-based radiometric observations; the BSRN is traceable to the world calibration standard, managed using commonly adopted practices and is strategically distributed for global coverage. There are six current and former BSRN stations in the Arctic, three in Antarctica and numerous stations at

lower latitudes that are located at high elevations and/or experience icing conditions seasonally. In 2008, BSRN established the Cold Climates Issues Working Group (CCIWG) to address uncertainties in cold regions, including icing (Lanconelli et al., 2011). Several BSRN stations affected by icing have reported increased data capture rates using ventilators, including the 75 Sonnblick station in the Austrian Alps (Weisser, 2016) and the Georg von Neumayer station in Antarctica (BSRN, 2016). The U.S. Department of Energy (DoE) Atmospheric Radiation Measurement (ARM) Program North Slope of Alaska Radiometer Campaign also reported that high-flow ventilation was a useful technique, but that ice mitigation was further improved when the air was also heated (BSRN, 2012). A consensus in BSRN thus emerged that heating and ventilation are capable of mitigating ice, but the effectiveness and uncertainties remained poorly quantified and the range of experiences reported by 80 BSRN users indicated that more work was needed to constrain the attributes of effective designs (BSRN, 2016).

To address these objectives, the NOAA Physical Sciences Laboratory (PSL) in partnership with the BSRN-CCIWG and NOAA Global Monitoring Laboratory (GML) carried out the De-Icing Comparison Experiment (D-ICE) to collect data suitable for assessing the influence of icing on the measurements and evaluating the status of ice-mitigation technology. D-ICE was deployed at the GML Barrow Atmospheric Baseline Observatory near Utqiagvik, Alaska, from August 2017 through 85 June 2018. This location was chosen because a variety of icing conditions characteristic of high latitudes regularly occur there and it is home to two long-term operational stations, one BSRN (NOAA-GML) the other DoE-ARM. D-ICE collected new data at the NOAA observatory using a variety of radiometers and housings that have been developed to mitigate the formation of ice or are used in icing environments. The systems were contributed by academic and government research institutions as well as development departments of commercial radiometer vendors and were installed alongside the existing operational 90 suites. The systems were monitored continuously using cameras for the duration of the campaign.

In this manuscript, we describe D-ICE and associated data sets, which are available for future analyses. These data sets include a 10-15 minute resolution classification of the icing status of instruments, quality-controlled versions of the radiometric data with occurrences of icing retained and rejected (Cox, 2020a), and a verified ice-free “best-estimate” baseline (Cox, 2020b) for comparison produced by the aggregate of the quality-controlled data. We use these data sets to analyse 95 instantaneous and time-averaged biases caused by ice, to calculate ice-mitigation performance statistics for the participating systems, to discern some of the reasons for successful ice mitigation, and to gather insight for interpretation of ice-contaminated data.

## 2. Campaign

### 2.1. Experimental Design

D-ICE solicited contributions of radiometric ice-mitigation systems developed by research institutions and industry manufacturers to be part of the campaign. In total, 26 systems were included, 21 housing pyranometers (measuring “global” 105 [hemispheric diffuse + direct] SWD) and 5 housing pyrgeometers (measuring LWD). In addition to the Utqiagvik BSRN

station, D-ICE collaborated with the two other operational stations, the DoE-ARM North Slope of Alaska (NSA) site located at Utqiagvik ~150 m west of the BSRN station, and the DoE-ARM Oliktok Point (OLI) site located 250 km to the east. Data collected at these stations formed a partner campaign termed the D-ICE ARM Component (DICEXACO, Cox et al. 2019). The operational radiometric stations at the three observatories include global unshaded SWD, shaded LWD, and diffuse (DIF) and direct (DIR) shortwave components using a shaded pyranometer and a pyrheliometer, respectively, mounted to a solar tracker. The focus of D-ICE was on upward-facing pyrometers and pyranometers. Pyrheliometer performance is not considered here, but a separate analysis was completed by DoE-ARM (Steufer et al. 2019).

The ice-mitigation strategy used by all contributors was some combination of heating and ventilation, in some cases supplied by separate housings in which radiometers were set and in others integrated into the instruments themselves. This consistency in approach is not surprising. Though other methods have been proposed, such as automated alcohol rinses (e.g., Persson and Semmer, 2010), the use of ventilators for controlling ice is pragmatic because ventilation is already regularly used for maintaining thermal homogeneity in the instrument. However, no specific criteria were given to potential contributors and D-ICE set up each system as instructed. Several sets of redundant housings were used with different radiometers or with only small modifications (see S1). All systems were powered using 12 or 24 VDC except for one 48 VAC heater. All fans were powered by DC, which is less prone to propagation of added uncertainty into the signal (Michalsky et al., 2017), in particular from infrared loss in pyranometers (Dutton et al., 2001).

The instruments were installed on the east end of the GML observatory roof in a single line along a 4.9 m table positioned perpendicular to the predominant wind direction (Figure 1a) near the BSRN tracker. The purpose of this orientation was to reduce the possibility of instruments being influenced by heat produced from neighbouring systems, taking advantage of dominant easterlies characteristic of the site (e.g., Cox et al., 2012). The table was constructed from aluminium with a top consisting of fiberglass resin to electrically isolate the systems. The BSRN global pyranometer was positioned on this table. Refer to S1 for a complete record of system specifications and S2 for a list of modifications made during the course of the campaign. Individual radiometers are referenced in the text by their serial number and the ventilators by their model number. The positions of the systems are displayed in Figure 1b, labelled with numbers that are referenced where appropriate and cross-referenced in S1.

D-ICE data were collected using four Campbell Scientific CR1000 data loggers in individual logger boxes; most systems were analog, but data was also logged digitally from seven sensors. Fan speeds and heating current were logged whenever possible. All data were recorded as one-minute averages of 1 Hz sampling except for the digital systems, which were switched to 0.5 Hz sampling on 26 October 2017 because lags that occurred in digital communications at temperatures below -10 C caused occasional missed scans. One-minute averages of wind speed and direction (Lufft 2d sonic), temperature (RTD) and relative humidity (Vaisala HMP155) were also recorded at the north end of the table (Figure 1b) to document localized meteorological conditions complementary to that recorded routinely by NOAA-GML from a nearby tower.

Before deployment in June 2017, the radiometers were calibrated at the NOAA-GML calibration facility in Boulder, Colorado. Per standard procedures, the calibration data were collected without use of the ventilators, but did use the same data

Deleted: ;

Deleted: ;

acquisition system that was later deployed. The digital systems were also included in this procedure for comparison, but were not assigned new calibration coefficients because it is impractical to do so. The pre- and post-campaign calibrations (S3) were found to be within uncertainty for all instruments. The pre-campaign calibration values determined by NOAA-GML are used in the processing of the final data set.

All systems on the D-ICE table were monitored using three 720p low-light (0.1 lux) cameras in heated enclosures. The cameras recorded images every 15 minutes and were set up such that each captured approximately one third of the table. They were installed facing west (away from the predominant wind direction). Two 18 W LED flood lights were fixed to poles to illuminate the table for the cameras. The lights were automatic and only on during low-light conditions. The cameras were functional and unobscured by ice for 97.6% of the campaign. ARM also installed cameras facing the trackers at OLI and NSA with 10 min sampling.

The BSRN and ARM operational systems received their routine daily maintenance procedures. Daily cleaning is performed to remove contaminants such as dust and salt residues, but also ice. Since one of the objectives of D-ICE was to monitor icing it was important to allow icing events to unfold naturally. Therefore, the D-ICE radiometers were cleaned daily only when there was no ice present. Infrequently, in cases when ice persisted on a particular radiometer long after the end of an event, the ice was removed. These dates were 24 October; 14, 22, 25, 29 (#1) January; 7 February; 14, 27 March (#10). Interestingly, we found that icing can be induced by the very maintenance procedures that are designed to remove it. The use of alcohol (such as ethanol) to clean the domes is common practice and was documented during tests at D-ICE to sometimes result in immediate re-icing of the dome. The precise reasons for this are not known, but it is likely a combination of refreezing meltwater from the ice that is residual, being slower to evaporate than the alcohol, and/or atmospheric vapor deposition induced by cooling of the dome from the evaporative process. Complete drying of the dome after cleaning was found to reduce this problem.

## 2.2. Icing conditions during D-ICE

In this section we characterize the natural icing events that occurred in the environment surrounding the D-ICE systems to set the context for the types and frequency of icing events to which the ice mitigation systems were subjected. During August and September, the temperatures were persistently above freezing with occasional light snow and frequent rain (Figure 1c). Significant icing was not observed until a prolonged cold period after 22 October, with only brief frosts prior on 28 September and 10 October. Warm temperatures and rain returned during the first week of November and more winter-like conditions prevailed only in the second half of the month. Autumn 2017 experienced record late freezing of the Beaufort and Chukchi Seas (Overland and Wang, 2018), with freezing beginning in earnest north of Utqiagvik in late November. Because of the predominant onshore flow at Utqiagvik, autumn temperatures there remain near-freezing until after the sea ice isolates the supply of heat from the ocean (Wendler et al., 2014; Cox et al., 2017) and the onset of snowpack is subsequently delayed

Deleted: and recorded in the logbook

Deleted: .

Deleted: .

in late freeze-up years (Cox et al., 2017). These conditions may have also contributed to the delay in the start of the 2017 icing season.

During the winter, both rime (usually from freezing fog) and frost were regularly observed in the environment surrounding the D-ICE systems (distinguished qualitatively from the images), spanning at total of 28.8 and 66.3 days, respectively. Frost events were more common, being identified 108 times compared to 11 rime events, but the duration of individual rime events was longer. The mean duration of frost events was 0.61 ( $\pm$  0.69) days and the mean duration of rime events was 2.6 ( $\pm$  2.2) days. Diurnal (morning) frosts were commonly observed during spring.

During the campaign, 34.9% of the time that rime or frost was observed to be present in the vicinity of the D-ICE systems, the station meteorology indicated that the relative humidity with respect to ice (RHI) was  $< 100\%$ . Note that this calculation is sensitive to the determination of the “end” of an icing event, which in practice was found subjectively using the camera images, and is therefore uncertain (refer to Section 2.3.4). Nevertheless, this implies that the portion of time the ice was present and sublimating was approximately 1/3 of the duration of presence of ice on surfaces surrounding the experiment.

This period was longer for frost (41.6%) than rime (14.1%), which is surprising because riming events were generally observed with a thicker coating of ice than frost, but may be explained by the fact that rime events were much more persistent than frost. Conversely, 15% of the time during which no icing was observed the RHI exceeded 100%. Thus, RHI alone was not a reliable proxy for the presence or absence of icing.

## 2.3. Data Processing

Here we describe the processing of the data streams, beginning with review and classification of the images in 2.3.1 and then the radiometric data in 2.3.2, summarized in Table 1. The processed data streams were then used to produce a best-estimate (“BE”) data set that is the average of the calibrated, bias-corrected, ice-free and quality controlled data streams in 2.2.3, from which uncertainties are derived in 2.3.4. A second iced-estimate data set was also made that received all of the same treatment except that occurrences of icing were retained for analysis.

### 2.3.1. Processing of the D-ICE images

The images captured approximately 780,000 views of the D-ICE radiometer domes with an additional 143,000 and 125,000 views captured by ARM at NSA and OLI, respectively. Images were captured of the BSRN global pyranometer and all 25 D-ICE radiometers, but not the instruments mounted on the BSRN tracker. At NSA and OLI, images of the global SWD, DIF and LWD tracker radiometers were captured, but only limited images of the pyrhemometers were made (see Steufer et al., 2019). The status of each dome in each image was recorded in a spreadsheet after manual review. Because of the large volume of images, this was done in movie form in one-month intervals, one radiometer at a time. The radiometer domes were classified as being wet (e.g., raindrops or melted ice and slush); containing frost, rime or snow accumulation; having accumulation of

Deleted: sublimation period

Deleted: of icing events

215 snow around the domes (but not on the domes); being wet with ethanol (used for cleaning); and (rarely) “other” contaminants,  
such as resting birds. Occurrences of rime and frost always took precedence in the classification. For example, in cases when  
snow and rime simultaneously affected a radiometer, the status of the instrument was recorded as rimed. Note that because the  
domes are hemispheric, the cameras were blind to some parts of the domes, though this was somewhat alleviated by the fact  
that the pyranometer domes are transparent and the pyrgeometer domes are relatively small and/or flat. All visible ice  
regardless of amount or coverage was recorded. Thus, the classification was conservative; a snowflake or thick coating of rime  
220 were both flagged as iced. Camera downtime was also indicated.

To increase the robustness of the icing determinations, additional instances of ice were identified by comparing each  
of the data streams to the average of all the data streams and reviewing the images where anomalies were found. While this  
procedure successfully identified instances of icing that had been missed, the number of identifications increased by < 0.5%.  
This indicates that the original classification was sufficient to identify the icing that impacted data quality. However, the  
225 statistics compiled for the presence of ice include occurrences that were too minor to bias the measured signal and these  
occurrences were also both common and their identification subject to qualitative interpretation. The relevance of this  
limitation is discussed further in Section 4.1 where the statistics are reported.

230 **2.3.2. Baseline data from the trackers**

While the BSRN instruments that were mounted on the solar tracker were not imaged by the cameras, the tracker  
instruments provide important information for two reasons: First, the pyrgeometers were shaded, which reduces solar heating  
of the domes (Alados-Arboledas et al., 1988) and the magnitude of associated corrections that apply to some pyrgeometers  
(Albrecht and Cox, 1977); and second, because SWD is more accurately represented by the sum (hereafter, “SUM”) of the  
235 DIF and DIR due to increased calibration uncertainty in pyranometers from the direct beam at low sun angles (Michalsky et  
al., 1995). All BSRN data were quality controlled with manual screening and application of the relevant definitive tests  
described by Long and Shi (2008). The manual screening removed suspect data and shadows from station structures. The  
BSRN tracker measurements were supplemented where there was missing data by the SUM from the ARM QCRAD value-  
added product from the neighbouring ARM station, which is also based on Long and Shi (2008). The resulting data set was  
240 used as an intermediary processing step for two purposes: First, to provide a baseline to aid in identification of shadows on the  
D-ICE instruments and second to provide a statistical baseline for correcting or validating the aforementioned sources of  
uncertainty in the D-ICE measurements.

245 **2.3.3. Quality controlling D-ICE data**

**2.3.3.1. Light pollution**

Deleted: 2

Deleted: 2

250 The amount of light pollution from the camera LEDs measured by the pyranometers was determined empirically for each instrument by comparison to night time periods on 19-20, 30 September and 1-2 October 2017 when the illumination was switched off. The calculated biases were then subtracted off in post-processing when the lights were on. These biases were small, ranging from  $\sim 0$ -1.5 Wm<sup>-2</sup> (mean, 0.35 Wm<sup>-2</sup>).

#### 2.3.3.2. Shadows

255 Light poles, as well as some additional station structures, such as nearby aerosol inlet pipes were minimal obstructions to the view of the sky by the radiometers except for episodic appearances of shadows on clear days that reduced the signal in the pyranometers. The shadows occurred at different solar azimuth and zenith angles for each pyranometer and were only present when the sun was unobstructed by clouds. The times when each instrument was shadowed were identified by a reduction of normalized total irradiance signal exceeding -3% in the pyranometers relative to the SUM (Section 2.3.2) when the direct beam accounted for at least 25% of the irradiance, which was qualitatively determined to be a suitable threshold for 260 when shadows were observed to appear. This method for detection of shadows was supplemented with manual screening. Cases of shadows and ice co-occurring were treated as shadows and removed from the analysis of biases associated with ice. Approximately 1-4% of the data was removed, depending on the location of the instrument.

Deleted: 2

#### 265 2.3.3.3. Outlier detection

Data from each D-ICE radiometer was processed with the same Long and Shi (2008) procedures as the operational systems. This was followed by manual screening. One radiometer (a1571), which is typically operated unventilated, was experimentally set in a ventilator that was later found to shadow its thermopiles. Another (26214) was out of level, but without the possibility of re-levelling after installation. Both of these radiometers are excluded from the radiometric analyses and BE 270 product, but are included in the analysis of the ventilator de-icing performance in Section 4.1.

Deleted: 2

275 The Long and Shi (2008) “QCRAD” approach is designed to identify outliers relative to the data stream being screened. It therefore relies on the assumption that most of the data falls within normal limits and is only sensitive to data that does not. Figure 2 shows examples of the “climatological configurable limits” for a D-ICE pyranometer in panel (a) and a pyrgeometer in panel (b). Since occurrences of icing rarely produce signals that fall outside the statistical distribution, the spurious data are not readily captured by outlier-detection methodologies, such as QCRAD. For example, the 2<sup>nd</sup> level threshold for the definitive configurable QCRAD limit flagged < 3% of the iced data in Figure 2a (green line). Similarly, > 99% of the  $\sim 900$  hours of iced LWD in Figure 2b passed the QCRAD climatologically configurable limit test.

#### 2.3.3.4. Icing

280 The results from the processing of the D-ICE images were used to flag data contaminated by the presence of ice on the radiometer domes. This data was removed from the BE data set, but a second version with occurrences of icing preserved was needed to calculate the biases caused by the ice. To construct such a data set, only data that had been rejected for failing

Deleted: 2



physically-possible limit tests or having been determined to be shadowed was removed while outliers flagged using other tests that were within physically-possible limits when ice was present were retained.

### 2.3.3.5. Infrared loss corrections

Infrared loss corrections were applied to pyranometers that exhibited night time offsets following the method of Dutton et al. (2001) (see Table 1), though the offsets observed during D-ICE were consistently small (generally  $< 3 \text{ Wm}^{-2}$ ). Interestingly, two systems that feature air intake tubes extending below the ventilator fan (MeteoSwiss and Eigenbrodt 480) were found to have night time offsets in the CM11s they housed that were uncorrelated with the net longwave ( $r^2 < 0.05$ ) but highly (negatively) correlated with wind velocity ( $r^2 = 0.54\text{-}0.55$ ); this was also somewhat true for the CM11 and PSP in the PMOD ventilators ( $r^2 = 0.22 \text{ \& } 0.36$ ). What each of these systems have in common is that they were both heated and vulnerable to airflow obstructions. We interpret the source of this bias to be clogging from blowing snow that reduced aspiration thereby allowing the heating element to differentially warm the ventilator and radiometer case, which would be expected to produce a similar voltage offset as infrared loss. Clogging has also been reported in similar ventilators by the Sonnblick BSRN station and a longer set of inlet tubes were constructed there that alleviated the problem (Weisser, 2016). For D-ICE, we corrected the affected pyranometers in the MeteoSwiss and Eigenbrodt 480 analogously to Dutton et al. (2001) using the wind measurements despite a limited understanding of how the bias would translate under sunlit conditions, but note that the corrections were small (the mean of the more severely-affected instrument was  $\sim 3 \text{ Wm}^{-2}$ ) and served to bring the measurements closer to the mean of the others.

### 2.3.4. Best Estimate Fluxes

The BE data set was produced by averaging the calibrated, bias-corrected, ice-free and quality controlled D-ICE data streams. For LWD, this consisted of all 8 upward-facing pyrgeometers (5 from D-ICE, 2 from NSA and 1 from BSRN). For SWD, this consisted of 17 pyranometers from D-ICE, the global BSRN and the global NSA. Since the sensitivity of a thermopile is not precisely isotropic, the calibration of global pyranometers is designed to be well-suited for the daily average but prone to varying errors through the day as the incident angle of the direct beam changes. Thus, to produce a BE, the average of the global pyranometers could be used to constrain the SUM from the trackers or the tracker measurements could be used to bias-correct the average of the global pyranometers. We chose to do the latter because the large number of included data streams produces a data set less prone to discontinuities and noise, and importantly ~~was also directly verified as ice-free~~ (Section 2.3.1). Thus, the SWD average was bias-corrected as a function of solar zenith angle (SZA) and the diffuse fraction using the SUM; the magnitude of the correction varied between 0.5% and 3% depending on the diffuse partitioning.

### 2.3.5. Uncertainty calculations

Deleted: 2

Deleted: 4

Deleted: 3

Deleted: i

Deleted: ably

Deleted: 4

Uncertainty is estimated empirically as the  $1\sigma$  spread ~~between~~ the one-minute average measurements ~~from the different sensors~~ where fluxes are available from at least two radiometers. Only the data that passed quality control procedures and was determined to be ice-free is included. Thus, the number ~~of measurements used in the calculation of uncertainty can be less than the total number of instruments, but this limitation does not significantly impact the uncertainty calculation as~~   
 330 ~~evidenced by the fact that the result is uncorrelated with the number of systems used in the calculation for both LWD and SWD.~~ Nevertheless, the uncertainty may be best understood by its bulk properties: Uncertainty in LWD is shown in Figure 3a plotted against the mean net longwave flux from the pyrgeometer thermopiles (this differs from, but is correlated with, the net longwave of the natural surface). The solid line is the mean of the 1 min resolution uncertainties in bins of  $1 \text{ Wm}^{-2}$  of the net longwave and the shading is  $\pm 1\sigma$  of the same. Large negative net longwave values are indicative of clear skies while the value   
 335 is generally greater than  $-20 \text{ Wm}^{-2}$  in the presence of optically-thick clouds. The BSRN target uncertainty is  $3 \text{ Wm}^{-2}$  (McArthur, 2005); the average for D-ICE is  $2.6 \text{ Wm}^{-2}$ . The absolute accuracy of pyrgeometers at Utqiagvik based on *in situ* calibration to a common standard has been shown previously to be  $\pm 2 \text{ Wm}^{-2}$  (Marty et al. 2003). The uncertainty is larger for clear skies and smaller for cloudy skies. This is not surprising because clear skies are anisotropic and spectrally-complex in the infrared. In the Arctic, the precipitable water vapor is commonly  $\leq 1 \text{ cm}$  during clear skies, ~~which causes the far-infrared to become~~   
 340 ~~semi-transparent~~ (e.g., Cox et al., 2015). Under such conditions, instrument-dependent biases of  $-2$  to  $-6 \text{ Wm}^{-2}$  in pyrgeometers have been reported ~~with respect to windowless longwave radiometers~~ (Gröbner et al., 2014).

Uncertainty in SWD is plotted Figure 3b as a function of SZA. In addition to absolute units, the uncertainty is also shown in relative units (%). The BSRN target uncertainty for pyranometers is 2% (McArthur, 2005), a condition that is met, and the uncertainty is relatively flat when the SZA is  $< 70^\circ$ . When the SZA is larger, the relative uncertainty is larger too, but   
 345 the absolute uncertainty is  $< 5 \text{ Wm}^{-2}$ , which meets the standard for the minimum expected error (McArthur, 2005).

### 3. Biases caused by ice

To better understand the consequences of icing, Figure 4 shows a case study for LWD from late January in panel (a)   
 350 and for SWD on 14-15 April in panel (b). Analysis of these cases, next, is followed in Section 3.3 with a more general calculation of biases at the monthly scale.

#### 3.1. LWD icing case

355 The LWD time series spans approximately two weeks and shows a range of LWD typical of the Arctic winter, from  $\sim 140 \text{ Wm}^{-2}$  during the coldest, clearest times to  $\sim 280 \text{ Wm}^{-2}$  during the warmest, cloudiest times. The blue line in Figure 4a is the LWD BE and the grey shading is the uncertainty. The red line is the time series of pyrgeometer 28507, which was susceptible to icing. The red shading highlights the bias caused by the ice in 28507 relative to the BE. Two events stand out: First, beginning on 22 January, was a frost event that completely covered 28507, shown in the inset image. The effect on 28507

Deleted: of

Deleted: of instruments and combinations of instruments

Deleted: included

Deleted: varies minute to minute

Deleted: However, no relationship between the number of radiometers included in estimated uncertainty is observable for either LWD or SWD. ....

Deleted: below

Deleted: . When this occurs the

Deleted: s

Deleted: a

Deleted: 3

Deleted: 4

Deleted: b

can be compared to the clear dome in the neighbouring pyrgeometer (34309), which was included in the BE. Later, on 27 January, a rime event caused by freezing fog occurred with similar results for the pyrgeometers. For both events, the biases were +40 to +45 Wm<sup>-2</sup>, with the maximum observed bias during the case study of +58 Wm<sup>-2</sup> occurring on 25 January. (This is comparable to the maximum bias from icing observed during the campaign of +59.5 Wm<sup>-2</sup> on 26 December, though occasionally larger biases were observed briefly in association with melting ice or snow on the dome.) The systems in the figure are identical except that the radiation shield covering 34309 was lifted 2 mm using washers to improve airflow over the dome, highlighting the influence of small differences in ventilator design. These cases were not the only periods of severe icing during D-ICE, but the example shown was unusually impactful on 28507 and is therefore highlighted because it is instructive. The bias is largest when the sky is clear. This is because when the sky is clear, the sky emissivity (and thus brightness temperature) is most different from that of the ice. When clouds are present, the bias is reduced to near 0 Wm<sup>-2</sup>. This is evidenced by the brief occurrence of an optically-thick stratiform mixed-phase cloud with a liquid layer between 2 and 3 km late on 23 January, highlighted in the top-centre panel of Figure 4a. While this cloud was over the station, the icing conditions remained unchanged, as confirmed by review of the camera images (Figure 4a centre inset), but the flux from the ice was similar to that of the cloud because both had similar emissivity and thermodynamic temperature (as confirmed by radiosoundings, not shown). Thus, this case study demonstrates that biases in LWD can be large, but are episodic in nature, depending on both ventilator performance and cloud properties, in addition to icing conditions. The bias in 28507 relative to the BE averaged for the time period represented in the figure is +7.8 Wm<sup>-2</sup>, which is consistent with the biases reported during brief periods having icing conditions elsewhere (Persson et al. 2018).

### 3.2. SWD icing case

Figure 4b shows an example of a clear-sky day in mid-April that followed frost formation the previous night. The time during which the frost was observed to be growing through deposition, ended at approximately 17:00 UTC on 14 April after which the frost sublimated during the day. The black line in the figure shows the SWD BE and the grey shading is the uncertainty. Five pyranometers that had frost on their domes for at least some of the day are shown by the coloured lines. Missing data in the figure are because of shadows.

The biases from the ice are generally positive (up to +188 Wm<sup>-2</sup>), but sometimes also negative (up to -106 Wm<sup>-2</sup>) and the maximum absolute and relative errors were not necessarily coincidental in time. These values are comparable to the largest instantaneous biases observed during the campaign, though several occurrences on other days (e.g., 28 April) of negative biases as large as -211 Wm<sup>-2</sup> were associated with thick pieces of ice and snow that accumulated on the lee side of the dome and then later faced the direct sun. In Figure 4b, some biases (e.g., 160002) manifest as an apparent shift in the solar cycle, but the data appears otherwise physical. Note that the thickness and density of the ice in the example images (insets in figure) is qualitatively similar. The main difference between the images is in the coverage of the ice. The dome of both the pyranometers (32421, F16305R) that exhibited negative biases during the day were entirely covered by ice when the negative biases were

**Deleted:** deposition period

**Deleted:** of the frost

410 observed; the bias was negative because the irradiance was attenuated. In contrast, the ice on the domes of the other affected radiometers (and also F16305R and 32421 later in the day) was concentrated near the top of the domes. This is a condition commonly observed on ventilated radiometers that is colloquially known as “capping”. Capping is thought to be the consequence of the ventilator being least efficient in circulating air over the top of the dome; thus, deposition typically occurs at the top of the dome first and ice in this location also takes longer to sublimate. The contrast between the negative bias during 415 the early and middle parts of the day and the biases of the capped radiometers, including F16305R and 32421 as they began to sublimate later the day, is notable: While not definitive, it suggests that capping tends to result in positive biases, at least during relatively low sun angles (the maximum solar elevation angle for this case was 28.3°) when the direct beam passes largely uninhibited through the clear portion of the dome and the signal is enhanced by scattering towards the thermopile by the ice at the top of the dome.

420 To illustrate the influence of ice during diffuse conditions, another example from 7 April (Figure 5) shows the transition from a positive bias (dominated by scattering) to a negative bias (dominated by attenuation) in F16305R capped with ice due to a transition in lighting. From 20:00 to 20:30 UTC the direct beam is present, being 10-30% of the total irradiance, during partly cloudy conditions. At that time, a bias of up to +50 Wm<sup>-2</sup> is observable and after which the bias becomes negative, about -25 Wm<sup>-2</sup>, as overcast conditions obscure the sun and the lighting becomes entirely diffuse.

425 These cases demonstrate that errors from ice in SWD can be large and that the sign of the bias is dependent on the amount of coverage of ice on the pyranometer dome, as well as the presence, and likely also the angle, of radiation from the direct beam.

### 3.3. Biases from ice in monthly means

430 Figure 6 shows monthly mean biases in LWD (panel a) and SWD (panel b) for each radiometer. For each cell, the colour indicates the bias associated with frost, rime, snow, or liquid (usually ice melted by heat from the ventilator). The monthly means are also plotted as a time series in panels (c) and (d) with the aggregate means shown by solid lines. Note that the months of July and August include limited amounts of data because of beginning and end dates of the campaign. All bias 435 calculations are corrected to account for differences between individual radiometers and the BE that is associated with calibration uncertainty. The bias calculations are insensitive to the determination of ice occurrences from the images because the average of all conditions, regardless of ice presence, is calculated.

As noted in Section 3.1, the LWD case study was chosen because it was a particularly influential event and a particularly susceptible system was highlighted. Figure 6 shows that when data are averaged for long periods of time, the bias 440 in icing of pyrgeometers is actually small. Indeed, only two radiometers, BSRN and 28507 (having similar configurations and equipment), exhibit biases that are detectable relative to the average uncertainty (Figure 3). The most severely affected month was January when the average bias was just +1 Wm<sup>-2</sup> and the most affected system was biased +4 Wm<sup>-2</sup>. Note that some

experiments were conducted during icing periods on four days (82 hours total) in the first week of January (described later in Section 4) and that these times were rejected from the analysis in the figure.

SWD icing biases during D-ICE occurred from February through June with a peak in April. This is because biases in SWD depend both on the amount of sunlight and the amount of icing, which have opposing seasonal cycles. The opposition is slightly out of phase such that in autumn there was too little sunlight when the icing first began in earnest, but that both substantial amounts of sunlight and icing co-occurred during spring. Recall from Section 2.2 that the beginning of the icing season was late during D-ICE and that in a more typical year at Utqiaġvik some biases may also have been observed in September and October. Note that the calculation includes the average of both negative and positive biases. If the average of the absolute value of the bias is plotted instead (not shown), the biases increase slightly but interpretation is hampered by the fact that noise contributes to the bias calculation rather than cancelling out. Nevertheless, the results indicate that biases in pyranometers at D-ICE were dominated by positive perturbations, which is consistent with spurious data being principally tied to a combination of clear-skies, low sun angles and capping in early spring.

#### 4. Ice Mitigation

##### 4.1. Performance of ventilators

To assess ventilator performance, we begin with two qualitative examples that illustrate broadly the influence that heating and ventilation have in mitigating ice. The first example is of a freezing fog event that occurred from 1230 UTC on 5 January with rime accumulation continuing until about 0900 UTC on 6 January. The image in Figure 7a show the status of the systems during the event at 1900 UTC, 5 January. At this time, rime is observable on the domes of some of the systems while most remain ice-free. Immediately after these images were taken, the power was deliberately cut to the ventilators and the radiometers began accumulating ice immediately, being iced over within 2.5 hours (Figure 7b). The second example began on 2130 on 9 January when the RH > 100%, but no active icing was observed, the instruments were intentionally iced by manually spraying water on the domes and de-icing was monitored for 9 hours before the experiment was ended by the onset of a natural riming event. Of the 25 tested systems, 17 successfully de-iced within the 9-hour window in the supersaturated conditions (mean 6 hours, minimum 0.25 hours). The systems that de-iced the fastest were those that featured heating elements, though several unheated systems were observed to de-ice themselves.

To quantify performance over the course of the campaign, Figure 8 shows a summary of statistics from the systems at D-ICE, NSA and OLI based on the classification of the images described in Section 2.4.2. The systems are labelled on the x-axis and the y-axis shows a simple performance metric, which is calculated thusly:

$$P = 100 * \left\{ \left[ \frac{t_{iced}}{t_{icing}} \right] - 1 \right\}, \quad (1)$$

475 where  $P$  is the ice mitigation performance in units of percent,  $t_{i,iced}$  is the amount of time system  $i$  was iced, and  $t_{icing}$  is the  
amount of time icing conditions occurred. Therefore, when  $P = 0\%$ , the amount of time the radiometer was iced and the amount  
of time icing occurred are the same; i.e., the de-icing system had no effect. When  $P < 0\%$ , the value expresses the percent of  
time during icing conditions that the system successfully mitigated ice, with a minimum of -100% (all icing mitigated) because  
 $t_{i,iced}$  cannot be less than 0. Instances where  $P > 0\%$  indicates that the radiometer was iced more frequently than icing conditions  
480 occurred, suggesting that the ventilator exacerbated icing. Positive values of  $P$  can theoretically reach infinity because  $t_{icing}$  is  
independent of, and can pose no restriction on  $t_{i,iced}$  (for example, over some time  $t$  if no icing conditions are observed but  
radiometer  $i$  was iced then  $t_{icing} = 0$ ,  $t_{i,iced} > 0$  and  $P = \infty$ ).

Uncertainty in  $P$  arises from errors in  $t_{i,iced}$  or  $t_{icing}$ . Recall from Section 2.4.2 that the identification criteria for the  
status of the individual radiometers ( $t_{i,iced}$ ) is that all ice is flagged, regardless of coverage, density, or thickness. This criterion  
485 is advantageous because it is an objective threshold for icing but also has the disadvantage that instances of very light icing  
could be missed during classification. To attempt to understand the uncertainty in  $t_{i,iced}$ , we compared systems that were treated  
most similarly (the 2 MS80s, the 2 SW CVF4s, the 2 LW CVF4s and 2 VEN/PSP systems). We found that the differences  
were between 2% and 20%, averaging to 8.5%. We acknowledge that we do not have a robust way to calculate this uncertainty,  
but it is likely conservative because while some of the observed difference reflects error in the classification, the treatment of  
490 the compared systems was not precisely the same nor can local variability in icing be ruled out, and upon review some  
differences between similar systems are found to be real (see below). Identification of events ( $t_{icing}$ ) is subjective and uncertain  
as well, in particular in determining the end time for an event. However, uncertainty in  $P$  due to uncertainty in the  $t_{icing}$  is a  
constant applied to all radiometers. Consequently, the magnitudes of  $P$  in Figure 8 may be biased, but if so are biased uniformly  
while the relative differences in  $P$  between the systems have uncertainties of approximately 10% based on the comparison  
495 between like systems. Particular caution should be exercised in interpreting the differences between the sites, D-ICE, NSA and  
OLI because  $t_{icing}$  was determined independently for each.

While no systems were found to be 100% effective, two-thirds of the systems, including all those housing  
pyrgeometers, were effective at least 80% of the time and 15/34 were effective at least 90% of the time. The average was 77%,  
but there was also a substantial amount of variability ( $\sigma = 30\%$ ) and five systems were found to mitigate ice  $< 50\%$  of the time.  
500 One of these was observed to increase icing. The positive value of  $P$  for this system, F16305R, is consistent with subjective  
analyses that indicated ice (likely frost) on the F16305R's dome when no ice was present on the ventilator or nearby structures.  
While we do not know the explanation for this behaviour, the most noticeable design element of F16305R's ventilator (which  
was unheated) is that the aspiration vent around the base of the dome is larger than any of the other systems. It is plausible that  
this could produce a low-pressure pocket around the dome that could support deposition.

505 Interestingly, the CMP22 outperformed the SMP22 in the CVF4 by 20% despite the similarity between the ventilation  
systems and the radiometers. The only difference was that on 6 January the air intake screen on the CVF4 holding the SMP22  
was removed to assess whether clogging by snow and reduced air flow impacted effectiveness. The CMP22 was observed to

outperform the SMP22 by 19% prior to this change and 21% after, so the difference is not attributable to the presence of the screen and the screen apparently had little impact on effectiveness. We do not know the explanation for the observed difference.

In general, mitigation of ice on pyrometers was more effective than pyranometers, even for cases when the systems were otherwise similar (e.g., CVF4s and VENs). There are several plausible, but not mutually-exclusive explanations for this: First, the domes of the pyrometers are smaller and lower-profile, and therefore aspirated air may be more easily circulated to the top of the dome; second, the smaller surface area of the dome supports improved conduction of heat, as does the fact that pyrometer domes are constructed of silicon, which is more thermally conductive than the quartz pyranometer domes; and third, more speculatively, the outer coatings of the domes may be less prone to accretion of ice.

#### 4.2. Physical Mechanism

Successful mitigation of ice is demonstrated by systems in Figure 8 that were not equipped with heaters. This supports the heuristic within BSRN that ventilation of ambient air alone can be effective. However, it is counter-intuitive because aspiration of saturated air increases rather than decreases deposition rates, specifically resulting in denser, but not necessarily thicker, frost (Kandula, 2011 and references therein).

We examined the properties of the Eppley ventilation system configured similarly to those in use at the Barrow BSRN station to help elucidate the attributes that contribute to effectiveness in the absence of heating elements. The tested system is an Eppley VEN housing a high-flow 80 cfm (10.3 W) DC fan (Delta Electronics FFB0812EHE) modified with bearings rated for low-temperature; examples of such systems at D-ICE are in positions 6-9 and 24 (Figure 1b). When the fan is operated outside of the ventilator, the velocity of the air downstream is  $\sim 9.8 \text{ m s}^{-1}$ . When installed in a standard VEN configuration, the maximum velocity measured near the top of the dome is  $7.7 \text{ m s}^{-1}$ . When the shield is lifted to improve airflow, the velocity increases to  $8.6 \text{ m s}^{-1}$  for a 1 mm lift and to  $9.3 \text{ m s}^{-1}$  for a 2 mm lift (as in positions 6 and 8).

Figure 9a shows a 9-hour time series of temperatures collected during D-ICE in January, 2018. The dome temperatures from PIRs 28507 and 34309 were 0.5-0.6 °C warmer than the ambient air temperature and differed from each other by about 0.15 °C. On 5 January both fans were shut down simultaneously and the dome temperatures agreed after equilibration to ambient conditions (difference 0.01 °C RMSE). Thus, the 0.15 °C difference represents a real difference in temperature and not uncertainty. We will return to this later.

The fan in 34309 was turned off shortly before 20:00 UTC on 8 January for  $\sim 30$  min before being turned on again. It was then turned off a second time at  $\sim 21:00$  UTC for  $\sim 60$  min. As observable in Figure 9a, in both cases the dome temperature decreased  $\sim 0.6$  °C to the ambient 2 m air temperature measured by the station. The fan in 28507 ran continuously during the experiment and its dome temperature responded only to changes in meteorology. At -25 °C, a 0.6 °C increase in temperature subsaturates air (w.r.t. ice) with an RHI as high as 105%, which is a higher supersaturation than typically occurs. Thus, the heat added by the fan is sufficient to explain the effectiveness of the ventilators without heating elements.

Deleted: of the fan



To better understand the sources of the heating, the experiment was repeated under controlled conditions in a laboratory in Boulder, Colorado. First, an FFB0812EHE was placed in a cold chamber without the VEN and a thermocouple (Type-T; copper-constantan) was positioned in the air stream ~10 cm from the fan. The apparatus was allowed to equilibrate to -15 °C for several hours without the fan running after which the fan was started using an external control and a temperature increase of 0.35-0.4 °C was observed over the course of several minutes after which the fan was turned off again and the temperature returned to its previous value (purple in the Figure 9b). A similar result was observed using a stock ebm-papst 8212JN that has comparable specifications to the FFB0812EHE (yellow in Figure 9b). This test confirms that the temperature increase observed at D-ICE was supported by the fan independent of the ventilator.

Next, the experiment was repeated again using an FFB0812EHE installed in a VEN containing a PIR and having a shield with a 1 mm lift and clay sealing around the shield edges. Similar to the previous iteration, a 0.39 °C increase in dome temperature occurred (blue in Figure 9b). The case temperature increased by the same amount (red in Figure 9b), slightly lagging the dome because the case thermistor is more deeply embedded within the radiometer's mass. Both case and dome equilibrated within 1 hour. After the fan was turned off, the system re-equilibrated to within 0.05 °C of its unperturbed state after 3 hours. Finally, the experiment was repeated two more times with changes to the height of the lift of the radiation shield (thin blue lines in Figure 9b). When the shield was lifted to 2 mm, the equilibrated temperature increased relative to the 1 mm lift and when no lift was provided the smallest temperature increase was recorded. This is consistent with the results shown earlier, which indicate that system with the lifted shield had a warmer dome (Figure 9a) and performed better overall during D-ICE (Figures 4, 6, and 8).

The heating of the dome by the fan is principally from two sources. The first is heating of the air moving past the fan motor, which is warmed by waste energy. This can be calculated by first estimating the amount of waste heat in Watts,  $H$ , from the static pressure reported by the manufacturer,  $S$ , and the observed volume,  $V$ , moved by the fan in  $t$  seconds,

$$H = 1 - \frac{SV}{t}, \quad (2)$$

and then finding the temperature increase,  $T_w$ , associated with  $Ht$  Joules applied to the same volume,

$$T_w = \frac{H}{c_p \rho V}, \quad (3)$$

where  $c_p$  is the specific heat of the air at constant pressure, and  $\rho$  is the air density. Note that Eq. (3) neglects energy that is radiated or conducted away.

The second source is that the air downstream immediately in contact with the radiometer necessarily comes to rest and thus undergoes an adiabatic compression. This topic has been studied extensively for high velocity flows (e.g., Thompson, 1968; Lenschow, 1972), but less at low velocities. At low velocities, the properties of the gas can be approximated as ideal. Therefore, we formulate the problem from the first law of thermodynamics beginning with the ideal gas law, differentiating as follows:

$$dT = \frac{\alpha dP + P d\alpha}{R}, \quad (4)$$

where  $T$  is the temperature,  $\alpha$  is the specific volume of the air (i.e., the inverse of the air density),  $P$  is atmospheric pressure, and  $R$  is the gas constant. The calculation is insensitive to the reduced density of the humid air and it is sufficient to set  $R = R_d$ . The system is assumed to be in hydrostatic equilibrium such that  $dP = 0$ , and so Eq. (4) reduces to

$$dT = \frac{P d\alpha}{R}. \quad (3)$$

$d\alpha$  is found as follows:

$$d\alpha = \alpha_0 - \alpha_{tot}, \quad (4)$$

where  $\alpha_0$  is the specific volume of the air at static atmospheric pressure,  $P$ , and  $\alpha_{tot}$  is the specific volume of the air at total pressure, the sum of the static and dynamic pressures; i.e., it is the change in specific volume caused by the compression of the air where it comes to rest at the surface of the radiometer downstream of the fan. Note that here,  $dT$  is treated as idealized, but that in actuality the adiabatic compression is not perfectly efficient.

The results (Figure 9c) indicate that for the experimental setup in question, waste heat and adiabatic heating contribute similarly to the observed temperature increase in the chamber, with ~44% (0.17 °C) explainable by the former and ~42% (0.16 °C) explainable by the latter at velocities corresponding to the ventilator. The remaining 14% was unaccounted for, but besides error may be associated with secondary effects such as drag (Lenschow, 1972) and turbulence.

The lab experiments resulted in about half of the total heating that was observed in the January D-ICE case. D-ICE was carried out at sea level whereas the tests in Boulder (~1500 m.a.s.l.) were carried out at lower (~15%) atmospheric pressure.

The field case study shown in Figure 9a was also colder (-25 °C) than the chamber tests (-15 °C). Both of these factors increase the air density and therefore reduce the calculated temperature change. Thus, differences in the state variables do not explain the difference in fan heating observed between the field and the lab. The fan speed was monitored at D-ICE and did not indicate that fan efficiency was lower than the lab because of clogging by snow. Instead, we hypothesize that the difference could plausibly be affected by wind forcing, which also results in a compression of the air stream and subsequent heating (e.g., Thompson, 1968), in this case at the point of impact with the dome.

Interestingly, that heating from waste heat increases as air velocity is decreased (Figure 9c) counters the observed relationship between increasing the lift of the shield and increases in both air velocity measured at the top of the dome and dome temperature. This suggests that the effect of raising the shield is to enhance the circulation of air around the dome.

## 5. Discussion and Conclusions

The De-Icing Comparison Experiment (D-ICE) was carried out in 2017 and 2018 at the NOAA Atmospheric Baseline Observatory in Utqiagvik, Alaska (71.3°N) in collaboration with the DoE ARM NSA (also Utqiagvik) and Oliktok Point (250 km east of Utqiagvik) stations. D-ICE collected data suitable for assessing technology designed to mitigate the formation of ice on broadband radiometric stations and to quantify the influence of ice on the flux measurements. Over the course of an Arctic cold season, the status of icing on a total of 34 upward-facing broadband radiometers was monitored using cameras.

Most of the radiometers were housed in ventilators that aspirated air over the sensors, sometimes heated, while others were designed with internal heating and/or ventilation. The systems were contributed by research institutes and commercial vendors and were representative of the types used by research-grade programs, such as the BSRN and DoE-ARM.

System performance, defined as the amount of time a radiometer was classified as iced normalized by the amount of time icing conditions were present (Eq. 1), was in the mean amongst the systems, a 77% reduction in the expected amount of time the systems were iced. Thus, on average the systems tested during D-ICE were successful in mitigating most ice. Ice was more effectively mitigated from pyrgeometers than pyranometers. Many systems housing either type of radiometer were 90% effective or better, including some that did not use external heat. Even systems without external heating elements were observed to have radiometer domes that were warmer than ambient air by 0.5 to 0.6 °C, which is sufficient to subsaturate the air (w.r.t. ice) during typical icing conditions, explaining the skilful performance. Through field and post-campaign laboratory tests, the source of this heating was found to have approximately equal contributions from waste heat from the (~10 W) ventilator fan and adiabatic heating from compression of the air downstream from the fan. Thus, while heating elements were found to be effective, they are not required for successful ice mitigation. Instead, an important factor for success appears to be effective circulation of air over the dome.

Generally, we did not identify significant errors caused by the ventilators and the night time offsets in all systems were small, consistent with Michalsky et al. (2017). One exception was heated ventilators that were susceptible to clogging by snow. These were observed to have small night time offsets correlated with wind velocity but not net longwave, the latter being expected for errors from infrared loss (Dutton et al., 2001). Instead, we postulate that blowing snow clogged the ventilators, reducing aspiration and causing differential heating of the radiometer after which during calm winds the heated ventilator unclogged the inlet.

When ice was present on sensors, the instantaneous biases varied, but could be large, up to +60 Wm<sup>-2</sup> in the LWD and from -211 to +188 Wm<sup>-2</sup> in SWD. However, the monthly mean biases from ice were found to be similar to, or smaller than uncertainties from other sources, which is approximately 3 Wm<sup>-2</sup> (LWD) and 2% (SWD). There are a few reasons for this unexpected result. First, the fact that icing conditions were not present continuously was a factor: from November through April, icing conditions occurred 63% of the time. The skilful performance of the ventilators was also a notable contributing factor in reducing the bias, but there were other factors as well. For SWD, compensation between positive and negative biases provided some cancellation in the monthly mean. The positive biases were tied to scattering of the direct beam when pyranometer domes had a cap of ice at the dome top at low sun angles during clear skies. Negative biases by attenuation when domes were completely encased in ice were less common. While negative biases appear to dominate during diffuse (cloudy) conditions, the irradiance is also less at those times, which reduces the bias. Overall, positive biases were found to dominate for SWD and the cancellation did not explain the relatively small monthly mean errors. Instead, it is the timing of the occurrence of icing that likely explains the result: biases in SWD in the monthly mean were only found in spring when both sufficient sunlight and sufficiently frequent icing conditions co-occurred. Icing in spring is commonly in the form of diurnal (morning) frost, which occurs during relatively low-light times of the day; i.e., the icing is most severe when the irradiance is

small. Therefore, we recommend scheduling daily maintenance in early morning during spring for efficiency. Indeed, icing was most severe during the polar night (November – January) when the net radiation is dominated by the longwave and pyranometers do not measure any signal. It is thus fortuitous that pyrgeometers were more effectively kept ice-free than pyranometers; i.e., small monthly mean icing biases can partially be attributed to the fact the when icing is most severe, radiometric measurements rely on a type of sensor that is more easily kept free of ice. LWD biases from ice were large when the sky was clear, but reduced to near-zero in overcast conditions. Thus, the fact that the frequency of cloud occurrence is near 80% in the annual mean at Utqiagvik (Shupe et al., 2011) contributed to reducing LWD biases. This was also a mitigating factor for the SWD because the largest biases were observed near solar noon on clear days. Since cloud amount, icing meteorology, and available sunlight are all important, geographical location is meaningful and the results presented here may not be representative of other Arctic locations. We hypothesize that this may be true also for locations in the vicinity of Utqiagvik, such as over the sea ice where local or mesoscale natural de-icing mechanisms (such as downslope wind events) may be more limited.

Consistent with earlier studies reporting difficulty in distinguishing iced data in post-processing (Lanconelli et al., 2011; Matsui et al., 2012), we find that quality control procedures are poorly-suited for detection of iced data because the signal caused by ice is not statistically outside the range of variability in the signal caused by clouds. Therefore, common screening methods (e.g., Long and Shi, 2008) are insufficient. Some of the non-definitive tests proposed by Long and Shi that involve cross-comparison between sensors may be more likely to identify suspect data, but results are dependent on the differential icing characteristics between the sensors. Other tests have been proposed such as comparing the sign and time derivative of the difference between upward and downward LW and SW measurements (van den Broke et al., 2004; Wang et al., 2018), though these tests rely on similar assumptions. Some studies rely on logbooks from station personnel and thresholds for relative humidity (e.g., Sedlar et al., 2011; Miller et al., 2015, 2017; Persson et al., 2018), but because of the relative infrequency of observer records (e.g., daily) and suspect reliability of RHI as a proxy for icing (Section 2.2), these methods also have limitations. D-ICE demonstrates success in quality control by monitoring instrumentation with cameras, but this approach is not always practical. In keeping with van den Broke et al. (2004), we suggest that time-derivative analysis for ice detection should be further explored. For example, the variability in the iced data in the SWD case (Figure 4b) is much slower and smoother than would be expected from clouds in a regime not dominated by the diffuse. Thus, development of new algorithms that flag iced data based on time-variant tests might be possible if the regime can be determined to be dominated by the direct beam and can be distinguished from the consequences of instruments being out of level or expected differences between the global and SUM SWD though the day, both of which can produce structurally-similar errors.

Finally, as a baseline for comparison used for analysis, a “best-estimate” data set was produced using a combination of the measurements that were ice-free. Though an unexpected outcome of D-ICE, the number of radiometers, variety of systems and skilful performance of the systems resulted in production of a verified ice-free data set that is nearly 100% complete for the duration of the campaign. Empirically-based uncertainties were also calculated from the variability amongst the ice-free observations. This data set is uniquely well-characterized in the Arctic and therefore may be suitable for use beyond

675 inquiry related to ice-mitigation. For example, D-ICE took place during the Year of Polar Prediction (YOPP) at one of the  
YOPP “supersite” observatories and the campaign spanned the wintertime YOPP Special Observing Period (SOP) #1 during  
February and March 2018. We therefore propose that the D-ICE best-estimate data products (Cox, 2020b) may be useful for  
model evaluations, such as the planned YOPP site Model Intercomparison Project (YOPPsiteMIP).

680 Code and Data Availability

Images collected by ARM as part of DICEXACO are available from the ARM data archive (<https://www.arm.gov>),  
<https://doi.org/10.5439/1507148>. NOAA-GML station data are available from <https://www.esrl.noaa.gov/gmd/obop/brw/>. D-  
ICE data are available from NOAA-NCEI: Cox (2020a, <https://accession.nodc.noaa.gov/0209059>) processed radiometric data  
and Cox (2020b, <https://accession.nodc.noaa.gov/0209058>) best-estimate files. All D-ICE images and raw data files are  
685 available from NOAA-PSL through the D-ICE web portal, <https://www.esrl.noaa.gov/psd/arctic/d-ice/>. QCRAD radiometric  
data products for OLI and NSA are available from the ARM archive, <https://doi.org/10.5439/1027372>, ceilometer data from  
<https://doi.org/10.5439/1181954>, and radiosoundings from <https://doi.org/10.5439/1021460>.

Author Contribution

690 CC and SM designed, implemented, and led the experiment with input from TU and CL. CC, SM, TU, RB, EH, JW, MK, CL,  
AM, and BT conducted the field programs, CC led the data analysis and wrote the manuscript with input from all co-authors.

Competing Interests

The author declares that there are no conflicts of interest.

695 Acknowledgements

This work is dedicated to the memory of the late Charles N. Long (formerly of CIRES) who first suggested the concept for D-  
ICE and provided invaluable guidance and support in developing and carrying out the experiment. We appreciate deployment  
assistance from J. Booth (NOAA), N. Lewis (Univ. Colorado), M. Helmberger (Univ. Colorado), C. Schultz (NOAA), A.  
Clarke (NOAA), A. Looze (NOAA Pathways intern), K. Olivas (NOAA summer intern); field support from D. Oaks  
700 (Fairweather LLC), B. Bishop (Sandia), W. Brower (UIC Science, retired); engineering and equipment support from R. Albee  
(formerly STC); logistical support from B. Vasel (NOAA), J. Mather (PNNL), M. Ivey (Sandia), F. Helsel (Sandia), M. Steufer  
(Univ. Alaska, Fairbanks), and useful conversations with R. Zamora (NOAA, retired), who assisted with adiabatic heating  
calculations; P.O.G. Persson (CIRES), who suggested that natural de-icing processes vary geographically; G. König-Lango  
705 (AWI, retired), J. Osborn (CIRES), M. Shupe (CIRES); M. Martinsen (NOAA) who provided science and logistical guidance;  
R. Latatis (NOAA) who provided an internal review as well as constructive comments from three anonymous reviewers and  
facilitation by the editors at AMT; and guidance from members of BSRN’s Cold Climates Issues Working Group (CCIWG).  
The following organizations (points of contact) contributed equipment to the campaign: Delta-T (Dick Jenkins), Kipp & Zonen

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Italic

Formatted: Indent: First line: 0"

Formatted: Font: Not Italic

Deleted: ¶

Formatted: Font: Not Bold, Italic

Deleted: ¶

(V. Cassella), Hukseflux (J. Konings), Eppley (T. Kirk), EKO (W. Beuttell), PMOD/WRC (J. Gröbner), Environment and Climate Change Canada (ECCC, A. Platt), NOAA, MeteoSwiss (L. Vuilleumier), NCAR (S. Oncley, S. Semmer, K. Knudeson) and the Alfred Wegener Institute (H. Schmithüsen, B. Loose). D-ICE was supported by the NOAA Arctic Research Program, the NOAA Physical Sciences Laboratory (PSL) and the U.S. Department of Energy (DoE) Atmospheric Systems Research (ASR) grant DE-SC0013306. Campaign logistical support was provided by the NOAA Global Monitoring Laboratory (GML). This work was authored in part by the National Renewable Energy Laboratory, operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy (DOE) under Contract No. DE-AC36-08GO28308. Funding provided by U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Solar Energy Technologies Office. The views expressed in the article do not necessarily represent the views of the DoE or the U.S. Government. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes.

## References

- Alados-Arboledas, L., Vida, J., and Jiménez, J. I.: Effects of solar radiation on performance of pyrgometers with silicon domes, *J. Atmos. Ocean. Technol.*, 5, 666-670, [https://doi.org/10.1175/1520-0426\(1988\)005<0666:EOSROT>2.0.CO;2](https://doi.org/10.1175/1520-0426(1988)005<0666:EOSROT>2.0.CO;2), 1988.
- Albrecht, B. and Cox, S. K.: Procedures for improving pyrgometer performance, *J. Appl. Meteorol.*, 16, 188-197, [https://doi.org/10.1175/1520-0450\(1977\)016<0190:PFIPP>2.0.CO;2](https://doi.org/10.1175/1520-0450(1977)016<0190:PFIPP>2.0.CO;2), 1977.
- BSRN: Report of the 12<sup>th</sup> Baseline Surface Radiation Network (BSRN) Scientific Review and Workshop, 1-3 August 2012, Alfred Wegener Institute, Potsdam, Germany, WCRP Report No. 20/2012, [https://www.wcrp-climate.org/documents/bsrn-12\\_report.pdf](https://www.wcrp-climate.org/documents/bsrn-12_report.pdf), 2012.
- BSRN: 14<sup>th</sup> Baseline Surface Radiation Network (BSRN) Scientific Review and Workshop, 26-29 April 2016, Australian Bureau of Meteorology, Canberra, Australia, WCRP Report No. 17/2016, [https://www.wcrp-climate.org/WCRP-publications/2016/WCRP\\_Report\\_17\\_2016\\_14th\\_BSRN\\_Meeting\\_Report.pdf](https://www.wcrp-climate.org/WCRP-publications/2016/WCRP_Report_17_2016_14th_BSRN_Meeting_Report.pdf), 2016.
- Cox, C.: De-Icing Comparison Experiment (D-ICE) campaign data: Radiometric and icing condition observations from the NOAA Barrow Atmospheric Baseline Observatory, August 2017-July 2018 (NCEI Accession 0209059). NOAA National Centers for Environmental Information. Dataset. <https://accession.nodc.noaa.gov/0209059>, 2020a.

**Deleted:** ndrew

**Deleted:** Images collected by ARM as part of DICEXACO are available from the ARM data archive (<https://www.arm.gov>), <https://doi.org/10.5439/1507148>. NOAA-GML station data are available from <https://www.esrl.noaa.gov/gmd/obop/brw/>. D-ICE data are available from NOAA-NCEI: Cox (2020a, ) processed radiometric data and Cox (2020b, ) best-estimate files. All D-ICE images and raw data files are available from NOAA-PSL through the D-ICE web portal, <https://www.esrl.noaa.gov/psd/arctic/d-ice/>. QCRAD radiometric data products for OLI and NSA are available from the ARM archive, <https://doi.org/10.5439/1027372>, ceilometer data from <https://doi.org/10.5439/1181954>, and radiosoundings from <https://doi.org/10.5439/1021460>.

**Deleted:** of the Earth Systems Research Laboratories

- Cox, C.: De-Icing Comparison Experiment (D-ICE) campaign data: Best-estimate downwelling longwave and shortwave radiometric fluxes from the NOAA Barrow Atmospheric Baseline Observatory, August 2017-July 2018 (NCEI Accession 0209058). NOAA National Centers for Environmental Information. Dataset. <https://accession.node.noaa.gov/0209058>, 2020b.
- Cox, C. J., Morris, S. M., Uttal, T., Long, C. N., and McComiskey, A.: The De-Icing Comparison Experiment – ARM Contribution (DICEXACO) Field Campaign Report. Ed. By R. Stafford, ARM user facility, DOE/SC-ARM-19-020.
- Cox, C. J., Stone, R. S., Douglas, D. C., Stanitski, D. M., Divoky, G. J., Dutton, G. S., Sweeney, C., George, J. Craig, and Longenecker, D.: Drivers and environmental responses to the changing annual snow cycle of northern Alaska, Bull. Amer. Meteorol. Soc., 98, 2559-2577, <https://doi.org/10.1175/BAMS-D-16-0201.1>, 2017.
- Cox, C. J., Walden, V. P., and Rowe, P. M.: A comparison of the atmospheric conditions at Eureka, Canada, and Barrow, Alaska (2006-2008), J. Geophys. Res., 117, D12204, <https://doi.org/10.1029/2011JD017164>, 2012.
- Driemel, A. and coauthors: Baseline Surface Radiation Network (BSRN): structure and data description (1992-2017), Earth Sys. Sci. Data, 10, 1491-1501, <https://doi.org/10.5194/essd-10-1491-2018>, 2018.
- Dutton, E. G., Michalsky, J. J., Stoffel, T., Forgan, B. W., Hickey, J., Nelson, D. W., Alberta, T. L., and Reda, I.: Measurement of broadband diffuse solar irradiance using current commercial instrumentation with a correction for thermal offset errors, J. Atmos. Ocean. Technol., 18, 297-314, [https://doi.org/10.1175/1520-0426\(2001\)018<0297:MOBDSI>2.0.CO;2](https://doi.org/10.1175/1520-0426(2001)018<0297:MOBDSI>2.0.CO;2), 2001.
- Gröbner, J., Reda, I., Wacker, S., Nyeki, S., Behrens, K., and Gorman, J.: A new absolute reference for atmospheric longwave irradiance measurements with traceability to SI units, J. Geophys. Res., 119, 7083-7090, <https://doi.org/10.1002/2014JD021630>, 2014.
- Kandula, M.: Frost growth and densification in laminar flow over flat surfaces, Int. J. Heat Mass Trans, 54, 3719-3731, <https://doi.org/10.1016/j.ijheatmasstransfer.2011.02.056>, 2011.
- Koerner, R. M. and coauthors: The Devon Island Expedition 1960-64, Arctic, 16, 57-76, <https://doi.org/10.14430/arctic3523>, 1963.

Field Code Changed



790 Lanconelli, C., Busetto, M., Dutton, E. G., König-Langlo, G., Maturilli, M., Sieger, R., Vitale, V., and Yamanouchi, T.: Polar  
baseline surface radiation measurements during the International Polar Year 2007-2009, *Earth Sys. Sci. Data*, 3, 1-8,  
<https://doi.org/10.5194/essd-3-1-2011>, 2011.

Lenschow, D. H.: The measurement of air velocity and temperature using the NCAR Buffalo Aircraft Measurement System,  
National Center for Atmospheric Research, NCAR-TN/EDD-74, <https://doi.org/10.5065/D6C8277W>, 1972.

795 Long, C. N. and Shi, Y.: An automated quality assessment and control algorithm for surface radiation measurements, *Open  
Atmos. Sci. J.*, 2, 23-37, <https://doi.org/10.2174/1874282300802010023>, 2008.

Matsui, N., Long, C. N., Augustine, J., Halliwell, D., Uttal, T., Longenecker, D., Niebergall, O., Wendell, J., and Albee, R.:  
800 Evaluation of Arctic broadband surface radiation measurements, *Atmos. Meas. Tech.*, 5, 1-10, <https://doi.org/10.5194/amt-5-1-2012>, 2012.

McArthur, B.: World Climate Research Programme Baseline Surface Radiation Network (BSRN) Operations Manual Version  
2.1, WCRP-121 WMO/TD-No. 1274, 176 pp.,  
805 [https://bsrn.awi.de/fileadmin/user\\_upload/bsrn.awi.de/Publications/McArthur.pdf](https://bsrn.awi.de/fileadmin/user_upload/bsrn.awi.de/Publications/McArthur.pdf), 2005.

Michalsky, J. J., Harrison, L. C., and Berkheiser III, W. E.: Cosine response characteristics of some radiometric and  
photometric sensors, *Solar Energy*, 54, 397-402, [https://doi.org/10.1016/0038-092X\(95\)00017-L](https://doi.org/10.1016/0038-092X(95)00017-L), 1995.

810 Michalsky, J. J., Kutschenreiter, M., and Long, C. N.: Significant improvements in pyranometer nighttime offsets using high-  
flow DC ventilation, *J. Atmos. Ocean. Technol.*, 34, 1323-1332, <https://doi.org/10.1175/JTECH-D-16-0224.1>, 2017.

Miller, N. B., Shupe, M. D., Cox, C. J., Noone, D., Persson, P. O. G., and Steffen, K.: Surface energy budget responses to  
radiative forcing at Summit, Greenland, *The Cryosphere*, 11, 497-516, <https://doi.org/10.5194/tc-11-497-2017>, 2017.

815 Miller, N. B., Shupe, M. D., Cox, C. J., Walden, V. P., Turner, D. D., and Steffen, K.: Cloud radiative forcing at Summit,  
Greenland, *J. Climate*, 28, 6267-6280, <https://doi.org/10.1175/JCLI-D-15-0076.1>, 2015.

Ohmura, A. and coauthors: Baseline Surface Radiation Network (BSRN/WCRP): New precision radiometry for climate  
820 research, *Bull. Amer. Meteorol. Soc.*, 79, 2115-2136, [https://doi.org/10.1175/1520-0477\(1998\)079<2115:BSRNBW>2.0.CO;2](https://doi.org/10.1175/1520-0477(1998)079<2115:BSRNBW>2.0.CO;2), 1998.

- Overland, J. E. and Wang, M.: Arctic-midlatitude weather linkages in North America, *Polar Sci.*, 16, 1-9, <https://doi.org/10.1016/j.polar.2018.02.001>, 2018.
- 825 Persson, P. O. G., Blomquist, B., Guest, P., Stammerjohn, S., Fairall, C. W., Rainville, L., Lund, B., Ackley, S., and Thomson, J.: Shipboard observations of meteorology and near-surface environment during autumn freezeup in the Beaufort/Chukchi Seas, *J. Geophys. Res.*, 123, 4930-4969, <https://doi.org/10.1029/2018JC013786>, 2018.
- 830 Persson, P. O. G. and Semmer, S.: Impacts of Riming on Arctic Surface Energy Budget Measurements, Autonomous Polar Observing Systems Workshop, Potomac, MD, Sep 30 – Oct 1, 2010.
- Persson, P. O. G., Fairall, C. W., Andreas, E. L., Guest, P. S., and Perovich, D.: Measurements near the Atmospheric Surface Flux Group tower at SHEBA: Near-surface conditions and surface energy budget, *J. Geophys. Res.*, 107, 8045, <https://doi.org/10.1029/2000JC000705>, 2002.
- 835 Sedlar, J., Tjernström, M., Mauritsen, T., Shupe, M. D., Brooks, I. M., Persson, P. O. G., Birch, C. E., Leck, C., Sirevaag, A., and Nicolaus, M.: A transitioning Arctic surface energy budget: the impacts of solar zenith angle, surface albedo and cloud radiative forcing, *Climate Dyn.*, 37, 1643-1660, <https://doi.org/10.1007/s00382-010-0937-5>, 2011.
- 840 Shupe, M. D., Walden V. P., Eloranta, E., Uttal, T., Campbell, J. R., Starkweather, S. M., and Shiobara, M.: Clouds at Arctic atmospheric observatories. Part I: Occurrence and macrophysical properties, *J. Appl. Meteorol. Clim.*, 50, 626-644, <https://doi.org/10.1175/2010JAMC2467.1>, 2011.
- 845 Steufer, M., Cassella, V., Korevaar, M., and Wong, T.: Heater Pyrheliometer Field Campaign Report. Ed. By R. Stafford, ARM user facility, DOE/SC-ARM-19-030.
- Thompson, D. C.: Aerodynamic heating of miniature bead thermistor thermometers in a rarified airstream, *J. Appl. Meteorol.*, 7, 504-508, [https://doi.org/10.1175/1520-0450\(1968\)007<0504:AHOMBT>2.0.CO;2](https://doi.org/10.1175/1520-0450(1968)007<0504:AHOMBT>2.0.CO;2), 1968.
- 850 van den Broeke, M., van As, D., Reijmer, C., and van de Wal, R.: Assessing and improving the quality of unattended radiation measurements in Antarctica, *J. Atmos. Ocean. Technol.*, 21, 1417-1431, [https://doi.org/10.1175/1520-0426\(2004\)021<1417:AAITQO>2.0.CO;2](https://doi.org/10.1175/1520-0426(2004)021<1417:AAITQO>2.0.CO;2), 2004.

Field Code Changed

Deleted: r

Wang, W., Zender, C. S., and van As, D.: Temporal characteristics of cloud radiative effects on the Greenland ice sheet: discoveries from multiyear automatic weather station measurements, J. Geophys. Res., 123, 11348-11361, <https://doi.org/10.1029/2018JD028540>, 2018.

860 Weisser, U.: Status update of BSRN station Sonnblick (SON) – (Apr 2016), 14<sup>th</sup> VSRN Science Review and Workshop, Canberra, Australia, April 26-29, 2016, [https://www.esrl.noaa.gov/gmd/grad/meetings/BSRN\\_talks/P1\\_7\\_Poster\\_BSRN\\_Canberra\\_Olefs\\_Weiser\\_2016.pdf](https://www.esrl.noaa.gov/gmd/grad/meetings/BSRN_talks/P1_7_Poster_BSRN_Canberra_Olefs_Weiser_2016.pdf), 2016.

Wendler, G., Moore, B., Galloway, K.: Strong temperature increase and shrinking sea ice in Arctic Alaska, Open Atmos. Sci. J., 8, 7-15, <https://doi.org/10.2174/1874282301408010007>, 2014.

865



870

875

880


**Table 1.** List of quality control procedures received by D-ICE instruments. “x”s denote the procedure was implemented and “o”s indicate the procedure was not implemented.

885

Table Position	Radiometer Serial #	Band	Calibration Source	Table Illumination Removed	QC: Visual Screening	QC: Long and Shi (2008)	QC: Shadow Flag	QC: Icing Flag	QC: IR- Loss Correction	QC Notes
1	34231F3	SW	GMD	x	x	x	x	x	x	None
2	160478	SW	GMD	x	x	x	x	x	x	None
3	160183	LW	GMD	o	x	x	o	x	o	None
4	160002	SW	Factory	x	x	x	x	x	o	None
5	160008	LW	Factory	o	x	x	o	x	o	None
6	26818F3	SW	GMD	x	x	x	x	x	x	None
7	18135F3	SW	GMD	x	x	x	x	x	x	None
8	34309F3	LW	GMD	o	x	x	o	x	o	None
9	28507F3	LW	GMD	o	x	x	o	x	o	None
10	F16305R	SW	GMD	x	x	x	x	x	x	None
11	26214	SW	GMD	x	x	x	x	x	x	No cleaning; Poor Level
12	130814	SW	GMD	x	x	x	x	x	x	Fan dead 27-Dec-2017 to 04-Jan-2018
13	A1571	SW	Factory	x	x	x	x	x	o	Ventilator shadowing
14	20523F3	SW	GMD	x	x	x	x	x	x	Fan dead 19-Jan-2018 to 08-Feb-2018
15	38172F3	SW	GMD	x	x	x	x	x	x	None
16	26236	SW	GMD	x	x	x	x	x	x	None
17	130819	SW	GMD	x	x	x	x	x	o	None
18	4037	LW	Factory	o	x	x	o	x	o	None
19	S16088025	SW	GMD	x	x	x	x	x	o	None
20	S16090016	SW	GMD	x	x	x	x	x	o	None
21	2510	SW	GMD	x	x	x	x	x	o	None
22	A1338	SW	Factory	x	x	x	x	x	o	None
23	2060	SW	Factory	x	x	x	x	x	o	None
24	8041	SW	GMD	x	x	x	x	x	o	None
25	130617	SW	GMD	x	x	x	x	x	o	None
26	970426	SW	GMD	x	x	x	x	x	x	None


890

895

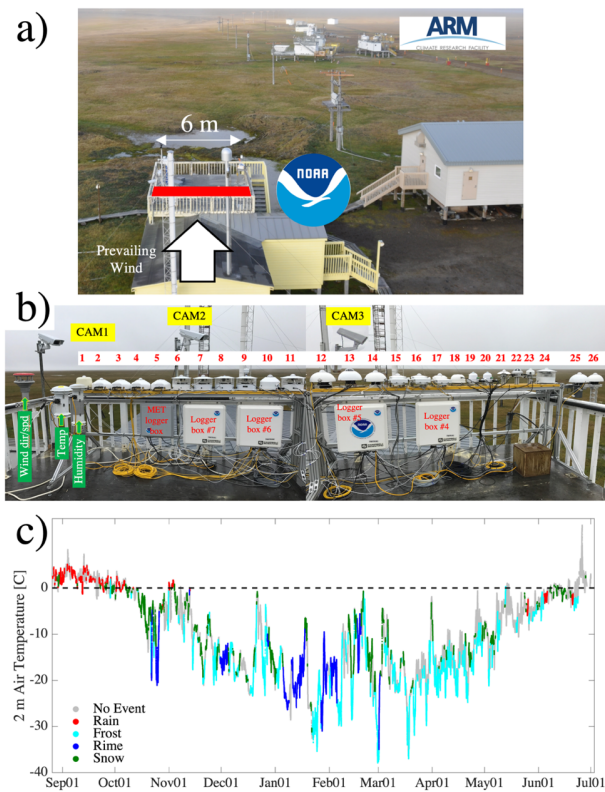


**Figure 1.** (a) NOAA-GML Barrow Atmospheric Baseline Observatory in Utqiagvik, Alaska ( $71.325^{\circ}\text{N}$ ,  $156.625^{\circ}\text{W}$ , 8 masl), DoE-ARM facility in the background (image from <https://www.esrl.noaa.gov/gmd/obop/brw/>). The red square in (a) shows location and orientation of the D-ICE table, which is pictured in (b). (c) Time series of air temperature color-coded with the types of precipitation and icing events that were recorded: rain (red), frost (cyan), rime (blue), snow (green), and grey (no event).

Deleted: a

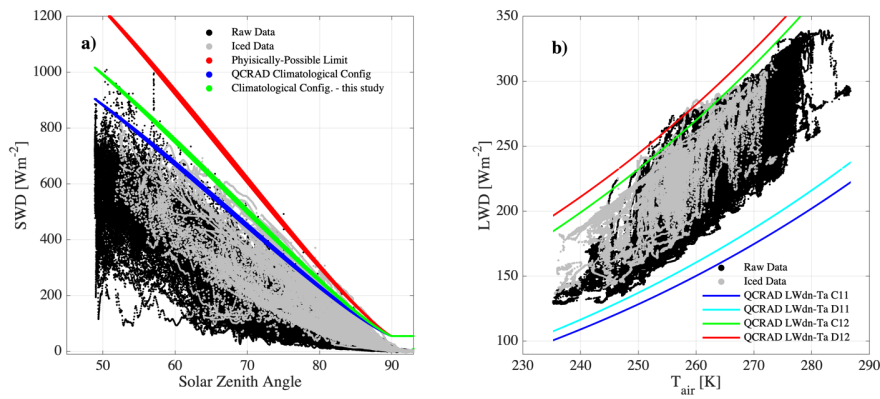


**Figure 2.** Examples of climatological configurable limit tests from Long and Shi (2008) for SWD (SN F16305R) (a) and LWD (SN 28507) (b). The figures are comparable to figures 1 and 9 from Long and Shi except that 1 min average are shown here instead of 15 min. Black points are ice-free and gray points are contaminated with ice. The colored lines are suggested thresholds for rejection of data of varying degrees of strictness.

Deleted: a

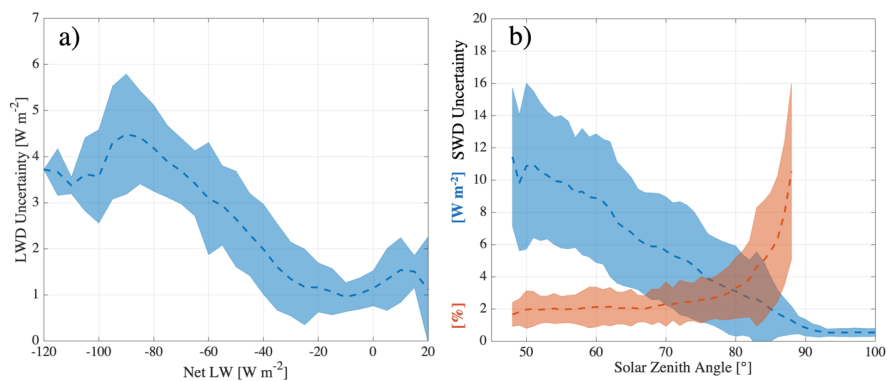


**Figure 3.** (a) Mean (dashed line) and  $1\sigma$  (shading) variability in calculated 1 min average uncertainties for LWD as a function of the net longwave flux represented by the mean thermopile flux of the pyrgeometers. (b) Similar to (a) for uncertainty in SWD plotted against solar zenith angle. Uncertainties in (b) are plotted in units of  $\text{W m}^{-2}$  (blue) and relative units (red).



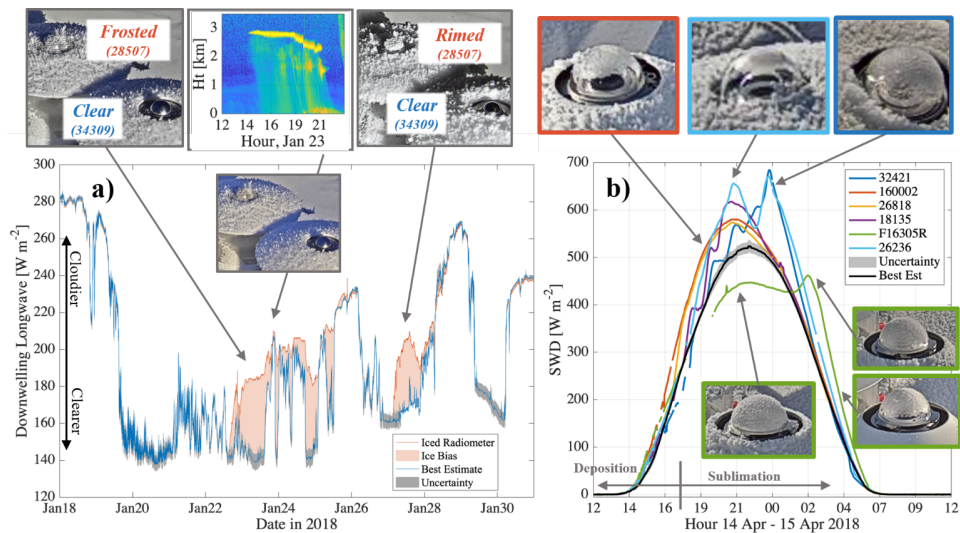


**Figure 4.** Case studies of icing for LWD in late January (a) and SWD during a clear day in April (b). Inset images show condition of highlighted radiometers. The upper-centre panel in (a) shows backscatter from the DoE-ARM ceilometer.

Deleted: e

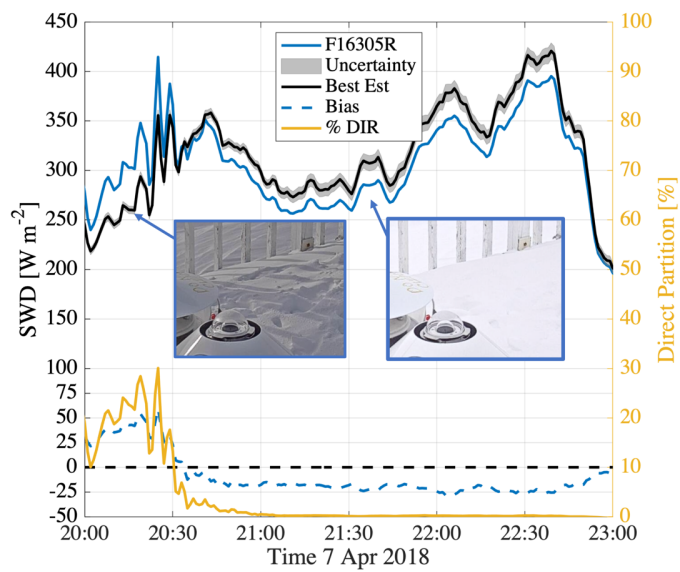

**Figure 5.** Case study of SWD on 7 April 2018. The solid black line and grey shading are the best estimate and uncertainty, the solid blue line is an icy pyranometer shown in the inset images. The dashed blue line is the bias in the solid blue relative to the solid black and the yellow line shows the percent of the irradiance contributed by the direct beam: when this value is near zero, the lighting is diffuse under overcast conditions.


Deleted: a

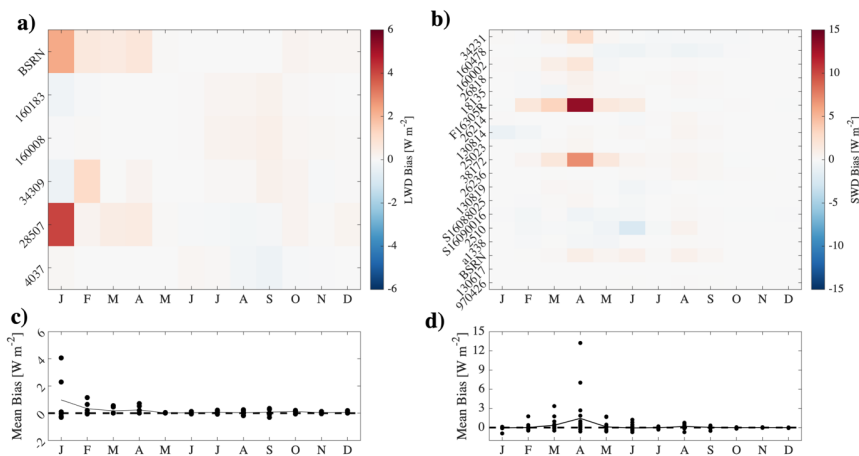

**Figure 6.** Calculations of biases in monthly means relative to the BE for  $LWD$  (a,c) and  $SWD$  (b,d). The upper panels show individual instruments and months; the same data are plotted in time series form in the lower panels for reference. All calculations are corrected for statistical differences between individual radiometers and the BE when ice-free. The calculations are for all conditions, not just times when ice was present.

Deleted: s


Deleted: L

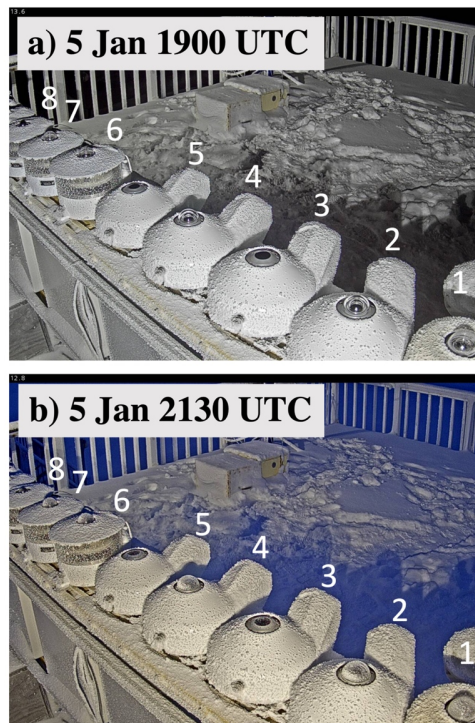

**Figure 7.** From CAM1, a freezing fog event in progress on 5 Jan and resulting in riming. (a) Ventilators operating normally during the riming event. (b) After the image in (a) was captured, the ventilators were unpowered resulting in icing on domes after several hours of equilibration. Numbers refer to the system positions from Figure 1b.

1005



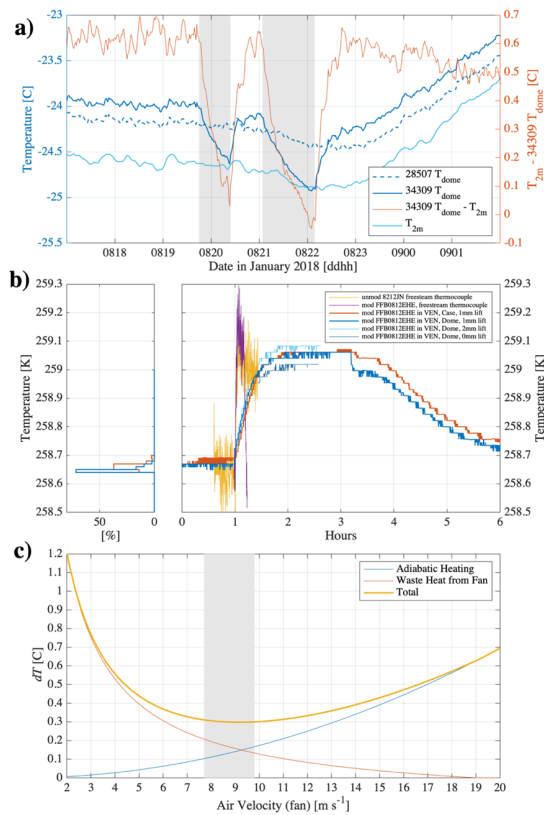

**Figure 9.** (a) Case study from D-ICE on 8-9 Jan, 2018 showing the dome temperatures of PIR 28507 (dashed blue), PIR 34309 (solid blue), the 2 m air temperature (light blue) and the difference in the two dome temperatures (red, right-side axis). The grey shading highlights periods when the ventilator in 34309 was turned off. (b) Laboratory tests carried out in a cold chamber in Boulder, Colorado, using various configurations of the Eppley VEN ventilator housing an FFB0812EHE fan (red and blues) as well as tests with an FFB0812EHE (purple) and 8212JN (yellow) fan without the VEN. The tests are described in Section 4.2. (c) Theoretical calculations of heating from FFB0812EHE fan waste heat (Eq. 2) (red), adiabatic compression (Eq. 3) (blue), and the sum of both (yellow). The grey shading in (c) is the range of observed air velocities near the top of the PIR dome in an Eppley VEN.