



# Deep Learning Based Post-Process Correction of the Aerosol Parameters in the High-Resolution Sentinel-3 Level-2 Synergy Product

Antti Lipponen<sup>1</sup>, Jaakko Reinvall<sup>2</sup>, Arttu Väisänen<sup>2</sup>, Henri Taskinen<sup>2</sup>, Timo Lähivaara<sup>2</sup>, Larisa Sogacheva<sup>1</sup>, Pekka Kolmonen<sup>1</sup>, Kari Lehtinen<sup>1,2</sup>, Antti Arola<sup>1</sup>, and Ville Kolehmainen<sup>2</sup>

<sup>1</sup>Finnish Meteorological Institute, Atmospheric Research Centre of Eastern Finland, Kuopio, Finland

<sup>2</sup>University of Eastern Finland, Department of Applied Physics, Kuopio, Finland

**Correspondence:** Antti Lipponen (antti.lipponen@fmi.fi)

**Abstract.** Satellite-based aerosol retrievals provide global spatially distributed estimates of atmospheric aerosol parameters that are commonly needed in applications such as estimation of atmospherically corrected satellite data products, climate modeling and air quality monitoring. However, a common feature of the conventional satellite aerosol retrievals is that they have reasonably low spatial resolution and poor accuracy caused by uncertainty in auxiliary model parameters, such as fixed aerosol model parameters, and the approximate forward radiative transfer models utilized to keep the computational complexity feasible. As a result, the improvement and re-processing of the operational satellite data retrieval algorithms would become a tedious and computationally excessive problem. To overcome these problems, we have developed a machine learning-based post-process correction approach to correct the existing operational satellite aerosol data products. Our approach combines the existing satellite retrieval data and a post-processing step where a machine learning algorithm is utilized to predict the approximation error in the conventional retrieval. With approximation error we refer to the discrepancy between the true aerosol parameters and the ones retrieved using the satellite data. Our hypothesis is that the prediction of the approximation error with a finite training data set is a less complex and easier task than the direct fully learned machine learning based prediction in which the aerosol parameters are directly predicted given the satellite observations and measurement geometry. With our approach, there is no need to re-run the existing retrieval algorithms and only a computationally feasible post-processing step is needed. Our approach is based on neural networks trained based on collocated satellite data and accurate ground based AERONET aerosol data. Based on our post-processing approach, we propose a post-process corrected high resolution Sentinel-3 Synergy aerosol product, which gives a spectral estimate of the aerosol optical depth at five different wavelengths with a high spatial resolution equivalent to the native resolution of the Sentinel-3 level-1 data (300 meters at nadir). With aerosol data from Sentinel-3A and 3B satellites, we demonstrate that our approach produces high-resolution aerosol data with better accuracy than the operational Sentinel-3 level-2 Synergy aerosol product or a conventional fully learned machine learning approach.



## 1 Introduction

Climate change is one of the biggest challenges our society is facing today (IPCC, 2021). Despite the rapidly  
25 progressing climate research, projections of the future climate still contain large uncertainties with anthropogenic  
aerosol forcing being among the largest sources of these uncertainties (Pachauri et al., 2014). If more accurate global  
information about the atmospheric aerosol parameters such as the aerosol optical depth (AOD) and Angstrom  
exponent (AE), and consequently of their product aerosol index (AI), were available, it would enable more accurate  
30 modelling of anthropogenic aerosol forcing and could lead to a significant reduction of the uncertainties in future  
climate projections. Another major challenge for our societies is air quality. In 2017, 2–25% of all deaths worldwide  
were attributable to ambient particulate matter pollution (GBD 2017 Risk Factor Collaborators et al., 2018). To  
monitor more accurately air quality and pollution sources near real time spatially high resolution estimates of aerosols  
are needed (van Donkelaar et al., 2015).

Ground based aerosol observations can be obtained from the Aerosol Robotic Network (AERONET) which utilizes  
35 ground based direct sun photometers (Holben et al., 1998). AERONET stations produce accurate information on  
aerosols because they directly observe the attenuation of solar radiation without interference from land surface  
reflections. However, AERONET has the limitation that the network consist of a few hundreds of irregularly spaced  
measurement stations, leading to a very limited and sparse spatial coverage of aerosol information. The only way to  
get wide spatial coverage information on aerosols is to use satellite retrievals.

40 Aerosol satellite retrieval algorithms produce estimates of the aerosol optical properties such as AOD given the  
satellite observation data such as the top-of-atmosphere reflectances or radiances and the information on the  
observation geometry. Satellite retrieval algorithms have been developed for multiple satellite instruments and the  
available satellite aerosol data records span already time series that are over 40 years long (Sogacheva et al., 2020).  
Examples of satellite aerosol data products include the Moderate Imaging Spectroradiometer (MODIS) aerosol  
45 products (Salomonson et al., 1989; Levy et al., 2013), and Sentinel-3 Synergy aerosol products.

A satellite aerosol retrieval requires solution of a non-linear inverse problem, where the task is to find aerosol  
parameters that minimize a misfit (such as the least squares residual) between the satellite observation data and a  
forward model, which models the causal relationship from the unknown aerosol parameters to the satellite observation  
data. Atmospheric monitoring satellites cover the globe almost daily with spatial high resolution observation data,  
50 resulting in huge amount of daily data to be processed by the retrieval algorithms. Due to the excessive amount of  
data, the operational aerosol retrieval algorithms employ physically and computationally reduced approximations of  
radiative transfer models as the forward models (e.g. lookup-tables) and relatively simple inverse problem approaches,  
which often ignore some of the observation data to reach fast computation times (Dubovik et al., 2011). Further, the  
retrieval algorithms typically produce spatially averaged aerosol products that have lower spatial resolution compared  
55 to the native satellite level-1 observation data. Because of these approximations and reductions, the aerosol retrievals  
have limited accuracy and sub optimal spatial resolution.



Machine learning based solutions have been recently proposed for satellite aerosol retrievals in many studies. Compared to conventional inverse problems approaches, machine learning based solutions lead to much faster computation time (once the model has been trained) and they also offer a flexible framework for utilization of learning data based prior information in the retrieval. Most of the machine learning approaches to aerosol retrieval employ a fully learned approach where the machine learning model is trained to emulate the retrieval directly, that is, to predict the values of the unknown aerosol parameters given the satellite observation data (top-of-atmosphere radiances or reflectances) and observation geometry as the inputs. In Randles et al. (2017) neural network based fully learned aerosol retrievals are assimilated into NASA's MERRA-2 re-analysis model. In Di Noia et al. (2017), a fully learned neural network model is used to retrieve the initial AOD for an iterative retrieval algorithm. In Lary et al. (2009), a fully learned approach with MODIS retrieved AOD and the surface type as additional inputs was used for the AOD retrieval from MODIS data. The results of Lary et al. (2009) were validated using the accurate (AERONET) data Holben et al. (1998). The authors were able to reduce the bias of the MODIS AOD data from 0.03 to 0.01 with neural networks, while with support vector machines even better improvement was reported - AOD bias was less than 0.001 and the correlation coefficient with AERONET was larger than 0.99. However, they performed validation using all the available AERONET network stations both for training and validation. The split between the training and validation datasets was carried out using random sets of the MODIS pixel values. With the random split of all pixels, the data samples from the same AERONET station were present both in training and evaluation datasets, leading potentially to overfitting as the model learns, for example, the surface properties at the locations of the AERONET stations and can thus predict the aerosol properties very accurately at these locations but may not generalize well to data from other regions. In Albayrak et al. (2013), a neural network based fully learned model was trained and evaluated for MODIS AOD retrieval. In their model, MODIS reflectances, measurement geometry information, MODIS AOD and its quality flag were used as the input to predict the AOD. They found their model to produce more accurate AOD retrievals than the operational MODIS Dark Target algorithm. In Lanzaco et al. (2017), a slightly different type of machine learning based approach was used to improve satellite AOD retrievals. The authors used MODIS AOD retrievals and local meteorology information as inputs to predict the AOD in South America. This approach that combines the conventional AOD retrievals and local meteorology information was found to improve the AOD accuracy over the operational MODIS AOD. A problem in fully learned approaches is that they rely only on the training data and do not employ physics-based models in the retrievals. This may cause problems for the model to generalize to cases in which the inputs are outside the input space spanned by the training dataset.

In Lipponen et al. (2020) we proposed a model enforced machine learning model for post-process correction of satellite aerosol retrievals. The key idea in the model enforced approach is to exploit also the model and information of the conventional retrieval algorithm and train a machine learning algorithm for correction of the approximation error in the result of the conventional satellite retrieval algorithm. Previously, the post-process correction approach has been found to produce more stable and accurate results than a fully learned approach in generation of surrogate simulation models (Lipponen et al., 2013, 2018) and in medical imaging, see for example Hamilton et al. (2019). The



advantages of the model enforced post-process correction approach are improved accuracy over the existing data products and fully learned machine learning approach, and the possibility to post-process correct existing (past) satellite data products with no need for full recalculation of the retrievals. In Lipponen et al. (2020), the model enforced approach was combined with a Random Forest regression algorithm for post-process correction of MODIS AOD and AE products using collocated MODIS and AERONET aerosol data for training the correction model for the approximation error in AOD and AE in the MODIS DT over land product. The post-process correction was found to yield significantly improved accuracy over the MODIS AOD and AE retrievals, and the correction approach resulted in better accuracy retrievals than the fully learned machine learning approach.

100 In this paper, we propose a post-process corrected high resolution Sentinel-3 Synergy aerosol product. The product is based on the high resolution Sentinel-3 level-2 Synergy land product aerosol parameters with 300 meter spatial resolution and the model enforced machine learning approach, where a feed forward neural network is trained for post process correction of the approximation error in the Sentinel-3 level-2 Synergy aerosol product. The training of the neural network is based on collocated Sentinel-3 Synergy and AERONET data from five selected regions of interest. Given the Sentinel-3 observation data and high resolution aerosol products as input, our model produces an estimate of the AOD at five wavelengths utilizing the native 300m resolution of the Sentinel-3 observation data.

105 The rest of this paper is organized as follows. In section we describe the approximation error model for post-process correction of the satellite aerosol retrieval. Section 3 explains the preprocessing of the Sentinel-3 and AERONET data for machine learning and the neural network model used for the regression task. Section 4 gives the results and Section 5 the conclusions.

## 2 Post-process correction model of satellite aerosol retrievals

Let  $\mathbf{y} \in \mathbb{R}^m$  denote an accurate satellite aerosol retrieval

$$\mathbf{y} = f(\mathbf{x}), \tag{1}$$

115 where vector  $\mathbf{y}$  contains the output of the satellite retrieval algorithm,  $f : \mathbb{R}^n \mapsto \mathbb{R}^m$  is an accurate retrieval algorithm and  $\mathbf{x} \in \mathbb{R}^n$  contains all the algorithm inputs including the observation geometry and level-1 satellite observation data such as the top-of-atmosphere reflectances. Typically, the retrieval is carried out one image pixel at a time and the aerosol retrieval  $\mathbf{y}$  can consist, for example, AOD and AE for a single image pixel, or as in the present study, AOD in a single image pixel at five wavelengths.

In practice, due to uncertainties in the auxiliary parameters, such as land surface reflectance, of the underlying forward model utilized in the retrieval, extensive computational dimension of the problem and processing time limitations, it is not possible to construct an accurate retrieval algorithm  $f$  but an approximate retrieval algorithm

$$\tilde{\mathbf{y}} \approx \tilde{f}(\mathbf{x}) \tag{2}$$



has to be employed instead. The approximate retrieval  $\tilde{f}$  is typically based on physically simplified and computationally reduced approximate forward models that are used due to huge amount of data and the need for computational efficiency. The utilization of the approximate retrieval algorithm leads to an *approximation error*

$$e(\mathbf{x}) = f(\mathbf{x}) - \tilde{f}(\mathbf{x}) \quad (3)$$

in the retrieval parameters.

The core idea in the model enforced post-process correction model is to improve the accuracy of the approximate retrieval (2) by machine learning techniques Lipponen et al. (2020). By Equations (1)-(3), the accurate retrieval can be written as

$$\begin{aligned} \mathbf{y} &= f(\mathbf{x}) \\ &= \tilde{f}(\mathbf{x}) + [f(\mathbf{x}) - \tilde{f}(\mathbf{x})] \\ &= \tilde{f}(\mathbf{x}) + e(\mathbf{x}). \end{aligned} \quad (4)$$

To obtain the corrected retrieval, Equation (4) is used to combine the conventional (physics based) retrieval algorithm  $\tilde{f}(\mathbf{x})$  and a machine learning based model  $\hat{e}(\mathbf{x})$  to predict the realization of the approximation error  $e(\mathbf{x})$  to obtain a corrected retrieval


$$\mathbf{y} \approx \tilde{f}(\mathbf{x}) + \hat{e}(\mathbf{x}). \quad (5)$$

Note that this approach is different from a conventional fully learned machine learning model in which the aim is to emulate the accurate retrieval algorithm  $f(\mathbf{x})$  with a machine learning model

$$\mathbf{y} \approx \hat{f}(\mathbf{x}) \quad (6)$$

that is trained to predict the retrieval  $\mathbf{y}$  directly from the satellite observation and geometry data  $\mathbf{x}$ , see Figure 1 for a flowchart of fully learned and model enforced regression models.

The reason why the model enforced approach (5) can be expected to perform better than the fully learned model (6) is that the approximation error  $e(\mathbf{x})$  is a simpler function for machine learning regression than the full physics-based retrieval  $f(\mathbf{x})$  thus resulting in more accurate results than with a fully learned approach Lipponen et al. (2013, 2018). Also, while the fully learned approach utilizes an ensemble of satellite observation data as learning data, the model enforced approach utilizes also the additional information in the approximate retrievals. Also, as the training of the post process correction is based on existing satellite data and retrievals, the implementation can be done in a straightforward manner, for example, using black-box machine learning code packages and used for correction of past satellite retrievals without recomputing the approximate retrieval products  $\tilde{f}(\mathbf{x})$ . In addition, the post process correction model is also flexible with respect the choice of the statistical regression model, and the choice of the regression model can be tailored to different retrieval problems separately.

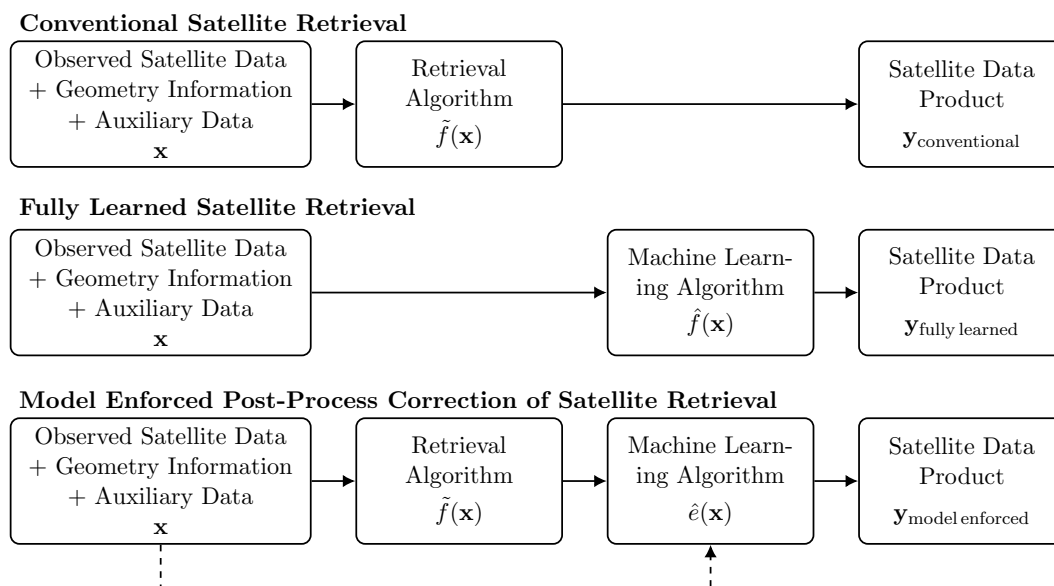

**Figure 1.** Top: Conventional satellite retrieval. Middle: Fully learned machine learning based satellite retrieval approach. Bottom: Model enforced post-process correction satellite retrieval approach.

### 3 Methods

This section describes the construction of the learning and test data for the machine learning retrieval of Sentinel-3  
155 aerosol product with the post-process correction model (5) and the fully learned model (6). The selection of the  
neural network models and training of the networks is also described. For training and validation of the post-process  
correction, we use the high resolution Sentinel-3 level-2 Synergy and AERONET aerosol data.

#### 3.1 Sentinel-3 satellite datasets

Sentinel-3 is a European ocean and land mission. Currently two satellites related to this mission (Sentinel-3A and 3B)  
160 are flying and collecting data. In this study, we use the Sentinel-3 Ocean and Land Color Instrument (OLCI) and Sea  
and Land Surface Temperature Radiometer (SLSTR) data. OLCI is a medium-resolution imaging spectroradiometer  
(spatial resolution about 300 m at nadir) with 21 spectral bands from 400 to 1020 nm. SLSTR is an imaging  
radiometer with dual-view capabilities. The pixel size of SLSTR is from 500 meters to 1 km and spectral coverage is  
from visible to thermal infrared in 9 standard bands (S1-S9). The swaths of these two instruments overlap allowing  
165 combined products that exploit data from both instruments. The high resolution Sentinel-3 level-2 Synergy land  
aerosol product is this type of combined product which we will post-process correct by the model (5).

We use both level-1b and level-2 data of the Sentinel-3 satellite mission data products from both Sentinel-3A and  
Sentinel-3B satellites. The level-1b data includes the information about the measurement geometry and the satellite



observed reflectances. The level-2 data includes the Synergy retrieval data and the corresponding quality information.  
170 We use the SLSTR level-1b data from the product SL\_1\_RBT, OLCI level-1b data from the OL\_1\_ERR data product  
and Sentinel-3 level-2 data from the SY\_2\_SYN data product. We use year 2019 data in our study. For more information  
on the Sentinel-3 mission datasets, see <https://sentinel.esa.int/web/sentinel/missions/sentinel-3/data-products>. The  
Sentinel-3 data used in the models are listed in the appendix.

### 3.2 AERONET


175 AERONET is a global network of sun photometers Holben et al. (1998). AERONET has a Direct Sun data product  
that has both the AOD and AE data that we will use for training and testing of the machine learning models.  
AERONET is commonly used as an independent data source and all the data is publicly available at the AERONET  
website (<http://aeronet.gsfc.nasa.gov/>). An extensive description of the AERONET sites, procedures and data pro-  
vided is available from this website. Ground-based sun photometers provide accurate measurements of AOD, because  
180 they directly observe the attenuation of solar radiation without interference from land surface reflections. The AOD  
estimated uncertainty varies spectrally from  $\pm 0.01$  to  $\pm 0.02$  with the highest error in the ultraviolet wavelengths  
Eck et al. (1999). In this study, we use AERONET, Version 3, level-2, Direct Sun algorithm data. The AERONET  
variables used in our studies are listed in the appendix.

### 3.3 Regions of interest

185 The training and testing of the post process correction model is based on Sentinel-3 and AERONET data for year  
2019 from five regions of interest shown in Figure 2. The regions of interest were selected so that different types of  
aerosol regions based on aerosol source and type, AOD values and different types of surface reflectances are included  
and also that the areas have good enough coverage of AERONET stations.

The data for the machine learning procedures consist of collocations of Sentinel-3 pixels with aerosol information  
190 and AERONET data. We use similar collocation procedure as in Petrenko et al. (2012) but with reduced radius  
of 5 km. We also require that the aerosol data in the pixels we use is not flagged as filled, climatology data, too  
low values, high error, partly cloudy or ambiguous clouds. Furthermore, we require that the pixels we use do not  
contain any cosmetic level-1 data. Our selections lead to a total number of 5526 collocated Sentinel-3 - AERONET  
overpasses for the machine learning procedures.

195 The AERONET stations were divided to separate training, validation and testing sets for good generalization of  
the machine learning procedures. More specifically, the stations were randomly split into two sets for two-fold cross  
validation. To ensure as equal spatial distribution of AERONET stations as possible in both sets, we carried out the  
random split separately for each region of interest.

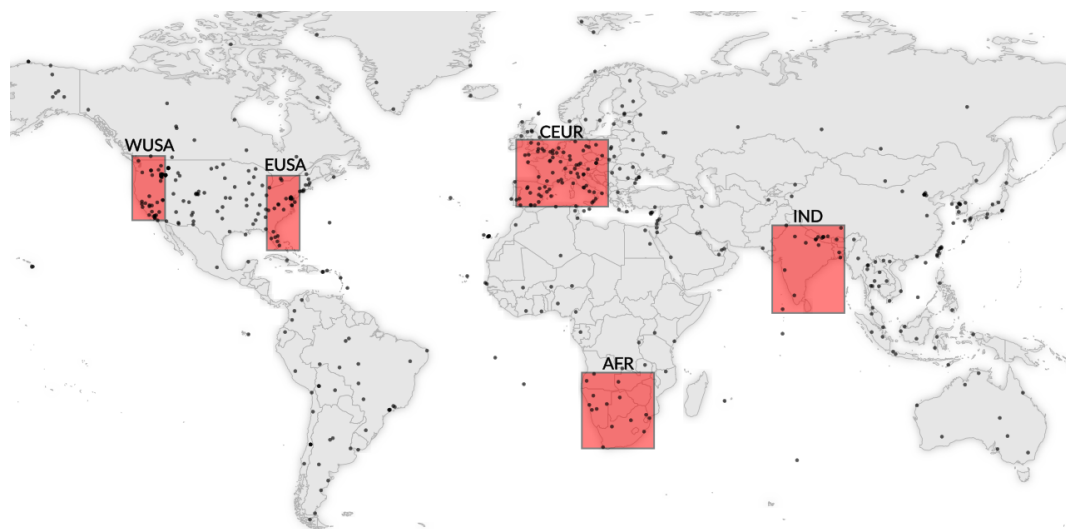

**Figure 2.** Regions of interest. Black dots indicate locations of AERONET stations.

### 3.4 Input and output data for the machine learning models

200 The aerosol retrieval  $\mathbf{y} \in \mathbb{R}^5$  in both, the post-process correction approach (5) and the fully learned approach (6), consist of AODs for a single  $300 \times 300\text{m}^2$  (at nadir) image pixel at wavelengths 440nm, 500nm, 550nm, 675nm and 870 nm. These wavelengths are native wavelengths in the AERONET and Sentinel-3 level-2 Synergy aerosol products in the sense that the AERONET produces AOD at 440nm, 500nm, 675nm and 870nm and the Synergy product at 550nm.

205 In the fully learned model (6), the regression target  $\mathbf{y} \in \mathbb{R}^5$  consist of the AERONET AODs at the selected five wavelengths. The AERONET AOD at the Synergy 550nm channel was estimated as the mean of AOD 550nm obtained from Angstrom law based on AERONET AOD at 500nm and AE 440-870nm. The input data for the fully learned model contains Sentinel-3 satellite geometry and observation variables for a single image pixel. All the input and output variables were standardized by subtracting the training data set mean and dividing by the standard  
210 deviation. To retain the spectral dependency of the AOD values at different wavelengths, all the AOD variables were standardized together using the mean and standard deviation of all AOD wavelengths. In case some of the inputs contains a missing value, it is filled with the average value of the training dataset. We also add a binary (0/1) inputs for each input variable to indicate if the data was filled. These selections and processing leads to an input vector  $\mathbf{x} \in \mathbb{R}^{90}$ . See the appendix for the Sentinel-3 data file variable names of the the inputs and outputs.

215 In the post-process correction approach, the regression target  $\mathbf{e} \in \mathbb{R}^5$  consist of the approximation error between AERONET and Synergy spectral AOD. The Synergy aerosol product contains AOD and AE at 550 nm, which are transformed by the Angstrom law to obtain the Synergy AOD product at the wavelengths 440nm, 500nm, 675nm





and 870nm. The input data of the post-correction model contains the same geometry and level-1 data variables that are used in the fully learned model plus the Sentinel-3 level-2 Synergy aerosol data. Furthermore, the inputs and 220 outputs are standardized and the missing values filled similarly as for the fully learned model. These selections lead to an input  $\mathbf{x} \in \mathbb{R}^{156}$ .

### 3.5 Deep learning based regression models

A fully connected feedforward neural network was selected as the model for the supervised learning tasks of estimating the regressors  $\hat{f}(\mathbf{x})$  in (6) and  $\hat{e}(\mathbf{x})$  in (5). In the neural network, the rectified linear unit (ReLU) was used as the 225 activation function for all the hidden layers and no activation function was employed for the output layer. The weight coefficients of the neural net were estimated by minimization of the MSE loss functional with the ADAM optimizer. In the network training, batch size was 512, initial learning rate  $5 \cdot 10^{-5}$  and the termination criteria for the learning was set to maximum 10000 epochs or until validation loss started to increase with patience tolerance set to 10 epochs. For further information on deep learning and neural networks, see e.g. (Goodfellow et al., 2016).

230 The architecture of the feedforward neural networks were optimized by utilizing the Asynchronous Successive Halving Algorithm (ASHA) (Li et al., 2020). In the ASHA optimization the maximum number of trial network architectures was set to 2500 and the algorithm was allowed to use up to 500 epochs in a single trial. The space of feasible states for the number of hidden layers in the ASHA optimization was set to (2, 3, 4) and the number of nodes in the hidden layers was allowed to be up to the number of elements in the input vector  $\mathbf{x}$ . The optimization of 235 the network architectures by ASHA led to the network structures shown in Figure 3 for the fully learned approach  $\hat{f}(\mathbf{x})$  and the post-process correction approach  $\hat{e}(\mathbf{x})$ . These network architectures were utilized in the final training of the models.


### 3.6 Implementation

The neural network computations were implemented in Python utilizing Pytorch and the ASHA optimization utilizing 240 the Ray-tune package. The codes for the fully learned model and post-process correction model will be made available. See the code and data availability for information on how to obtain the code to run the post-process correction and load a sample dataset.

## 4 Results

The accuracy of the post-process correction is tested using AERONET data as the ground truth for the aerosol 245 retrievals and the results are compared to the high resolution Sentinel-3 level-2 Synergy aerosol product and to the fully learned retrieval model (6).

Figure 4 shows scatter plots of the AOD retrievals with the Sentinel-3 level-2 Synergy product (left column), fully learned machine learning (middle column) and post-process correction model (right column) against the AERONET

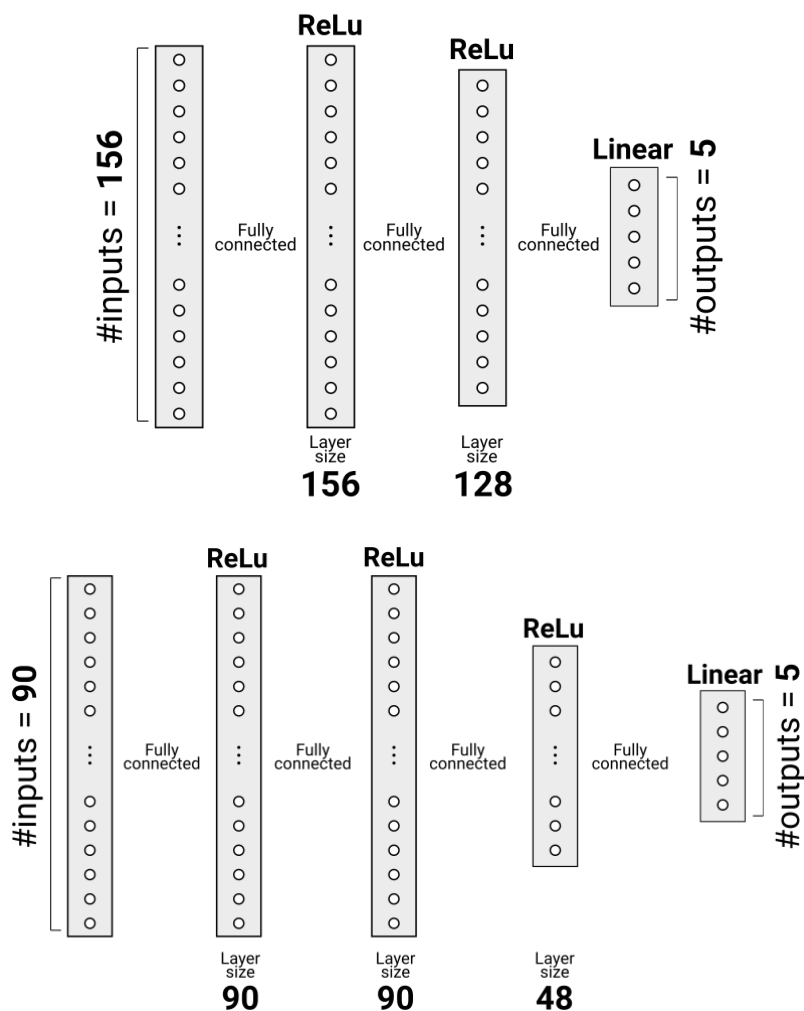

**Figure 3.** Schematic figure of neural network architectures used. Top: Correction network  $\hat{e}(\mathbf{x})$ . Bottom: Regression network  $\hat{f}(\mathbf{x})$ .

data at all the test data stations at the four visible to near infrared wavelengths 440nm, 500nm, 675nm and 870nm  
 250 measured by the AERONET. Each figure shows the coefficient of determination based correlation coefficient  $R^2$ ,  
 root mean squared error (RMSE), and median bias as the metrics to compare the retrievals. The figures show also  
 the ratio of samples that are inside the Dark Target over land expected error (EE) envelope of  $\pm(0.05 + 15\%)$ . As can  
 be seen, the machine learning approaches improve clearly the accuracy of the AODs compared to the high resolution  
 Sentinel-3 level-2 Synergy product. Between the two machine learning approaches, the post-process correction model  
 255 has otherwise better  $R^2$ , RMSE and median bias error metrics than the fully learned model with the exceptions of  
 the bias being the same as with the fully learned model at 500nm and 675nm. The ratio of samples inside the Dark



Target EE envelope are very similar with the post-process correction and fully learned models. A notable feature in the figures is that there are significantly less samples and relatively more "outliers" for large AOD values than for small AOD values. The accuracy of the machine learning estimates also improves for the higher wavelengths, which do contain fewer high AOD values. These findings can be attributed to the fact that the learning data contains relatively few samples for large AOD (the number of samples with  $AOD > 0.5$  is less than 5%). This indicates that more high AOD value learning data would be needed to improve the prediction of the high AOD values.

Figure 5 shows comparison of AOD at the native Sentinel-3 level-2 Synergy wavelength 550nm, AE and AI. Given the estimated AODs at the five wavelengths, the AE was estimated as a separate post processing step by utilizing the standard approach (e.g. in AERONET) where AE is estimated by a least squares fit to the linearization of the Angstrom law. In AERONET, the AE estimation is carried out using ordinary least squares type of method that rejects clear outliers from the data to improve the outlier tolerance of the AE estimation. The difference to AERONET AE obtained using ordinary least squares fitting with no outlier treatment, however, is small. The aerosol index (AI) is computed then as product of the AOD and AE. AI has been considered as a better proxy for cloud condensation nuclei (CCN) than AOD (Gryspeerd et al., 2017), since AI is more sensitive than AOD to the accumulation mode aerosol concentration. Figure 5 shows that the machine learning approaches lead to clearly improved estimates of AOD 550nm, AE and AI compared to the Sentinel-3 level-2 Synergy product. The post process correction approach produces the best RMSE,  $R^2$  and EE metrics for the AOD estimates. From the AE estimates, we observe that the high resolution Sentinel-3 level-2 Synergy AE product is uninformative as it produces the same constant value (approximately 1.1) for all of the test data points with a wide range of AERONET AEs. For the AE, the post-process correction approach has smaller bias and visibly better correlation (with nearly two times larger  $R^2$  metric) but worse RMSE than the fully learned model. For the AI the post-process correction has better RMSE, bias and  $R^2$  metrics compared to the fully learned model.

Figure 6 shows AERONET and Sentinel-3-based time series of AOD at 550 nm over three AERONET stations, Madrid, Paris, and Rome\_Tor\_Vergata for year 2019. In all stations, the overestimation of AOD by the Sentinel-3 level-2 Synergy product is evident. The Sentinel-3 level-2 Synergy AOD has also a clear seasonal cycle with higher AODs occurring on summer and lower AOD on winter. Both the fully learned model and post process corrected Sentinel-3 Synergy AOD are in very good agreement with the AERONET AOD. Furthermore, the regressor and post process correction model AOD capture very well the events of elevated AOD with duration of some days.

In Figure 7, monthly averages of AOD at 550 nm in western Europe for January, April, July and October 2019 are shown for the Sentinel-3 level-2 Synergy, fully learned model and post-process correction model based data. Again, the significantly higher AOD of Sentinel-3 level-2 Synergy compared to the other two models is evident. The figure also clearly shows that the amount of data varies quite significantly throughout the year mainly due to clouds and snow and more data is available for April and July than January and October. All datasets show some spatial variations of AOD over Europe and some cities and regions, such as Paris, France and Po Valley, Italy, clearly show up in AOD maps.



Figure 8 shows monthly averages of AOD at 550 nm for Madrid, Paris and Rome in July 2019. The filled circles in the images indicate the monthly averages of the AERONET stations present in the regions. The Sentinel-3 level-2 Synergy data product clearly produces a much higher AOD values than the fully learned and post-process correction models, and the overestimation with respect to AERONET is also evident. The Sentinel-3 level-2 Synergy AOD is also, due to spatial median filtering of the data, much smoother than the two other models. For the fully learned and post-process correction models, the AOD values are very close to the AERONET AODs at the AERONET sites and some high-resolution features are also clearly visible in the data. For all three cities, both the fully learned and post-process correction model show some neighbourhoods with elevated AOD. The correction model AOD shows even more details and less artefacts than the fully learned model AOD. For example in Rome, the road from the city center to the airport is clearly visible from the AOD data while the regression model does not show this road. The fully learned model also has some more box-shaped spatial anomalies than the other models.

## 5 Conclusions

We have developed a deep learning based post-process correction of the aerosol parameters in the high resolution Sentinel-3 level-2 Synergy land product. Sentinel-3 Synergy has also an aerosol data product specifically designed to retrieve the aerosol parameters. The aerosol data product, however, has spatial resolution of 4.5 km whereas the land product provides data with the Sentinel-3 instrument's full spatial imaging resolution of 300 meters. The drawback in the Synergy land product aerosol parameters is their relatively poor accuracy. The aim of the post-process correction is to significantly improve the accuracy of the Sentinel-3 level-2 Synergy land product aerosol parameters. The correction is carried out as a computationally light-weight post-processing step and therefore there is no need for re-running the actual Synergy retrieval algorithm to obtain the corrected aerosol data. As a reference for the machine learning based post-process correction of the Sentinel-3 level-2 Synergy data product we also trained a fully learned machine learning based regression model that carries out the full aerosol retrieval using Sentinel-3 level-1 data.

The results show that the fully learned and post-process correction machine learning approaches produces a clear improvement in the aerosol parameter accuracy over the official Synergy data product. The post-process correction approach leads generally to a more accurate aerosol parameters than the fully learned approach. The post-process correction approach combines information both from the physics-based conventional retrieval algorithm and machine learning correction whereas the fully learned model does not include any physics-based model information. The inclusion of the physics-based model information may make the post-process correction approach more tolerant against samples outside the range of the training data set when compared to the fully learned approach. The results show that the fully learned model results more often in high errors than the post-process correction.

The high spatial resolution, about 300 meters at nadir, and the high accuracy of the post-process corrected Sentinel-3 Synergy aerosol parameters over the official Sentinel-3 level-2 Synergy data product may possibly enable usage of



325 the data for new applications. For example, for air quality applications, the high resolution accurate aerosol data  
could be a step towards street level monitoring instead of the typical city or neighbourhood levels in conventional  
aerosol data products. Improved accuracy high spatial resolution aerosol parameter information may significantly  
also benefit atmospheric correction in many land surface satellite applications. The most impacted land surface  
applications are especially those that retrieve information from very low signal to noise ratio data such as the  
330 retrieval of vegetation solar-induced fluorescence.

*Code availability.* Python code and trained models to run the post-process correction are available at <https://github.com/TUT-ISI/S3POPCORN>

*Video supplement.* Video corresponding to Figure 7 can be found online at <https://doi.org/10.5281/zenodo.5287243>

## Appendix A: Sentinel-3 data used

335 This section describes the Sentinel-3 data used in the study. We use both level-1b and level-2 data of the Sentinel-3  
satellite mission data products and we use data from both Sentinel-3A and Sentinel-3B satellites. For more informa-  
tion on the Sentinel-3 mission datasets please see <https://sentinel.esa.int/web/sentinel/missions/sentinel-3>.

### Level-1b

#### SLSTR

340 We use SLSTR level-1b data from the SL\_1\_RBT data product. The variable names and the corresponding filenames  
in the data products are listed in Table A1.

#### OLCI

We use OLCI level-1b data from the OL\_1\_ERR data product. The variable names and the corresponding filenames  
in the data products are listed in Table A2.

345 **Level-2**

#### Synergy

We use Sentinel-3 level-2 data from the SY\_2\_SYN data product. The variable names and the corresponding filenames  
in the data products are listed in Table A3.



**Table A1.** Sentinel-3 SL1\_RBT files and variables used. Here [X] denotes the SLSTR band number 1 – 6.

Variable name	Variable
File: geodetic_an.nc	
latitude_an	Latitude of detector FOV centre on the Earth's surface, nadir view
longitude_an	Longitude of detector FOV centre on the Earth's surface, nadir view
File: geodetic_ao.nc	
latitude_ao	Latitude of detector FOV centre on the Earth's surface, oblique view
longitude_ao	Longitude of detector FOV centre on the Earth's surface, oblique view
File: geodetic_tx.nc	
latitude_tx	Latitude of detector FOV centre on the Earth's surface
longitude_tx	Longitude of detector FOV centre on the Earth's surface
File: geometry_tn.nc	
solar_zenith_tn	Solar zenith angle, nadir view
File: geometry_to.nc	
solar_zenith_to	Solar zenith angle, oblique view
File: SXX_radiance_an.nc	
S[X]_radiance_an	TOA radiance for channel S[X] (A stripe grid, nadir view)
File: S[X]_quality_an.nc	
S[X]_solar_irradiance_an	Solar irradiance at top of atmosphere, channel S[X], nadir view
File: S[X]_radiance_ao.nc	
S[X]_radiance_ao	TOA radiance for channel S[X] (A stripe grid, oblique view)
File: S[X]_quality_ao.nc	
S[X]_solar_irradiance_ao	Solar irradiance at top of atmosphere, channel S[X], oblique view

## Appendix B: Input and output variables of the models

350 We divide the input and output variables into following five groups.

### Geometry variables

- SYN\_altitude
- SYN\_O\_VAA



**Table A2.** Sentinel-3 OL1\_ERR files and variables used. Here [YY] denotes the OLCI band number 1 – 21.

Variable name	Variable
File: geo_coordinates.nc	
latitude	DEM corrected latitude
longitude	DEM corrected longitude
File: qualityFlags.nc	
quality_flags	Classification and quality flags
File: instrument_data.nc	
detector_index	Detector index
solar_flux	In-band solar irradiance, seasonally corrected
File: tie_geometries.nc	
SZA	Solar zenith angle
File: Oa[YY]_radiance.nc	
Oa[YY]_radiance	TOA radiance for OLCI acquisition band Oa[YY]

- SYN\_O\_VZA
- 355 – SYN\_O\_SAA
- SYN\_O\_SZA
- SYN\_SN\_VAA
- SYN\_SN\_VZA
- SYN\_SO\_VAA
- 360 – SYN\_SO\_VZA
- SYN\_O\_scattering\_angle
- SYN\_SO\_scattering\_angle
- SYN\_SN\_scattering\_angle

Here all variables are based on the Sentinel-3 Synergy data product. SYN\_O, SYN\_SN and SYN\_SO correspond  
 365 to OLCI, SLSTR nadir view and SLSTR oblique view, respectively.

**Satellite observation variables**

- SL1\_S1\_reflectance\_nadir



**Table A3.** Sentinel-3 SY\_2\_SYN files and variables used.

Variable name	Variable
File: time.nc	
start_time	Time of start measurement
stop_time	Time of stop measurement
File: geolocation.nc	
altitude	DEM corrected altitude
lat	DEM corrected latitude
lon	DEM corrected longitude
File: Syn_AMIN.nc	
AMIN	Aerosol Model Index Number
File: Syn_Angstrom_exp550.nc	
A550	Aerosol Angstrom exponent at 550 nm
File: Syn_AOT550.nc	
T550	Aerosol optical thickness
T550_err	Aerosol optical thickness standard error
File: flags.nc	
SYN_flags	Synergy classification and aerosol retrieval flags
CLOUD_flags	Synergy cloud flags
OLC_flags	Selected quality and classification flags for OLCI SYN channels
SLN_flags	Exception summary and confidence flags for SLSTR nadir-view SYN channels
SLO_flags	Exception summary and confidence flags for SLSTR oblique-view SYN channels
File: Syn_Oa[XX]_reflectance.nc	
SDR_Oa[YY]	Surface directional reflectance associated with OLCI channel [XX]
SDR_Oa[YY]_ERR	Surface directional reflectance error estimate associated with OLCI channel [XX]
File: Syn_S[YY]N_reflectance.nc	
SDR_S[YY]N	Surface directional reflectance associated with SLSTR channel [YY] acquired in nadir view
SDR_S[YY]N_ERR	Surface directional reflectance error estimate associated with SLSTR channel [YY] acquired in nadir view
File: Syn_S[YY]O_reflectance.nc	
SDR_S[YY]O	Surface directional reflectance associated with SLSTR channel [YY] acquired in oblique view
SDR_S[YY]O_ERR	Surface directional reflectance error estimate associated with SLSTR channel [YY] acquired in oblique view
File: tiepoints_olci.nc	
OLC_TP_lat	Latitude (WGS-84)
OLC_TP_lon	Longitude (WGS-84)
OLC_VAA	OLCI view azimuth angle
OLC_VZA	OLCI view zenith angle
SAA	Sun Azimuth Angle
SZA	Sun Zenith Angle
File: tiepoints_slstr_n.nc	
SLN_TP_lat	Latitude (WGS-84)
SLN_TP_lon	Longitude (WGS-84)
SLN_VAA	SLSTR nadir view azimuth angle
SLN_VZA	SLSTR nadir view zenith angle
File: tiepoints_slstr_o.nc	
SLO_TP_lat	Latitude (WGS-84)
SLO_TP_lon	Longitude (WGS-84)
SLO_VAA	SLSTR oblique view zenith angle
SLO_VZA	SLSTR oblique view zenith angle
File: tiepoints_meteo.nc	
air_pressure	Mean air pressure at sea-level
ozone	Total columnar ozone
water_vapour	Total column water vapour





- SL1\_S1\_reflectance\_oblique
- SL1\_S2\_reflectance\_nadir
- 370 – SL1\_S2\_reflectance\_oblique
- SL1\_S3\_reflectance\_nadir
- SL1\_S3\_reflectance\_oblique
- SL1\_S4\_reflectance\_nadir
- SL1\_S4\_reflectance\_oblique
- 375 – SL1\_S5\_reflectance\_nadir
- SL1\_S5\_reflectance\_oblique
- SL1\_S6\_reflectance\_nadir
- SL1\_S6\_reflectance\_oblique
- OL1\_Oa01\_reflectance
- 380 – OL1\_Oa02\_reflectance
- OL1\_Oa03\_reflectance
- OL1\_Oa04\_reflectance
- OL1\_Oa05\_reflectance
- OL1\_Oa06\_reflectance
- 385 – OL1\_Oa07\_reflectance
- OL1\_Oa08\_reflectance
- OL1\_Oa09\_reflectance
- OL1\_Oa10\_reflectance
- OL1\_Oa11\_reflectance
- 390 – OL1\_Oa12\_reflectance
- OL1\_Oa13\_reflectance



- OL1\_Oa14\_reflectance
- OL1\_Oa15\_reflectance
- OL1\_Oa16\_reflectance
- 395 – OL1\_Oa17\_reflectance
- OL1\_Oa18\_reflectance
- OL1\_Oa19\_reflectance
- OL1\_Oa20\_reflectance
- OL1\_Oa21\_reflectance
  
- 400 **SYN L2 variables**
- SYN\_AOD550
- SYN\_AOD550err
- SYN\_AE550
- SYN\_AMIN
- 405 – SYN\_SYN\_no\_slo
- SYN\_SYN\_no\_sln
- SYN\_SYN\_no\_olc
- SYN\_SDR\_Oa01
- SYN\_SDR\_Oa02
- 410 – SYN\_SDR\_Oa03
- SYN\_SDR\_Oa04
- SYN\_SDR\_Oa05
- SYN\_SDR\_Oa06
- SYN\_SDR\_Oa07
- 415 – SYN\_SDR\_Oa08



- SYN\_SDR\_Oa09
- SYN\_SDR\_Oa10
- SYN\_SDR\_Oa11
- SYN\_SDR\_Oa12
- 420 – SYN\_SDR\_Oa16
- SYN\_SDR\_Oa17
- SYN\_SDR\_Oa18
- SYN\_SDR\_Oa21
- SYN\_SDR\_S1N
- 425 – SYN\_SDR\_S1O
- SYN\_SDR\_S2N
- SYN\_SDR\_S2O
- SYN\_SDR\_S3N
- SYN\_SDR\_S3O
- 430 – SYN\_SDR\_S5N
- SYN\_SDR\_S5O
- SYN\_SDR\_S6N
- SYN\_SDR\_S6O

**Regression output variables**

- 435 – AERONET\_AOD\_550nm\_mean
- AERONET\_AOD\_440nm\_mean
- AERONET\_AOD\_500nm\_mean
- AERONET\_AOD\_675nm\_mean
- AERONET\_AOD\_870nm\_mean



#### 440 Correction output variables

- AOD550\_approximationerror
- AOD440\_approximationerror
- AOD500\_approximationerror
- AOD675\_approximationerror

445 – AOD870\_approximationerror

Approximation error variables ( $\epsilon$ ) are computed using the Equation 3.

#### Inputs and outputs

As the inputs for the regression model we use the variables from the following variable sets:

- Geometry variables
- 450 – Satellite observation variables

As the outputs for the regression model we use the variables from the following variable sets:

- Regression output variables

As the inputs for the correction model we use the variables from the following variable sets:

- Geometry variables
- 455 – Satellite observation variables
- SYN L2 variables

As the outputs for the correction model we use the variables from the following variable sets:

- Correction output variables

#### Appendix C: AERONET data used

460 The following variables of the AERONET data were used

- AOD\_440nm
- AOD\_500nm



- AOD\_675nm
- AOD\_870nm
- 465 – 440-870\_Angstrom\_Exponent

*Author contributions.* AL, JR, AV, HT, TL, and VK developed the deep learning methodology presented. AL collected and processed the data. All authors participated in the data analysis of the results. VK wrote the original manuscript. All authors reviewed and edited the manuscript.

*Competing interests.* The authors declare that they have no conflict of interest.

- 470 *Acknowledgements.* This study was funded by the European Space Agency EO science for society programme via POPCORN project. The research was also supported by the Academy of Finland, the Finnish Center of Excellence of Inverse Modeling and Imaging (project 336791) and Academy of Finland (project 321761).




## References

- Albayrak, A., Wei, J., Petrenko, M., Lynnes, C. S., and Levy, R. C.: Global bias adjustment for MODIS aerosol optical  
475 thickness using neural network, *Journal of Applied Remote Sensing*, 7, 073 514, 2013.
- Di Noia, A., Hasekamp, O. P., Wu, L., van Diedenhoven, B., Cairns, B., and Yorks, J. E.: Combined neural network/Phillips–  
Tikhonov approach to aerosol retrievals over land from the NASA Research Scanning Polarimeter, *Atmospheric Measure-  
ment Techniques*, 10, 4235–4252, <https://doi.org/10.5194/amt-10-4235-2017>, 2017.
- Dubovik, O., Herman, M., Holdak, A., Lapyonok, T., Tanré, D., Deuzé, J., Ducos, F., Sinyuk, A., and Lopatin, A.: Statistically  
480 optimized inversion algorithm for enhanced retrieval of aerosol properties from spectral multi-angle polarimetric satellite  
observations, *Atmospheric Measurement Techniques*, 4, 975–1018, 2011.
- Eck, T. F., Holben, B., Reid, J., Dubovik, O., Smirnov, A., O’neill, N., Slutsker, I., and Kinne, S.: Wavelength dependence  
of the optical depth of biomass burning, urban, and desert dust aerosols, *Journal of Geophysical Research: Atmospheres*,  
104, 31 333–31 349, 1999.
- 485 GBD 2017 Risk Factor Collaborators et al.: Global, regional, and national comparative risk assessment of 84 behavioural,  
environmental and occupational, and metabolic risks or clusters of risks for 195 countries and territories, 1990–2017: a  
systematic analysis for the Global Burden of Disease Study 2017, *Lancet (London, England)*, 392, 1923, 2018.
- Goodfellow, I., Bengio, Y., and Courville, A.: *Deep Learning*, MIT Press, <http://www.deeplearningbook.org>, 2016.
- Gryspeerd, E., Quaas, J., Ferrachat, S., Gettelman, A., Ghan, S., Lohmann, U., Morrison, H., Neubauer, D., Partridge, D. G.,  
490 Stier, P., et al.: Constraining the instantaneous aerosol influence on cloud albedo, *Proceedings of the National Academy of  
Sciences*, 114, 4899–4904, 2017.
- Hamilton, S. J., Hänninen, A., Hauptmann, A., and Kolehmainen, V.: Beltrami-net: domain-independent deep D-bar learning  
for absolute imaging with electrical impedance tomography (a-EIT), *Physiological measurement*, 40, 074 002, 2019.
- Holben, B. N., Eck, T., Slutsker, I., Tanre, D., Buis, J., Setzer, A., Vermote, E., Reagan, J. A., Kaufman, Y., Nakajima,  
495 T., et al.: AERONET—A federated instrument network and data archive for aerosol characterization, *Remote sensing of  
environment*, 66, 1–16, 1998.
- IPCC: Summary for Policymakers, 2021.
- Lanzaco, B. L., Olcese, L. E., Palancar, G. G., and Toselli, B. M.: An Improved Aerosol Optical Depth Map Based on  
Machine-Learning and MODIS Data: Development and Application in South America, *Aerosol and Air Quality Research*,  
500 17, 1523–1536, 2017.
- Lary, D. J., Remer, L., MacNeill, D., Roscoe, B., and Paradise, S.: Machine learning and bias correction of MODIS aerosol  
optical depth, *IEEE Geoscience and Remote Sensing Letters*, 6, 694–698, 2009.
- Levy, R., Mattoo, S., Munchak, L., Remer, L., Sayer, A., Patadia, F., and Hsu, N.: The Collection 6 MODIS aerosol products  
over land and ocean, *Atmospheric Measurement Techniques*, 6, 2989, 2013.
- 505 Li, L., Jamieson, K., Rostamizadeh, A., Gonina, E., Hardt, M., Recht, B., and Talwalkar, A.: A System for Massively Parallel  
Hyperparameter Tuning, 2020.
- Lipponen, A., Kolehmainen, V., Romakkaniemi, S., and Kokkola, H.: Correction of approximation errors with Ran-  
dom Forests applied to modelling of cloud droplet formation, *Geoscientific Model Development*, 6, 2087–2098,  
<https://doi.org/10.5194/gmd-6-2087-2013>, 2013.




- 510 Lipponen, A., Huttunen, J. M. J., Romakkaniemi, S., Kokkola, H., and Kolehmainen, V.: Correction of model reduction errors in simulations, *SIAM Journal on Scientific Computing*, 40, B305–B327, 2018.
- Lipponen, A., Kolehmainen, V., Kolmonen, P., Kukkurainen, A., Mielonen, T., Sabater, N., Sogacheva, L., Virtanen, T. H., and Arola, A.: Model Enforced Post-Process Correction of Satellite Aerosol Retrievals, *Atmospheric Measurement Techniques Discussions*, 2020, 1–17, <https://doi.org/10.5194/amt-2020-229>, 2020.
- 515 Pachauri, R. K., Allen, M. R., Barros, V. R., Broome, J., Cramer, W., Christ, R., Church, J. A., Clarke, L., Dahe, Q., Dasgupta, P., et al.: Climate change 2014: synthesis report. Contribution of Working Groups I, II and III to the fifth assessment report of the Intergovernmental Panel on Climate Change, Ipcc, 2014.
- Petrenko, M., Ichoku, C., and Leptoukh, G.: Multi-sensor Aerosol Products Sampling System (MAPSS), *Atmospheric Measurement Techniques*, 5, 913–926, <https://doi.org/10.5194/amt-5-913-2012>, 2012.
- 520 Randles, C., Da Silva, A., Buchard, V., Colarco, P., Darmenov, A., Govindaraju, R., Smirnov, A., Holben, B., Ferrare, R., Hair, J., et al.: The MERRA-2 aerosol reanalysis, 1980 onward. Part I: System description and data assimilation evaluation, *Journal of Climate*, 30, 6823–6850, 2017.
- Salomonson, V. V., Barnes, W., Maymon, P. W., Montgomery, H. E., and Ostrow, H.: MODIS: Advanced facility instrument for studies of the Earth as a system, *IEEE Transactions on Geoscience and Remote Sensing*, 27, 145–153, 1989.
- 525 Sogacheva, L., Popp, T., Sayer, A. M., Dubovik, O., Garay, M. J., Heckel, A., Hsu, N. C., Jethva, H., Kahn, R. A., Kolmonen, P., Kosmale, M., de Leeuw, G., Levy, R. C., Litvinov, P., Lyapustin, A., North, P., Torres, O., and Arola, A.: Merging regional and global aerosol optical depth records from major available satellite products, *Atmospheric Chemistry and Physics*, 20, 2031–2056, <https://doi.org/10.5194/acp-20-2031-2020>, 2020.
- van Donkelaar, A., Martin, R. V., Spurr, R. J. D., and Burnett, R. T.: High-Resolution Satellite-Derived PM<sub>2.5</sub> from Optimal
- 530 Estimation and Geographically Weighted Regression over North America, *Environmental Science & Technology*, 49, 10 482–10 491, <https://doi.org/10.1021/acs.est.5b02076>, PMID: 26261937, 2015.

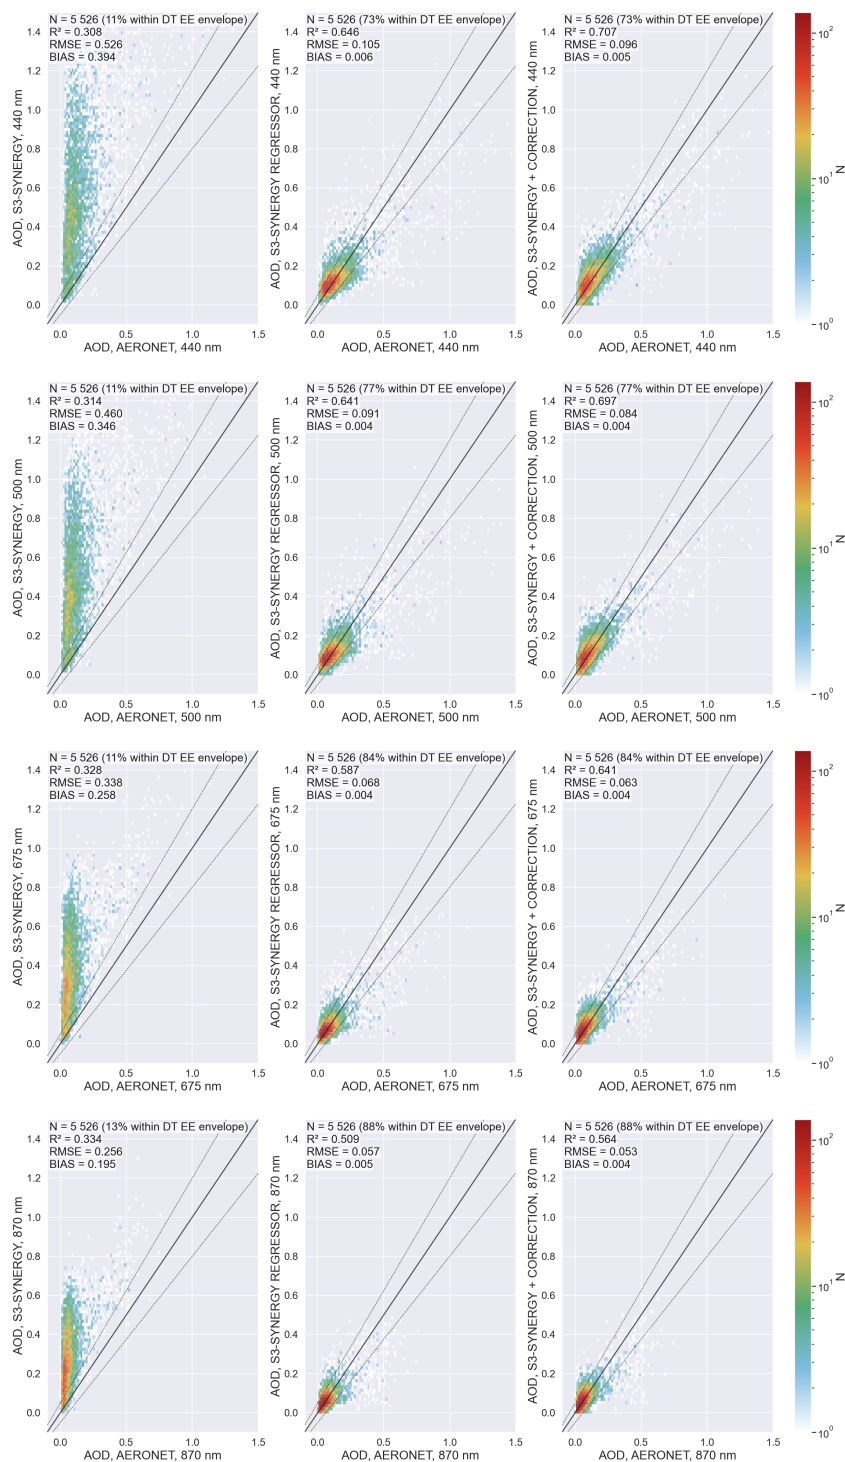


**Figure 4.** Estimated AODs at the wavelengths employed in the AERONET. Top to bottom: 440nm, 500nm, 675nm and 870nm. Left: Sentinel-3 level-2 Synergy AOD product. Middle: Fully learned regressor model. Right: Post-process correction.




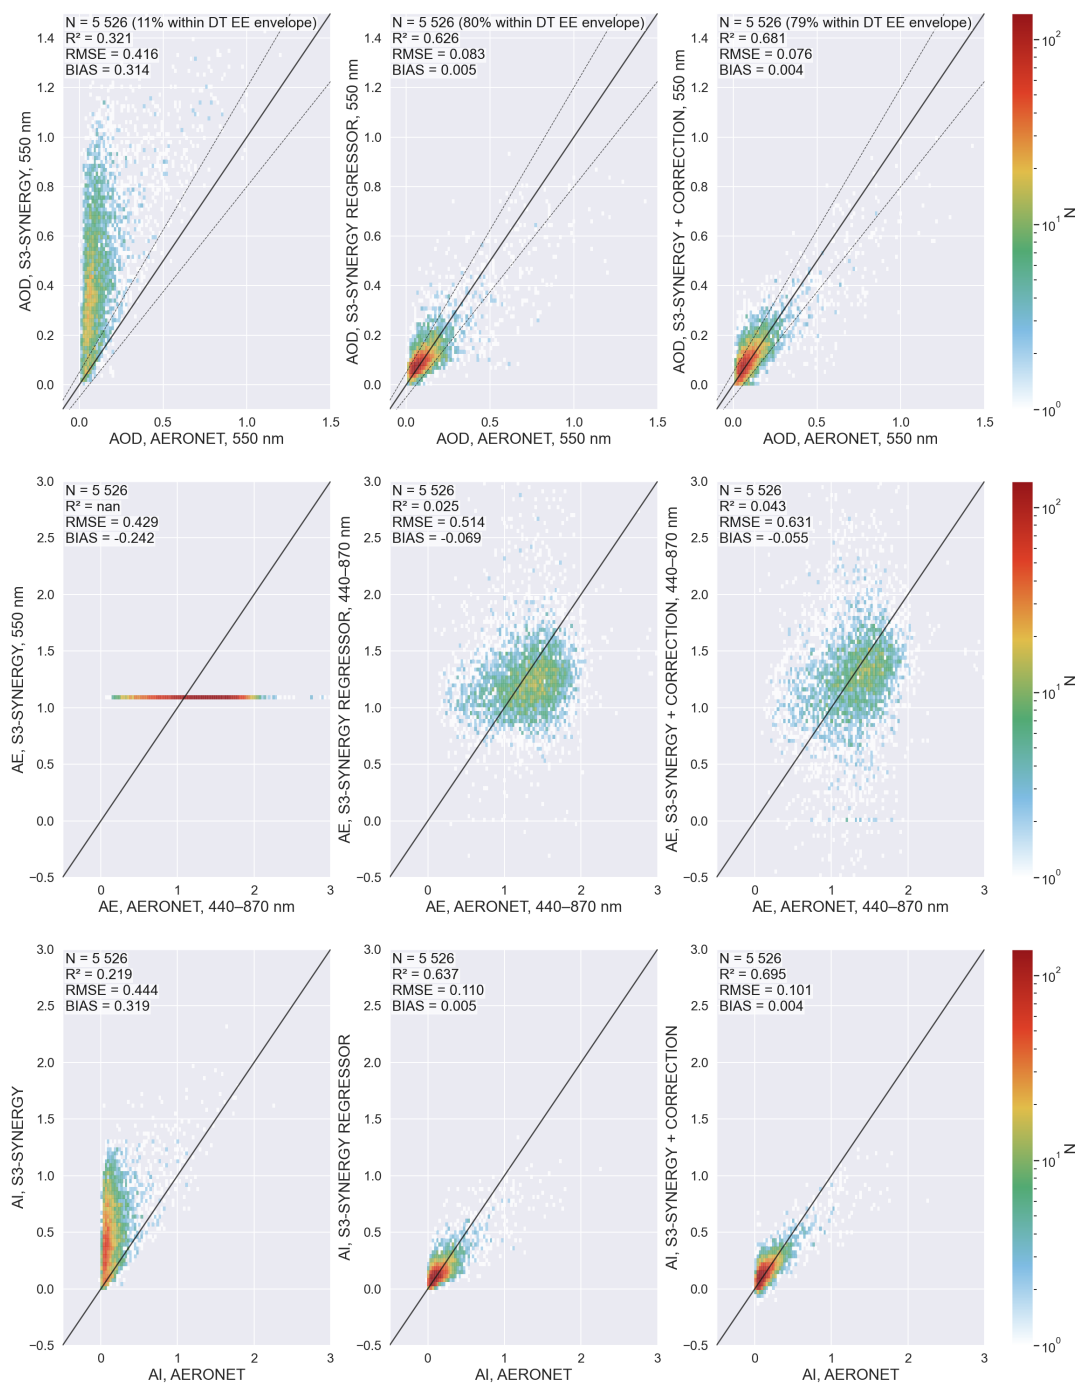


**Figure 5.** Rows from top to bottom: AOD (550nm), AE, AI. Left: Sentinel-3 level-2 Synergy product. Middle: Fully learned regressor model. Right: Post-process correction model.

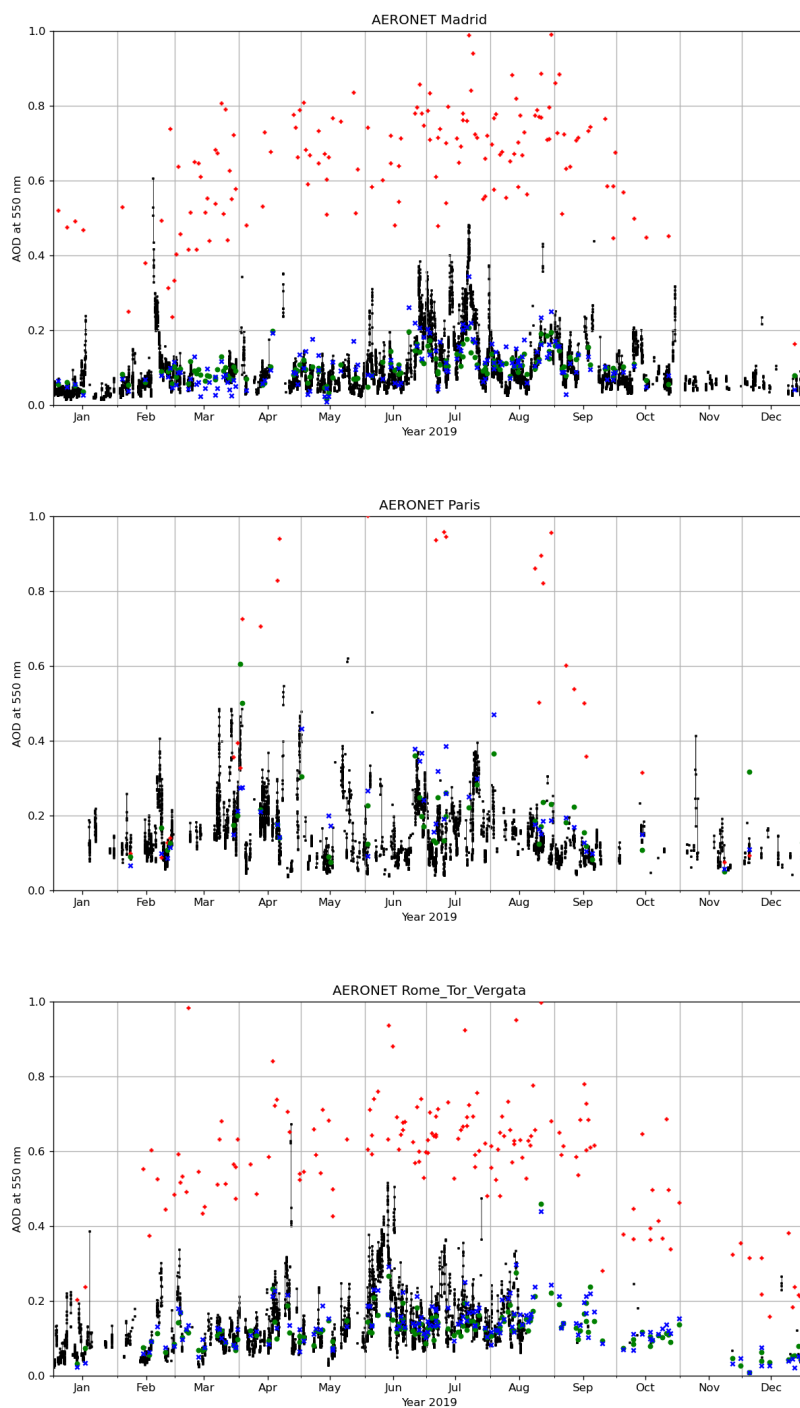

**Figure 6.** AOD at 550 nm time series for three AERONET stations. The black lines and dots indicate AERONET measurements, red diamonds indicate Sentinel-3 level-2 Synergy, green circles regression model, and blue crosses corrected Sentinel-3 Synergy retrievals.

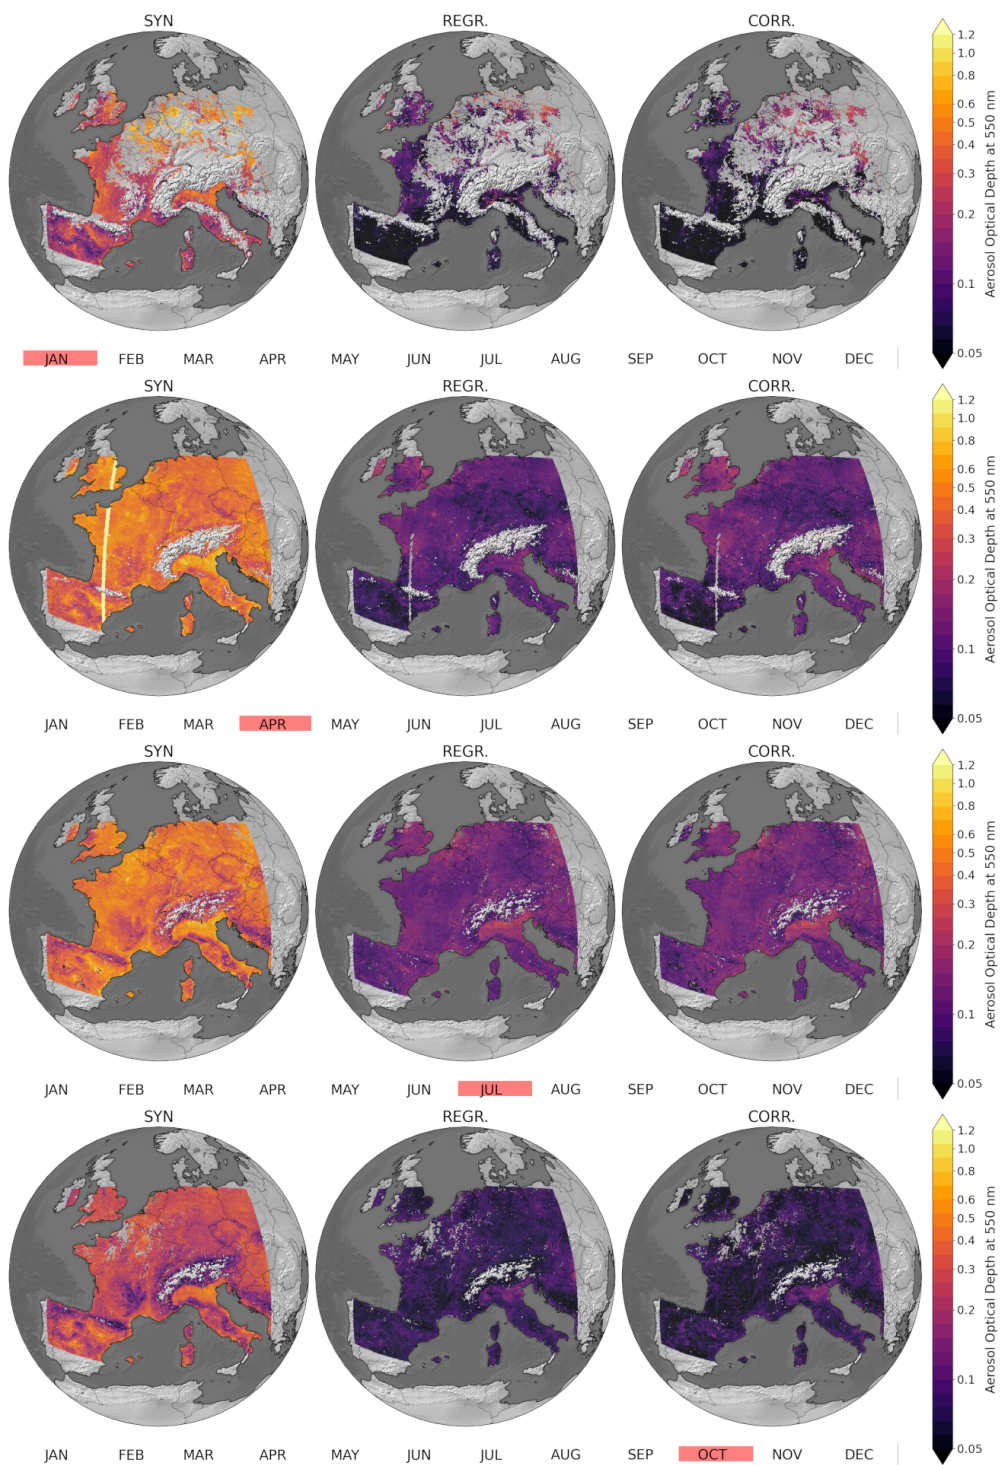

**Figure 7.** Monthly averages of AOD at 550 nm for January (1st row), April (2nd row), July (3rd row), and October (4th row) 2019. Left column: Sentinel-3 level-2 Synergy. Middle column: Regressor model. Right column: Corrected Sentinel-3 Synergy.

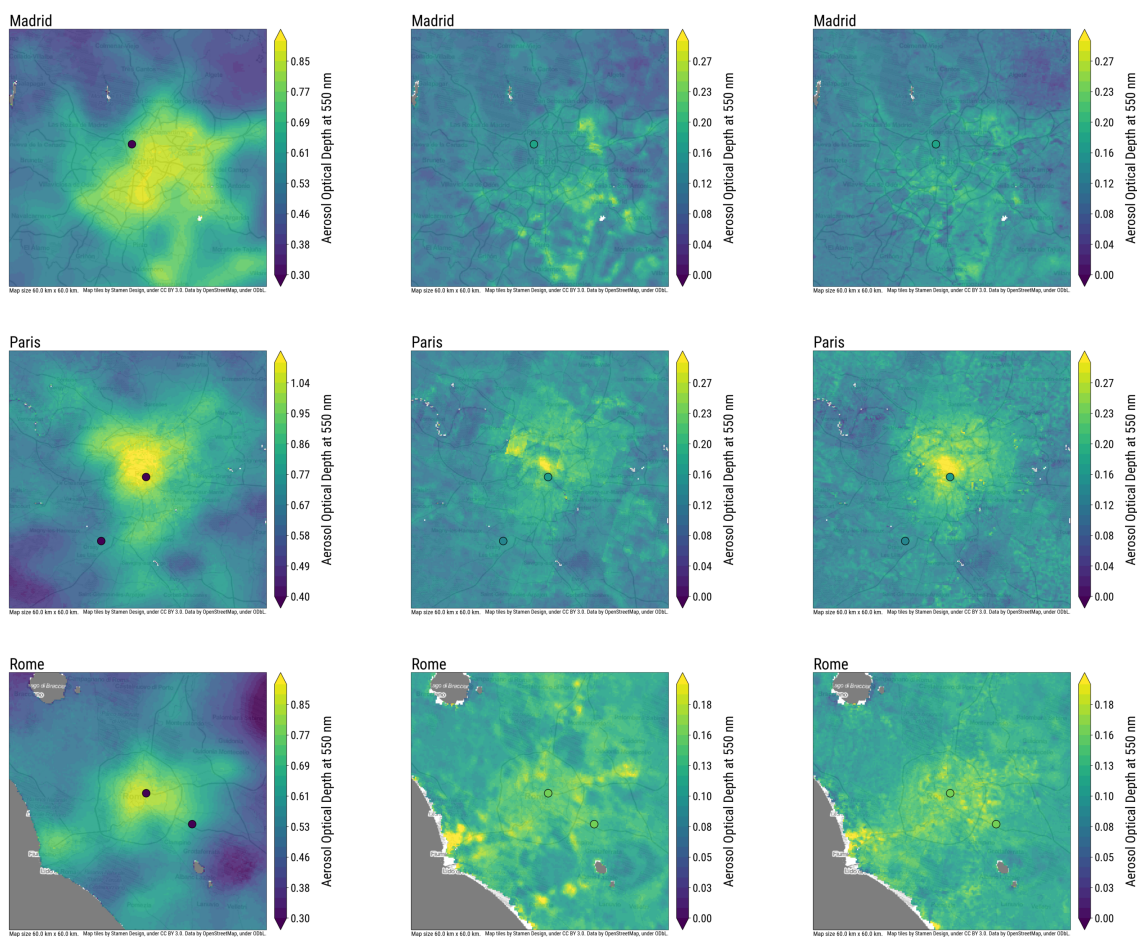

**Figure 8.** July 2019 monthly averages of AOD at 550 nm for Madrid (1st row), Paris (2nd row) and Rome (3rd row). Left column: Sentinel-3 level-2 Synergy. Middle column: Regressor model. Right column: Corrected Sentinel-3 Synergy. Circles represent the monthly averages of AERONET stations.