

# Machine Learning Techniques to Improve the Field Performance of Low-Cost Air Quality Sensors

Tony Bush<sup>1,2</sup>, Nick Papaioannou<sup>1</sup>, Felix Leach<sup>1</sup>, Francis D. Pope<sup>3</sup>, Ajit Singh<sup>3</sup>, G. Neil Thomas<sup>4</sup>, Brian Stacey<sup>5</sup> and Suzanne Bartington<sup>4</sup>.

<sup>1</sup> Department of Engineering Science, University of Oxford, Parks Road, Oxford, OX1 3PJ, UK

<sup>2</sup> Apertum Consulting, Harwell, Oxfordshire, UK

<sup>3</sup> School of Geography, Earth and Environmental Sciences, University of Birmingham, Edgbaston, Birmingham, B15 2TT, UK

<sup>4</sup> Institute of Applied Health Research, University of Birmingham, Edgbaston, Birmingham, B15 2TT, UK

<sup>5</sup> Ricardo Energy and Environment, The Gemini Building, Fermi Avenue, Harwell, Didcot, OX11 0QR, UK

*Correspondence to:* Felix Leach (felix.leach@eng.ox.ac.uk)

**Abstract** Low-cost air quality sensors offer significant potential for enhancing urban air quality networks by providing higher spatio-temporal resolution data needed, for example, for evaluation of air quality interventions. However, these sensors present methodological and deployment challenges which have historically limited operational ability. These include variability in performance characteristics and sensitivity to environmental conditions. In this work, we investigate field ‘baselining’ and interference correction using Random Forest regression methods for low-cost sensing of NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>. Model performance is explored using data obtained over a 7-month period by real-world field sensor deployment alongside reference method instrumentation. Workflows and processes developed are shown to be effective in normalising variable sensor baseline offsets and reducing uncertainty in sensor response arising from environmental interferences. A mean absolute error of 2.6 ppb, 5.1 µg/m<sup>3</sup> and 2.9 µg/m<sup>3</sup> for NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> respectively, was achieved for corrected field-deployed sensors compared to a reference method. When used to correct data collected under environmental conditions outside model training, results meet European data quality objectives, albeit with lower accuracy than data from within the trained range.

## 1 Introduction

### 1.1 Air Quality Context

Poor air quality is recognised as the largest environmental risk to human health worldwide (Public Health England, 2018). Pollution levels in many UK cities regularly exceed legal limits and health-based guidelines and exert a national mortality burden equivalent to 28,000-36,000 deaths each year (Kelly, 2018), with estimated economic costs of more than £20Bn. Road transport is widely recognised as the major urban air pollution source, particularly for NO<sub>2</sub> (Leach et al., 2020). Within this context in the UK, there has been continued policy commitment to tackling poor air quality through the UK Clean Air Strategy (Defra, 2019; Defra and DfT, 2017). As a result, there is much demand for air quality evidence which can contribute to responsive decision making for pollutant mitigation interventions. In turn, low-cost sensor technologies have proved attractive, offering some advantages over traditional instrumentation. These include lower operating costs (infrastructure, commissioning

and running costs), reduced administrative barriers (planning) and options for deployment in dense networks to deliver high spatio-temporal resolution datasets. One such setting which has adopted this approach is in the city of Oxford, where the ‘OxAria’ study commissioned a low-cost sensor network to enhance regulatory grade air quality data for rapid assessment of COVID-19 related transport variations and local emissions control policy interventions including a proposed Zero Emissions Zone (National Institute for Health Research, 2020)

Low-cost, or, at least, more affordable air quality sensors provide considerable potential to enhance spatial coverage of high-quality measurements which have historically been limited by the prohibitive cost of regulatory grade monitoring (Castell et al., 2017). Low-cost sensors offer potential for (i) a more agile and responsive technique for capturing the impact of air quality interventions and hotspots, being more flexible and quicker to deploy to capture the spatio-temporal variability in pollutant levels arising from specific emissions sources or influences of the built environment (Schneider et al., 2017), (ii) supplementing regulatory monitoring, modelling and source attribution evidence base for a better-informed population exposure estimates and policy decisions (Morawska et al., 2018) and (iii) opportunities for mobile air quality measurements and citizen science approaches that further challenge the traditional evidence base and democracy of information sources that contribute local air quality policy (Lim et al., 2019; Wang et al., 2021).

Low-cost sensors utilise and require (i) hardware which is both sensitive and specific to air pollutants at ambient levels; (ii) robust calibration and/or (iii) data processing methods to generate data of sufficient reliability and accuracy for the intended purpose(s) (Hasenfratz et al., 2012; Zimmerman et al., 2018). The latter present multiple methodological challenges: calibrations developed in the laboratory may not reflect real-world performance, resulting in sensor baseline drift, and post-hoc data calibration is typically necessary to optimise data quality (Karagulian et al., 2019). For these reasons there remain concerns about data quality and reliability which imposes limitations upon current applications beyond a research setting (Bigi et al., 2018; Clements et al., 2019; Crilley et al., 2018, 2020; Woodall et al., 2017). However, their accelerated uptake in local authority settings is testament to their potential to deliver a new, high-resolution evidence base capable of contributing to modern policies for air quality management and public health protection.

## 1.2 Machine Learning Applications

Given the challenges and opportunities above, several studies have been undertaken using, primarily, machine learning (ML) algorithms, for low-cost sensor calibration and validation. ML techniques offer significant benefits in terms of utility over simpler methods such as multivariate regression and decision trees which can offer greater interpretive facility to understand and quantify the interfering factors. There is a trade-off, from an air quality domain perspective, between understanding and quantifying the sensor performance and developing satisfactory, practicable methods to support higher quality sensor observations at the expense of knowing ‘why and how much’. Given the setting for this research outlined above and more

65 broadly, the current appetite for low-cost sensor data to support and influence local policy, data volumes and complexity of  
interferences, black-box ML approaches present greater utility. Techniques such as artificial neural networks (ANNs) (Esposito  
et al., 2016; Spinelle et al., 2017a; De Vito et al., 2009), high-dimensional multi-response models (Cross et al., 2017), and  
multiple linear regression (MLR) models have been ~~successfully used~~ developed with variable results. In addition, experimental  
evidence suggests that sensors from the same manufacturer can behave differently under the same environmental conditions  
(Spinelle 2017a); highlighting the importance of model development using data generated by multiple sensors. Furthermore,  
In-particular, ANNs have been shown to be able to meet sufficiently low levels of uncertainty for certain gaseous pollutants  
such as ozone (Spinelle et al., 2017/2017a), but higher uncertainty levels for NO<sub>2</sub> persist and further model performance  
optimisation is required.

**Commented [A1]:** Responds to RC1-1

**Commented [A2]:** Responds to RC1-1

**Commented [A3]:** Responds to RC1-1

75 Random Forest (RF) models present an alternative ML method which have shown promise as a tool for low-cost sensor  
calibration and validation. Zimmerman et al. used a RF regression model (RFR) for validation of co-located sensor for four  
gases (CO<sub>2</sub>, CO, O<sub>3</sub> and NO<sub>2</sub>) and found error rates of <5% for CO<sub>2</sub>, ~10–15% for CO and O<sub>3</sub>, and 30% for NO<sub>2</sub>. These  
estimates were within the precision and accuracy error metrics from the US EPA Air Sensor Guidebook for personal exposure  
(Tier IV) monitoring (Zimmerman et al., 2018).

80 RFs are an ensemble decision tree approach which employ multiple decision trees to solve regression and classification  
problems. They are a bagging technique, growing their decision trees in a bootstrap fashion (random sampling with  
replacement). A final prediction of the target value (in our case the reference method air quality concentration) being made as  
an aggregation (average) of the values estimated by the component trees.

85 Decision trees are known to be prone to overfitting, especially when allowed to grow deep, because after bootstrap sampling,  
their trees are grown by considering all sampled features at each decision node. RFs use an alternative, improved tree growth  
method which tends to limit this propensity for overfitting. The RF method achieves this by adding greater diversity to the  
data used to train its decision trees. As a result, predictions from all trees have less correlation and, therefore, when aggregated,  
90 a better prediction. RFs do this by selecting a random subset of training features for consideration at each decision node for  
each bootstrapped sample. Consequently, even if by chance, the same bootstrapped sample were selected to train two trees,  
the resulting trees will likely to be different because subsequent random sampling of features at each decision node (Breiman,  
1996).

95 A generic example of a two variable regression problem is presented in Fig. 1. In this figure, the decision tree (on the left)  
splits the parameter space into partitions (branches) based on logical operators on criteria relating to the parameter space  
(variable  $X^* < 0.*$  etc.). These operations continue until a terminal node is reached. At this point, a single prediction is made

which is the average of all the available values that the dependent variable takes in that partition. The same process is navigated for more than two features, however the parameter space becomes non-trivial to visualise.

100

One major problem that decision trees can suffer from is high variance (Hastie et al., 2009). Often a small change in the data can result in a very different series of splits and to a large change in the structure of the optimal decision tree. At least in part, this specificity of decision trees contributes to a tendency to overfit which results in models that do not generalise well to unseen data / situations. Although methods to manage this behaviour exist, they add an extra burden and are either not needed by RF models or included out-of-the-box.

105

The disinclination of RF models to over-fit is a key advantage of the technique and comes from the bagging and random feature selection methods employed. They build a diverse ensemble of many weakly correlated predictors (decision trees) which, at run time, predict based on the modal class (in classification models) or the average of all predictions (regression models). It is the diversity of predictions and their prediction error that present advantages for RF models, as when averaged to make the ensemble prediction, they often result in better performance than decision trees.

110

From an operations perspective they offer benefits to the multivariate regression problems presented in this paper: (i) tolerant of multiple collinearity, which is intrinsic to the air quality datasets of interest; (ii) suffer less from over-fitting and therefore promote a well generalised model which is adept to deployment across multiple datasets derived from different sensor locations; (iii) do not require data transformation for optimisation, thereby simplifying the data logistics and computational burden; (iv) handle multiple inputs variables with ease; (v) relatively easy to deploy, train and test across common desktop computer environments available to air quality practitioners.

115

This study further develops practicable methods for enhancing low-cost air quality sensor data uncertainty. Whilst ML techniques are established for low-cost air quality sensor validation with co-located sensors for NO<sub>2</sub> (and other gases), in this study we aim to advance the base-lining strategies of low-cost air quality sensors by repurposing existing analytical techniques which, to the best of our knowledge have not previously been used for field baselining and interference correction. In addition, we apply RF algorithms to low-cost particle sensors. We present an approach which utilises an RFR to predict and compensate for interferences from multiple environmental parameters upon the sensor signals. These methods offer a flexible, extendable, and reusable technique(s) to account for drift/changes in sensor calibration that can commonly occur in the field, in addition to a correction model to compensate for environmental interferences from, for example, temperature and relative humidity amongst others.

125

## 2 Methods and Materials

### 2.1 Air Quality Instrumentation

The sensor technology used in this research was the Praxis Urban sensor system supplied by South Coast Science Ltd. The units were equipped with an Alphasense NO<sub>2</sub>-A43F electrochemical NO<sub>2</sub> sensor (Alphasense Ltd., 2019a) and an Alphasense N3 optical particle counter (OPC) (Alphasense Ltd., 2019b). The sensor system sample rate was set to 10 second intervals.

~~The sensor was deployed as received from the sensor manufacturer, with no excluding acceptance tests no additional calibration of the sensor was performed prior to field deployment beyond standard acceptance tests. in the field.~~

Commented [A4]: Responds to RC2-6

Reference measurements of ambient NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> were obtained from the Defra, Oxford St Ebbe's, Automatic Urban & Rural Network (AURN) monitoring station (UKA00518) (Defra, 2021). The St Ebbe's monitoring is located in a south Oxford residential area, approximately 250 m from the nearest main road; as such it presents a typical urban background environment. St Ebbe's employs a Teledyne T200 chemiluminescence NO<sub>x</sub> analyser and a Palas FIDAS 200 fine dust aerosol optical spectrometer. Both the Praxis Urban sensors and the AURN sensor inlets are located at a height of 2.7m and 8m from the nearest minor road. The reference methods are designated type approved reference instrumentation for regulatory compliance monitoring (Defra, 2013). Reference measurements were obtained at 15-minute resolution by special arrangement with the network operators for the period 1<sup>st</sup> June to 31<sup>st</sup> December 2020. Official 1-hour time resolution datasets were considered too coarse for RF model development and sourcing of higher time resolution data was, therefore, essential for the characterisation of the transient interferences.

~~Sensor and reference method sample inlets were co-located within 0.5 metres (gases) and 2 metres (particles) for the study duration.~~

Commented [A5]: Responds to RC1-5

### 2.2 Air Quality Datasets

~~The OxAria project maintains a network of 16 operational Praxis units within the City of Oxford.~~ Measurements obtained from the OxAria sensor unit co-located at the Oxford St Ebbe's AURN monitoring station was the primary source of data for model development in this work. ~~The unit was installed in January June 2020 as part of a wider project aimed at understanding the impacts of COVID-19 upon air and noise quality in Oxford. Sensor and reference measurement data work collected throughout June to December 2020.~~ Sensor data were aggregated to a 15-minute mean resolution, from the initial logging interval of 10s, to ensure conformity with the time datum for the AURN datasets. The quality assurance status of the AURN datasets was valid / verified.

Formatted: Font color: Auto

Formatted: Heading 2, Left, Line spacing: single

### 2.3 Sensor Baseline Offset Correction

The rationale for the baseline correction was to prepare sensor datasets for interference correction using an RF model. There was clear evidence for variability in the baseline of the NO<sub>2</sub> sensors deployed (more details are in the results section), but less so in the PM sensor data. Any variation in the baseline conditions at a network level will confound comparisons undertaken

Formatted: Font color: Auto

Formatted: Heading 2, Left, Line spacing: single

160 across the network and with air quality limit values and guidelines, irrespective of the pollutant species. Importantly, baseline  
variability was also anticipated to be problematic for the deployment of a generalised RF correction model, the characteristics  
of which will be ‘locked-in’ to the baseline of the dataset used for its training. In this case, the co-located sensor at St Ebbe’s  
displayed a baseline offset of approximately +80 ppb (NO<sub>2</sub>). To address this issue, ~~asensor baseline correction was handled~~  
~~separately from transient environmental interferences.~~ A series of filters and baseline identification techniques were developed  
165 to adjust for variance in sensor signal and correct for the sensor baseline in a systematic and automatable way. This method  
enables the sensor baseline(s) to be standardised, for example across ~~a small~~ network of sensors and has been applied in this  
~~ongoing research~~ to the NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> datasets. The 4-stage processing approach is summarised in the schematic  
presented in Fig. 2 and ~~is~~ outlined in more detail in the sections below. ~~The offset correction model operated at the same~~  
~~resolution as the reference data (on 15-minute means) sensor and reference data and was initialised with ~6 7.5-months of~~  
170 ~~continuous sensor data.~~

**Commented [A7]:** Provides better signposting of how different corrections are to be accounted for – responds to RC2’s general note or more clarity

**Formatted:** Font: Not Italic

**Commented [A8]:** Responds to RC2-4

### 2.3.1 Stage 1 – Empirical Filters for Removal of Outliers and Anomalies.

The data filtering criteria presented in Table 1 ~~was were identified empirically from developed to facilitate pragmatic screening~~  
~~of anomalous / erroneous sensor data points. Their development was informed by a combination of local meteorological~~  
~~observations, data logged by the reference monitoring station, and an analysis of typical sensor performance from the sensor~~  
175 ~~network and from similar. The acceptable sample flow rate criteria for the PM sensor was recommended by the manufacturer.~~  
~~When one or more parameters logged at the St Ebbe’s AURN station. Sensor observations falling were detected outside the of~~  
~~these bands of acceptance shown (in Table 1), the sensor observation(s) were excluded from further analysis. Filters for NO<sub>2</sub>~~  
and particles are presented in Table 1. Filters (i) and (iii) removed data points outside of ~~conservative precautionary~~ estimates  
of the normal range of ambient temperature in Oxford, thereby excluding any anomalies arising from temperature dependent  
180 sensor system corrections that may be performing out of range. Filters (ii) and (iv) performed a similar role for relative  
humidity. Filter (v) removed particles data during periods of low OPC sample flow rate. ~~Application of these empirical filters~~  
~~rejected ~1% of the initialisation dataset.~~

**Commented [A9]:** Responds to RC1-3

**Commented [A10]:** Responds to RC2-1

**Commented [A11]:** Responds to RC1-3

### 2.3.2 Stage 2 - Baseline Identification & Offset / Drift Correction.

Stage 2 implements a statistical method developed in the analytical domain for baseline correction in chromatography and  
185 Raman spectroscopy. ~~Signal processing in these domains show parallels with that of air quality sensors. The method, Adaptive~~  
Iteratively Reweighted Penalised Linear Squares regression (airPLS) (Z. M. Zhang, 2011; ~~is presented by Zhang et al., (2010)~~  
~~was used and (2011).~~), ~~combines least squares regression smoothing, a penalty to systematically correct control the amount~~  
~~of smoothing, and a weighting function to constrain the baseline from following peaks in the sensor datasets signal. Weightings~~  
190 ~~are changed iteratively, after stage 1 filters had been an initial best-fit, with large weights applied where the newly iterated a~~  
~~signal is below the previously fitted baseline and conversely small weights applied where the signal is above the fitted baseline.~~

**Commented [A12]:** Responds to RC2-2

Performance and flexibility were a key factor in selection of a preferred method for baseline correction. airPLS does not require significant user intervention to perform satisfactorily, nor prior information or supervision, e.g. peak detection. It is a fast, flexible technique, and readily deployable in code (Zhang et al., 2011). In addition, airPLS offers important benefits as controlled, systematic and reproducible approach to the handling of baseline offset in individual and networked sensors. No data losses occurred in Stage 2 corrections.

Commented [A13]: Responds to RC1-3

Commented [A14]: Responds to RC2-2

### 2.3.3 Stage 3 – Baseline Over-fit Compensation

airPLS is highly efficient in correcting a baseline to zero, an artefact that derives from its intended application domain (chromatography) where a zero baseline is generally encouraged. Stage 3 applies a compensation method for the efficacy of the airPLS algorithm in correcting sensor baseline to zero, which in effect removes the urban, regional, and rural background contributions from the sensor signal. The method scales the Stage 2 outputs by the difference between the identified Stage 2 baseline and that of the city scale background, the latter having been calculated using airPLS in this case using observations from Oxford St Ebbe's, urban background AURN station. For. A compensation was calculated for each data point i.e. at a 15-minute time resolution. Taking the NO<sub>2</sub> time series as a whole for NO<sub>2</sub>, this compensation method resulted in an average uplift of +2.4 ppb. For PM<sub>10</sub> and PM<sub>2.5</sub> the uplift was +2.6 and +1.5 µg/m<sup>3</sup> respectively. No data losses occurred induring the Stage 3 corrections.

Commented [A15]: Responds to RC2-3

Formatted: Subscript

Commented [A16]: Responds to RC1-3

### 2.3.4 Stage 4 – Residual Error Removal

The final stage of the sensor offset correction method accounts for any remaining residual anomalies that present as negative concentrations not accounted or corrected for in stages 1-3. The impact of this stage on the sample population was intended to be negligible. Taking NO<sub>2</sub>, for example, stage 4 processing identified only 0.4% of the sample population as negative values and removed them from downstream RF modelling workflow and account for a further ~3% reduction in sample size. Approximately 7.26 months of continuous 15-minutes averagemean sensor data, paired with reference methods concentrations was then used for flowed-down-to RF training and validation activities.

Commented [A17]: Responds to RC1-3

Formatted: Font: Times New Roman, Font color: Black

## 2.4 Sensor Interference Correction with Random Forest Regression Modelling

The following sections present the configuration of the RF model and approach to model training of the regression model. The RF modelling was carried out in Python implemented using the SciKitScikit-Learn open-source machine learning library (Pedregosa et al., 2011).

### 2.4.1 Feature Engineering

Feature engineering describes the process of creating new training features (variables / parameters) that are more illustrative of the underlying problem being modelled. The aim of feature engineering is to affect better model training and performance.

It is a common pre-processing step in RF modelling and many other regression and classification techniques (Breiman, 2001; Yu et al., 2011).

Feature engineering was constrained in scope and complexity by the need to deploy the model across a network of sensors.

Hence, feature datasets must be readily available or replicable throughout the network of sensors. ~~This operational constraint introduced a recognised simplification of a component known environmental interferences acting upon the Alphasense NO<sub>2</sub>-A43F electrochemical sensor. Spinelle et al (2017b) reported evidence of cross sensitivities with NO<sub>2</sub> and O<sub>3</sub> on the (similar) Alphasense NO<sub>2</sub>-B43F electrochemical sensors. However, because ~~ozone~~O<sub>3</sub> was only measured at half of the ~~not a sensed species throughout the wider OxAria sensor network, and nor is less commonly it widely found within the existing an air quality management setting in the UK, in our experience, we chose to forego theits inclusion of ozone as a training feature for the RF correction model. Although this may come with the penalty of reduced model training performance - (Spinelle et al (2017b) reported an-O<sub>3</sub>-to-NO<sub>2</sub> cross sensitivity of ~6% per ppb of NO<sub>2</sub>), it comes with the benefit of a potentially broader real-world deploymentapplication domain, outside of a research setting~~~~

Commented [A18]: Responds to RC1-1

Table 2 presents the features used in model training of the pollutant specific correction model. The source of the training feature is presented in the 'type' column.

#### **2.4.2 Random Forest Regression Model Training**

~~RF model training was performed with co-located sensor and reference measurements acquired at the St Ebbe's AURN monitoring station over the period June to November 2020. After feature engineering (above), the core dataset was split into training and validation datasets using a 75% and 25% split, respectively. This 'hold-out' validation method was combined with a K-Fold cross validation approach (Berrar, 2018) to estimate the performance of the model in terms of the mean absolute error score (MAE):~~

#### **2.4.2 Random Forest Regression Model Training**

~~RF model training was performed with co-located sensor and reference measurements acquired at the St Ebbe's AURN monitoring station over the period June to November 2020. After feature engineering (above), the core dataset was split into training and validation datasets using a 75% and 25% split, respectively. This 'hold-out' validation method was combined with a K-Fold cross-validation approach (Berrar, 2018) to estimate the performance of the model in terms of the mean absolute error score (MAE) (Buitinck et al., 2013; Pedregosa et al., 2011).~~

Commented [A19]: Responds to RC2-9

In many cases, RF models work reasonably well with the default values for the hyper-parameters specified in the software packages (Probst et al., 2019). Even so, for standardisation across pollutant applications and computational efficiency we



considered constraining the models using tree size metrics – number of trees, maximum number of leaf nodes and the minimum number of samples required to split an internal node.

255 The maximum number of leaf nodes hyper-parameter was established by way of a cross validation sensitivity test on an array of 10 to 5,000 nodes (node spacing set to 50). The cross-validation exercise fitted an RFR model to the input feature dataset and iterated over the array of nodes to predict the MAE. Cross validation results for NO<sub>2</sub> are presented in Fig. 3. These are illustrative of similar behaviours for PM<sub>10</sub> and PM<sub>2.5</sub>. Figure 3 shows the MAE decreasing as a function of increasing maximum number of leaf nodes (model complexity). Cross validation results similar to those presented in Fig. 3 were used to identify  
260 the optimum number of leaf nodes for each pollutant-specific model, the point on the x-axis where increased model complexity delivers only marginal improvement in MAE for training, validation and cross validation test samples. The process was repeated for the PM<sub>10</sub> and PM<sub>2.5</sub> models. Figure 3 also confirms some assumptions about RFR model training in general:

- Gains in MAE quickly drop-off with increasing feature numbers,
- For RF model predictions which are based on an ensemble average of all trees, the MAE of predictions based on  
265 training data will tend towards but never reach zero,
- K-fold cross validation produced the most conservative estimates of model accuracy (highest MAE).

The maximum of 3,500 of leaf nodes was established by this cross-validation process for the NO<sub>2</sub> RFR model whereas the  
270 same hyper-parameter for both PM<sub>10</sub> and PM<sub>2.5</sub> models was set at 3,000 nodes. The minimum number of samples allowed in a single partition was set to two.

Having established the maximum number of leaf nodes for the three pollutant-specific models (NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub>), the number of trees was determined. Best-practice on setting the optimum number of trees within RF is variable with advice ranging from between 64-128 (Oshiro et al., 2012) For this research, the incremental improvement in MAE arising from  
275 between 100 and 500 trees was evaluated. Results did not show significant improvement in model MAE over this range within the context of the typical ambient air quality concentrations expected. The number of trees used was set to 100 to minimise computational cost during training. Table 3 presents a summary of the hyperparameters used in the training of each Random Forest model. As a check, on the hyperparameters presented in Table 3, the model's sensitivity to departures from these  
280 parameters was tested using the Scikit-Learn GridSearch function (Pedregosa et al., 2011). These tests showed that only small (<0.01 ppb) improvements in the MAE associated with the validation could be achieved by further tuning did not indicate significant benefit arising from modifications to the hyperparameters as shown in Table3.

**Commented [A20]:** Responds to RC2-10

### 3 Results and Discussion

#### 3.1 Uncorrected sensor data

285 Figure 4 presents the 3-hour rolling mean of 'raw' real-world NO<sub>2</sub> observations from three OxAria low-cost electrochemical  
sensors and a reference method i.e. sensor data outputs before any correction algorithms are applied. The rolling 3-hour mean  
is presented to attenuate noise in the datasets for visualisation. Sensor A and the reference method are co-located at an urban  
background location, Sensor B is located at an urban centre location, and Sensor C at a roadside location. The sensor systems  
are identical and were calibrated at the same time [by the -manufacturers](#). Figure 4 shows a comparatively low signal to noise  
290 ratio in the sensor's observations when compared with the reference method and marked variability in the baseline(s) which  
confound interpretation of the pollutant levels. The severity of the variability in sensor baseline offset is further contextualised  
when sensor location is considered (as noted above). Sensor A being at the urban background is far from significant NO<sub>2</sub>  
emissions sources, whereas Sensors B (urban centre) and C (roadside) are comparatively close to major road transport emission  
sources. Despite their relative proximity to emission sources the baseline for the urban background sensor is ~40 ppb higher  
295 than its urban centre / roadside neighbours. Given that the sensors were calibrated to the same standard within a laboratory  
environment prior to deployment in the field, our assumption is that the sensor baselines have been influenced in some way  
after calibration, then stabilised as shown. In addition, frequent spikes in the sensor trace(s) can be observed which manifest  
as both short lived, transient events of ~10 s duration in the 100-500 ppb range and as longer-lived 60 s+ events, frequently in  
the 1000-2000 ppb range. This sort of sensor behaviour is linked to multiple environmental interferences of which temperature  
and relative humidity are amongst the most important (Spinelle et al., 2015). We anticipate that these sensor characteristics are  
300 replicated across the OxAria sensor network and [repeatedindeed](#) throughout similar sensor networks using electrochemical  
NO<sub>2</sub> sensors [and](#) are therefore [the focus of the sensor offset correction model described in the following sections](#).

#### 3.1 Sensor Baseline Offset Correction Results

305 Figure 5 presents the incremental outputs of each stage of the sensor baseline correction model described in section 2.3. As an  
example, co-located NO<sub>2</sub> sensor and reference method observations from St Ebbe's are presented for August 2020. This sensor  
and fragment of the 2020 time series was chosen as illustrative of the performance of the model on a sensor of known offset  
(~80 ppb) and the general effect of each stage in the correction process.

310 Commenting individually on each stage presented in Fig. 5; Fig.5a indicates the presence of a clear offset in the NO<sub>2</sub> sensor  
signal of ~+80 ppb relative to the co-located reference method. Fig.5b presents the outcome of applying empirical filters to  
screen out anomalous sensor behaviours and data outliers. Noticeably for this location, the empirical filters have screened out  
observations around 10 August but left the 250+ ppb spike in concentrations on 13 August in place. Fig.4c presents the removal  
of the sensor baseline using airPLS and Fig.5d compensation for its efficacy; the baseline of the corrected sensor time series

and reference method baseline are recalculated (again using airPLS) and the sensor baseline scaled by the difference in the two terms. The last step shown in Fig.5e removes any residual negative errors not already captured.

The data presented in Fig. shows the airPLS based baseline correction model to be effective at ~~normalising-standardising at the~~ variable baseline shown in the NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> sensor signals across the network. The method also maintains the fidelity of the dynamic range of the original sensor signal. Its effectiveness facilitates the training of generalised RF correction models. In terms of optimisations, the approach was relatively insensitive to changes in the configuration of the empirical filters applied in stage 1 corrections and the lambda value of the airPLS technique which controls the order of smoothing applied to the baseline estimate.

The over-fitting of the corrected sensor baseline (to zero ppb) introduced by the efficacy of the airPLS technique is compensated for by rescaling of the sensor baseline to that of the city background. If this is an over-simplification of the experimental error handling it is a reasonable trade-off given the volumes of data involved and computational logistics involved overall.

The availability of a reliable and high-quality city background at a time resolution comparable to that of sensor observations e.g. at most 15-minutes ~~averagemean~~s, is essential for effective screening transient anomalous sensor behaviours which skew sensor datasets significantly and mask important underlying data structure or anomalies. We also note that reference method data resolved to these time resolutions is difficult to obtain in the UK, ~~and acknowledge the support of Oxford City Council and Defra's AURN QA/QC management team in securing these data for this study.~~

### 3.2 Random Forest Correction Modelling Results

#### 3.2.1 Random Forest Regression Model Training

Outputs from the model training exercise are shown in ~~Fig.s~~Figs. 6-8 as a series of regression plots for the RFR models developed for NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub>. For each pollutant, three regression plots are presented to illustrate (i) the relationship between the baseline corrected sensor observations and reference method (left), (ii) the same relationship constrained to the validation subset (middle) and (iii) the relationship between the corrected sensor observations and reference method. A simple ordinary least squares (OLS) regression analysis is presented in each case to describe each relationship. ~~The~~All data shown are at a 15-minute ~~averagesmean~~ resolution.

The plots to the right of Figs. 6-8 show that the respective RF models are highly effective in predicting the target observations (reference method). In doing so, they demonstrate their capability to predict the combined interferences from a variety of environmental factors found in the data of the left and middle regression plots. The left and middle plots also show that training

Commented [A21]: Responds to RC2-3

and validation datasets come from the same sample population (one having been randomly sampled from the other) providing a useful internal validation of model training to reflect variations in training features. Further checks on the models using unseen data from outside of the sample populations will better test likely performance of the models in the field.

350 Figs. 6-8 show the dramatic impact of the RF model correction as demonstrated by the coefficients of variation in each of the three cases. The R-squared value of corrected sensor vs reference method observations is a convenient evaluator for the ability of the models to capture the variability in the dependent datasets. Clearly, the PM<sub>2.5</sub> model performs excellently in this respect with an R-squared value of 0.96 and OLS slope and intercept terms approaching unity. The respective R-squared value for both PM<sub>10</sub> and NO<sub>2</sub> RF models (0.84 and 0.86) also indicate good model performance. The values for R-squared above are  
355 consistent with the out of bag scores achieved at training time (0.85, 0.82 and 0.91 for NO<sub>2</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub> respectively) which provide an additional check on model performance using data not explicitly used in the training. Even so, it is clear from Figs. 6 and 7 that the models struggled, on occasion, to accurately predict higher reference concentrations and NO<sub>2</sub> and PM<sub>10</sub> predicted concentrations are generally more scattered compared with PM<sub>2.5</sub>. It is also noticeable that in all three cases the RF models are biased, tending to under-predict the reference concentration as demonstrated by the regression equation  
360 slope terms and this is particularly noticeable in the  $\geq 15$  ppb+ concentration unit range.

### 3.2.2 RF Correction Performance Characteristics (hold-out validation set)

The performance of each component of the correction method upon 15-minute averaged mean data is presented in Table 34 in terms of the MAE delivered by correction outputs at each stage, relative to the reference method observations. Table 34 shows that the RFR correction adds significant value to the baseline correction alone contributing to a further 90-95% reduction in the MAE terms. In concentration units this equates to fully corrected NO<sub>2</sub> sensor observations within approximately  $\pm 1$  ppb of the reference observation. Similar comparisons for PM<sub>10</sub> and PM<sub>2.5</sub> indicate corrected concentrations within  $\pm 1-2$   $\mu\text{g}/\text{m}^3$  of the reference method. These compare favourably with results in the literature for all three pollutants.

The impact of corrections to this order of magnitude upon the sensor time series can be visualised in Figs. 9-11 which presents the 15-minute averaged mean uncorrected-baseline normalised sensor observations, fully corrected sensor observations and reference observations for NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub>. Figure 9 shows that for NO<sub>2</sub> there is some visual evidence of the RFR model over correction (relative to the reference method) during periods of peak concentration, particularly in mid to late June and August. Otherwise, the NO<sub>2</sub> correction tracks that of the reference observations well.

### 3.2.3 RF Correction Model Performance Characteristics (unseen data)

Table 45 presents estimates of the performance of the correction models based on 15-minute averaged mean unseen data from December 2020 i.e. data not previously used for model training nor validation. Table 4 shows The data shown are, as expected,

Commented [A22]: Responds to RC2-3

Commented [A23]: Responds to RC1-7 & RC2-11

Commented [A24]: Responds to RC1-7 & RC2-11

Commented [A25]: Responds to RC2-3

Formatted: Font: Bold, Not Italic, Font color: Auto

Commented [A26]: Responds to RC1-7 & RC2-11

Commented [A27]: Responds to RC2-3

Formatted: Font: Italic

380 ~~that model performance for unseen data is less favourable compared with the validation dataset, returning higher values for the MAE metric, particularly for but for air quality context, within ~1 ppb (NO<sub>2</sub>) and 2-3 µg/m<sup>3</sup> (PM) of the PM<sub>10</sub> MAE returned by the model validation set.~~

Commented [A28]: Responds to RC2-7

385 In late November / December 2020 and latterly, continuing through quarter one of 2021 (not shown), the sensor network observed episodes of high particle concentrations which coincided with a drop in ambient temperature (and dew point temperature) to the order of 10°C. Reciprocal changes in relative humidity ~~are were~~ not observed, nor ~~is was~~ there an obvious change in sensor sample flow rate. It is noteworthy also, ~~notable~~ that similar conditions were not commonplace throughout the model training dataset (June to November 2020). The episode conditions observed by the sensor network ~~are were~~ not replicated in the reference method dataset and are likely the main driver for the increase in the MAE for the particulate matter correction models shown in [Table 4-5]. Figs 13-14 show examples of the episodes in December 2020 for PM<sub>10</sub> and PM<sub>2.5</sub> respectively, including the absence of a reciprocal peak in the reference data and the performance of the model correction.

Commented [A29]: Responds to RC1-7 & RC2-11

Commented [A30]: Respond to RC1-8

390 ~~Despite these issues, the and as demonstrated in Figs 13-14, the RF models deliver substantial improvements on the raw dataset (not shown in Table 5) and baseline-adjusted data (shown), with relative improvements in sensor error). Improvements in MAE attributable to the RF model in the range of 37-94% in the latter are shown;~~ equivalent to corrected observation within, on average; approximately ±3 ppb of the reference method for NO<sub>2</sub>, ±5 µg/m<sup>3</sup> for PM<sub>10</sub> and ±3 µg/m<sup>3</sup> for PM<sub>2.5</sub>.

Commented [A31]: Responds to RC2-8

Formatted: Font: Times New Roman, Font color: Black

395 The decrease in model performance ~~when targeted at~~ observed with the ~~unseen data~~ dataset and the observations on ambient conditions and sensor operation (above), illustrate the need for long time series for model training, ~~and certainly time-series that cover covering~~ all environmental conditions to which the sensors will be exposed.

Formatted: Font: Italic

400 ~~The MAE value for PM<sub>10</sub> and to lesser extent that of PM<sub>2.5</sub> in December indicates that these pollutants displayed sizeable variance during this period. This can be observed in the time series for December 2020 presented in Figs. 12-14 which shows that both PM<sub>10</sub> (Fig. 13) and PM<sub>2.5</sub> (Fig. 14) exhibited a number of large peaks in concentrations or episode events. Despite these events in the unseen data, the correction model outputs demonstrate that they generalise sufficiently to remove most of the interference(s).~~

Commented [A32]: repetition

### 405 3.2.34 Corrected Sensor Performance vs. European Air Quality Data Quality Objectives

410 European Ambient Air Quality Directives (European Commission, 2004, 2008) have established data quality objectives (DQO) which must be met to perform specific types of regulatory measurement tasks. These DQOs include, amongst other criteria, a minimum requirement for the expanded uncertainty of measurements. Under these regulations, 'indicative' assessment methods, those that can be used to supplement reference and / or equivalent methods, require an expanded uncertainty estimate of ±25% and ±50% for NO<sub>2</sub> and particles measurement methods, respectively. These criteria are important given that indicative

assessment is the most likely niche for low-cost sensors within the regulatory assessment toolkit. Comprehensive guidance on the calculation of expanded uncertainty has been provided by the European Commission Working Group on Guidance for the Demonstration of Equivalence (EC Working Group, 2010, 2020) in addition to a convenient spreadsheet tool to support traceable calculation of appropriate metrics .

415 ~~Table 5 presents~~ ~~the Tables 6 and 7 present~~ expanded uncertainty estimates for corrected sensor observations. These estimates were calculated using the spreadsheet tool (EC Working Group, 2020) to provide a further performance indicator on the adequacy of the corrected sensor data for air quality assessment applications. ~~From Table 56~~ we see that the corrected sensor outputs for all pollutants perform well relative to the target expanded uncertainty criteria recommended by European 420 legislation. The expanded uncertainty estimates for the corrected sensor data from the validation dataset, (data not used in RF model training), are within the prescribed limits, 21%, 34% and 18% respectively for NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub>. In addition, guidance on the calculation of expanded uncertainty (EC Working Group, 2010), allows for the correction of slope and intercept terms in the relationship between sensor and reference method. The result for each model is also presented in Table ~~56~~ and demonstrate further reductions in the expanded uncertainty estimates can be achieved, to levels that approach those of 425 the reference method itself (Defra, 2013) and certainly within the equivalence thresholds ( $\pm 25\%$ ) established by the European Commission Working Group on Guidance for the Demonstration of Equivalence. In tests based on the validation set, expanded uncertainty estimates for RFR model corrected observations for NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> were 4%, 12% and 10% respectively. Highly respectable coefficients of determination are achieved between reference and corrected sensor observation in all cases.

430 Results from reciprocal tests based on *unseen* data are presented ~~in Table 67~~ using corrected sensor and reference method observations from December 2020. ~~Comparing Tables 56 and 67,~~ an increase in uncertainty is observed. ~~This is expected,~~ ~~given that statistics~~ ~~Caveats~~ presented in ~~Table 5 are based on~~ ~~section 3.2.3 regarding the expected performance of the validation set, dataset, taken at random, from the same sample population as that used for model training, whereas Table 6 is based on~~ ~~entirely, unseen data-data and the episode events observed in the unseen datasets apply.~~ Despite ~~the~~ observed increases in 435 uncertainty, corrected sensor observations continue to perform well relative to their target DQOs. All corrected datasets meet the criteria recommended by European legislation and the corrected expanded uncertainty estimate for NO<sub>2</sub> (10%) is noteworthy.

440 ~~Also evident from Tables 5 and 6 is the decrease in the performance of the PM<sub>10</sub> and PM<sub>2.5</sub> correction models on the unseen dataset. December 2020 saw the occurrence of several pollution events in the particle sensor time series (as also noted above). Although these events were observed throughout Oxford in multiple particle sensor time series, they were not reciprocated in reference measurements, nor in NO<sub>2</sub> data. We theorise, therefore, that they are an artefact of local meteorological events interfering with the OPC sensor operation. Occurrence of similar events in training data is limited and offers (i) an explanation of comparative underperformance of PM<sub>10</sub> and PM<sub>2.5</sub> correction models during December 2020 dataset and (ii) an illustration~~

**Commented [A33]:** Responds to RC1-7 & RC2-11

**Commented [A34]:** Responds to RC1-7 & RC2-11

**Commented [A35]:** Responds to RC1-7 & RC2-11

**Commented [A36]:** Responds to RC1-7 & RC2-11

**Formatted:** Font: Italic

**Commented [A37]:** Responds to RC1-7 & RC2-11

**Formatted:** Font: Not Italic

**Formatted:** Font: Not Italic

445 of the importance thorough training of the correction models using long-running datasets which provide adequate coverage of likely environmental interferences and their anticipated variation.

Commented [A38]: Removed to avoid repetition

#### 4 Conclusions

This study has presented and demonstrated a simple and effective method for attenuating the confounding effects of sensor baseline variability and interferences from ambient environmental parameters upon low-cost electrochemical and optical particle counter sensor signals.

The methods presented in this paper have been tested at a high temporal resolution against high-quality, co-located reference method observations sourced from the UK's regulatory monitoring network (AURN). Using MAE as an indicator of sensor error (relative to reference observations), the methods developed can reduce the error in NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> observations from the low-cost sensors tested by up to 90-95% (based on model validation data not used in RF training). In the case of the low-cost NO<sub>2</sub> sensor, corrections reduced the MAE of sensor observations to within ± 1.2 ppb of the reference observation. Similarly, for PM<sub>10</sub> and PM<sub>2.5</sub> MAE estimates were within ± 2.0 µg/m<sup>3</sup> and ± 1.0 µg/m<sup>3</sup> respectively. The R-squared value achieved for corrected NO<sub>2</sub> and PM<sub>10</sub> sensor observations was 0.84 and 0.92 for PM<sub>2.5</sub>.

460 Tests on how the methods generalised to unseen conditions have shown that the RFR correction models, trained on 6-months of data from June to November 2020, are tolerant of a wide range of competing environmental interferences. Tests based on unseen data from December 2020, unseen by the RF model in training, from December 2020 delivered MAE estimates for corrected low-cost NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> sensors of 2.6 ppb, 5.1 µg/m<sup>3</sup> and 2.9 µg/m<sup>3</sup> respectively. Despite this observed (and expected) drop in performance, the MAE in corrections to unseen datasets were within ~1 ppb (NO<sub>2</sub>) or 2-3 µg/m<sup>3</sup> (PM) of those returned by the model validation set.

Formatted: Font: Italic

470 Given these indicators for the level of improved uncertainty that can be achievable with low-cost sensors the methods presented, we propose that data from reputable, high-quality devices and sensors may now play have a meaningful role in the air quality assessment toolkit. Indeed, using the methods presented, sensor data are likely to may deliver at least data quality comparable data quality to passive sampler methods (for NO<sub>2</sub>), with the benefit of higher temporal resolutions.

Commented [A39]: Echoes the abstract headline statement consistency

To substantiate this observation potential future applications, this paper has presented data demonstrating that the RF-based methods are capable of delivering corrected low-cost sensor data that meet the general requirements for 'indicative measurements' as set out by the European Ambient Air Quality Directive. In doing so, we have used methods prescribed by the European Commission Working Group on Guidance for the Demonstration of Equivalence to calculate expanded uncertainty estimates for corrected sensor observations. For tests based on both validation and unseen datasets, the expanded

uncertainty of corrected sensor data was within the requirements set by the European Ambient Air Quality Directive for indicative monitoring (within  $\pm 25\%$  of the reference observation for  $\text{NO}_2$ ,  $\pm 50\%$  for particles). Indeed, these tests showed that the corrected expanded uncertainty estimates were within or proximal to the equivalence thresholds ( $\pm 25\%$ ) established by the European Commission Working Group on Guidance for the Demonstration of Equivalence. In tests using unseen data, the most stringent test available to the study, the expanded uncertainty estimates for RFR model corrected observations for  $\text{NO}_2$ ,  $\text{PM}_{10}$  and  $\text{PM}_{2.5}$  were 10%, 24% and 29% respectively.

Demonstrating conformance with these regulatory thresholds in a traceable way is a significant milestone, not least for the potential to unlock applications as ‘supplementary assessment’ method for compliance assessments but also within the context of the stringency of the acceptance criteria, and the rigour of the expanded uncertainty calculation method set out by the Working Group.

We anticipate application of the model in other local contexts will require re-training and validation of the RF model for local conditions; an important focus for future research. As such, the techniques developed are presented as a working method to be adapted for other applications, rather than a definitive model for wider generalisations. We also note that scaling of the method to applications across a sensor network is likely to be limited by the diversity of the RF training datasets and the quality of the city scale background (both spatial and scalar representativeness). However, this work has demonstrated capabilities for application to monitoring across a small city, with clear potential benefits for supporting air quality management.

#### **Funding**

This research was funded by The Natural Environment Research Council, grant number NE/V010360/1. Its forerunning pilot project was funded by The National Institute for Health Research, grant number NIHR130095. This publication arises in part from research funded by Research England’s Strategic Priorities Fund (SPF) QR allocation.

#### **Acknowledgments**

The authors would like to extend thanks and gratitude to the Chair of the project Steering Committee, the late Prof Martin Williams, for his guidance and encouragement over the years. The authors would also like to thank the study steering group for their technical contributions and administrative support and Ricardo Energy & Environment in facilitating data acquisition. Oxford City Council and Oxfordshire County Council are both thanked for advice and support.

Formatted: Font: Times New Roman, Font color: Black



### **Author contributions**

505 FL, NP, SB and TB conceived the study. TB and FL corralled the data. TB and NP performed data analysis. BS supplied  
reference observations at the required resolutions and finessed expanded uncertainty estimates in accordance with the guidance.  
TB drafted the paper. All co-authors contributed to reviewing and editing the paper.

### **Conflicts of Interest**

The authors declare no conflict of interest.

510

## References

Alphasense Ltd.: NO<sub>2</sub>-A43F Nitrogen Dioxide Sensor 4-Electrode Technical Specification, [online] Available from: <https://www.alphasense.com/wp-content/uploads/2019/09/NO2-A43F.pdf> (Accessed 19 May 2021a), 2019.

Alphasense Ltd.: OPC-N3 Particle Monitor Technical Specification, [online] Available from: <https://www.alphasense.com/wp-content/uploads/2019/03/OPC-N3.pdf> (Accessed 19 May 2021b), 2019.

Berrar, D.: Cross-validation, in [Encyclopaedia](#) of Bioinformatics and Computational Biology: ABC of Bioinformatics, vol. 1–3, pp. 542–545, Elsevier., 2018.

Bigi, A., Mueller, M., Grange, S. K., Ghermandi, G. and Hueglin, C.: Performance of NO, NO<sub>2</sub> low-cost sensors and three calibration approaches within a real-world application, *Atmos. Meas. Tech.*, 11(6), 3717–3735, doi:10.5194/amt-11-3717-2018, 2018.

Breiman, L.: Bagging predictors, *Mach. Learn.*, 24(2), 123–140, doi:10.1023/A:1018054314350, 1996.

Breiman, L.: Random forests, *Mach. Learn.*, 45(1), 5–32, doi:10.1023/A:1010933404324, 2001.

Castell, N., Dauge, F. R., Schneider, P., Vogt, M., Lerner, U., Fishbain, B., Broday, D. and Bartonova, A.: Can commercial low-cost sensor platforms contribute to air quality monitoring and exposure estimates? *Environ. Int.*, 99, 293–302, doi:10.1016/j.envint.2016.12.007, 2017.

Clements, A. L., Reece, S., Conner, T. and Williams, R.: Observed data quality concerns involving low-cost air sensors, *Atmos. Environ. X*, 3(May), 100034, doi:10.1016/j.aeaoa.2019.100034, 2019.

Crilley, L. R., Shaw, M., Pound, R., Kramer, L. J., Price, R., Young, S., Lewis, A. C. and Pope, F. D.: Evaluation of a low-cost optical particle counter (Alphasense OPC-N2) for ambient air monitoring, *Atmos. Meas. Tech.*, 11(2), 709–720, doi:10.5194/amt-11-709-2018, 2018.

Crilley, L. R., Singh, A., Kramer, L. J., Shaw, M. D., Alam, M. S., Apte, J. S., Bloss, W. J., Hildebrandt Ruiz, L., Fu, P., Fu, W., Gani, S., Gatari, M., Ilyinskaya, E., Lewis, A. C., Ng'ang'a, D., Sun, Y., Whitty, R. C. W., Yue, S., Young, S. and Pope, F. D.: Effect of aerosol composition on the performance of low-cost optical particle counter correction factors, *Atmos. Meas. Tech.*, 13(3), 1181–1193, doi:10.5194/amt-13-1181-2020, 2020.

Cross, E. S., Williams, L. R., Lewis, D. K., Magoon, G. R., Onasch, T. B., Kaminsky, M. L., Worsnop, D. R. and Jayne, J. T.: Use of electrochemical sensors for measurement of air pollution: Correcting interference response and validating measurements, *Atmos. Meas. Tech.*, 10(9), 3575–3588, doi:10.5194/amt-10-3575-2017, 2017.

Defra: Quality Assurance and Quality Control (QA/QC) Procedures for UK Air Quality Monitoring under 2008/50/EC and 2004/107/EC. [online] Available from: [www.defra.gov.uk](http://www.defra.gov.uk) (Accessed 5 May 2021), 2013.

Defra: Clean Air Strategy 2019., 2019.

Defra: Site Information for Oxford St Ebbes(UKA00518) - Defra, UK, [online] Available from: [https://uk-air.defra.gov.uk/networks/site-info?uka\\_id=UKA00518&search=View+Site+Information&action=site&provider=archive](https://uk-air.defra.gov.uk/networks/site-info?uka_id=UKA00518&search=View+Site+Information&action=site&provider=archive) (Accessed 21 April 2021), 2021.

- 545 Defra and DfT: UK plan for tackling roadside nitrogen dioxide concentrations: An overview. [online] Available from: [www.nationalarchives.gov.uk/doc/open-government-licence/version/3/%0Awww.gov.uk/government/publications](http://www.nationalarchives.gov.uk/doc/open-government-licence/version/3/%0Awww.gov.uk/government/publications), 2017.
- EC Working Group: GUIDE TO THE DEMONSTRATION OF EQUIVALENCE OF AMBIENT AIR MONITORING METHODS Report by an EC Working Group on Guidance for the Demonstration of Equivalence. [online] Available from: <https://ec.europa.eu/environment/air/quality/legislation/pdf/equivalence.pdf>, 2010.
- 550 EC Working Group: Equivalence Spreadsheet Tool on the Demonstration of Equivalence, Version Control. Version 3.1 02/07/20 [online] Available from: [https://ec.europa.eu/environment/air/quality/legislation/pdf/Equivalence Tool V3.1 020720.xlsx](https://ec.europa.eu/environment/air/quality/legislation/pdf/Equivalence%20Tool%20V3.1%20020720.xlsx) (Accessed 5 May 2021), 2020.
- Esposito, E., De Vito, S., Salvato, M., Bright, V., Jones, R. L. and Popoola, O.: Dynamic neural network architectures for on field stochastic calibration of indicative low-cost air quality sensing systems, *Sensors Actuators, B Chem.*, 231, 701–713, doi:10.1016/j.snb.2016.03.038, 2016.
- 555 European Commission: Relating to arsenic, cadmium, mercury, nickel and polycyclic aromatic hydrocarbons in ambient air. [online] Available from: <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32004L0107&from=EN>, 2004.
- European Commission: Directive 2008/50/EC of the European Parliament and of the Council of 21 May 2008 on ambient air quality and cleaner air for Europe., 2008.
- Frank Kelly, P.: Associations of long-term average concentrations of nitrogen dioxide with mortality., 2018.
- 560 Hasenfratz, D., Saukh, O. and Thiele, L.: On-the-Fly Calibration of Low-Cost Gas Sensors, in *Wireless Sensor Networks*, edited by G. Pietro Picco and W. Heinzelman, pp. 228–244, Springer Berlin Heidelberg, Berlin, Heidelberg., 2012.
- Hastie, T., Tibshirani, R. and Friedman, J.: *The Elements of Statistical Learning*, , doi:10.1007/978-0-387-84858-7, 2009.
- Karagulian, F., Barbiere, M., Kotsev, A., Spinelle, L., Gerboles, M., Lagler, F., Redon, N., Crunaire, S. and Borowiak, A.: Review of the performance of low-cost sensors for air quality monitoring. *Atmosphere (Basel)*., 10(9), doi:10.3390/atmos10090506, 2019.
- 565 Leach, F. C. P., Peckham, M. S. and Hammond, M. J.: Identifying NOx Hotspots in Transient Urban Driving of Two Diesel Buses and a Diesel Car, *Atmosphere (Basel)*., 11(4), 355, doi:10.3390/atmos11040355, 2020.
- Lim, C. C., Kim, H., Vilcassim, M. J. R., Thurston, G. D., Gordon, T., Chen, L. C., Lee, K., Heimbinder, M. and Kim, S. Y.: Mapping urban air quality using mobile sampling with low-cost sensors and machine learning in Seoul, South Korea, *Environ. Int.*, 131, 105022, doi:10.1016/J.ENVINT.2019.105022, 2019.
- 570 Morawska, L., Thai, P. K., Liu, X., Asumadu-Sakyi, A., Ayoko, G., Bartonova, A., Bedini, A., Chai, F., Christensen, B., Dunbabin, M., Gao, J., Hagler, G. S. W., Jayaratne, R., Kumar, P., Lau, A. K. H., Louie, P. K. K., Mazaheri, M., Ning, Z., Motta, N., Mullins, B., Rahman, M. M., Ristovski, Z., Shafiei, M., Tjondronegoro, D., Westerdahl, D. and Williams, R.: Applications of low-cost sensing technologies for air quality monitoring and exposure assessment: How far have they gone?, *Environ. Int.*, 116, 286–299, doi:10.1016/j.envint.2018.04.018, 2018.
- National Institute for Health Research: NIHR Funding and Awards Search Website, [online] Available from: <https://fundingawards.nihr.ac.uk/award/NIHR130095> (Accessed 30 April 2021), 2020.

- 580 Oshiro, T. M., Perez, P. S. and Baranauskas, J. A.: How many trees in a random forest? in Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics), vol. 7376 LNAI, pp. 154–168., 2012.
- Probst, P., Wright, M. and Boulesteix, A.-L.: Hyperparameters and Tuning Strategies for Random Forest., 2019.
- Public Health England: Health matters: air pollution - GOV.UK, UK Gov., (November) [online] Available from: <https://www.gov.uk/government/publications/health-matters-air-pollution/health-matters-air-pollution>, 2018.
- 585 Schneider, P., Castell, N., Vogt, M., Dauge, F. R., Lahoz, W. A. and Bartonova, A.: Mapping urban air quality in near real-time using observations from low-cost sensors and model information, *Environ. Int.*, 106, 234–247, doi:10.1016/j.envint.2017.05.005, 2017.
- Spinelle, L., Gerboles, M. and Aleixandre, M.: Performance evaluation of amperometric sensors for the monitoring of O<sub>3</sub> and NO<sub>2</sub> in ambient air at ppb level, *Procedia Eng.*, 120, 480–483, doi:10.1016/j.proeng.2015.08.676, 2015.
- 590 Spinelle, L., Gerboles, M., Villani, M. G., Aleixandre, M. and Bonavitacola, F.: Field calibration of a cluster of low-cost commercially available sensors for air quality monitoring. Part B: NO, CO and CO<sub>2</sub>, *Sensors Actuators, B Chem.*, 238, 706–715, doi:10.1016/j.snb.2016.07.036, [2017a](#).
- [Spinelle, L., Gerboles, M., Kotsev, A. and Signorini, M.: Evaluation of low-cost sensors for air pollution monitoring: Effect of gaseous interfering compounds and meteorological conditions., 2017b.](#)
- 595 De Vito, S., Piga, M., Martinotto, L. and Di Francia, G.: CO, NO<sub>2</sub> and NO<sub>x</sub> urban pollution monitoring with on-field calibrated electronic nose by automatic bayesian regularization, *Sensors Actuators, B Chem.*, 143(1), 182–191, doi:10.1016/j.snb.2009.08.041, 2009.
- Wang, S., Ma, Y., Wang, Z., Wang, L., Chi, X., Ding, A., Yao, M., Li, Y., Li, Q., Wu, M., Zhang, L., Xiao, Y. and Zhang, Y.: Mobile monitoring of urban air quality at high spatial resolution by low-cost sensors: impacts of COVID-19 pandemic lockdown, *Atmos. Chem. Phys.*, 21(9), 7199–7215, doi:10.5194/acp-21-7199-2021, 2021.
- 600 Woodall, G., Hoover, M., Williams, R., Benedict, K., Harper, M., Soo, J.-C., Jarabek, A., Stewart, M., Brown, J., Hulla, J., Caudill, M., Clements, A., Kaufman, A., Parker, A., Keating, M., Balshaw, D., Garrahan, K., Burton, L., Batka, S., Limaye, V., Hakkinen, P. and Thompson, B.: Interpreting Mobile and Handheld Air Sensor Readings in Relation to Air Quality Standards and Health Effect Reference Values: Tackling the Challenges, *Atmosphere (Basel)*, 8(12), 182, doi:10.3390/atmos8100182, 2017.
- 605 Yu, H., Lo, H., Hsieh, H., Lou, J., Mckenzie, T. G., Chou, J., Chung, P., Ho, C., Chang, C., Weng, J., Yan, E., Chang, C., Kuo, T., Chang, P. T., Po, C., Wang, C., Huang, Y., Ruan, Y., Lin, Y., Lin, S., Lin, H. and Lin, C.: Feature engineering and classifier ensemble for KDD Cup 2010, *JMLR Work. Conf. Proc.* [online] Available from: <http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.367.249> (Accessed 4 May 2021), 2011.
- 610 Zhang, Z. M., Chen, S. and Liang, Y. Z.: Google Code Archive - Long-term storage for Google Code Project Hosting., [online] Available from: <https://code.google.com/archive/p/airpls/> (Accessed 5 May 2021), 2011.
- Zhang, Z. M., Chen, S. and Liang, Y. Z.: Baseline correction using adaptive iteratively reweighted penalized least squares, *Analyst*, 135(5), 1138–1146, doi:10.1039/b922045c, 2010.

Zimmerman, N., Presto, A. A., Kumar, S. P. N., Gu, J., Hauryliuk, A., Robinson, E. S., Robinson, A. L. and Subramanian, R.: A machine learning calibration model using random forests to improve sensor performance for lower-cost air quality monitoring, *Atmos. Meas. Tech.*, 11(1), 291–313, doi:10.5194/amt-11-291-2018, 2018.

615

Figure 1: Visual representation of a generic, two variable Decision Tree regression problem (left) and its mapping on to a parameter space for the independent variables (right).


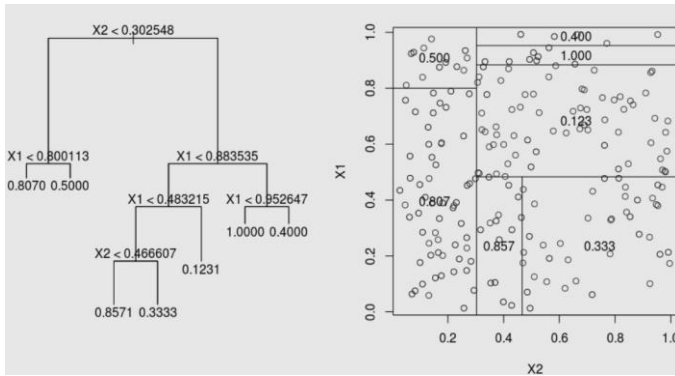


Figure 2. Schematic of the sensor baseline correction model including interfaces with downstream RFR interference correction model.

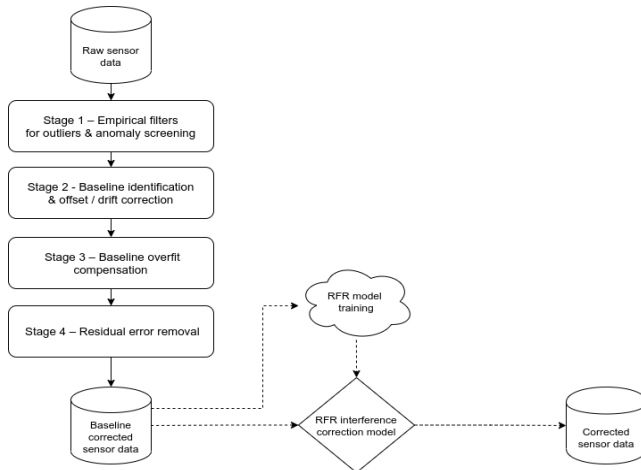

620

625

**Table 1. Filtering criteria used for initial screening out of anomalous sensor data.**

Acceptable sensor parameters - NO <sub>2</sub>		Acceptable sensor parameters – PM <sub>10</sub> and PM <sub>2.5</sub>	
(i)	-10 °C < <u>sensor</u> temperature < 35 °C	(iii)	-10 °C < <u>sensor</u> temperature < 35 °C
(ii)	<u>RelativeSensor relative</u> humidity > 35%* <sup>*</sup>	(iv)	<u>RelativeSensor relative</u> humidity > 35%* <sup>*</sup>
		(v)	<u>SampleSensor sample</u> flow rate > 2 ml/min

Filters (i-iv) were derived from local meteorological data. Filter (v) is a manufacturer recommendation.

\* There were ~ 1,400 15-minute periods or 2.5 weeks (total) in 2020 when relative humidity was <35%

**Formatted:** Font: Times New Roman, 9 pt, Bold, Font color: Black

**Formatted:** Centered

**Formatted:** Centered

**Formatted:** Centered

**Formatted:** Centered

**Formatted:** Centered

**Formatted:** Centered

630

**Table 2. Model feature (variables) used in RF model training and prediction by pollutant model.**

Model	NO <sub>2</sub>	PM <sub>10</sub>	PM <sub>2.5</sub>	Type
Sensed concentration / mass	Yes	Yes	Yes	Stock
Working electrode voltage	Yes	No	No	Stock
Auxiliary electrode voltage	Yes	No	No	Stock
Corrected working electrode voltage (offset corrected)	Yes	No	No	Stock
Sample flow rate	No	Yes	Yes	Stock
Sample time of flight	No	Yes	Yes	Stock
Temperature	Yes	Yes	Yes	Stock
Relative humidity (RH)	Yes	Yes	Yes	Stock
Rate of change in temperature at T-15 mins	Yes	Yes	Yes	Engineered
Rate of change in temperature at T-30 mins	Yes	Yes	Yes	Engineered
Rate of change in RH at T-15 mins	Yes	Yes	Yes	Engineered
Rate of change in RH at T-30 mins	Yes	Yes	Yes	Engineered
Hour of day	Yes	Yes	Yes	Engineered
Day of week	Yes	Yes	Yes	Engineered
Rush hour classifier	Yes	Yes	Yes	Engineered

‘Stock’ indicates a feature based directly upon logged sensor observations, ‘Engineered’ indicates a featured derived from re-analysis of one of more stock features.

**Formatted:** Font: 9 pt


**Formatted:** Space Before: 10 pt, After: 10 pt, Line spacing: single

**Formatted Table**

**Formatted:** Centered

635

Figure 3. NO<sub>2</sub> RFR model performance returns with increasing model complexity (maximum number of leaf nodes included in training, validation and cross-validation datasets).

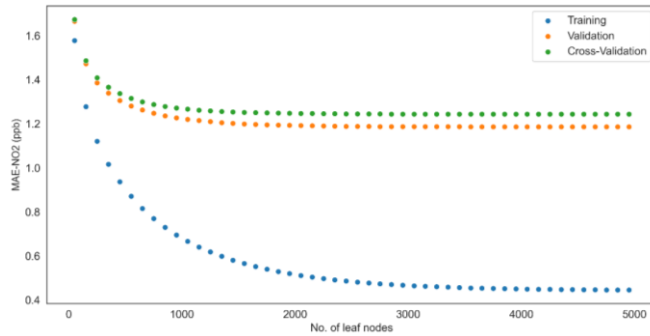

640

Table 3. Summary of Random Forest hyperparameter setting used in model training.

Hyperparameter	Model Type		
	NO <sub>2</sub>	PM <sub>10</sub>	PM <sub>2.5</sub>
No. of trees	100	100	100
Criterion	0	0	0
Max. tree depth	0	0	0
Min. samples per leaf node	1	1	1
Max. no. of leaf nodes	3500	3000	3000
Min. sample per node	2	2	2
Min. leaf node weight fraction	0	0	0
Min. impurity decrement	0	0	0
Min impurity split	0	0	0
Max. no. features	15	15	15
No. jobs	-1	-1	-1
Bootstrap sampling	1	1	1



645 **Figure 4. Three hour rolling mean raw low-cost sensor and reference method NO<sub>2</sub> time series at three locations in Oxford 2020 (The y-axis is discontinuous to allow structure in data below 200 ppb and upper extrema to be displayed).**

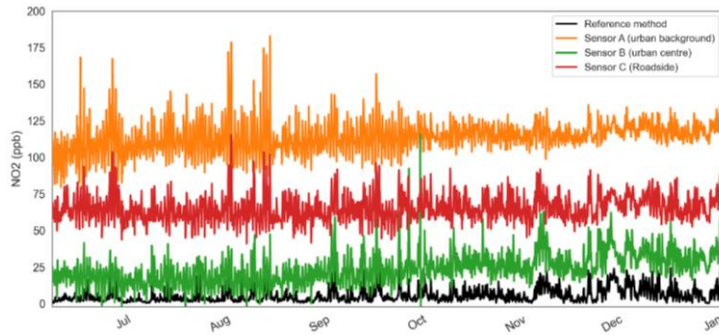


Figure 5. (a-e) Illustrative impacts of each stage in the sensor baseline offset correction model, St Ebbe's, August 2020.

Fig.5a - Raw sensor signal & reference method




Fig.5b – Correction 1. Application of empirical filters for anomaly & outlier removal




Fig.5c – Correction 2. Baseline offset correction




Fig.5d – Correction 3. Compensation for efficacy of baseline offset correction






Fig.5e – Correction 4. Removal of residuals

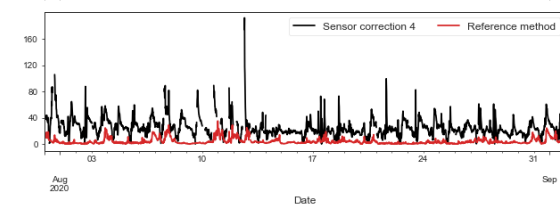


Formatted Table

Note. Figure 5 presents the sensor offset correction model for illustrative purposes. Outputs from (5e) are in turn parsed by the RF interference correction model to correct for transient effects of environmental parameters (not shown).


655 **Figure 6. Relationship between uncorrected, RF model corrected sensor and reference method observations for NO<sub>2</sub>, the dotted line shows the unity slope.**

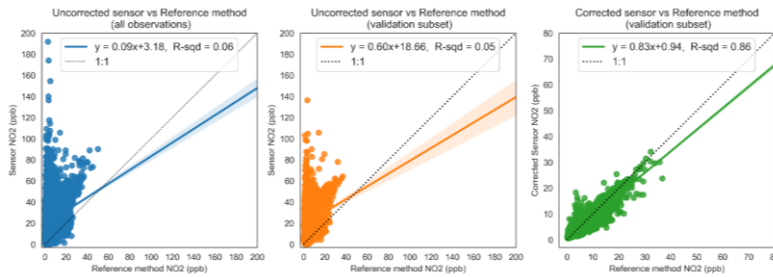

**Figure 7. Relationship between uncorrected, RF model corrected sensor and reference method observations for PM<sub>10</sub>, the dotted line shows the unity slope.**

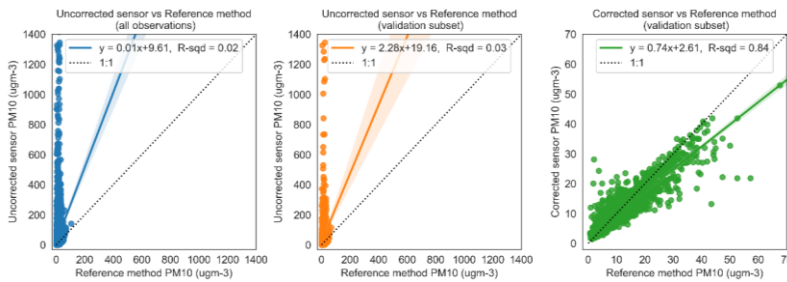


660 **Figure 8. Relationship between uncorrected, RF model corrected sensor and reference method observations for PM<sub>2.5</sub>, the dotted line shows the unity slope.**

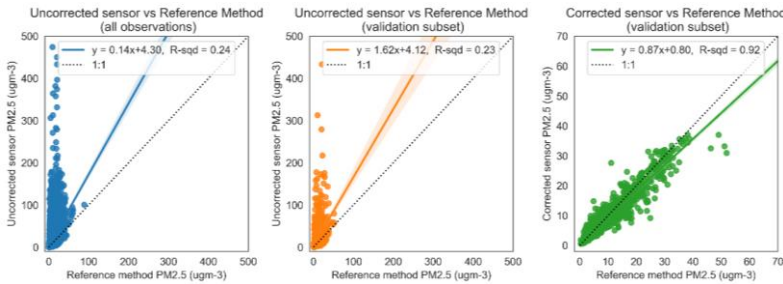

665 **Table 4. RFR correction model performance in terms of MAE relative to reference method observations, validation data, June to November 2020.**


	Mean absolute error (MAE)		Coefficient of determination ( $R^2$ )		Change in MAE arising from RFR correction
	Baseline correction only	Baseline + RFR correction	Baseline correction	Baseline + RFR correction	
NO <sub>2</sub> (ppb)	16.8	1.2	0.06	0.86	93%
PM <sub>10</sub> (µg/m <sup>3</sup> )	36.5	2.0	0.02	0.84	95%
PM <sub>2.5</sub> (µg/m <sup>3</sup> )	8.1	1.0	0.24	0.92	88%

670 **Figure 9. Time series of uncorrected-baseline-normalised, fully corrected sensor observations and reference method observations for NO<sub>2</sub> St Ebbe's Oxford 2020.**

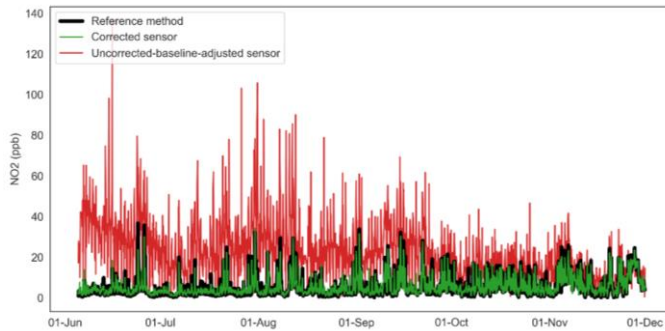


675

**Figure 10. Time series of uncorrected-baseline-normalised, fully corrected sensor observations and reference method observations for PM<sub>10</sub> St Ebbe's Oxford 2020.**

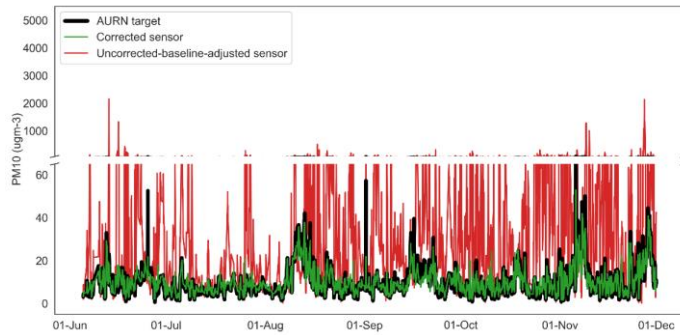

**Figure 11. Time series of uncorrected-baseline-normalised, fully corrected sensor observations and reference method observations for PM<sub>2.5</sub> St Ebbe's Oxford 2020.**

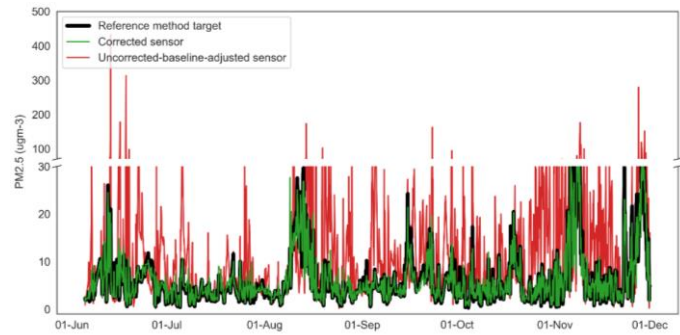

**Table 5. RFR correction model performance in terms of MAE relative to reference method observations, unseen data December 2020.**

	Mean absolute error (MAE)		Change in MAE arising from RFR correction
	Baseline correction	Baseline + RFR correction	
NO <sub>2</sub> (ppb)	4.1	2.6	37%
PM <sub>10</sub> (µg/m <sup>3</sup> )	81.5	5.1	94%
PM <sub>2.5</sub> (µg/m <sup>3</sup> )	10.0	2.9	71%

Figure 12. Time series of uncorrected-baseline-normalised, fully corrected sensor observations and reference method observations for NO<sub>2</sub> St Ebbe's Oxford, unseen data, December 2020.



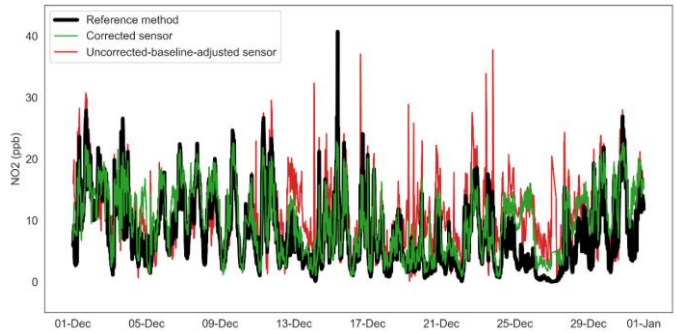


Figure 13. Time series of uncorrected-baseline-normalised, fully corrected sensor observations and reference method observations for PM<sub>10</sub> St Ebbe's Oxford, unseen data, December 2020.

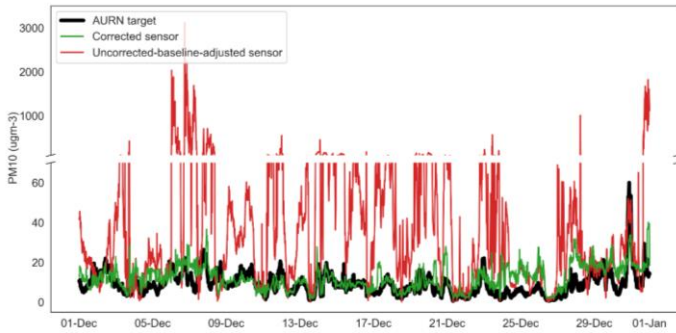

**Figure 14. Time series of uncorrected-baseline-normalised, fully corrected sensor observations and reference method observations for PM<sub>2.5</sub> St Ebbe's Oxford, unseen data, December 2020.**

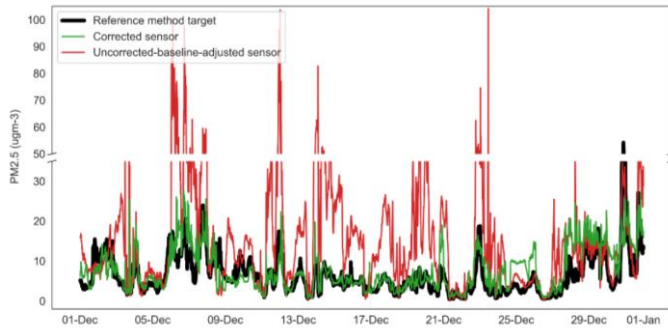

695

**Table 6. Expanded uncertainty estimates for corrected sensor observations using RFR validation dataset, the target values are the target expanded uncertainty criteria recommended by European legislation.**

Pollutant	Expanded Uncertainty	Corrected Expanded Uncertainty <sup>a</sup>	R-squared Value	Conformance with Target Expanded Uncertainty Objective
NO <sub>2</sub>	21%	4%	0.86	True, ≤25%
PM <sub>10</sub>	34%	12%	0.84	True, ≤50%
PM <sub>2.5</sub>	18%	10%	0.92	True, ≤50%

a. expanded uncertainty estimates with allowance to correct for non-zero intercept and non-unitary slope in the linear regression relationship of sensor to reference method.

700

**Table 7. Expanded uncertainty estimates for corrected sensor observations from unseen dataset, December 2020.**

Pollutant	Expanded Uncertainty	Corrected Expanded Uncertainty <sup>a</sup>	R-squared Value	Conformance with Target Expanded Uncertainty Objective
NO <sub>2</sub>	21%	10%	0.87	True, ≤25%
PM <sub>10</sub>	34%	24%	0.27	True, ≤50%
PM <sub>2.5</sub>	29%	29%	0.45	True, ≤50%

a. expanded uncertainty estimates with allowance to correct for non-zero intercept and non-unitary slope in the linear regression relationship of sensor to reference method.

705

710

715

720

725

730

735



