

Rainfall retrieval algorithm for commercial microwave links: stochastic calibration

Wagner Wolff¹, Aart Overeem^{2,3}, Hidde Leijnse^{2,3}, and Remko Uijlenhoet^{3,4}

¹Department of Biosystems Engineering, University of São Paulo/“Luiz de Queiroz” College of Agriculture (ESALQ/USP);

²R&D Observations and Data Technology, Royal Netherlands Meteorological Institute (KNMI);

³Hydrology and Quantitative Water Management Group, Wageningen University & Research (WUR);

⁴Department of Water Management, Delft University of Technology (TU Delft).

Correspondence: Wagner Wolff (wwolff@usp.br)

Abstract. During the last decade, rainfall monitoring using signal level data from commercial microwave links (CMLs) in cellular communication networks has been proposed as a complementary way to estimate rainfall for large areas. Path-averaged rainfall is retrieved between the transmitting and receiving cellular antenna of a CML. One rainfall estimation algorithm for CMLs is RAINLINK, which has been employed in different regions (e.g., Brazil, Italy, the Netherlands, and Pakistan)

5 with satisfactory results. However, the RAINLINK parameters have been calibrated for a unique optimum solution, which is inconsistent with the fact that multiple similar or equivalent solutions may exist due to uncertainties in algorithm structure, input data, and parameters. Here, we show how CML rainfall estimates can be improved by calibrating all parameters of the algorithm systematically and simultaneously with the stochastic optimization method Particle Swarm Optimization, which is used for the numerical maximization of the objective function. An open dataset of approximately 2,800 sub-links of minimum
10 and maximum received signal levels over 15-minute intervals covering the Netherlands ($\sim 35,500 \text{ km}^2$) is employed, where 12 days are used for calibration and 3 months for validation. A gauge-adjusted radar rainfall dataset is utilized as reference. Verification of path-average daily rainfall shows a reasonable improvement for the stochastically calibrated parameters with respect to RAINLINK’s default parameter settings. Results further improve when averaged over the Netherlands. Moreover, the method provides a better underpinning of the chosen parameter values and is therefore of general interest for calibration of
15 RAINLINK’s parameters for other climates and cellular communication networks.

1 Introduction

Accurate rainfall observations with high temporal and spatial resolution are crucial for, e.g., agriculture, meteorology, flood warnings and fresh water resource management. However, for many places on the earth’s land surface, accurate rainfall information is lacking, especially from ground-based measurements at sub-daily and daily time scales (Sun et al., 2018). Another
20 issue is the severe reduction in available ground-based measurements. For instance, the largest worldwide rain gauge database, maintained by the Global Precipitation Climatology Centre (GPCC), underwent a decline caused by the delay of the data delivery and by post-processing at GPCC. A reduction of approximately 43,000 (81%) and 27,000 (77%) rain gauges with monthly and daily precipitation records during the last 30 years, respectively (Schneider et al., 2021).

Suggested by Upton et al. (2005) and initially applied by Messer (2006) and Leijnse et al. (2007), the technique to estimate rainfall intensities based on signal level data from commercial microwave links (CMLs) is slowly but surely becoming a complementary source of rainfall information next to traditional ground-based measurements from rain gauges, weather radars and disdrometers. A CML is the link along a path between a transmitting antenna on one cell phone tower and a receiving antenna on another cell phone tower, often having two sub-links for communication in both directions. Since rainfall attenuates microwave radiation at frequencies of tens of GHz (wavelengths of about 1 cm), typically employed by CMLs, the integrated rain-induced attenuation along the link path can be computed from the decrease in signal levels with respect to dry weather, and subsequently converted to path-average rainfall. The core of the rainfall retrieval algorithm is the conversion of specific attenuation k (dB km^{-1}) to path-average rainfall intensity R (mm h^{-1}) via the power-law relation $R = ak^b$ (Atlas and Ulbrich, 1977; Olsen et al., 1978). The coefficient a ($\text{mm h}^{-1} \text{ dB}^{-b} \text{ km}^b$) and exponent b (–) depend mainly on the microwave link’s frequency and polarization and on the rain drop size distribution (DSD) (Leijnse et al., 2007). Before applying the power-law relation, the received signal power must be processed to filter out any attenuation unrelated to rain, and to compare signals during a rainy interval with those from dry intervals. A typical workflow consists of: (i) CML data acquisition and preprocessing; (ii) identification of rain events in noisy raw data (wet-dry classification); (iii) baseline determination, representative of dry intervals; (iv) removal of outliers due to malfunctioning links; (v) correction of received signal powers; and (vi) computation of mean path-average rainfall intensities (Overeem et al., 2016a; Chwala and Kunstmann, 2019).

An advantage of CMLs is that they use the existing infrastructure of mobile network operators (MNOs) for network maintenance, data storage and acquisition. Furthermore, CMLs can be employed as a complement to existing rain gauge and weather radar networks, as well as in areas where instruments for ground observation are poor or non-existent. Thus, rainfall retrieval from CML data and subsequent mapping is a form of “opportunistic” sensing that has gained prominence in recent years (Uijlenhoet et al., 2018; Chwala and Kunstmann, 2019).

A number of studies highlight the successful employment of CMLs for rainfall retrieval, of which the most relevant for this study are discussed here. Zinevich et al. (2009) show that this technique is suitable for measuring near-ground rainfall around the cities of Ramle and Modi’in (area $\approx 900 \text{ km}^2$; density $\approx 0.025 \text{ CML km}^{-2}$) in Israel. Incorporating the uncertainty associated with the different sources of rainfall information, Bianchi et al. (2013) obtained reliable rainfall intensity estimates by combining rain gauge, radar, and microwave link observations in the Zürich area, Switzerland (area $\approx 460 \text{ km}^2$; density $\approx 0.03 \text{ CML km}^{-2}$). In a dedicated case study in Prague, Czech Republic, Fencel et al. (2015) used 14 CMLs over a small area of 2.5 km^2 (i.e. a density of 5.6 CML km^{-2}), concluding that quantitative precipitation estimates from CMLs capture the spatio-temporal rainfall distribution at the microscale very well. Recently, de Vos et al. (2019) reached correlations around 0.60 for daily rainfall accumulations, using instantaneously sampled data from a CML network in the Netherlands (density $\approx 0.054 \text{ CML km}^{-2}$). Moreover, comparing those results with earlier studies in the Netherlands, the authors highlight min/max sampling outperforms instantaneous sampling in terms of rainfall estimates. Long-term studies involving country-wide verification of CML rainfall estimates based on data from a few thousand CMLs are provided by Overeem et al. (2016b) for the Netherlands employing RAINLINK (Overeem et al., 2016a), and by Graf et al. (2020) for Germany employing pycomlink (<https://github.com/pycomlink/pycomlink>), both open-source rainfall retrieval packages. Machine learning supervised

algorithms have been used for rainfall retrieval via CMLs, improving the performance of this kind of rainfall measurement
60 (Pudashine et al., 2020; Habi and Messer, 2021). Although representing a recent advancement, data-driven solutions are not
feasible for places or countries without sufficient reference data to train the machine learning algorithms, such as a gauge-
adjusted radar dataset which provides full coverage over a CML network.

Likewise, research has been conducted to evaluate CML-derived rainfall in hydrological model responses. Brauer et al.
(2016) study the effects of differences in rainfall measurement techniques (including CMLs) on discharge and groundwater
65 simulations using a lumped rainfall-runoff model in a small (6.5 km²) catchment. CML-derived rainfall estimates are found
to lead to much better results than real-time weather radar data when comparing discharge and groundwater simulations to
observations for a full year. Investigating the potential of CML-derived rainfall estimates for streamflow prediction and water
balance analyses, Smiatek et al. (2017) observe a significant improvement in the reproduction of observed discharge values
for events with local heavy rainfall. The authors find that even rainfall fields provided by gauge-adjusted weather radar do not
70 capture such events, which suggests that an extremely dense monitoring network would be needed to properly capture local
heavy rainfall. Likely, this explains why Liberman et al. (2014) achieve better results by merging CML and radar data rather
than using just one of these sources to retrieve rainfall intensities.

Despite all these studies showing the potential of CMLs for rainfall monitoring, challenges remain. These are mainly related
to dealing with typical sources of error, e.g., wetting of antennas in rain events causing additional attenuation and hence
75 resulting in rainfall overestimation, as well as signal level decrease during dry periods in CML raw data (Leijnse et al., 2008;
Messer and Sendik, 2015; Overeem et al., 2016a). Rainfall retrieval algorithms for CMLs aim to take these phenomena into
account, although issues such as wet-dry classification still require improvement. Another challenge concerns the calibration
of the parameters of the rainfall retrieval algorithms. Current calibration procedures fall short of addressing the uncertainties
associated with CML signal levels (e.g. due to different brands of antennas and varying path lengths), algorithm structure
80 (e.g. attenuation thresholds for classification of rainy and non-rainy periods), model parameters (e.g. for wet antennas and
outlier filters), and rainfall itself (e.g. due to DSD spatial variability along the link path). Concretely, the parameters of the
algorithms are calibrated empirically in order to obtain a unique optimum solution. In fact, many optimum solutions can occur,
in accordance with a strong variability of the parameters, thus the optimization should account for the distribution of these
solutions and parameters, selecting them based on uncertainty levels.

85 Here, we partly address this by calibrating the most important parameters of the open-source rainfall retrieval algorithm
RAINLINK systematically and simultaneously with the stochastic optimization method Particle Swarm Optimization. This
is preceded by a sensitivity analysis selecting the most important parameters. RAINLINK has been used for CML rainfall
estimation in various regions, i.e. Brazil, Italy, the Netherlands, Nigeria, Pakistan, and Sri Lanka (Overeem et al., 2016a, b;
Sohail Afzal et al., 2018; Rios Gaona et al., 2018; de Vos et al., 2019; GSMA, 2019; Roversi et al., 2020), and has been
90 calibrated deterministically (Overeem et al., 2011, 2013, 2016a, b; de Vos et al., 2019). With the new optimization method,
we provide a better underpinning of parameter values for this CML rainfall retrieval algorithm, also we optimize for the first
time the main RAINLINK processes, namely wet-dry classification and rainfall retrieval, separately. These resulting CML
rainfall estimates are contrasted to those based on RAINLINK's default parameter values (Overeem et al., 2011, 2013, 2016a).

A gauge-adjusted radar rainfall dataset is utilized as reference for the CML-derived path-average rainfall estimates. We use
95 a large publicly available CML dataset of approximately 2,800 sub-links of minimum and maximum received signal levels
over 15-minute intervals covering the Netherlands ($\sim 35,500 \text{ km}^2$), where 12 days are used for calibration and 3 months for
validation.

This study is organized as follows. First, study area (Section 2.1), datasets (Section 2.1), and methodology (Sections 2.2
and 2.3) employed for RAINLINK calibration are presented. Next, the results and discussion (Section 3) present our major
100 findings. Finally, the conclusions (Section 4) summarize the findings and highlight the recommendations and outlooks for
further research.

2 Material and methods

2.1 Study area and datasets

The study area considered is the Netherlands ($\sim 35,500 \text{ km}^2$; Fig. 1 (a)), which has a temperate oceanic climate according
105 to the Köppen-Geiger classification (Peel et al., 2007). CML data were obtained from MNO T-Mobile NL: minimum and max-
imum received powers over 15-minute intervals, based on 10 Hz sampling with a precision of 1 dB. Data from approximately
2,800 sub-links (validation) and 2,940 (calibration) per time interval were available (after preprocessing with RAINLINK).
The 12-day calibration dataset, used to optimize RAINLINK's parameters, covers the period from June to September 2011. It
served as validation dataset in Overeem et al. (2013). The 3-month validation dataset covers the summer months June, July,
110 and August 2012. We are only using data from summer in the Netherlands to prevent analyzing events with solid precipitation.
This has the added advantage of the data bearing greater resemblance to rainfall in (sub)tropical climates, where the use of
CMLs for rainfall retrieval has the largest potential.

Figure 1 illustrates the main characteristics of the CML dataset used for validation. Being distributed over the entire country
(Fig. 1 (a)), the CMLs have a high temporal and spatial data availability, i.e., 92% of CMLs have observations for more than
115 80% of the period. In spite of not having a perfectly uniform distribution in terms of their directions, all direction classes are
well-represented (Fig. 1 (b)). Microwave frequencies range from $\sim 13 \text{ GHz}$ to 40 GHz (the majority from 37 to 40 GHz , Fig. 1
(c)). Lengths vary from 0.1 km to 20 km (the majority less than 5 km , Fig. 1 (d)), where shorter lengths typically correspond
to higher microwave frequencies (Fig. 1 (d)).

A climatological gauge-adjusted radar rainfall dataset of 5-min rainfall depths, aggregated over 15 minutes, was used as
120 reference for calibration of the rainfall retrieval algorithm (RAINLINK) and validation of rainfall estimates. The radar dataset
is maintained by the Royal Netherlands Meteorological Institute (KNMI) and has a 1-km spatial resolution. For more details
see Overeem et al. (2009a, b, 2011).

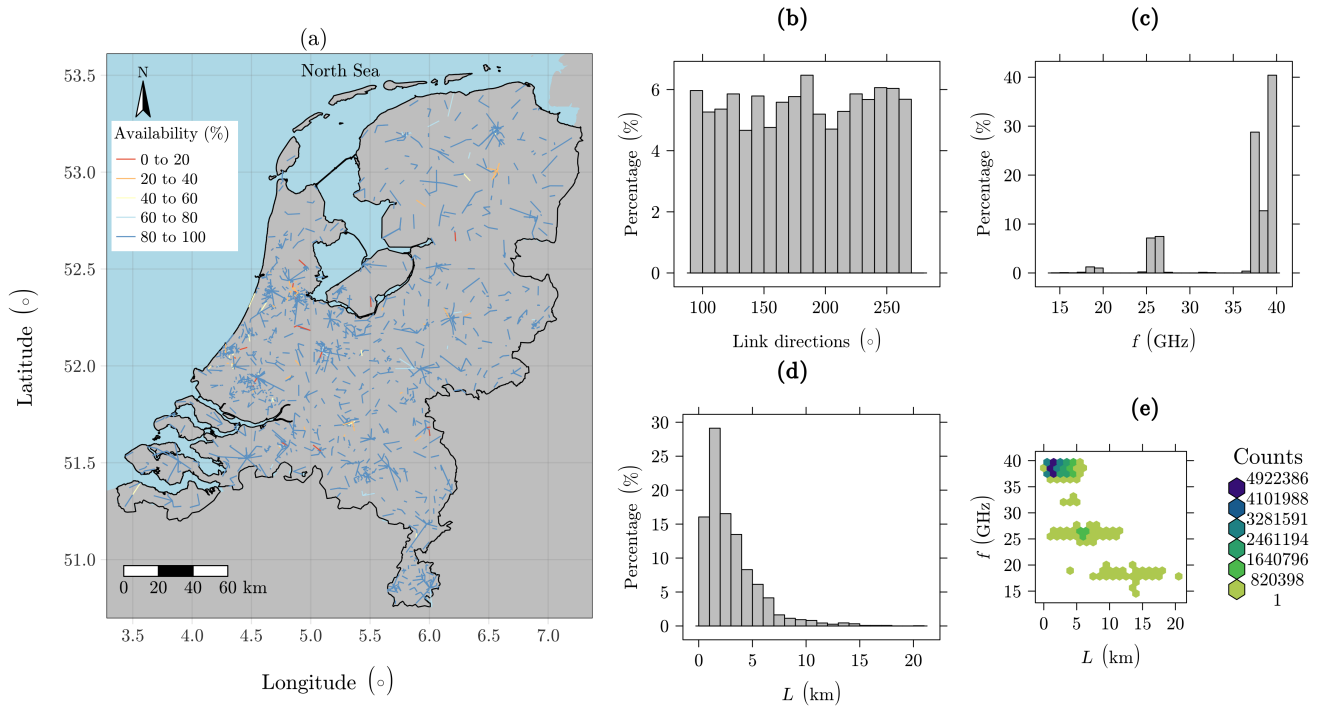


Figure 1. Map of the Netherlands and sub-link characteristics for the validation dataset: (a) CML locations and availability, (b) distribution of link directions, (c) distribution of microwave link frequencies, (d) distribution of link lengths, and (e) density of link length and frequency combinations.

2.2 Rainfall retrieval algorithm

Overeem et al. (2016a) describes the CML rainfall retrieval algorithm RAINLINK. Made available as R-package (R Core Team, 2018), current version of RAINLINK is 1.21 (Overeem et al., 2019), which is hosted at GitHub. RAINLINK's default parameter values are derived or selected in (Overeem et al., 2011, 2013, 2016a). The algorithm begins with a quality control by preprocessing of the CML data. Links with frequencies lower than 12.5 GHz and higher than 40.5 GHz are discarded. Moreover, the attributes frequency, link coordinates, path length, and identifier are checked for either duplicated or mismatches of information. Next, RAINLINK is divided into two main sub-processes, one for defining wet and dry periods and the other one for the actual rainfall retrieval.

2.2.1 Wet-dry classification

The process to define wet and dry periods assumes that rainfall is spatially correlated. Therefore, during a rainy time interval, a substantial decrease in received signal levels should be detected by nearby links within a specific radius (Overeem et al., 2011, 2016a). This approach is called “nearby link approach”. The output is a binary response to indicate wet and dry periods, respectively. Table 1 highlights all employed parameters.

Table 1. Wet-dry classification parameters (WD_{pn}): default values from RAINLINK and calibration search space (minimum and maximum values). Modified from Overeem et al. (2016a).

Parameter description	Symbol and unit	Default value	Minimum value	Maximum value
WD_{p1} – Minimum number of hours needed to compute $\max(P_{\min})$	– (h)	6	2	15
WD_{p2} – Number of previous hours over which $\max(P_{\min})$ is to be computed (also determines period over which cumulative difference F of outlier filter is computed)	– (h)	24	6	24
WD_{p3} – Radius	r (km)	15	10	30
WD_{p4} – Attenuation threshold	$\text{median}(\Delta P)$ (dB)	–1.4	–8	0
WD_{p5} – Specific attenuation threshold	$\text{median}(\Delta P_L)$ (dB km ^{–1})	–0.7	–2	0
WD_{p6} – Minimum number of available (surrounding) links	– (–)	3	3	10
WD_{p7} – Minimum received power threshold	– (dB)	2	1	4

2.2.2 Rainfall retrieval

Once the rainy and non-rainy time intervals have been identified, a reference signal level (P_{ref}) is computed, which represents the median received power during dry intervals. Next, outliers are removed by applying a filter which uses specific attenuation derived from the uncorrected minimum received power. It assumes that rainfall is correlated in space. The filter removes a time interval of a link for which the time-integrated difference between its specific attenuation and that of the surrounding links over the previous period (Tab. 2, parameter RR_{p2}) is lower (i.e. more negative) than a certain threshold (Tab. 2, parameter RR_{p3}).

Preventing non-zero rainfall estimates during non-rainy intervals, corrected minimum (P_{\min}^C) and maximum (P_{\max}^C) received powers are calculated by adjusting the signals to the base level for non-rainy intervals. Subsequently, the minimum and maximum rain-induced attenuation, A_{\min} (dB) and A_{\max} (dB), respectively, are calculated for each link and time interval using

$$\begin{aligned} A_{\min} &= P_{\text{ref}} - P_{\max}^C, \\ A_{\max} &= P_{\text{ref}} - P_{\min}^C. \end{aligned} \quad (1)$$

Next, the minimum and maximum path-averaged rainfall intensities, \bar{R}_{\min} (mm h^{–1}) and \bar{R}_{\max} (mm h^{–1}), respectively, are computed according to

$$\bar{R}_{\min, \max} = a \left(\frac{A_{\min, \max} - A_a}{L} H(A_{\min, \max} - A_a) \right)^b, \quad (2)$$

where H is the Heaviside function (if the argument of H is smaller than zero, $H = 0$; else $H = 1$). A_a (dB) is a fixed wet antenna attenuation correction term, and a (mm h^{–1} dB^{– b} km ^{b}) and b (–) are the coefficient and exponent of the employed power-law $R - k$ relation, respectively. The values of a and b , which depend mainly on link frequency, have been derived from measured raindrop size distributions and computations of electromagnetic scattering by rain drops for vertically polarized

Table 2. Rainfall retrieval parameters (RR_{pn}): default values from RAINLINK and calibration search space (minimum and maximum values). Modified from Overeem et al. (2016a).

Parameter description	Symbol and unit	Default value	Minimum value	Maximum value
RR_{p1} – Minimum number of hours that should be dry in preceding period	– (h)	2.5	2.5	12
RR_{p2} – Period over which reference level is to be determined	– (h)	24	12	24
RR_{p3} – Outlier filter threshold	F_t (dB km ⁻¹ h)	–32.5	–100	0
RR_{p4} – Wet antenna attenuation	A_a (dB)	2.3	0	5
RR_{p5} – Temporal rainrate distribution coefficient	α (–)	0.33	0.1	0.6

signals (Leijnse et al., 2008). The polarization for individual links was unknown, but the majority of links used vertically polarized signals.

155 Finally, the mean path-averaged rainfall intensity, \bar{R} (mm h⁻¹) is computed by means of

$$\bar{R} = \alpha \bar{R}_{\max} + (1 - \alpha) \bar{R}_{\min}, \quad (3)$$

where α is a coefficient which determines the contribution of the minimum and maximum path-averaged rainfall intensity during a time interval. Table 2 gives an overview of all parameters used in the rainfall retrieval process.

2.3 RAINLINK sensitivity analysis and calibration

160 Using the 15-minute rainfall accumulations retrieved from RAINLINK, the parameters with the highest importance in the algorithm are identified by means of a sensitivity analysis called Latin-Hypercube One-factor-At-a-Time (LH-OAT) (Van Griensven et al., 2006). This method ensures that the full range of parameters is sampled according to a LH design and within each sample the parameters are tested, one at a time. Initially, it takes N LH sample points for N intervals while varying each LH sample point p times by changing each of the n parameters one at a time, according to the OAT design (Van Griensven
165 et al., 2006). Around each Latin Hypercube point a relative partial effect for each parameter is calculated. A final effect is calculated by averaging the partial effects over all N LH points. Having the same feature as the Monte Carlo sampling, i.e., a global screening method, LH sampling reduces the computational cost significantly ($n - 1$ times), being more efficient (Van Griensven et al., 2006).

The method is very efficient, as the N intervals in the LH method require a total of $N(p + 1)$ evaluations. The relative
170 importance of the parameters is determined by ranking the final effects from large to small (Van Griensven et al., 2006). Each relative importance can be divided by the sum of all relative importances to yield a normalized measure of relative importance. We choose a step size that represents a fraction of 0.1 of the parameter search space. The twelve parameters selected for the sensitivity analysis are listed in Tables 1 and 2. The most sensitive parameters are selected such that the sum of their normalized relative importances reaches at least 95%.

175 After having selected the most important parameters by sensitivity analysis, the RAINLINK parameters are optimized with the method Standard Particle Swarm Optimization (SPSO-2011) (Clerc, 2012). Being a major improvement over previous PSO versions, with an adaptive random topology and rotational invariance, SPSO-2011 is a stochastic, effective, and efficient calibration method, as highlighted in recent studies with other hydrological and environmental models (Abdelaziz and Zambrano-Bigiarini, 2014; Bisselink et al., 2016; Pijl et al., 2018). The optimization is performed for the two RAINLINK sub-
180 processes separately. First, the wet-dry classification parameters are calibrated, to make sure RAINLINK is able to correctly identify dry and rainy periods. Next, using the optimum parameters for the wet-dry classification, the rainfall retrieval parameters are calibrated. We have included all zero rainfall observations in the entire calibration process, both for the gauge-adjusted radar reference and for the RAINLINK estimates. Note that data from individual sub-links were used in the calibration process, so data from two links (in opposite directions) having the same link path were not averaged.

185 The goodness-of-fit measures chosen to drive the optimization and performance for the wet-dry classification and the rainfall retrieval processes are the Matthews Correlation Coefficient (MCC) (Matthews, 1975) and the modified Kling-Gupta efficiency (KGE) (Kling et al., 2012), respectively. Both are maximized towards an optimum value of 1. A 15-minute time interval from a given sub-link is considered dry if the reference is below 0.25 mm.

Due to the higher frequency of non-rainy 15-min intervals (data points), the process of wet-dry classification is considered an
190 imbalanced classification problem. Employing recurrent metrics for binary classification, such as F1 score and Accuracy, may lead to inflated results. The Matthews Correlation Coefficient is less subjective and preferred since it informs how correlated the predictions and observations are, reaching a high score only if the prediction obtained good results in all the four confusion matrix categories (true positives (TP), false negatives (FN), true negatives (TN), and false positives (FP)) (Chicco and Jurman, 2020). The Matthews Correlation Coefficient is defined as

$$195 \text{ MCC} = \frac{TP \cdot TN - FP \cdot FN}{\sqrt{(TP + FP)(TP + FN)(TN + FP)(TN + FN)}}, \quad (4)$$

The denominator is arbitrarily set to one when any of the four sums in the denominator is zero. Kling-Gupta efficiency is defined as

$$\text{KGE} = 1 - \sqrt{(\rho - 1)^2 + (\beta - 1)^2 + (\gamma - 1)^2}, \quad (5)$$

with ρ the Pearson correlation coefficient, β the bias ratio

$$200 \beta = \frac{\mu_e}{\mu_o}, \quad (6)$$

and γ the variability ratio

$$\gamma = \frac{CV_e}{CV_o} = \frac{\sigma_e \mu_o}{\mu_e \sigma_o}, \quad (7)$$

where μ and σ are the mean and standard deviation of path-averaged rainfall intensity (mm h^{-1}) for CML estimates (e) and gauge-adjusted radar observations (o). CV is the coefficient of variation, defined as the ratio of the standard deviation and the
205 mean.

2.4 RAINLINK validation

The validation was performed for both wet-dry and rainfall retrieval RAINLINK processes by using the newly calibrated parameters against its default parameters. In addition to MCC and following the confusion matrix, the assessment binary metrics, Accuracy, Sensitivity, and Specificity were computed as follows:

$$210 \quad \text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN}, \quad (8)$$

$$\text{Sensitivity} = \frac{TP}{TP + FN}, \quad (9)$$

$$\text{Specificity} = \frac{TN}{FP + TN}. \quad (10)$$

215 As for the RAINLINK rainfall retrieval process, besides KGE and its components ρ , β and γ , the CV of the residuals (CV_{res}), the percent bias (PBIAS) and root-mean-square error (RMSE) were employed.

$$CV_{\text{res}} = \frac{\sigma_{\text{res}}}{\mu_o}, \quad (11)$$

$$220 \quad \text{PBIAS} = 100 \frac{\sum_{i=1}^n (e_i - o_i)}{\sum_{i=1}^n o_i}, \quad (12)$$

$$\text{RMSE} = \sqrt{\frac{\sum_{i=1}^n (e_i - o_i)^2}{n}}. \quad (13)$$

Finally, the level of agreement of daily rainfall patterns is analyzed graphically. RAINLINK's ability to estimate 15-minute path-average rainfall rates is also evaluated. Moreover, both agreement of accumulated rainfall for all individual CMLs and agreement of daily mean rainfall over the Netherlands estimated from the CML values (as time series) are considered, taking
225 those links with over 75% of data availability into account.

3 Results and discussion

3.1 Calibration

3.1.1 Wet-dry classification parameter optimization

The sensitivity analysis for the wet-dry classification process is performed at a 15-minute time interval. Table 3 provides the
230 parameter ranking obtained considering the search space illustrated in Tab. 1. The most important parameters are, WD_{p2} , WD_{p4}

Table 3. Wet-dry classification sensitivity analysis: WD_{pn} (symbol) – wet-dry classification parameters, see description in Table 1. Note: ^a - Most sensitive parameters obtained from the Latin-Hypercube One-factor-At-a-Time analysis.

Rank	Parameter (symbol)	Relative Importance (RI)	RI Normalized
1 ^a	WD_{p2}	77.68	0.48
2 ^a	WD_{p4} ($\text{median}(\Delta P)$)	35.07	0.21
3 ^a	WD_{p1}	29.44	0.18
4 ^a	WD_{p5} ($\text{median}(\Delta P_L)$)	10.37	0.062
5 ^a	WD_{p3} (r)	10.23	0.061
6	WD_{p7}	2.16	0.013
7	WD_{p6}	0.32	0.0019

($\text{median}(\Delta P)$), WD_{p1} , WD_{p5} ($\text{median}(\Delta P_L)$), and WD_{p3} (r). The accumulated relative importance of these parameters is 98%. The importance of the two thresholds (WD_{p4} and WD_{p5}) was expected, because these parameters define the values for which an individual microwave link will be classified as rainy or not. However, the analysis performed here, which systematically evaluates all parameters together by maximizing a goodness-of-fit measure, reveals that the parameters WD_{p2} , WD_{p1} , and WD_{p5} are important as well. The low ranking of the WD_{p7} threshold is consistent with the findings of Overeem et al. (2016a), who report that including this step hardly changes results for a 12-day dataset when validating rainfall depths (i.e., the total effect on the amounts, not the occurrence of wet and dry periods as such).

The five highest ranked parameters are now employed in the calibration, taking the ranges reported in Tab. 1 into account. Using particle swarm optimization (PSO), the parameters' dispersion and distributions across the search space have been computed for the 12-day calibration dataset (Fig. 2). The distributions are obtained for the all solutions, the frequency histograms of the parameters are multi-modal and skewed (Fig. 2 (b)), reflecting the uncertainties in the optimum values.

The parameters WD_{p1} , WD_{p2} , WD_{p3} , WD_{p4} , and WD_{p5} reach the optimum values equal to 7.5 h, 14.1 h, 19.7 km, -2.7 dB, and -0.9 dB km^{-1} , respectively. Compared with the default values of these parameters, namely 6 h, 24 h, 15 km, -1.4 dB, and -0.7 dB km^{-1} , the difference is considered small for the parameters WD_{p1} , WD_{p3} , and WD_{p5} . However, the parameters WD_{p2} and WD_{p4} presented a reasonable difference compared to the default values. For those solutions with MCC value greater than 0.53, being classified as “behavioral” solutions (Zambrano-Bigiarini and Rojas, 2013), the median value of the parameters were 4.8 h, 10 h, 18.9 km, -1.5 dB, -0.7 dB km^{-1} for WD_{p1} , WD_{p2} , WD_{p3} , WD_{p4} , and WD_{p5} , respectively. The values obtained for the calibrated parameters are based on the median of the “behavioral” solutions and are in line with the default parameters, except for WD_{p2} , which indicates a smaller period for computing the maximum of the minimum received power.

It should be noted that, in spite of being gauge-adjusted, the radar product used here is not a perfect reference. Differences between radar sampling (indirect measurements aloft) and ground-based sensors can lead to significant errors (de Vos et al., 2019). Thus, accounting for this sampling difference could even further increase the value of the MCC metric. In particular for small rainfall events these errors can lead to false positive and false negative classifications.

Due to the similar value of WD_{p1} 12% of the data points are excluded during the algorithm processing for both default and calibrated parameters set. Although the calibration dataset has been selected considering rainy days, the number of non-

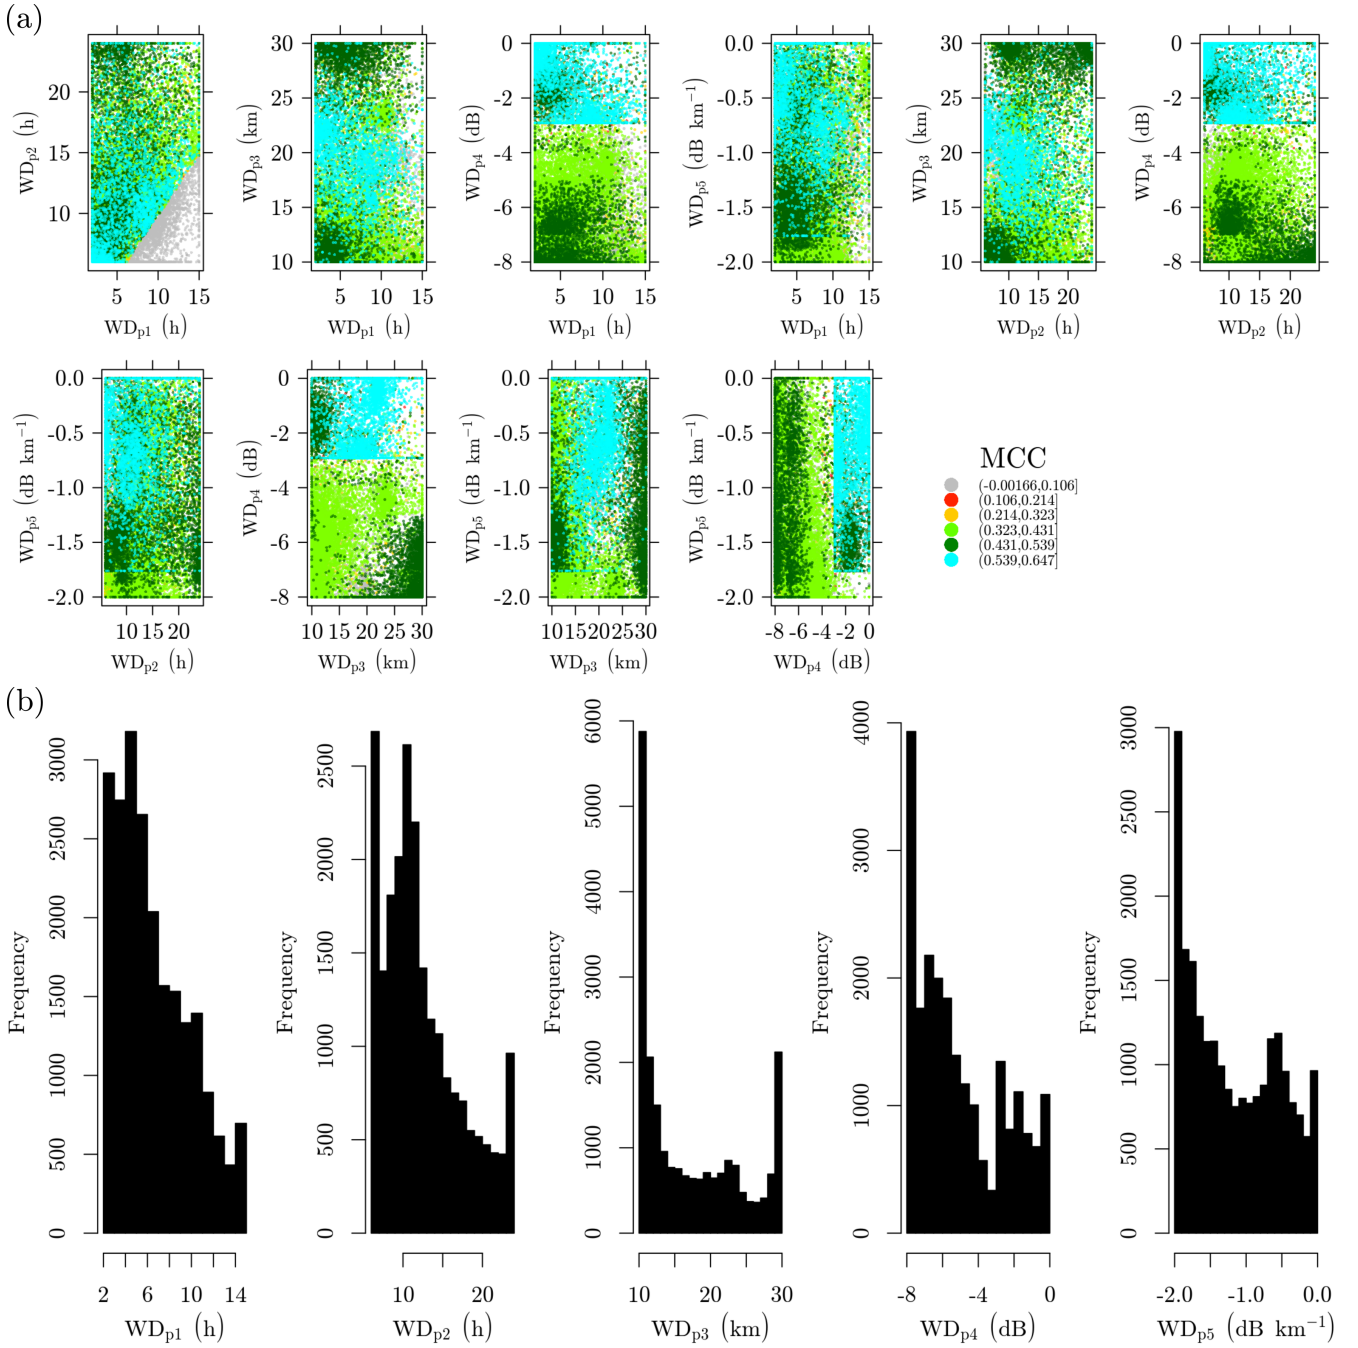


Figure 2. Calibration of the wet-dry classification parameters: (a) dot plot showing the interaction between calibration parameters at different Matthews correlation coefficient (MCC) values; (b) histograms of the parameters.

Table 4. Rainfall retrieval sensitivity analysis: RR_{pn} – rainfall retrieval parameters, see Tab. 2.

Rank	Parameter (symbol)	Relative Importance (RI)	RI Normalized
1	$RR_{p5} (\alpha)$	1071.18	0.84
2	$RR_{p4} (A_a)$	143.92	0.11
3	RR_{p1}	27.96	0.02
4	RR_{p2}	17.39	0.01
5	$RR_{p3} (F_l)$	8.32	0.006

rainy data points is much higher than the number of rainy data points, representing 93%, which is comparable to the average occurrence of dry spells in the Netherlands according to automatic weather stations. Thus, this calibration period can be considered representative for higher periods within the same weather season.

3.1.2 Rainfall retrieval parameter optimization

260 The same sensitivity analysis and calibration are employed for the rainfall retrieval at the 15-minute time interval (Tab. 4), where zeroes in either CML and/or reference are also included. The sensitivity analysis presented here underlines the uncertainty associated with the microwave link measurements. The most sensitive parameters are the parameters $RR_{p5} (\alpha)$ and $RR_{p4} (A_a)$. The summed relative importance of these parameters is 95%.

265 The parameter RR_{p4} is related to the correction of the attenuation due to wet antennas. This phenomenon is considered an important source of extra attenuation and may cause significant rainfall overestimation if not sufficiently accounted for (Leijnse et al., 2008; Messer and Sendik, 2015; Overeem et al., 2016a).

Since the parameter RR_{p5} represents a coefficient that determines the relative contributions of the minimum and maximum path-averaged rainfall intensities (\bar{R}_{min} and \bar{R}_{max} , Eq. 3) to the 15-minute average rainfall intensity estimates, it is directly related to the temporal sampling strategy of the received signal power and has an important weight in the rainfall retrieval. In
270 a comparative study, de Vos et al. (2019) found that min/max sampling at a 15-minute time step (as employed by RAINLINK) outperforms instantaneous sampling in the Dutch climate. This underlines the importance of properly estimating $RR_{p5} (\alpha)$ for accurate rainfall retrievals.

The parameter $RR_{p3} (F_l)$ represents an outlier filter. Therefore, it seems reasonable to assume a threshold value based on expert judgment, because strict filtering would result in a high performance, but with a severe decline in the remaining number
275 of links. Using the default values of the parameters $RR_{p4} (A_a)$ and $RR_{p5} (\alpha)$ obtained in Overeem et al. (2013), Overeem et al. (2016a) applied a sensitivity analysis varying only the parameter $RR_{p3} (F_l)$, confirming that the default value equal to -32.5 dB km⁻¹ h⁻¹ (Overeem et al., 2013) is a reasonable trade-off between performance and retaining a significant number of links. Therefore, even though a proper calibration procedure is deemed important, the default value of $RR_{p3} (F_l)$ fixed at -32.5 dB km⁻¹ h⁻¹ is kept to prevent an excessive loss of data. One way forward to calibrate $RR_{p3} (F_l)$ would be to include both the
280 number of available links in the optimization or perform an optimization based on rainfall maps, which can be influenced by the underlying CML network density.

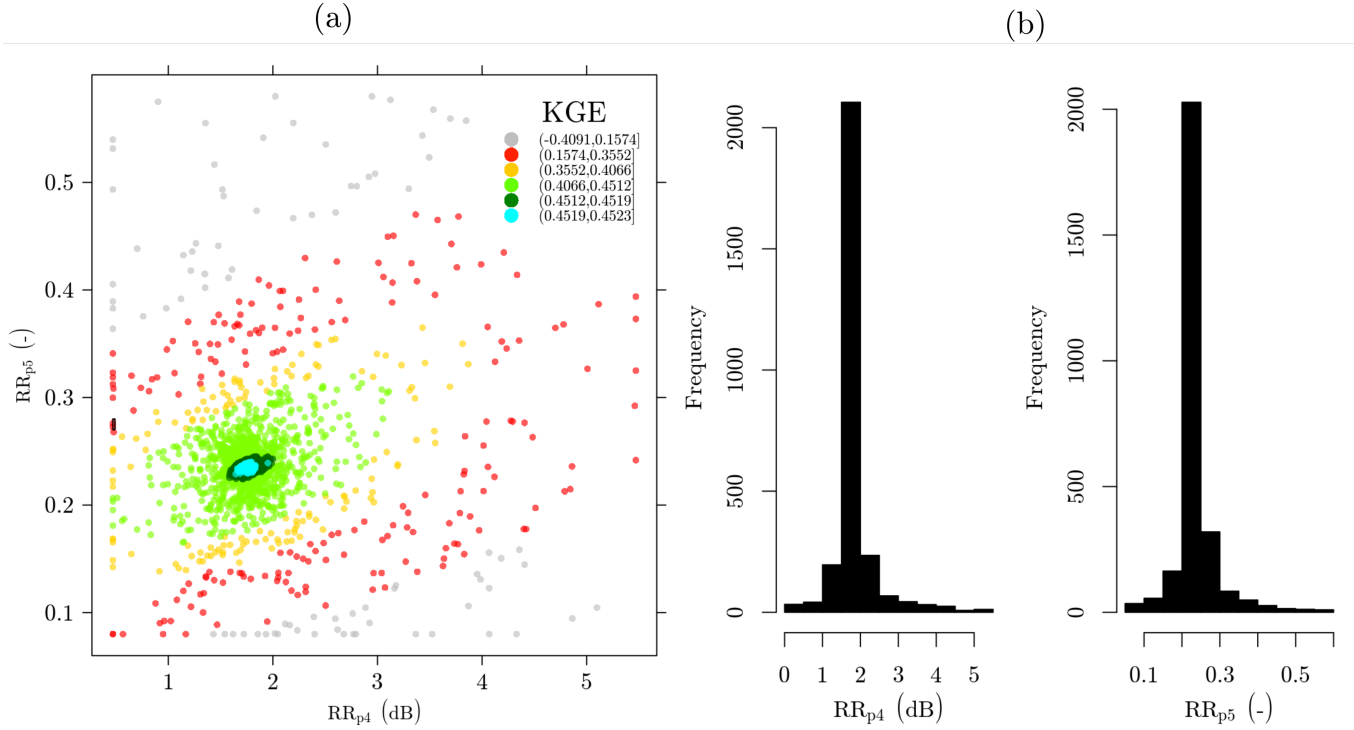


Figure 3. Rainfall retrieval performance projected onto the parameter space: dotty plot showing the interaction between calibration parameters at different Kling-Gupta efficiency (KGE) values.

Figure 3 illustrates the interaction between parameters in the calibration procedure for the rainfall retrieval at different KGE-values. This figure shows that the regions with the highest KGE-values (greens and blue points) correspond mainly to values ranging from 1 to 2.5 dB for RR_{p4} and from 0.17 to 0.30 for RR_{p5} . We classified the solutions greater than 0.45 as
 285 “behavioral” solutions (dark green and blue points in Fig. 3 (a)). Different from the calibration of the wet-dry classification process, we observe a distribution of the parameters less skewed and with a well defined mode (Fig. 3 (b)). Thus, for the respective parameters RR_{p4} and RR_{p5} , the optimum values, 1.7 and 0.23, bears to similarity with the median values for the “behavioral” solutions, 1.74 and 0.24.

The parameter RR_{p4} shows a more pronounced dispersion than the parameter RR_{p5} . RR_{p4} is related to wet antenna atten-
 290 uation and varies depending on the ambient conditions, e.g. while there is dew, rain water or melting precipitation (the latter unlikely in this study) present on the antenna covers (Leijnse et al., 2008; Overeem et al., 2016b; Uijlenhoet et al., 2018). It may also vary depending on the type of antenna cover. Finally, in the rainfall retrieval algorithm it is always assumed that, whenever it rains, both antennas of a microwave link are wet, whereas in reality none or only one antenna may be wet. Hence, it is unlikely that all CMLs across the considered study area will share the same excess signal attenuation in terms of magni-
 295 tude, timing and spatial occurrence. In principle, each single CML is expected to have its own time-varying set of values of the parameter RR_{p4} . This implies great uncertainty in the overall optimum value for the time period and region of interest. These

parameters are expected to be positively correlated. Likely, higher RR_{p5} values lead to higher rain intensities, increasing the weight of the maximum attenuation and consequently a higher value of RR_{p5} would become necessary to compensate for the extra attenuation, decreasing the rain intensity estimates.

300 It is apparent from Fig. 3 that the parameter RR_{p5} reaches its optimum value at 0.23, which is much lower than RAINLINK's default value of 0.33. This implies that the maximum and minimum path-averaged rainfall intensities (\bar{R}_{max} , \bar{R}_{min}) have respective weights of 0.23 and 0.77 in the computation of the best estimate of the 15-minute mean path-averaged rainfall intensity. However, a smaller spread around the optimum value compared to the other parameters can be observed, indicating a moderate uncertainty around the optimum. Note that the value of α is related to the temporal distribution of path-average rainfall intensities within 15-minute intervals, which is influenced by the lengths of the links as well as by the rainfall space-time variability. 305 This suggests that the optimum parameter value will depend on both link network topology and rainfall climatology.

Its important to highlight that we did not calibrate the power-law coefficients. Since they are physically-based, we used values obtained in dedicated experiments representative for the Dutch climate (Leijnse et al., 2007). For other countries, the International Telecommunication Union (ITU) presents recommendations (International Telecommunication Union, 2005). 310 However, these are not representative for all climates. A physically-based approach which derives these coefficients from drop size distribution observations and scattering computations is preferred compared to optimizing these coefficients in a statistical manner. However, taking these parameters in the optimization into account may be a way forward for regions which lack disdrometer data

3.2 Validation

315 After the parameter optimization using the 12-day calibration dataset from 2011, the optimized and default parameter sets are applied to a 3-month validation dataset from July, August, and September 2012. The 15-minute path-average rainfall estimates were aggregated to hourly and daily path-average rainfall estimates if CML-availability was at least 75%, resulting in data from on average 2,783 sub-links for both the default and optimized parameters. Thus, given that after the RAINLINK pre-processing on average 2,800 sub-links are left, data availability reduces by approximately 0.7% for both default and optimized parameters.

320 3.2.1 Wet-dry classification validation

Figure 4 highlights that the wet-dry classification process by using calibrated parameters perform better in terms of MCC and Accuracy metrics, 0.40 and 0.96 against 0.37 and 0.95 for the default parameters, respectively. However, the Sensitivity metric shows that the calibrated parameters is worst for classified rainy events rightly, the default parameters set reach a value of 0.51 against 0.49 for the calibrated parameters set.

325 In spite of having the same Specificity value, we can observe in confusion matrices (Fig. 4, green cells for line and column 1) that the calibrated parameters set classified more dry periods rightly than the default parameters set. Thus, considering the MCC feature, which aims to evaluate all elements of the confusion matrix (false positive, false negative, true positive, and true negative), the calibrated parameters outperform the default ones.

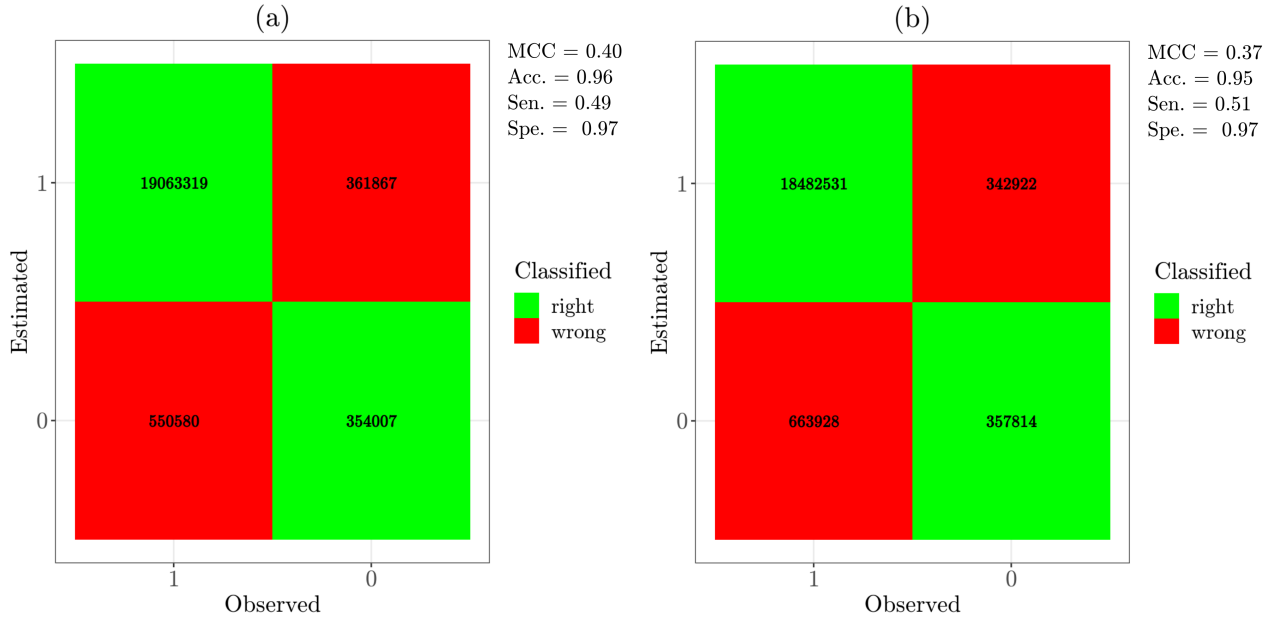


Figure 4. Confusion matrices and binary classification metrics for the wet-dry classification process, where 0 refers to wet and 1 to dry classification: (a) results of the wet-dry classification using calibrated parameters and (b) results of the wet-dry classification using default parameters. Note: Matthews correlation coefficient (MCC), Accuracy (Acc.), Sensitivity (Sen.), and Specificity (Spe.) metrics.

According to the wet-dry observations during the validation period, we observed that 97% of the data points represent non-rainy intervals. Being just percentage points higher than for the calibration period, the periods can be considered comparable to each other. Moreover, the employment of the MCC metric justifies any wet-dry distribution dissimilarity

3.2.2 Rainfall retrieval validation

Figure 5 illustrates the performance in terms of daily path-average rainfall estimates for the two tested parameter sets, i.e., calibrated and default. In general, the metrics for the calibrated parameters are slightly better than those for the default parameters. The values improve from 0.37 to 0.45 for KGE, from 6.37 mm to 5.75 mm for RMSE, from 2.5 to 2.27 for CV_{res} , and from 0.42 to 0.46 for ρ .

The main improvement is observed for the percent bias (PBIAS). Even if both parameter sets lead to overestimates compared to the reference, the rainfall depth retrieved when using the calibrated parameters shows 10.6 percentage points less overestimation compared to using the default parameters. In addition to ρ , the bias ratio (β) and the variability ratio (γ) are incorporated into the KGE metric (Equations (5)–(7)). For the default parameters β and γ are 1.24 and 0.99, respectively. For the calibrated parameters the values of β and γ are 1.13 and 0.99, respectively. All of the three KGE components have their

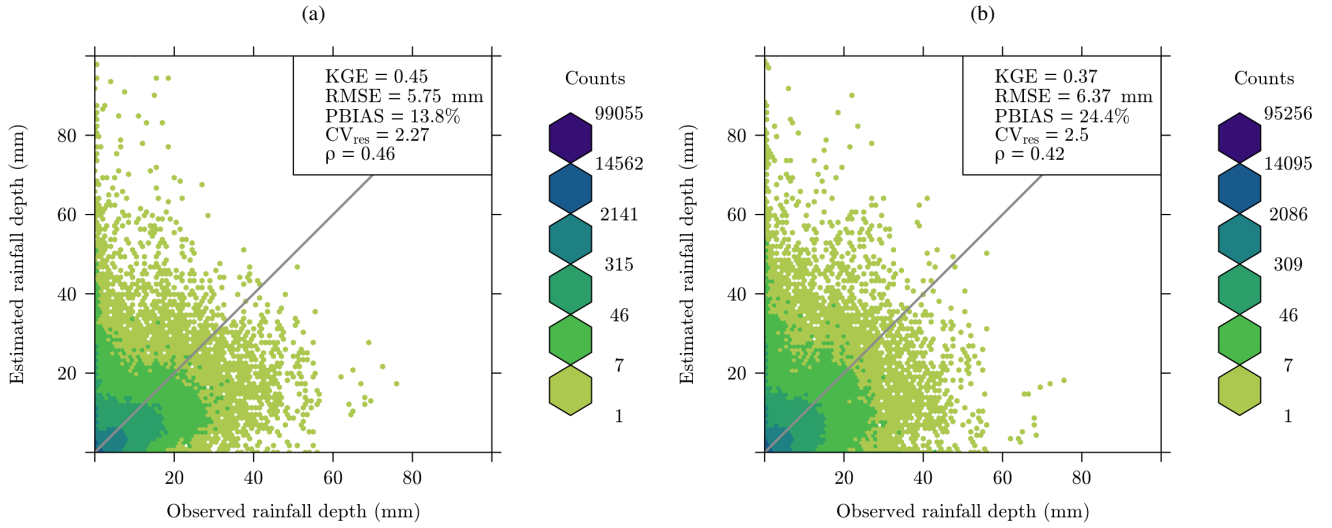


Figure 5. Daily path-averaged rainfall depth comparison of CML rainfall estimates against gauge-adjusted radar data: (a) rainfall retrieved using calibrated parameters; (b) rainfall retrieved using default parameters.

ideal value at unity and the higher value of KGE when using the calibrated parameters is due to a better bias performance. Overall, the calibrated parameters outperform the default parameters.

Next, the performance of 15-minute path-averaged rainfall estimates is investigated. Table 5 summarizes RAINLINK's performance when the default and calibrated parameters are applied for different rainfall thresholds. The calibrated parameter set yields a better performance of RAINLINK in terms of KGE, RMSE, and CV_{res} for all thresholds. As for PBIAS, the default parameters outperform the calibrated ones for the thresholds "Reference > 0" and "Reference > 1", whereas the calibrated parameters show better performance for the remaining thresholds. One can also observe that, if a threshold is only applied to the reference and consequently the false positives are removed, RAINLINK shows a large underestimation with respect to the reference. This underestimation is not observed if either RAINLINK or the reference are above the threshold. This indicates that the observed underestimation is due to RAINLINK estimating zero rain when the reference suggests that it is raining. This may be related to differences in spatial and temporal sampling, although we are not able to provide a conclusive explanation.

The ρ goodness-of-fit metric results in a better performance for the default parameters, where the CML rainfall estimates are used in the thresholds. On the other hand, when just the radar reference are considered in the thresholds, the calibrated parameters set reach better ρ performance.

As a result of the optimization setup including the zero observations, these positive validation outcomes are actually very similar and do not tend to really indicate improvements. With respect to data availability, the calibrated and default parameter sets contain 15.6% and 12.3% less observations than the entire data set, respectively.

Reevaluating the Overeem et al. (2016b) study employing default parameter values, de Vos et al. (2019) find 5.75%, 2.84, and 0.27 for PBIAS, CV_{res} , and ρ , respectively, for path-average 15-minute rainfall depths, and for link or radar larger than 0

Table 5. 15-minute path-averaged rainfall depth performance for different thresholds. Note: Reference is the gauge-adjusted radar data.

Thresholds of rainfall (mm)	RAINLINK with parameters	KGE	RMSE (mm)	PBIAS (%)	CV _{res}	ρ
Reference OR RAINLINK > 0	Default	0.21	1.06	33.10	2.69	0.28
	Calibrated	0.27	0.99	8.50	2.23	0.27
Reference OR RAINLINK > 0.1	Default	0.18	1.15	31.60	2.49	0.26
	Calibrated	0.24	1.05	7.40	2.10	0.25
Reference OR RAINLINK > 1	Default	−0.16	2.20	56.20	1.95	0.00
	Calibrated	−0.05	2.02	22.60	1.68	−0.02
Reference > 0	Default	−0.11	1.01	−38.00	1.30	0.48
	Calibrated	0.03	0.92	−42.20	1.16	0.50
Reference > 1	Default	−0.46	1.92	−39.70	0.89	0.38
	Calibrated	−0.31	1.77	−45.20	0.78	0.40
No threshold (zero included)	Default	0.33	0.28	33.10	10.55	0.42
	Calibrated	0.42	0.25	18.50	9.37	0.45

mm. Differences with respect to the performance obtained here for the default parameter values (33.10%, 2.69, and 0.28 for PBIAS, CV_{res}, and ρ , respectively) can be explained by the fact that the underlying data for both studies are from different periods, with different durations (~ 20 months for the months of February-October in de Vos et al. (2019) and 3 months for the months of June-August here). Possibly, the wet-dry classification using default parameters applied by de Vos et al. (2019) results in less false positives or due to the longer period the false negatives compensate for the false positives, resulting in a lower PBIAS value. The summer of 2012 was rainy, with 286 mm of rain compared to the climatological average of 225 mm, averaged over the Netherlands. For the central weather station in the Netherlands, a long precipitation duration of 153 hours was observed compared to the climatological average of 121 hours over the summer months June, July, and August. This could be a reason for differences in PBIAS, although this summer is also part of the 613-day dataset evaluated in de Vos et al. (2019).

Figure 6 shows density plots for all CML double-mass curves, i.e., the relation between the accumulations of rainfall retrieved by RAINLINK and that obtained from the gauge-adjusted radar reference. This figure shows that the class with the highest occurrence coincides with the diagonal, indicating a reasonable agreement between the estimates and the observations. A considerable dispersion above the diagonal is found for both the calibrated and the default parameters. However, it is clear that with the calibrated parameters, this dispersion is less severe. This overestimation observed in the double-mass curves is in line with the PBIAS values reported earlier (Tab. 5), being justified by the higher presence of false positive observations. Identifying the extra attenuation as the main source of error, de Vos et al. (2019) report a similar behavior of the double-mass curves for instantaneous signal power sampling, although the considered period and hence the meteorological circumstances are partly different.

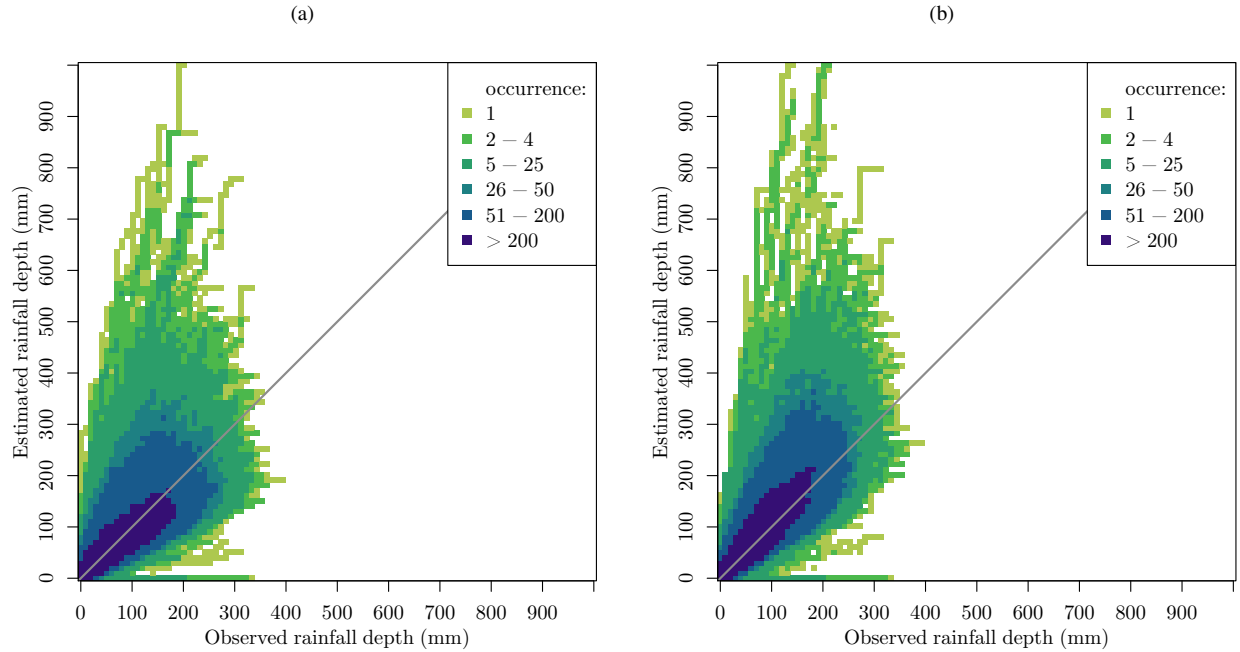


Figure 6. Density plots of the double mass curves of all individual CMLs with respect to the gauge-adjusted radar reference at 15-minute time intervals: (a) rainfall accumulations retrieved by RAINLINK with calibrated parameters; (b) rainfall accumulations retrieved by RAINLINK with default parameters.

So far small improvements in the rainfall retrievals are obtained when employing the calibrated parameters through the
 380 stochastic method Particle Swarm Optimization (PSO). However, analyzing the average over an area, in this case the Netherlands, more substantial improvements are found. Figure 7 shows time series of the daily mean rainfall depth over the Netherlands, i.e., for each day the mean of all CML rainfall estimates is computed.

By employing the calibrated parameters, all metrics improved with respect to the default parameters. The values of KGE, RMSE, PBIAS, CV_{res} , and ρ improved from 0.49, 3.39 mm, 24.4%, 1.32, and 0.59 to 0.57, 3.07 mm, 13.8%, 1.21, and 0.63,
 385 respectively. Since the CML rainfall estimates are averaged over a $\sim 35,500$ km² area not taking into account how they are distributed, the PBIAS and β values stay the same (Fig. 5). On the other hand, the variability and similarity (correlation), expressed by KGE components γ and ρ , respectively, are slightly better. In spite of not being a homogeneous network, the CMLs are observing in the entire Netherlands, having a high enough spatial representativity for computing a spatial average rainfall. Thus, for the areal time series obtained by employing calibrated parameters, γ and ρ are equal to 0.83 (0.81 for default)
 390 and 0.63 (0.59 for default), respectively. The γ value closer to unity, confirms that the estimated rainfall time series vary to the same extent as the observed rainfall time series. Hence, as concluded from the path-averaged rainfall evaluation, the main improvement provided by the calibrated parameters as compared to the default parameters is a lower relative bias.

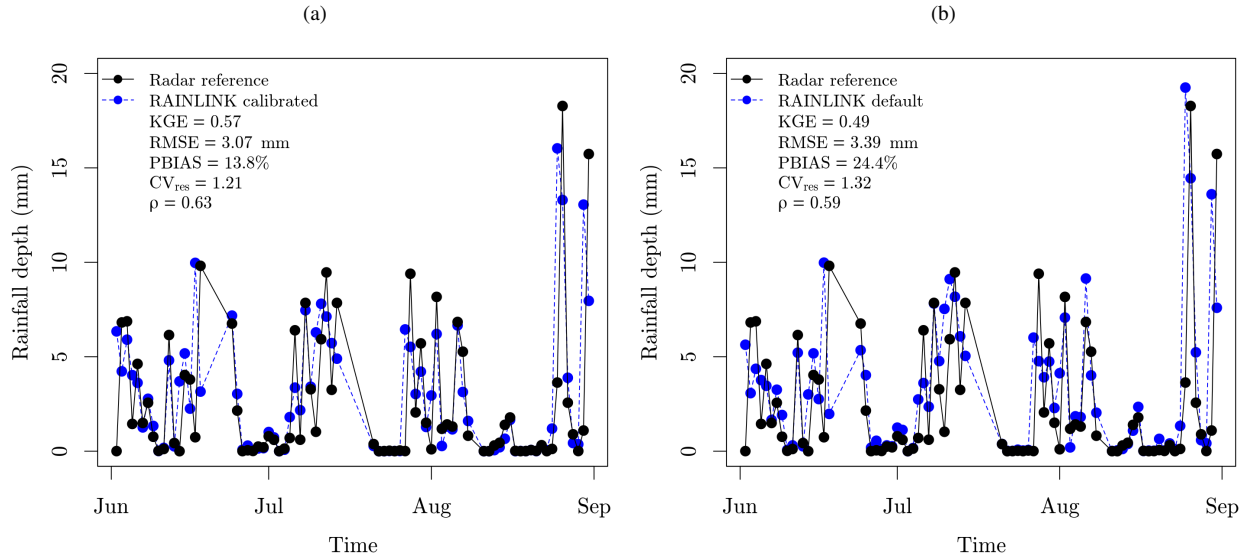


Figure 7. Comparison of the daily mean rainfall depth time series for the entire Netherlands during the summer months June, July and August 2012: (a) rainfall time series retrieved by RAINLINK with calibrated parameters; (b) rainfall time series retrieved by RAINLINK with default parameters.

For both sets of parameters, calibrated and default, CML-derived rainfall estimates correspond reasonably well to the gauge-adjusted radar rainfall estimates. For path-averaged daily rainfall an improvement is found when calibrated parameter values are employed, especially in terms of relative bias. Results further improve when rainfall estimates are averaged over the entire Netherlands. Differences in calibrated parameter values with respect to the default ones may be caused by the calibration being performed over different events in June and July 2009 and in 2011 for the default parameters (Overeem et al., 2011, 2013). Moreover, the calibration here is done with a state-of-the-art and efficient method.

3.3 Search space of parameters

For some parameters in Tables 1 and 2 a wider search space could have been chosen. For WD_{p2} and RR_{p2} a maximum value of 24 h was chosen, implying that data from the previous day are needed. Because the calibration dataset is not continuous, it was not feasible to use a larger value for WD_{p2} . In both cases 24 h seems reasonably long for a reliable computation. The maximum allowed value of 24 h for RR_{p2} may even be beneficial for the reference level determination. If this value would become longer than 24 h, varying meteorological conditions (e.g. related to changes in relative humidity) may affect the accuracy of the reference level determination, being less representative of the reference level just before a rainfall event. For the radius WD_{p3} the minimum value is 15 km. A lower value could be tested, but given the network density (Fig. 1), this is expected to lead to a (severe) reduction of available sub-links. This is because the wet-dry classification needs a minimum number of nearby links, which is more difficult to achieve in case of a smaller radius. The employed minimum value for WD_{p6}

is already quite low. The wet-dry classification is expected to become more reliable when more sub-links are involved. Hence,
410 it does not seem sensible to choose an even lower minimum value.

4 Conclusions

A novel and reliable method for the objective estimation of optimum parameter sets for RAINLINK and potentially for other CML-based rainfall retrieval algorithms has been presented and tested. Using a 12-day dataset, the calibration was performed by means of a stochastic approach, Particle Swarm Optimization (PSO), preceded by a sensitivity analysis selecting
415 the parameters to be optimized. The optimized parameters were determined according to optimum goodness-of-fit values and for the median of “behavioral” solutions, i.e., those solutions performing better than a threshold.

The validation of daily path-averaged CML rainfall estimates over three summer months reveals a reasonable improvement for the calibrated parameters compared to the default values. When daily path-averaged values are averaged over the entire surface area of the Netherlands, the improvement becomes much stronger. The aggregation over an area tends to limit the effects
420 of representativeness errors in the rainfall estimates and yields information with an acceptable performance for hydrological and meteorological applications. This result is important, because from a general perspective, hydrological and meteorological scales of application are defined over areas, e.g., watersheds, climate zones, political and administrative regions, etc. Compelling improvements were achieved not only in terms of the performance of CML rainfall estimates as such, but also with respect to the choice of parameter values, which are now underpinned in a more objective way.

425 In fact, we now have a way to analyze the sensitivity and optimize stochastically all parameters used in a rainfall retrieval algorithm. The proposed methodology is applicable for different CML networks, climates, and algorithms, where either rain gauge or (gauge-adjusted) radar data can be used as reference. In case of other sampling strategies than min/max the algorithm can be easily adapted. Ideally, optimized parameters would be obtained for different seasons. Hence, for each processing period a dedicated parameter set would be obtained.

430 Fencl et al. (2019) underline the importance of considering the rainfall properties in the quantification of wet antenna attenuation, where a fixed value may lead to overestimation of heavy rainfalls. This can lead to an increase in the computational cost however, especially in case of extensive CML datasets. We also recommend to extend our algorithm by adding an extra goodness-of-fit criterion to the optimization regarding the sub-link data availability after running RAINLINK’s processing steps (de Vos et al., 2019). This could lead to improved coverage of CML rainfall estimates. In general, quantifying the effect
435 of processing steps on data availability is important. Moreover, due to the large impact of false positives on PBIAS, a calibration of the rainfall retrieval process taking into account the wet-dry classification from the reference should be considered for further research. Thus, an overestimation of wet antenna attenuation that has to compensate for the long-term rainfall overestimation from false positives would be avoided.

As a recommendation, studies could be conducted by testing the convergence and performance of different goodness-of-fit
440 measures in addition to the Kling-Gupta efficiency (Kling et al., 2012). Moreover, one could optimize the parameters using rain gauges near the CMLs as reference in order to exclude deviations that are sometimes found in radar rainfall observations.

Moreover, representativeness errors between radars, measuring aloft, and CMLs, measuring near the Earth's surface, can affect comparisons between the two. This especially holds for short time intervals, as short as 15 minutes in this study.

445 In spite of having stochastic proprieties and aiming to explore the uncertainties affecting rainfall retrievals from CMLs, the approach proposed here is not a panacea. In regions without reliable rainfall ground-truth the calibration of rainfall retrieval algorithm parameters can be a challenge (Chwala and Kunstmann, 2019). Hence, we recommend the set-up of experiments in regions with little ground-based rainfall information in order to optimize parameters for specific networks and climates, or even to improve rainfall retrieval algorithms such as RAINLINK themselves. As an alternative, parameters could be optimized in a well-gauged region having a similar climate and CML network as the ungauged region for which CML rainfall estimates
450 are desired.

Comparing CML-derived rainfall maps and gauge-adjusted radar observations, Overeem et al. (2016b) found a better performance for the summer season than for the winter season in the Netherlands, among others due to the absence of snow and melting precipitation. The rainfall type during the Dutch summer is largely of a convective nature, bearing some resemblance with that in regions characterized by (sub)tropical climates, which often lack surface rainfall observations. As a consequence,
455 we believe CML rainfall monitoring is especially promising for low- to middle-income countries, typically having (sub)tropical climates.

Acknowledgements. We gratefully acknowledge Ronald Kloeg and Ralph Koppelaar from T-Mobile NL for providing the cellular communication link data. This study was financially supported by the São Paulo Research Foundation (FAPESP) under the grant number 2017/09708-7.

460 *Data availability.* The CML data are available via <https://doi.org/10.4121/uuid:323587ea-82b7-4cff-b123-c660424345e5>. The gauge-adjusted radar data can be obtained at https://dataplatfom.knmi.nl/catalog/datasets/index.html?x-dataset=rad_nl25_rac_mfbs_5min&x-dataset-version=2.0.

References

- Abdelaziz, R. and Zambrano-Bigiarini, M.: Particle Swarm Optimization for inverse modeling of solute transport in fractured gneiss aquifer, *Journal of Contaminant Hydrology*, 164, 285–298, <https://doi.org/10.1016/j.jconhyd.2014.06.003>, 2014.
- 465 Atlas, D. and Ulbrich, C. W.: Path- and area-integrated rainfall measurement by microwave attenuation in the 1–3 cm band, *Journal of Applied Meteorology*, 16, 1322–1331, [https://doi.org/10.1175/1520-0450\(1977\)016<1322:PAAIRM>2.0.CO;2](https://doi.org/10.1175/1520-0450(1977)016<1322:PAAIRM>2.0.CO;2), 1977.
- Bianchi, B., van Leeuwen, P. J., Hogan, R. J., and Berne, A.: A variational approach to retrieve rain rate by combining information from rain gauges, radars, and microwave links, *Journal of Hydrometeorology*, 14, 1897–1909, <https://doi.org/10.1175/JHM-D-12-094.1>, 2013.
- Bisselink, B., Zambrano-Bigiarini, M., Burek, P., and de Roo, A.: Assessing the role of uncertain precipitation estimates on the robust-
470 ness of hydrological model parameters under highly variable climate conditions, *Journal of Hydrology: Regional Studies*, 8, 112–129, <https://doi.org/10.1016/j.ejrh.2016.09.003>, 2016.
- Brauer, C. C., Overeem, A., Leijnse, H., and Uijlenhoet, R.: The effect of differences between rainfall measurement techniques on groundwater and discharge simulations in a lowland catchment, *Hydrological Processes*, 30, 3885–3900, <https://doi.org/10.1002/hyp.10898>, 2016.
- Chicco, D. and Jurman, G.: The advantages of the Matthews correlation coefficient (MCC) over F1 score and accuracy in binary classification
475 evaluation, *BMC Genomics*, 21, 6, <https://doi.org/10.1186/s12864-019-6413-7>, 2020.
- Chwala, C. and Kunstmann, H.: Commercial microwave link networks for rainfall observation: Assessment of the current status and future challenges, *Wiley Interdisciplinary Reviews: Water*, 6, e1337, <https://doi.org/10.1002/wat2.1337>, 2019.
- Clerc, M.: Standard Particle Swarm Optimisation, <https://hal.archives-ouvertes.fr/hal-00764996>, 15 pages, 2012.
- de Vos, L., Overeem, A., Leijnse, H., and Uijlenhoet, R.: Rainfall estimation accuracy of a nation-wide instantaneously sampling
480 commercial microwave link network: error-dependency on known characteristics, *Journal of Atmospheric and Oceanic Technology*, <https://doi.org/10.1175/JTECH-D-18-0197.1>, 2019.
- Fencl, M., Rieckermann, J., Sýkora, P., Stránský, D., and Bareš, V.: Commercial microwave links instead of rain gauges: fiction or reality?, *Water Science & Technology*, 71, 31, <https://doi.org/10.2166/wst.2014.466>, 2015.
- Fencl, M., Valtr, P., Kvicera, M., and Bares, V.: Quantifying wet antenna attenuation in 38-GHz commercial microwave links of cellular
485 backhaul, *IEEE Geoscience and Remote Sensing Letters*, 16, 514–518, <https://doi.org/10.1109/LGRS.2018.2876696>, 2019.
- Graf, M., Chwala, C., Polz, J., and Kunstmann, H.: Rainfall estimation from a German-wide commercial microwave link network: optimized processing and validation for 1 year of data, *Hydrol. Earth Syst. Sci.*, 24, 2931–2950, <https://doi.org/10.5194/hess-24-2931-2020>, 2020.
- GSMA: Mobile technology for rural climate resilience: The role of mobile operators in bridging the data gap, https://www.gsma.com/mobilefordevelopment/wp-content/uploads/2019/10/GSMA_AgriTech_Climate_Report.pdf, tech. Rep., London, UK, retrieved 13 August
490 2020, 2019.
- Habi, H. V. and Messer, H.: Recurrent Neural Network for Rain Estimation Using Commercial Microwave Links, *IEEE Transactions on Geoscience and Remote Sensing*, 59, 3672–3681, <https://doi.org/10.1109/TGRS.2020.3010305>, 2021.
- International Telecommunication Union: Specific attenuation model for rain for use in prediction methods, Tech. rep., International Telecommunication Union, https://www.itu.int/dms_pubrec/itu-r/rec/p/R-REC-P.838-3-200503-I!!PDF-E.pdf, 2005.
- 495 Kling, H., Fuchs, M., and Paulin, M.: Runoff conditions in the upper Danube basin under an ensemble of climate change scenarios, *Journal of Hydrology*, 424–425, 264–277, <https://doi.org/10.1016/j.jhydrol.2012.01.011>, 2012.
- Leijnse, H., Uijlenhoet, R., and Stricker, J. N. M.: Rainfall measurement using radio links from cellular communication networks, *Water Resources Research*, 43, <https://doi.org/10.1029/2006WR005631>, 2007.

- Leijnse, H., Uijlenhoet, R., and Stricker, J.: Microwave link rainfall estimation: effects of link length and frequency, temporal sampling, power resolution, and wet antenna attenuation, *Advances in Water Resources*, 31, 1481–1493, <https://doi.org/10.1016/j.advwatres.2008.03.004>, 2008.
- Liberman, Y., Samuels, R., Alpert, P., and Messer, H.: New algorithm for integration between wireless microwave sensor network and radar for improved rainfall measurement and mapping, *Atmospheric Measurement Techniques*, 7, 3549–3563, <https://doi.org/10.5194/amt-7-3549-2014>, 2014.
- Matthews, B.: Comparison of the predicted and observed secondary structure of T4 phage lysozyme, *Biochimica et Biophysica Acta (BBA) - Protein Structure*, 405, 442–451, [https://doi.org/10.1016/0005-2795\(75\)90109-9](https://doi.org/10.1016/0005-2795(75)90109-9), 1975.
- Messer, H.: Environmental monitoring by wireless communication networks, *Science*, 312, 713–713, <https://doi.org/10.1126/science.1120034>, 2006.
- Messer, H. and Sendik, O.: A new approach to precipitation monitoring: a critical survey of existing technologies and challenges, *IEEE Signal Processing Magazine*, 32, 110–122, <https://doi.org/10.1109/MSP.2014.2309705>, 2015.
- Olsen, R., Rogers, D., and Hodge, D.: The aR^b relation in the calculation of rain attenuation, *IEEE Transactions on Antennas and Propagation*, 26, 318–329, <https://doi.org/10.1109/TAP.1978.1141845>, 1978.
- Overeem, A., Buishand, T. A., and Holleman, I.: Extreme rainfall analysis and estimation of depth-duration-frequency curves using weather radar, *Water Resources Research*, 45, 1–15, <https://doi.org/10.1029/2009WR007869>, 2009a.
- Overeem, A., Holleman, I., and Buishand, A.: Derivation of a 10-year radar-based climatology of rainfall, *Journal of Applied Meteorology and Climatology*, 48, 1448–1463, <https://doi.org/10.1175/2009JAMC1954.1>, 2009b.
- Overeem, A., Leijnse, H., and Uijlenhoet, R.: Measuring urban rainfall using microwave links from commercial cellular communication networks, *Water Resources Research*, 47, <https://doi.org/10.1029/2010WR010350>, 2011.
- Overeem, A., Leijnse, H., and Uijlenhoet, R.: Country-wide rainfall maps from cellular communication networks, *Proceedings of the National Academy of Sciences*, 110, 2741–2745, <https://doi.org/10.1073/pnas.1217961110>, 2013.
- Overeem, A., Leijnse, H., and Uijlenhoet, R.: Retrieval algorithm for rainfall mapping from microwave links in a cellular communication network, *Atmospheric Measurement Techniques*, 9, 2425–2444, <https://doi.org/10.5194/amt-9-2425-2016>, 2016a.
- Overeem, A., Leijnse, H., and Uijlenhoet, R.: Two and a half years of country-wide rainfall maps using radio links from commercial cellular telecommunication networks, *Water Resources Research*, 52, 8039–8065, <https://doi.org/10.1002/2016WR019412>, 2016b.
- Overeem, A., Leijnse, H., and de Vos Lotte: RAINLINK: Retrieval algorithm for rainfall mapping from microwave links in a cellular communication network, <https://github.com/overeem11/RAINLINK>, R package version 1.14, 2019.
- Peel, M. C., Finlayson, B. L., and McMahon, T. A.: Updated world map of the Köppen-Geiger climate classification, *Hydrology and Earth System Sciences*, 11, 1633–1644, <https://doi.org/10.5194/hess-11-1633-2007>, 2007.
- Pijl, A., Brauer, C. C., Sofia, G., Teuling, A. J., and Tarolli, P.: Hydrologic impacts of changing land use and climate in the Veneto lowlands of Italy, *Anthropocene*, 22, 20–30, <https://doi.org/10.1016/j.ancene.2018.04.001>, 2018.
- Pudashine, J., Guyot, A., Petitjean, F., Pauwels, V. R. N., Uijlenhoet, R., Seed, A., Prakash, M., and Walker, J. P.: Deep Learning for an Improved Prediction of Rainfall Retrievals From Commercial Microwave Links, *Water Resources Research*, 56, 1–10, <https://doi.org/10.1029/2019WR026255>, 2020.
- R Core Team: R: A Language and Environment for Statistical Computing, Version 3.4.4, <http://www.R-project.org/>, 2018.
- Rios Gaona, M. F., Overeem, A., Raupach, T. H., Leijnse, H., and Uijlenhoet, R.: Rainfall retrieval with commercial microwave links in São Paulo, Brazil, *Atmospheric Measurement Techniques*, 11, 4465–4476, <https://doi.org/10.5194/amt-11-4465-2018>, 2018.

- Roversi, G., Alberoni, P. P., Fornasiero, A., and Porcù, F.: Commercial microwave links as a tool for operational rainfall monitoring in Northern Italy, *Atmos. Meas. Tech.*, 13, 5779—5797, <https://doi.org/10.5194/amt-13-5779-2020>, 2020.
- Schneider, U., Finger, P., Meyer-Christoffer, A., Ziese, M., and Becker, A.: Global Precipitation Analysis Products of the GPCC, Tech. Rep. 9, National Meteorological Service of Germany, Offenbach am Main, https://opendata.dwd.de/climate_environment/GPCC/PDF/GPCC_intro_products_v2020.pdf, 2021.
- Smiatek, G., Keis, F., Chwala, C., Fersch, B., and Kunstmann, H.: Potential of commercial microwave link network derived rainfall for river runoff simulations, *Environmental Research Letters*, 12, 034 026, <https://doi.org/10.1088/1748-9326/aa5f46>, 2017.
- Sohail Afzal, M., Shah, S. H. H., Cheema, M. J. M., and Ahmad, R.: Real time rainfall estimation using microwave signals of cellular communication networks: a case study of Faisalabad, Pakistan, *Hydrology and Earth System Sciences Discussions*, pp. 1–20, <https://doi.org/10.5194/hess-2017-740>, 2018.
- Sun, Q., Miao, C., Duan, Q., Ashouri, H., Sorooshian, S., and Hsu, K.-L.: A review of global precipitation data sets: data sources, estimation, and intercomparisons, *Reviews of Geophysics*, 56, 79–107, <https://doi.org/10.1002/2017RG000574>, 2018.
- Uijlenhoet, R., Overeem, A., and Leijnse, H.: Opportunistic remote sensing of rainfall using microwave links from cellular communication networks, *WIREs Water*, 5, 1–15, <https://doi.org/10.1002/wat2.1289>, 2018.
- Upton, G., Holt, A., Cummings, R., Rahimi, A., and Goddard, J.: Microwave links: The future for urban rainfall measurement?, *Atmospheric Research*, 77, 300–312, <https://doi.org/10.1016/j.atmosres.2004.10.009>, 2005.
- Van Griensven, A., Meixner, T., Grunwald, S., Bishop, T., Diluzio, M., and Srinivasan, R.: A global sensitivity analysis tool for the parameters of multi-variable catchment models, *Journal of Hydrology*, 324, 10–23, <https://doi.org/10.1016/j.jhydrol.2005.09.008>, 2006.
- Zambrano-Bigiarini, M. and Rojas, R.: A model-independent Particle Swarm Optimisation software for model calibration, *Environmental Modelling and Software*, 43, 5–25, <https://doi.org/10.1016/j.envsoft.2013.01.004>, 2013.
- Zinevich, A., Messer, H., and Alpert, P.: Frontal rainfall observation by a commercial microwave communication network, *Journal of Applied Meteorology and Climatology*, 48, 1317–1334, <https://doi.org/10.1175/2008JAMC2014.1>, 2009.