

Remote Sensing of solar surface radiation - A reflection of concepts, applications and input data based on experience with the effective cloud albedo

Richard Müller^{DWD} and Uwe Pfeifroth^{DWD}

^{DWD}Frankfurter Str. 135, Offenbach

Correspondence: Richard Müller (richard.mueller@dwd.de)

Abstract. Accurate solar surface irradiance data (SSI) is a prerequisite for efficient planning and operation of solar energy systems. Respective data are also essential for climate monitoring and analysis. Satellite-based SSI has grown in importance over the last few decades. However, a retrieval method is needed to relate the measured radiances at the satellite to the solar surface irradiance. In a widespread classical approach, these radiances are used directly to derive the effective cloud albedo (CAL) as basis for the estimation of the solar surface irradiance. This approach has been already introduced and discussed in the early 1980s. Various approaches are briefly discussed and ~~analyzed~~analysed, including an overview of open questions and opportunities for improvement. Special emphasis is placed on the reflection of fundamental physical laws and atmospheric measurement techniques. In addition, atmospheric input data and key applications are briefly discussed. It is concluded that the well established observational-based CAL approach is still an excellent choice for the retrieval of the cloud transmission. The coupling with Look-Up-Table based clear sky models enables the estimation of solar surface irradiance with high accuracy and homogeneity. This could explain why, despite its age, the direct CAL approach is still used by key players in energy meteorology and the climate community. For the clear sky input data it is recommended to use ECMWF forecast and reanalysis data.

1 Introduction

The surface solar irradiance (*SSI*) is defined as the incoming solar radiation at the surface in the 0.2–4.0 μm wavelength region on a given surface area, and is usually expressed in W/m^2 (Watts per square meter). SSI consists of the diffuse part (diffuse irradiance) and the direct part (direct irradiance), which is received from the direction of the sun. Diffuse radiation results from scattering by the atmosphere and is received from all directions.

Solar irradiance is a forcing quantity for heat fluxes, which causes atmospheric motion in all scales and is therefore a driving force for the circulation system (Müller, 2012b). Solar irradiance is needed for the monitoring of the Earth's radiation budget (Hollmann et al., 2006; Mueller et al., 2009; Cox et al., 2004; Darnell et al., 1992; Gupta et al., 2001, 1999; Harries et al., 2005; Harrison et al., 1990; Ramanathan and Cess, 1989), for analysis and prediction of extremes like heat waves (Träger-Chatterjee et al., 2013, 2014), climate change studies (Wild, 2009; Gilgen et al., 2009) and trend analysis (Pfeifroth et al., 2018; Pinker et al., 2005; Hinkelmann et al., 2009). Further, climate indices based on solar irradiance are of value for monitoring

25 and seasonal prediction of specific climate impacts (Wang and Qu, 2007). As a consequence solar irradiance is a key for a better understanding of atmospheric dynamics as well as the monitoring and analysis of climate trends and variability. Further applications include the satellite based estimation of droughts and evaporation (Dobler et al., 2011), hydrological modelling (Müller-Schmied et al., 2016), agro meteorology (Müller, 2021) as well as verification of reanalysis data and numerical weather prediction (Urbich et al., 2019, 2020; Babst et al., 2008; Träger-Chatterjee et al., 2010; Urraca et al., 2018).

30 An outstanding socio-economic application area is energy meteorology, which is linked to a huge commercial market associated with extensive and many-sided user demands on solar radiation data. The goal of energy meteorology is to provide specific information for efficient and sustainable use of renewables. Climatological data of solar surface irradiance are necessary for an efficient planning and monitoring of solar energy systems, e.g. the estimation of energy yield for Photovoltaic (PV) (Huld et al., 2012), monitoring and analysis of operational PV-systems (Hammer et al., 2003) and PV Performance Studies
35 (Amillo et al., 2015; Huld and Amillo, 2015). Near real time data and forecasts of solar surface irradiance are needed for the efficient integration of solar energy into the electric grid. Solar energy is fluctuating, hence forecasts are needed to optimise the levelling of conventional power plants (e.g. increase/decrease of power supply) and storage systems, to minimise the need for spontaneous trading of electricity on an in-balanced market (Hammer et al., 2003, 2015; Urbich et al., 2019) and to avoid grid overloads. Supported by the European Commission (EC) goal to aim for a secure, independent, sustainable and environmental
40 friendly energy supply (EC1, 1996; EC2, 2013) the renewable energies contribute nowadays significantly to the energy production. The share of PV of the total electricity sold in 2018 was 7.1 % in Italy (Jäger-Waldau, 2019) and 9.3 % 2020 [in](#) Germany in 2020 (Wirth, 2021). Even in less sunny regions (e.g. Denmark, UK) the share is of about 3 %. PV electricity generation capacity accounted for 39 % of the new installed capacity in 2018 (Europe), but worldwide Asia and the Pacific region had the highest share of new installed PV power capacity in 2018. Nevertheless, also the United States had reached a cumulative PV
45 capacity of almost 62.7 GW by the end of 2018 (Jäger-Waldau, 2019). Almost all players predict a further increase of PV. As a consequence, the demand for accurate climatological data, near real time data and forecasts of SSI data are expected to further increase.

For all mentioned applications accurate SSI data with a large geographical coverage and a high spatial and temporal resolution is either needed or of great benefit. SSI data gained from satellite observations meet these requirements and are therefore
50 widely used in many application areas. There are typically two types of satellite systems available for the retrieval of SSI. Geostationary weather satellites with a fixed location above the equator and polar orbiting satellites that fly in low orbit around the Earth. ~~flying in low orbit around the Earth~~. Geostationary satellites provide images in high spatial and temporal resolution, but are blind near the poles. This gap can be filled by polar orbiting satellites or by data from Numerical Weather Prediction (NWP). Geostationary satellites like METEOSAT (METEOrological SATellite, Schmetz et al. (2002), GOES (Geostationary
55 Operational Environmental Satellite GOES (2019)) or HIMAWARI (Sunflower, JMA (2017)) provide satellite data with a spatial resolution of about 500m to 3 km (sub-satellite point) and a temporal resolution of about a few minutes to 15 minutes, depending on the mode of operation and spectral channel. E.g. the visible 600 nm channel of HIMAWARI has a spatial resolution of 500 m and a temporal resolution of 10 minutes, with even higher temporal resolutions in rapid scan mode. These

satellites cover the complete geostationary ring and are quite useful for the estimation of solar irradiance at any point outside
60 the polar region.

The respective retrieval methods for SSI are ~~primary~~ primarily based on the law of energy ~~conversation~~ conservation. Radiation that is not reflected or absorbed by the atmosphere will reach the ground. Clouds are the main component for the atmospheric reflection. The satellite based observation of radiances reflected by clouds is the basis for the calculation of the cloud transmission. The combination with information of the clear sky transmittance enables the retrieval of gridded radiation
65 data sets with large geographical coverage and high spatial and temporal resolution. In many regions of the world ground based measurements are quite rare, (e.g. African continent, oceans). A look on the station list of the global high quality ~~network-BSRN(Ohmura et al., 1998)~~ Baseline Surface Radiation Network (BSRN, Ohmura et al. (1998)) reflects the scarcity of well maintained solar radiation measurements. Over oceans satellite data are needed for climate monitoring because of the lack of almost any reliable ground based SSI measurements (Behr et al., 2009). Thus, for most of the world satellite based solar
70 irradiance data are the primary observational source. Moreover, for any application requiring direct irradiance, satellite data are the main observational source, also in regions with a dense network of SSI measurements. This also applies for spectral resolved irradiance. The respective applications cover beside others the estimation of sunshine duration (WMO, 2010), the calculation of SSI on tilted planes and PV studies (Huld and Amillo, 2015; Amillo et al., 2015). Finally, satellite based SSI data are also a powerful alternative and complement in regions with a dense network of well maintained ground based pyranometer
75 measurements, e.g. (Perez et al., 1998; Journée et al., 2012).

Satellite-based SSI data therefore play a key role in almost all applications today and also add important information in countries with a dense ground-based network. The value of satellite data is further increased due to the automation of ground based networks. For example, at DWD satellite-based direct irradiance is used to derive raster data of sunshine duration as a replacement of the former Campbell-Stokes recorders. As a consequence, satellite based solar surface radiation data sets
80 are available from different sources all over the world. Open access to data and services are essential for science and for the efficient economical use. Thus, this review focuses on the retrieval methods used to generate open data. Within this discussion a climate data record (CDR) is hereafter referred to as a time series of sufficient length, consistency, and quality to determine climate variability and change. A CDR enables the accurate monitoring and analysis of climate trends and extremes. Essential data ~~provider~~ providers in Europe are the Satellite Applications Facilities (SAFs). SAFs are dedicated centres for processing satellite data, focusing on different application areas. They are part of the European Organisation for the Exploitation of Meteorological Satellites (EUMETSAT) and belong to the EUMETSAT network of SAFs (Schmetz et al., 2002). They are funded by EUMETSAT and the SAF consortium members, which consists mainly of meteorological services and institutes.
85 Three of the SAFs provide satellite based solar surface irradiance: The Climate Monitoring SAF (CM SAF), the Land Surface Analysis SAF (LSA SAF) and the Ocean and Sea Ice SAF (OSI SAF). The CM SAF generates and provides satellite
90 based Essential Climate Variables (ECVs) related to the energy and water cycle for the analysis and monitoring of the climate system, please see (Schulz et al., 2008) for more details. Beside surface radiation ~~also~~ cloud parameters, top of atmosphere (TOA) radiation budget components, atmospheric water vapour and precipitation data are part of the CM SAF data portfolio (Woick et al., 2002). The methods for the retrieval of the SSI are described in Mueller et al. (2009, 2011, 2012a); Mueller and

Trentmann (2015); Müller et al. (2015) and Posselt et al. (2011b). The data can be ordered via the CM SAF web user interface
95 (wui.cmsaf.eu). The LSA SAF develops methods for the retrieval of land surface products, such as radiation products, surface
albedo, snow cover, evapotranspiration and wild fires. The respective near real time products are provided via the EUMETcast
service. LSA SAF methods are also used within the COPERNICUS services. The method for the retrieval of SSI is described in
Carrer et al. (2019). The OSI SAF develops, processes and distributes near real-time products related to the ocean-atmosphere
interaction. This includes, scatterometer winds, sea ice concentration, sea surface temperature, as well as radiation products,
100 which are also generated over land. Products are accessible on OSI SAF FTP servers, EUMETCast, and EUMETSAT Data
Centre (EDC). The method for the retrieval of surface radiation is described in Marsouin (2019) and follows the approach of
Gautier et al. (1980).

[Solar radiation data is also available online from KNMI \(*msgcpp.knmi.nl*\). The data are based on the Cloud Physical Properties
\(CPP\) algorithm, which is being developed at KNMI to derive cloud, precipitation and radiation products from satellite
105 instruments \(e.g. SEVIRI\). The development was partly funded by Eumetsat within the scope of the CM SAF activities.
Open Geospatial Consortium \(OGC\) services are used to offer the near real time products.](#)

The Global Energy and Water Exchanges (**GEWEX**) project is dedicated to understanding Earth's water cycle and energy
fluxes. GEWEX is a network of scientists ([gewex.org](#)). Thus, several data sets are offered free of charge under the umbrella of
GEWEX. Respective data sets are usually announced and discussed in the quarterly GEWEX newsletter (GEWEX-Quarterly).
110 The International Satellite Cloud Climatology Project (**ISCCP**) was established in 1982 as part of the World Climate Research
Program (WCRP). A main goal of ISCCP is the generation of satellite based global cloud data for the monitoring and analysis
of the global distribution of clouds, their properties, and their diurnal, seasonal and inter-annual variations. Within this scope
Bishop and Rossow (1991) developed a fast radiative transfer algorithm for calculating SSI, which uses the total cloud amount
and cloud optical depth from the International Satellite Cloud Climatology Project (ISCCP) as important input parameters.
115 The ISCCP method for cloud detection is described in Rossow and Garder (1993). Respective data is available from the IS-
CCP web page and as SSI data set from National Aeronautics and Space Administration - Goddard Institute for Space Studies
(NASA-GISS).

The Clouds and the Earth's Radiant Energy System (**CERES**) teams generate and provide data of the Earth Radiation Budget
[\(ceres.larc.nasa.gov\)](#). The satellite instruments used for CERES products are developed for NASA's Earth Observing System
120 (EOS). The first CERES instrument was launched in December 1997 aboard NASA's Tropical Rainfall Measurement Mission
(TRMM). CERES instruments are collecting observations on different satellite missions, including the EOS Terra and Aqua
observatories, as well as the Suomi National Polar-orbiting Partnership (S-NPP) observatory of NASA and NOAA.

Solar energy specific data are provided from several sources as well. Joint Research Centre's PhotoVoltaic GeoInformation Sys-
tem PVGIS ([ec.europa.eu/jrc/en/pvgis](#)) offers an online tool for the estimation of the expected PV yield for ~~user~~-selected sites.
125 Several parameters can be chosen online, e.g. the slope of the PV module, the kind of solar cell. As an additional service PVGIS
allows one to visualise and download solar surface radiation (broadband) for user selected sites. Hereby different data sources
can be selected, ~~in~~. In addition to the satellite based CM SAF SARA data sets (Mueller and Trentmann, 2015) ~~also~~ data from
NWP models, e.g. ERA-5 (Hersbach et al., 2020) are available. SSI data is also available at the SoDa ~~services~~service. It origi-

nates from a European project funded by the European Commission in 1999. SoDa ~~is~~ was commercialised by Transvalor S.A. since 2009. However, SoDa still offers solar radiation data free of charge. Please see the the SODA web page (www.soda.de) for further information. Satelight (www.satelight.com) is a European data base for daylight and solar radiation. The starting point of the project was also a European project. The main data source in the US is NREL (Cox et al., 2018; NREL1)

2 ~~The methods~~ – Basics

The outline of the manuscript is as follows. In section 2 general basics concerning the method for the retrieval of solar radiation data are discussed. In section 3 and 4 more details concerning the methods are provided, including a discussion of main differences. In section 5 specific emphasis is given to the method for the retrieval of spectral resolved irradiance. For the sake of completeness, forecasting of solar radiation is briefly discussed in section 6. Finally, in section 7 recent developments and open issues are discussed concerning the method (section 7.1) as well es input data (section 7.2). The manuscript is closed with a conclusion.

2 The methods - Basics

SSI results from the emission of radiation from the sun. Without scattering and absorption by the atmosphere the SSI would only depend on the solar zenith angle and would be identical to the incoming solar radiation at the Top Of Atmosphere (TOA). The atmosphere modifies the amount and distribution of the TOA solar irradiance by scattering and absorption. All retrieval methods rely on the same basic equations, which is based on the law of energy conservation, expressed here as

$$T + R + A = 1 \quad (1)$$

T is hereby the Transmittance, which defines the proportion of radiation which passes through a medium. R is the proportion which is reflected and A the proportion that is absorbed by the medium, respectively. The sum of transmitted radiation plus the absorbed radiation plus the reflected radiation is 1. This means radiation that is not absorbed or scattered back by the atmosphere reaches the surface, leading to the following basic equation, see Müller (2012b) for further details.

$$SSI = SSI_{clear} * T_{cloud} \quad (2)$$

with

$$SSI_{clear} = T_{clear} * SSI_{ext} * \cos(SZA) \quad (3)$$

SSI is the solar surface irradiance, SSI_{clear} is the clear sky irradiance, T_{cloud} is the cloud transmission, SSI_{ext} is the extraterrestrial irradiance, often approximated as solar constant and $\cos(sza)$ is the cosine of the solar zenith angle. Various

155 algorithms and methods have been developed to estimate broadband surface solar radiation data sets based on equation 2 e.g., (Möser and Raschke, 1984; Cano et al., 1986; Bishop and Rossow, 1991; Pinker and Laszlo, 1992; Pinker et al., 1995; Darnell et al., 1992; Rigollier et al., 2004; Mueller et al., 2009; Dürr and Zelenka, 2009; Posselt et al., 2011b; Müller et al., 2015). In the following the individual components of equation 3 are discussed concerning applied methods and needed input information. Please note that all quantities in the above equations are fluxes and not radiances.

160 2.1 Extraterrestrial irradiance

The extraterrestrial irradiance SSI_{ext} results from the radiation ~~emmitted~~emitted by the sun and the distance between Earth and sun and is given by equation 4.

$$SSI_{ext} = SSI_{ext,const} * d_{cor} \quad (4)$$

~~Here,~~Here, d_{cor} is a correction factor for varying distance between the Earth and the Sun and $SSI_{ext,const}$ is the so called solar constant, a long term mean of the extraterrestrial irradiance for a mean distance between the Earth and the Sun ($d_{cor} = 1$). Nowadays accurate values of SSI_{ext} can be gained from satellite measurements (Kato et al., 2013; Harries et al., 2005). The University Corporation for Atmospheric Research (UCAR) proposes a value of 1361 W/m^2 for $SSI_{ext,const}$ (UCARteam).

SSI_{ext} is valid for the whole globe and results from the nearly constant flux of energy emitted by the sun (Carroll and Ostlie, 2017). However, the term solar constant is ~~somehow~~somewhat misleading, as there are variations in the solar irradiance at the top of atmosphere due to sun activity. The changes of the solar irradiance due to variations in sun activity are usually within the range of $2\text{-}3 \text{ W/m}^2$ and are therefore often neglected (Müller, 2012b).

In addition, variations in extraterrestrial irradiance are caused by the distance between Earth and Sun. Induced by the elliptical orbit of the Earth around the sun, the Earth-Sun distance varies sinusoidal throughout the year in the order of $\pm 3.3\%$, leading to ~~an~~a respective increase and decrease of solar irradiance at the top of atmosphere. This effect is considered in equation 4 by the factor d_{cor} and can be gained from standard astronomical equations (Iqbal, 1983).

175 2.2 Solar zenith angle

The Earth is approximately a sphere, hence, close to the equator the incoming solar irradiance covers a smaller region than at higher latitudes. Here, the same amount of incoming photons are spread over a larger region, hence the solar irradiance is lower per unit area. In mathematical terms this effect is expressed by the cosine of the solar zenith angle. The solar altitude is defined as 90 degree minus the solar zenith angle. As can be seen in equation 3, the solar zenith angle is a dominant factor for solar surface irradiance. The local noon solar zenith angle and its diurnal and seasonal variation depend on the latitude, longitude and time of the year. These variations originate from the rotation of the Earth around its axis in combination with the rotation of the Earth around the Sun on an elliptical sphere. The Earth's rotation axis is tilted at 23.5 degree with respect to the ecliptic axis. This tilt is called the obliquity of Earth's axis and is responsible for winter and summertime. The higher the latitude the lower the local noon solar zenith angle, which decreases from summertime to wintertime. The sun earth geometry

is well defined and the SZA can be calculated with standard astronomical equations (Iqbal, 1983) using latitude, longitude and time as input. The calculation of the SZA is therefore straightforward.

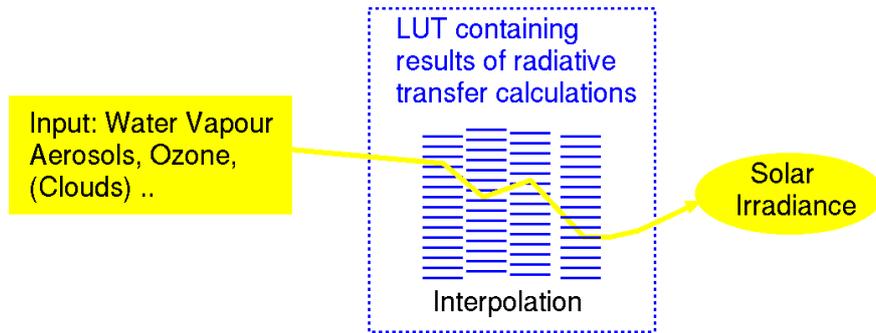


Figure 1. The principle of an LUT approach. The transmission is pre-calculated for a variety of atmospheric states with a radiative transfer model (RTM) and saved in a look-up table (LUT). The LUT is then used to determine SSI based on the input given for the atmospheric state for each pixel and time step by interpolation.

2.3 Radiative Transfer Models

The cloud and clear sky transmission needed to derive SSI (equation 2) can be calculated by a Radiative Transfer Model (RTM) with high accuracy for any given atmospheric state. With libradtran (Mayer and Kylling, 2005; Emde et al., 2016) a ~~powerfull~~ powerful open software package is available for RTM calculations (www.libradtran.org). Also for 3-d modelling RTMs are available in open access, e.g. Spherical Harmonic Discrete Ordinate Method (SHDOM) for Atmospheric Radiative Transfer (Pincus and Evans, 2009). An exemplary application of SHDOM within the scope of remote sensing of SSI is discussed in (Girodo, 2003; Girodo et al., 2006). However, concerning satellites an explicit usage of RTM for each pixel and time step would be too slow for the generation of long time series (climate data records) or near real time applications. Thus, instead of explicit RTM runs pre-calculated look-up-tables (LUTs) are usually used. A Look Up Table (LUT) contains the pre-calculated results of radiative transfer calculations performed for many different states of the atmosphere, surface albedo, and solar zenith angles. Figure 1 illustrates the principle of the LUT approach.

Nevertheless, classical LUT approaches have still a significant disadvantage. First, the computation speed is still hampered by the need to interpolate within large multi-dimensional arrays. Second, and more importantly, many ~~RTMs~~ RTM calculations must be performed to generate the LUTs, resulting in large and cumbersome binary matrices that raise the recalculation threshold. However ~~recalculation, whiis~~ recalculation, which is necessary from time to time to take advantage of new developments. Further, big and cumbersome LUTs increase ~~also~~ the chance for hidden bugs. ~~E.g~~ For example, after 4 years of development the CM SAF classical LUTs had a bug, probably induced by a switch in the indices somehow. Thus, 4 years of development were more or less worthless. The LUTs (clear sky, cloudy sky) contained over 100 000 RTM calculations each. As a consequence of the mentioned handicaps and the burden of ~~a recalculation of~~ recalculating classical LUTs a novel approach was developed, referred to as the "eigenvector hybrid" LUT approach (Mueller et al., 2009). This method takes benefit of the symmetries of atmospheric absorption processes and separates them from the linear independent processes of aerosol scattering. A further reduction is achieved by the use of the Modified Lambert Function (Mueller et al., 2004; Ineichen, 2008), which requires only

210 two SZA points (0 and 60 degree) to cover the complete SZA dependency in good accuracy. Overall, the number of needed
RTM ~~calculation~~ calculations could be scaled down from 100 000 to about 100 without losing accuracy (Mueller et al.,
2009, 2012a). The RTM calculations were performed with libRadtran (Mayer and Kylling, 2005) using the DISORT solver
(Stamnes et al., 1988). The respective retrieval procedure enables also the calculation of direct irradiance, resulting from ~~a~~ an
adaptation of the Skartveit et al. (1998) model for diffuse irradiance. Overall, this work implements several of the requirements
215 discussed in (Pinker et al., 1995) for the improvement of solar surface irradiance retrieval, RTMs are not only needed for the
calculation of LUTs but are also essential for the development of parameterizations and a better understanding of the processes
in the Earth atmosphere.

2.4 Clear sky transmittance

The clear sky irradiance can be derived by multiplication of the extraterrestrial irradiance SSI_{ext} with the cosine of the solar
220 zenith angle and the clear sky transmittance T_{clear}

$$\underline{SSI_{clear} = T_{clear} * SSI_{ext} * \cos(SZA)}$$

, according to equation 3

The term clear sky radiation is commonly used, but ~~nevertheless somewhat~~ misleading. It is the radiation received in cloud
free skies, which can still be quite turbid (low visibilities, high aerosol load). The incoming irradiance is scattered and absorbed
225 by gases and particles in the atmosphere. Scattering and absorption lead not only to attenuation of light but also ~~modify to~~
a modification of the spectra of the extraterrestrial irradiance. Scattering leads to a continuous modification of the spectra
whereas absorption occurs in specific spectral bands, the so called absorption bands. In these bands the absorption is strong
and the radiation is significantly reduced. ~~E.g. For example,~~ O₃ is acting as a strong absorber in the UltraViolet (UV), hence
almost all ~~of the UV-A radiation reaching the top of~~ UV-B radiation that enters the atmosphere is absorbed ~~in the atmosphere,~~
230 which is great luck for us, because it causes skin cancer. Further, water vapour has strong absorption bands in the InfraRed
(IR), but also in the microwave, thus acting as strong greenhouse gas. The absorption bands result from the transition of
radiation into periodic vibrations of molecules or atoms (IR) or change in electrons state (UV, VIS), whereby the energy of the
radiation is used to reach a higher energy level. The effect of the atmospheric scattering is apparent every day. The blue sky
results from Rayleigh scattering at air molecules (particles smaller than wavelength λ). The air molecules scatter the incoming
235 irradiance with a wavelength dependency of ~~λ^4~~ λ^{-4} . This means that the scattering effect decreases in the power of 4 with
increasing wavelength. As a result, blue light is scattered and reflected much more by the sky than other colours leading to
a blue illumination of the sky (blue sky). In contrast, cloud droplets and ~~aerosols are leading to~~ spherical aerosols follow
Mie scattering, which has a wavelength dependency of λ^{-1} (particles are about the same size as wavelength and assumed
to be spheres). Thus there is only a small dependency on the wavelength leading to grey sky. Scattering forces the light to
240 deviate from the direct path and is induced by the interaction of the photons with the respective media as a consequence of
oscillating electric fields or by consideration of the wave-particle dualism of quantum physics as particle to particle collisions.
More details can be found in Jackson (1998). The great majority of air molecules (N_2 , O_2 , ~~CO_2 , methane,~~ noble and inert

gases) are well mixed and uniformly distributed and do not affect the spatial and temporal ~~distribution-variation~~ of solar surface irradiance. ~~Even the rather small fluctuations of methane and CO₂ have no significant effect on SSI variation~~. Thus, their effect
245 is rather static in space and time and they pose no problem for the estimation of SSI as a static transmission can be assumed (Müller, 2012b). In contrast, ozone, water vapour and tropospheric aerosols are not well mixed. Their distribution is driven by atmospheric dynamics. They show significant temporal and spatial gradients and patterns on different scales. Thus, the spatial and temporal variation of clear sky irradiance is dominated by these parameters. Yet, the effect of ozone on the broadband solar irradiance is rather small and is therefore neglected in some methods. Sources of information for these variables are discussed
250 in detail in section 7.2. Figure 2 shows the irradiance at the top of atmosphere and the surface on an inclined plane at 37 degree tilt (toward the equator) for a US standard ~~atmosphere-atmosphere~~ and aerosol load and a SZA of 48.18 degree. The respective data was downloaded from NREL (NREL2, 1998), where more details on the ~~atmsopheric-atmospheric~~ components are given.

Different methods are applied to consider the effects of the clear sky components on the solar surface irradiance. A set of models use semi-empirical functions to derive the clear sky irradiance, e.g. (Ineichen and Perez, 2002; Beyer et al., 1996; Cano
255 et al., 1986; Rigollier et al., 2004; Bird and Hulstrom, 1981; Sengupta and Peter, 2003; Perez et al., 2002). More complex methods are based on look up tables derived from radiative transfer modelling e.g. (Gupta et al., 2001; Mueller et al., 2004, 2009) or some kind of ~~hybrids-hybrid~~ of the two. However, as a satellite retrieval of SSI_{clear} is not needed for a proper and accurate estimation of SSI (Mueller et al., 2012a, 2009, 2004; Müller et al., 2015), the ~~further-further~~ discussion of the methods focus on the retrieval of the cloud transmittance.

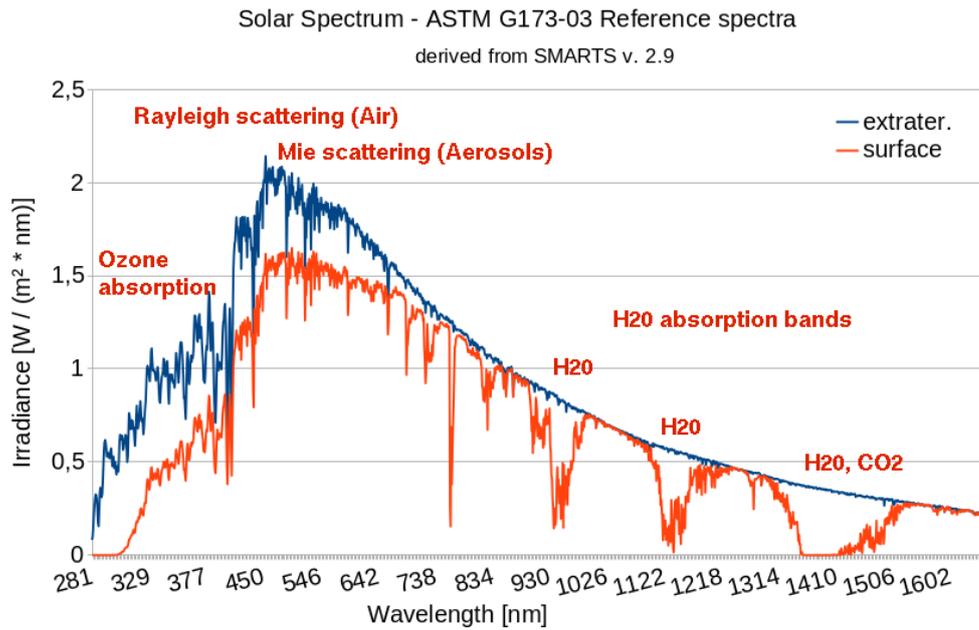


Figure 2. Illustration of the solar ~~irradiance~~ irradiance spectrum at the top of atmosphere (extraterrestrial irradiance) and the surface for cloud free skies. The main processes leading to the attenuation of irradiance are shown in the associated spectral range.

Overall, clouds are the dominant atmospheric component for the spatial and temporal variation of solar surface irradiance. Thus, accurate information of the cloud transmittance is crucial for the accurate retrieval of solar surface irradiance. Satellites measure the reflection of the surface and atmosphere. In order to derive the cloud transmission the reflection of the surface and clear sky atmosphere has to be separated from that of the clouds. The scattering effect of clouds is by far dominant and absorption can be neglected ~~in to a~~ good approximation. Thus, radiation that is not reflected by clouds is transmitted ~~trough~~ through the clouds. Therefore cloud transmission equals ~~in to~~ good approximation one minus cloud reflection, see equation 1.

$$T_{cloud} = 1 - R_{cloud} \quad (5)$$

Here, T_{cloud} is the cloud transmission and R_{cloud} the cloud reflection. It is important to mention here that the above equation is valid for fluxes. Satellites however, are observing radiances, i.e. photons reaching the satellite from a specific direction, see figure 3 for illustration. The reflection of the Earth's atmosphere is usually not isotropic (equal share of radiation in all directions) but depends on the specific direction and viewing angle. Therefore angular distribution models (ADM), which results from Bidirectional Reflectance Distribution Function (BRDF) have to be applied to transfer radiances to fluxes (Nicodemus et al., 1977) . See Loeb et al. (2005) for further details about BRDF and ADM.

Further, the upward flux depends on the solar zenith angle as the Surface Albedo (SAL) changes with changing SZA (Briegleb and Ramanathan, 1982). Further, the retrieval of SAL is characterised by severe uncertainties (Shuai et al., 2020; Carrer et al., 2010, 2018; Fell et al., 2021). This adds further difficulties to the accurate definition of ADMs (BRDFs) as the problem is somehow ill-posed. ~~Is the change in the fluxes induced by a different viewing geometry for the same SAL or by the change in SAL induced by SZA, change in vegetation, different~~ The relation between observed radiances and simulated fluxes depends not only on the viewing geometry but also on landuse (e.g. SAL SZA dependency), pixel size, calibration issues (ageing of channels, change of spectral response function) ~~, change of satellite instruments, and others~~ and other effects. BRDF and ADM are also spectrally dependent, hence differ from wavelength band to wavelength band. Thus, they can not be easily transferred from one satellite instrument to another. This poses the question which path is the best to follow, because there are mainly two different paths to get the cloud transmission. We follow the suggestion of Skartveit and Olseth (personal communication) to name them direct and indirect paths. For the indirect path, fluxes and thus ADMs and accurate SAL information are needed. For the direct path this information is not needed but implicitly considered by the satellite observations within the retrieval of the cloud transmission. The two paths are briefly discussed in the following sections.

3 The indirect paths: Methods using flux quantities

The cloud transmission can be defined by the micro-physical parameters cloud optical depth (COD) and the effective radii (r_{eff}) of cloud droplets. Thus, one way forward is to retrieve cloud optical depth and effective radii, following an approach discussed in Nakajima and King (1990). Once COD and r_{eff} are retrieved the cloud transmission can then be calculated

310 and ideas of Pinker and Laszlo (1992) and Pinker et al. (1995) . Also, the OSI SAF retrieval procedure for *SSI* is using TOA Albedo as input (Marsouin, 2019; Gautier et al., 1980). However, also in this approach clouds are assumed to be plane-parallel, ADMsBRDFs are needed to convert radiances to fluxes and accurate SAL data are necessary.

In brief, using the indirect approach means to be further away from the observations, ~~to introduce further error sources by weak assumptions and to use simulations instead of observations directly. All in all, there are additional variables and functions needed, which are partly based on ill-posed retrievals.~~ as additional assumptions and simulations are needed in contrast to the direct path, which is discussed in the next section.

315

4 The direct path

For the indirect paths (flux based methods) accurate SAL and ADMsBRDFs are needed. Further the clouds are assumed to be plane-parallel. These ~~induces~~ induce uncertainties into the estimation of the cloud transmission and motivates the use of the direct path. The direct path relates the measured reflection (radiances) directly to the cloud transmission without the need of any radiative transfer modelling, ADM or SAL, as they are implicitly considered by observations. In the following the method applied at CM SAF and DWD is described in more detail. It is based on the concepts of (Möser, 1983; Möser and Raschke, 1984; Cano et al., 1986; Diekmann et al., 1988) and originates from the Heliosat code developed at the University of Oldenburg (Beyer et al., 1996; Hammer, 2000; Hammer et al., 2003). Only observed radiances are needed in order to retrieve the Effective Cloud Albedo (Mueller et al., 2011), which is also referred to as cloud index or effective cloud coverage. The effective cloud albedo (*CAL*) is defined as the normalised relation between the all sky and clear sky reflection derived from satellite images in the solar spectral range. *CAL* is linearly related to the cloud transmission for *CAL* values lower than 0.8. A clear sky model is used afterwards to calculate the solar surface irradiance based on the retrieved cloud transmission according to equation 2. This approach is still the basis for several state of the art retrieval schemes, described in more detail in (Dürr and Zelenka, 2009; Posselt et al., 2011b; Mueller et al., 2012a; Müller et al., 2015; Castelli et al., 2014; Pfeifroth et al., 2019b).

320

325

330

In order to derive the effective cloud albedo it is important to consider the effect of the solar zenith angle on the extraterrestrial irradiance. Furthermore, the dark offset of the instrument has to be subtracted from the observed reflections. Thus, the observed reflections are normalised by application of equation 6 in a first processing step.

$$\rho = \frac{D - D_0}{f * \cos(\theta)} \quad (6)$$

Here, *D* is the observed digital count (including the dark offset). *D*₀ is the dark offset, the instruments value in the dark, which is provided by EUMETSAT. The sun-earth distance variation is considered by the factor *f*, finally, the cosine of the solar zenith angle corrects the different illumination conditions at the top of atmosphere introduced by different solar altitudes. The resulting ρ is referred to as normalised reflection. The effective cloud albedo is then derived from the normalised reflection ρ , the clear sky reflection ρ_{cs} and the calibration value ρ_{cal} by equation 7

335

$$CAL = \frac{\rho - \rho_{cs}}{\rho_{cal} - \rho_{cs}} \quad (7)$$

340

Here, ρ is the observed normalised reflection for each pixel and time. ρ_{cs} is the clear sky reflection, which is derived for every pixel and time slot separately. In principle this is done by applying statistics over the lowest reflections observed during a typical time span of 3-4 weeks, e.g the average of the lowest reflections within an epsilon band, which can be defined by the user and is typically of about 10 % of ρ_{cal} . Also percentile functions can be used, but based on tests at DWD this is expected
 345 to lead to a lower performance. Further details on the method to derive ρ_{cs} are given in Hammer (2000); Müller et al. (2015) and Mueller and Trentmann (2015). The need to calculate ρ_{cs} for every time slot of the day results from the strong dependency of the clear sky albedo (which is in turn usually dominated by the surface albedo) on the solar zenith angle (Briegleb and Ramanathan, 1982). ρ_{cal} is a measure for the reflections observed for the highest cloud albedos. It is therefore often also referred to the "maximum" reflection ρ_{max} . It is typically determined by the 95-98 percentile of all reflection values at local
 350 noon in a target region, characterised by high frequency of cloud occurrence for each month (Mueller et al., 2012a; Müller et al., 2015). In this manner changes in the reflections induced by the satellite are accounted for (Posselt et al., 2011a). Further, it calibrates also the reflections between clear sky ($CAL=0$) and "maximum" overcast ($CAL=1$).

For CAL values below 0.8 the relation between CAL and T_{cloud} is simply given by

$$T_{Cloud} = 1 - CAL \quad (8)$$

355 Thus,

$$SIS = (1 - CAL) * SIS_{clear} \quad (9)$$

For very thick clouds SSI does not decrease linearly any more with CAL as a result of lateral scattered light and a modification of the relation 9 is needed, e.g. as following.

$$T_{Cloud} = 1.1661 - 1.7814 * CAL + 0.7250 * CAL^2 \quad (10)$$

360 The term Heliosat is widely used in the energy meteorology community for methods using the relation given in 7. Yet, this naming is somehow misleading. In some Heliosat methods the observational approach for ρ_{cs} is partly replaced, e.g Heliosat-2 (Rigollier et al., 2004), or completely replaced, e.g. Heliosat-5 (Tournadre et al., 2021), by modelling of ρ_{cs} . However, the planetary reflection is in good approximation observed by the satellite and a ~~seperation~~ separation of the effect of ground albedo and atmospheric reflection or a complete replacement of ρ_{cs} with RTM simulations is a detour
 365 adding additional uncertainties. The motivation for these modifications is incomprehensible both from the point of view of measurement technology as well as from the point of view of radiative transfer modelling (see section 3 and the open reviewer comments concerning Tournadre et al. (2021)). In order to avoid misunderstandings we introduce the term CAL-SAT for the described method and use it instead of Heliosat throughout the manuscript. The CALSAT approach is applied routinely in real time at the University of Oldenburg since 1995. It was used to establish the server Satel-Light, which
 370 delivers valuable information on daylight in buildings to architects and other stakeholders (Fontoynt et al., 1997). The method was also used to provide the data for successful projects like PVSAT and PVSAT-2 (Lorenz et al., 2004; Hammer

et al., 2003) which went into 24/7 operational services. All CM SAF Climate Data Records (CDRs) (Posselt et al., 2011b; Müller et al., 2015; Pfeifroth et al., 2019b) ~~has~~ have been retrieved with the CALSAT approach coupled with a clear sky model based on the eigenvector hybrid LUT method (Mueller et al., 2009). The respective data sets belong to the most used and validated data sets in the world covering a wide field of applications, as can be seen from recent publications (Wild et al., 2021; Kulesza, 2021; Alexandri et al., 2021; Gardner et al., 2021b, a; Farahat et al., 2021; Yang and Gueymard, 2021; Kulesza, 2021; Wild et al., 2021; Kulesza, 2021; Alexandri et al., 2021; Gardner et al., 2021b, a; Farahat et al., 2021; Yang and Gueymard, 2021; Kulesza, 2021). *CAL* based SSI data are characterised by a high accuracy and homogeneity, which is a reason for the popularity, even up to quality control of ground based stations (Urraca et al., 2017, 2020). The CM SAF SSI data are ~~regurarly~~ regularly validated by the CM SAF team e.g. Pfeifroth et al. (2019) but also by the user community, e.g. (Wang et al., 2018; Amillo et al., 2018; Urraca et al., 2007; Trolliet et al., 2018; Riihelä et al., 2015; Posselt et al., 2011b; Ineichen et al., 2009) and references therein. The complete list of peer-reviewed articles dealing with CM SAF radiation data is available on *cmsaf.eu* under the menu item *Publications* (CMSAFpubl). Even if only the CM SAF data is counted there are already thousands of users all over the world (Selbach and Thies, 2021). There are of course much more if the other data provider are accounted for. All CM SAF Validation Reports, Product User Manuals, Algorithm Theoretical Baseline Documents and Operations Reports are available on *cmsaf.eu* ~~unter~~ under the menu item *Documentation*. The CAL based CM SAF SSI data went also into the PVGIS service (Huld et al., 2012; Amillo et al., 2014), which has several hundreds of accesses per week (T.Huld, personal communication). Finally, the CALSAT method is also used at DWD to generate 24/7 operational near real time data and forecasts, which are available at www.opendata.de. In summary, the direct approach using the observable *CAL* to define the cloud transmission ~~ist~~ is quite well established and is used ~~and~~ for the creation of radiation data sets that are widely used around the world, e.g. Selbach and Thies (2021). It enables the retrieval of monthly means with an accuracy of **5.2** W/m² and **7.7** W/m² for *SSI* and direct irradiance, respectively (Pfeifroth et al., 2019). Hereby, the mean absolute difference is used as metric for the accuracy. It is defined as the average of the absolute values of the differences between the ground based measurements and the satellite based irradiance first over all months and then over all stations. For the validation all available BSRN stations were used.

$$MAD = 1/n \sum_i^{1-n} |I_{sat,i} - I_{ground,i}| \quad (11)$$

The uncertainty in CALSAT SSI trends is with -0.8 ± 0.4 W/m²/decades quite small, which shows the adequate homogeneity of the data set and its ability to identify climate trends and decadal variability.

Already the early CALSAT methods had significant impact. e.g. the method developed by (Möser and Raschke, 1984; Diekmann et al., 1988) was routinely applied at the German Weather Service till it was replaced by a modified SPECMAGIC (Mueller et al., 2012a) version in 2018. A similar method was also used for the GEWEX Surface Radiation Budget Project as a quality control algorithm (Gupta et al., 2001; Darnell et al., 1992). This algorithm known as Staylor algorithm was chosen by the World Climate Research Program (WCRP) SRB project for generation of surface solar irradiance for a test period of several years (Whitlock et al., 1995) and has been used to produce long term data set. Finally, the CALSAT approach has been also adapted to polar orbiting satellites as effective cloud fraction Wang et al. (2014, 2011)

405 5 Spectral resolved irradiance

The demand for spectrally resolved irradiance has increased significantly in recent years due to new solar cell technologies and increased awareness of climate change. The importance of the spectrally resolved irradiance (SRI) for the efficient planning of PV systems is discussed in Huld and Amillo (2015). Further, SRI is of benefit for a more extensive monitoring and analysis of the climate system and enables the generation of essential meteorological variables for several application fields, e.g.

- 410 – Daylight, which is of importance for the design and planning of office buildings and health studies, e.g., concerning Seasonal Affective Disorder.
- Ultraviolet (UV)-A and UV-B, important for weather warnings concerning the UV dose
- Photosynthetic Active Radiation (PAR), important for agro-meteorology.

However, retrieval algorithms for the generation of accurate long term series of spectral resolved irradiance covering the complete solar spectrum were not available or applied to generate CDRs until 2012. The development of SPECMAGIC (Mueller et al., 2012a), a fast and accurate method for the retrieval of spectral resolved irradiance, was a game changer. It has been used to improve the quality of the broadband radiation of the CM SAF CDRs, but also to provide the first spectral resolved solar irradiance climate data record.

The SPECMAGIC method is a ~~adaption~~adaptation of the concept for the broadband radiation (Mueller et al., 2009) to Kato bands (Kato et al., 1999) using the correlated-k approach offered as part of libradtran (Mayer and Kylling, 2005). The correlated-k method is developed to compute the spectral transmittance (hence the spectral fluxes) based on grouping of gaseous absorption coefficients. However, in contrast to Mueller et al. (2009) the cloud transmission is derived with the CAL approach in SPECMAGIC (Mueller et al., 2012a) and only the clear sky irradiance is calculated with an eigenvector LUT. The CALSAT method was developed for broadband radiation. Thus, a spectral correction of the broadband transmission was needed, which was done by a RTM based spectral correction factor for the broadband CAL. A detailed description of the methods is given in Mueller et al. (2012a). Further validations were presented in Amillo et al. (2015). As ground measurements of spectral resolved irradiance are extremely rare, satellite derived information constitutes the primary data source for spectral resolved irradiance within the scope of climate monitoring and solar energy applications. The validation of the spectral resolved irradiance climate data record (SRI) in Ispra (Italy) shows an accuracy of the monthly mean values of spectral resolved data higher than 0.03 W/m²/nm for wavelengths below 1000 nm and even better for ~~larger~~longer wavelengths (Pfeifroth et al., 2019).

6 Forecasting and seamless prediction

Over recent decades the share of solar energy has increased enormously around the world, as already briefly discussed in section 1. In contrast to fossil and atomic energy, solar resources are fluctuating and the energy yield depends on the weather. Variations in solar radiation, and thus in solar energy, have to be balanced, either by increase or decrease of the production from conventional power plants or by trading energy on the electricity market. The shorter the time for this compensation, the higher the costs and the lower the efficiency of renewables. In addition, wrong forecasts of extreme weather events might also lead to grid instabilities and regional overloads. Accurate forecasts are therefore needed to enable an efficient, planning and operation of the energy production and to optimise the use of renewable energies and the reduction of CO₂ emissions. Beside forecasts, instantaneous near real time data are also essential for the optimisations and monitoring of solar energy systems. As a result, the demand for accurate near real time data and forecasts of solar surface irradiance has steadily increased. Satellite based cloud information is well suited for the estimation of near real time radiation data and the basis for short term forecasts, which outperforms NWP in the first hours (Lorenz et al., 2017; Urbich et al., 2019). However, forecasting SSI is not only needed within the scope of solar energy, but is also useful for weather warnings concerning UV radiation, heat waves, droughts and evaporation.

The satellite based short term forecast of SSI, also referred to as nowcasting, is usually done by retrieval of atmospheric motion vectors from satellite images and subsequent application to extrapolate the observed clouds into the future. The predicted cloudiness can then be used to calculate SSI with one of the methods discussed in section 4. In order to get the forecasts in the needed spatial and temporal resolution a dense field of cloud motion vectors is needed. The use of cloud motion vectors for nowcasting is widespread and many approaches have been proposed so far e.g., for example Gallucci et al. (2018) and Sirch et al. (2017) used cloud motion vectors from SEVIRI (Spinning Enhanced Visible and Infrared Imager) on board of MSG-Meteosat Second Generation (MSG) to forecast solar surface radiation for up to 2 hours. Further methods to gain AMVs are discussed for example in Raza et al. (2016); Wolff et al. (2016); Antonanzas et al. (2016) and Barbieri et al. (2017). In recent years, however, computer vision techniques (Szeliski, 2011) have found their way into meteorology and have offered the advantage of a strong developer community, which is typical for open software. This led to the use of optical flow methods for the estimation of atmospheric motion vectors. Optical flow has been used pre-dominantly for image pattern recognition in the fields of traffic, locomotion and face recognition (Sonka et al., 2014). To our knowledge, one of the first applications in meteorology has been the utilisation of the optical flow for radar images as described by Peura and Hohti (2004). At DWD the TV-L1 method (Zach et al., 2007) was implemented in 2018 for the short-term forecast of radar reflectivity by Manuell Werner. This has motivated the adaptation of TV-L1 to *CAL* images (Urbich et al., 2018) in order to track the cloud movements and to extrapolate the *CAL* values with optical flow. In order to met-meet the requirements of the operational near real time retrieval of *CAL* based on SPECMAGIC (Mueller et al., 2012a) has been modified. The modified version is referred to as SPECMAGIC_NOW. The Visible Channel in the 600 nm band is used instead of broadband visible channel, which is gained from a combination of VIS006 and VIS008 (Cros et al., 2006). Further, a-running backward statistics are performed to calculate ρ_{cs} . In contrast to SPECMAGIC, only 20 days are used for the statistics. Also the estimation of ρ_{cal} has been modified. Please

465 see section 7 for further details. ~~The near-real-time data and forecasts up to +18 hours are available at the DWD open data server (www.opendata.de).~~

The combination of the effective cloud albedo with TV-L 1 and SPECMAGIC_NOW delivers a novel powerful method for the short-term forecast of solar surface irradiance, as discussed in Urbich et al. (2019). Yet, for the satellite based nowcasting ~~2-two~~ subsequent images are needed. Before sunrise no former image in the visible is available for the estimation of the atmospheric motion vectors. Thus, the University of Oldenburg extended the Heliosat method to Infrared Images Hammer et al. (2015). For longer forecast horizons a blending with NWP models is needed (Urbich et al., 2020; Lorenz et al., 2017). However, cloud motion vector methods have the disadvantage that they can not capture convection or dissipation (change in intensity). Although NWP has also great difficulties in this area they include at least physical parameterisations to deal with the phenomena. That is the reason why after a couple of hours NWP models outperform NWC and a combination of both methods is needed in order to gain the optimal accuracy for every time step. The near real time data and forecasts up to +18 hours are available at the DWD open data server (www.opendata.de).

475 ~~However, forecasting SSI is not only needed within the scope of solar energy, but is also useful for weather warnings concerning UV radiation, heat waves, droughts and evaporation.~~

7 Recent developments and discussion

480 7.1 Method

Copernicus "hoping to return the science to a less cumbersome, more elegant view of the Universe suggested a heliocentric (Sun-centred) model of planetary motion" (Carroll and Ostlie, 2017) instead of the geocentric system, which was the prevailing view until then. His approach led to a much simpler description between planets and stars.

This paradigm should still be a central key for natural science. Make things as easy A central paradigm of science is the goal to make things as simple as possible and as complex as needed. ~~It is always a goal of science to improve methods. However, established ways should not be forgotten by this legitimate goal. It should not be expected a priori that more complex and more cumbersome methods lead to a higher accuracy. Science demands that there is a proof of improvement and not only a postulation based on the complexity of a method. Further, a central issue of science should be lessons learnt. Research and development should focus on the open issues to improve the methods and not trying to re-invent the wheel by ignoring existing~~ knowledge. These arguments call for a reflection of lessons learnt necessary and to benefit from the knowledge gained. In this context, we we would like to briefly review the lessons learned within the Heliosat-3 project. The goal of the Heliosat-3 project (Betecke et al., 2006) was to supply high-quality solar radiation data gained from the exploitation of existing Earth observation technologies by taking advantage of the enhanced capabilities of the new Meteosat Second Generation Satellites. Therefore one aim was to develop a method to replace the CALSAT method by a method using cloud micro-physical parameters. During 495 the Heliosat-3 project, the meteorologists Skartveit and Olseth reminded us not to forget the advantages of the the direct path, using *CAL* derived from satellite measurements. Lessons learned within Helisoat-3, *CAL* is still used and was not replaced by an approach using *COD* and r_{eff} at the University of Oldenburg, the leading entity of the project. Further, within CM SAF

the LUT approach used in the early phase for the generation of the first data sets (Mueller et al., 2009) has been replaced by the CALSAT approach concerning cloud transmission for the generation of CDRs (Posselt et al., 2011b; Müller et al., 2015) and the generation of near real time data and forecasts (Urbich et al., 2018). For clear sky cases RTM based LUTs are still used in the CALSAT approach, beside other arguments, in order to overcome the limitation of turbidity as input (Mueller et al., 2004)

Thus, the CALSAT approach has ~~been not not been~~ replaced by flux based methods at leading institutes and is to the knowledge of the authors still the best way forward for the retrieval of cloud transmission. The approach results from the law of energy ~~conversation~~ conservation and relates the observed reflection directly to the effective cloud albedo and the cloud transmission without the need for external SAL data or ADM simulations. In ~~this~~ these terms the CALSAT method takes full benefit of the satellite measurements in the visible (Mueller et al., 2011). Both, the data sets of the University of Oldenburg, CM SAF and other entities using *CAL* are among the most validated data sets of the world. The validation results around the SAF radiation data show that the improved CALSAT methods are in the meanwhile able to derive accurate SSI data close to the accuracy of well maintained ground based stations (Posselt et al., 2011b; Müller et al., 2015; Pfeifroth et al., 2019). The ~~quality is such good that~~ high quality of CAL based SSI data ~~can be used for monitoring the quality even enables the monitoring~~ of ground based measurements (~~Urraca et al., 2017, 2020~~) and (~~Urraca et al., 2017, 2020~~) and the use for climate trend analysis (Pfeifroth et al., 2018). The success and impact of the CALSAT approach is impressive. Nevertheless, further improvements of CALSAT have been performed and are still under progress. Yet, many of these improvements are not CALSAT specific, but represent general issues of satellite based retrieval of SSI. The following sections provide a discussion of limitations and possible improvements ~~that are of these retrievals~~ to the best knowledge of the authors.

7.1.1 Mountains

The pixel ~~size~~ of the visible MSG full disk channels (VIS006 and VIS008) ~~is with approximately~~ are with a size of 3-5 km ~~relative large~~ over the European mountains ~~relative coarse~~. This leads to pixels which covers mountains and valleys and are therefore no longer spatially representative of the area covered. The terrain is too heterogeneous and the spatial ~~representatives~~ representativeness is largely limited by the resolution of the VIS006 and VIS008 channels. However, over Europe and large parts of Africa the High Resolution Visible (HRV) channel is available. It has a sub-satellite resolution of 1x1km, which means ~~of about~~ 1x2 km over the European mountains. The spatial ~~representativity~~ representativeness is significantly improved by the higher spatial resolution and is a central key for the improvement of the precision and accuracy of SSI in mountainous regions (Dürr et al., 2010; Dürr and Zelenka, 2009).

Deep valleys are shadowed by mountains reducing the amount of available solar surface radiation. The shadowing information needs to be corrected by the use of additional geographical information and geometrical functions. For this correction the location, size and height of the mountains are needed, which are provided by a ~~digitally~~ digital elevation model (DEM). Respective data are available free of charge from various web sites, see (OpenDEM-link). Geometric functions can be used to calculate the solar zenith angle and azimuth angle for every date and hour, enabling to correct the shadowing based on the DEM information. This correction is independent of the retrieval method for SSI. A respective correction as well as further

mountain specific features has been implemented into ~~the~~the CALSAT approach by Dürr and Zelenka (2009). The work of Dürr and Zelenka (2009) has been the basis for the Heliomont algorithm (Stöckli, 2013; Castelli et al., 2014), which comes with further improvements.

535 Further, snow covered surfaces occur with much higher frequency in mountains than in low lands. Thus, also the treatment of clouds over snow needs more attention in the mountains. Dürr and Zelenka (2009) implemented a correction for the CAL retrieval over snow and demonstrated that it leads to higher accuracy.

7.1.2 Long Lasting clouds

All methods need cloud free ~~pixel~~pixels in order to get actual information of the surface albedo (indirect flux based methods) or the clear sky reflection ρ_{cs} . Outdated information of SAL or clear sky reflection can lead to significant errors in SSI. The clear sky reflection and the surface albedo can only be derived from satellites in cloud free situations. Thus, long lasting clouds are a serious error source for the satellite based retrieval of SSI. This is valid for all retrieval methods. Long lasting clouds can contaminate the observation of ρ_{cs} . The minimisation of ~~ρ_{cs}~~ leads only to the clear sky reflection if at least one pixel during a certain time interval is cloud free. However, especially in winter at higher latitudes (e.g. northwestern Europe) it can happen
545 that there is no cloudless sky for 20-30 days, which leads to cloud contamination and an overestimation of ~~ρ_{cs}~~ and, in turn, to an underestimation of CAL .

An option to reduce the uncertainties induced by long lasting ~~cloud~~clouds might be the use of simulated of ρ_{cs} based on RTMs or climatological values for ρ_{cs} as a backup. The former option has been implemented in SPECMAGIC_NOW, a SPECMAGIC modification dedicated and used for the 24/7 production of near real time data at DWD. However, the method
550 for the decision when the backup is used is still in development and needs further evaluation. Another option is to fit the diurnal variation of ρ_{cs} and to replace outliers by the fitting function, see Heliomont for details (Castelli et al., 2014). This approach requires ~~cloudfree skies for neighbouring slots in time and thus can only mitigate but not resolve~~ clear skies for adjacent time windows and can therefore only mitigate, not solve, the problem of ~~long lasting~~long-lasting clouds. However, it has also to be considered that long lasting clouds occur typically during wintertime at higher ~~latitude~~latitudes and are therefore associated
555 with low absolute SSI values and hence also low absolute errors. Even with a ~~backup~~backup for ρ_{cs} , CAL would be still derived directly from observations for the vast majority of cases.

7.1.3 Improvement of clear sky reflection, ρ_{cs} method

Usually the broadband visible channels are used for the CALSAT method, either directly or as a combination of the visible channels in the spectral bands 600 nm (VIS006) and 800 nm (VIS008) according to Cros et al. (2006). However, the precision
560 of the ρ_{cs} detection might be improved by using the VIS006 channel as the reflection in this band is rather dark for vegetation. This enhances the contrast between clear sky and cloudy reflection and enables a higher precision for optical thin clouds. A comparison of using different VIS channels was performed by Posselt et al. (2011a). This study showed the potential of using the VIS006 channel and motivated its use for SPECMAGIC_NOW. Experiments to improve the accuracy by using percentiles

instead of the original statistical method (Hammer, 2000) did not lead to an improvement. Hence, the same method is used for
565 the calculation of ρ_{cs} in SPECMACIC (Mueller et al., 2012a) and SPECMAGIC_NOW.

Miss-classification of snow covered surfaces as clouds or ~~clouds as snow~~ vice versa is a serious error source for all methods. This is also valid for the CALSAT method, but with some specificity resulting from the ρ_{cs} method. To illustrate, let there be a certain number of snow free and snow covered days within the 20-30 day period used for the retrieval of ρ_{cs} . As ρ_{cs} is calculated with a minimisation function ρ_{cs} will capture always the snow free situation. For the snow covered days the snow
570 will be treated as a thick cloud resulting in a large underestimation of SSI. This effect can be reduced if ρ_{cs} is calculated with a Fuzzy logic approach, discussed in detail in Posselt et al. (2011b). However, as experienced by the CM SAF the Fuzzy logic approach induced other artefacts, e.g. wrong ρ_{cs} values in the desert. There might be another option to treat this problem. An accurate snow map can be used to flag snow covered regions and to correct ρ_{cs} by simulated values if ρ_{cs} shows too low values for snow. Of course this approach would be a rough workaround which needs further optimisation and adjustments based on
575 validation studies. A world wide reference for snow cover maps are provided by NIC NOAA, referred to as the IMS snow ice map (Helfrich et al., 2018). This map is based on several satellite ~~information including microwave and~~ instruments including microwave as well as ground based information and is therefore not so prone to long lasting clouds. However, still melting periods of snow are still sometimes not captured by IMS as a result of long lasting clouds as discussed in the snow workshop (Helmert et al., 2018).

580 The upcoming CM SAF SARA3 data record is based on internal snow detection with the aim of better detecting snow-covered surfaces. The method is based on optical flow, assuming that cloud objects move much faster than snow objects, allowing separation of clouds and snow. Initial results indicate significant improvements, but the validation is still in progress. A detailed discussion of this approach and its validation will be included in the SARA3 documents. A comprehensive discussion of this approach and its validation will take place in the SARA3 documents.

585 In SPECMAGIC_NOW the duration used for the slot-wise detection of ρ_{cs} has been reduced from 30 to 20 days. This is expected to reduce the effect of snow miss-classification as cloud, but might be a handicap for long lasting clouds. However, for Germany the operational comparison with other data sets (DWD in-situ network, SPECMAGIC) have not shown any significant drawbacks concerning long lasting clouds so far.

7.2 Calibration

590 7.1.1 Calibration

An accurate calibration is of very high importance for the generation of homogeneous climate data records. Thus, it is the basis to enable appropriate trend analysis. The focus of the first geostationary Meteosat satellites was the support of weather monitoring and forecasting. As a result calibration issues of the visible channels were not considered (thoroughly) for MVIRI onboard of MFG and for SEVIRI onboard of MSG, respectively. Both instrument generations are not ~~equiped~~ equipped with
595 onboard calibration units for the visible channels. The increased awareness of climate change and the need for improved climate monitoring and analysis led also to the demand to use Meteosat satellite data for climate monitoring. As a result, the

CM SAF was implemented by EUMETSAT in 1999 and the activities concerning calibration of the visible channels increased. For example, Govaerts et al. (2004) developed a method for the calibration of the SEVIRI visible channels using desert and cloud targets as radiation references. However, longer time series are required for a CDR, which requires the use of MVIRI to extend the time series, but the method of Govaerts et al. (2004) is not applicable to MVIRI. Unfortunately the MVIRI time series is quite in-homogeneous as in the early days of MFG changes in the gauge were not unusual. Further, up to Meteosat-6 no inter-calibration between the satellite instruments was done, adding additional breaks in the observed reflections, see figure 4.

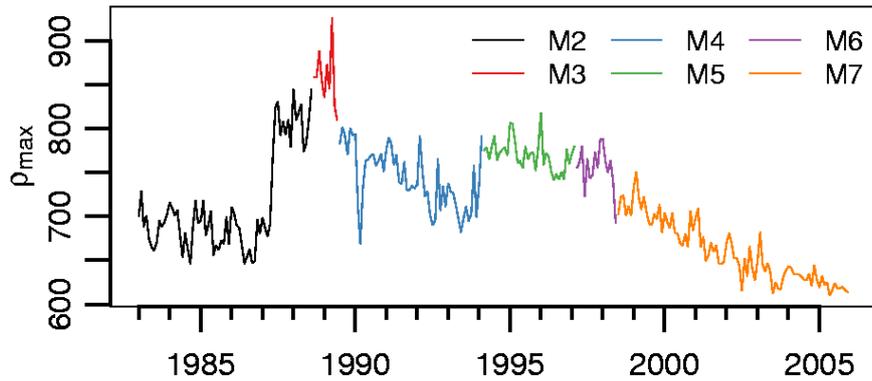


Figure 4. Temporal evolution of the 95th percentile (ρ_{max}) of the observed reflections for MVIRI, covering 1983 to 2005. The different MVIRI instruments (M 2-7) are coloured for a better distinction. Image from Posselt et al. 2011

For these reasons CM SAF took benefit of the calibration value ρ_{cal} of the CALSAT method (see equation 7) for the self-calibration of [MVIRI](#) [Meteosat instruments](#) (e.g. [MVIRI](#) and [SEVIRI](#)). This is described in more detail in Posselt et al. (2011a). Basically, the ρ values are ordered with a function in a first step. Then the 95 or 98 percentile is used as ρ_{cal} . This is done for a target region with a high cloud coverage (Atlantic ocean, South West of Southern Africa). The advantage of this approach is that the calibration is done for the same targets (clouds) for which the transmission is retrieved. It has been shown that the method leads to stable homogeneous data sets across satellite generations (Posselt et al., 2011b; Pfeifroth et al., 2018).

This approach has been slightly modified for SPECMAGIC_NOW. First of all another target region is used, following an approach of the Royal Meteorological [Insitute](#) [Institute](#) of Belgium (RMIB). The novel target region covers the ITC region. It is defined from line 1234 to 2486 of the Meteosat level 1.5 images. Here all counts of the 12 UTC slots are sampled over a period of 3 days and sorted with the heapsort function and subsequently assigned to a vector (fper). Then, the index of the 95 percentile (pm) and the 99.99 percentile (pmm) are calculated. Afterwards, ρ_{cal} is calculated within a loop between the indices of the respective radiances and finally multiplied by 1.1. Please see the [following](#) C-code lines [in the appendix](#) for details.

```
heapsort(kendl,fper);
int pm=(int)(0.95*(kendl+1));
int pmm=(int)(0.9999*(kendl+1));
```

```

620 for (kkk=pm; kkk < pmm; kkk += 1) {
    Rmaxsum += fper[kkk];
    Rnum += 1;
}
rho_cal=1.1*Rmaxsum/Rnum;

```

Comparison with the former method of CM SAF for the calculation of ρ_{cal} indicates that this method leads to less noise. As
625 SPECMAGIC_NOW is operated 24/7 using SEVIRI as input the method of Govaerts et al. (2004) could be applied. However,
concerning physics the ρ_{cal} method described above has a significant advantage. Identical channels and targets (clouds) are
used for both the calibration and the retrieval of *CAL*. Yet, the Govaerts et al. (2004) method uses desert targets in addition,
which is expected to add uncertainties to the calibration because the spectral albedo is quite different to that of clouds. At
least during the development and testing of SPECMAGIC the ρ_{max} calculation could not be improved by the use of additional
630 desert targets.

7.1.2 Parallax correction

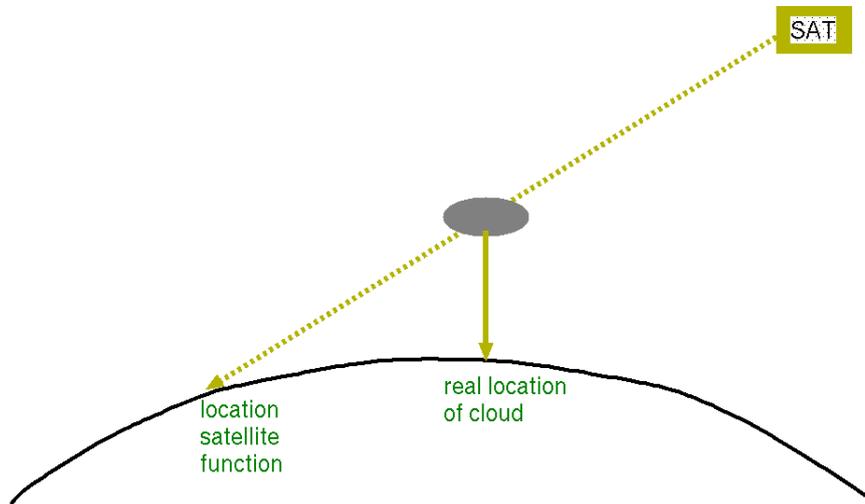


Figure 5. Illustration of the parallax effect.

The geolocation of the satellite is always related to the Earth surface (sea level). This means that independent ~~on~~^{of} cloud
height the cloud is assumed to be at the surface. The higher the clouds and latitudes the larger is the displacement of the
geolocation. ~~E.g.~~ For example, for a cloud with a top height of about 10 km the displacement effect at mid latitudes is several
635 kilometres. This hampers the comparison between satellite data and ground based information, in particular if instantaneous
data and not averages are compared. The parallax effect is illustrated in Figure 5. Eumetsat offers a geometrical function for
the correction of parallax effect, which needs only latitude, longitude and the cloud top height (CTH) as input. The CTH

can be estimated from the Brightness Temperature of the window channel at 10.8 nm. The displacement is then calculated based on geometrical (sin cos) functions. This approach works well for the Infrared channels. In the IR the satellite receives
640 mainly the emission from the cloud top if the clouds are not semi-transparent, which can be assumed for a COD larger than 10. Thus, CTH can be used for the needed altitude information for the parallax correction. However, the diffuse part of *SSI* is reflected throughout the cloud and the height needed for the parallax correction can not be assumed to be close to the top of the cloud. Therefore, the parallax correction should only applied to the direct radiation. The application of a parallax correction for direct irradiance was already postulated in 1996 by Beyer et al. (1996). A parallax correction has been implemented in
645 the HelioMont method (Stöckli, 2013; Castelli et al., 2014), but the reduction in the error measures was marginal compared to other more dominant effects (Reto Stöckli, personal communication). One reason might be that for *COD* larger than about 10 direct irradiance is zero. This means that diffuse radiation usually dominates *SSI* in cloudy situations and CTH is not well suited for the correction. Thus, the optimal definition of the cloud height for the parallax correction needs further investigations, in particular empirical studies and RTM calculations for different cloud scenes. Especially since the parallax correction could
650 be more significant in homogeneous terrain. After all, the parallax effect is not a weakness of a specific retrieval method, but results from the viewing geometry. Close to the equator, everything is fine.

7.1.3 Slant column correction

The geostationary orbit leads to slant column viewing geometries at higher latitudes and towards the western and eastern borders of the satellite field of view. As a consequence the "cross section" of the clouds increases significantly, see Figure
655 6 for illustration. Thus, on average the cloud coverage is artificially enhanced at larger satellite zenith angles leading to an underestimation of surface solar radiation. The validation study of Riihelä et al. (2015) provided a clear indication for the underestimation with increasing latitude. Based on ~~that results~~these results, a brief empirical correction has been developed and implemented in SPECMAGIC for the generation of the SARAH 2.1 data set (Pfeifroth et al., 2019c). The correction term for the slant geometry effect is approximated as a function of the satellite zenith angle θ_{sat} :

$$660 \text{ } Corr = 0.1 \cdot ((\cos(\theta_{sat}/1.13))^{1.3})^{-0.9} - 1 \quad (12)$$

The correction term is afterwards applied for $CAL * \theta_{sat}/1.3 < 0.55$ and $CAL > 0.04$

$$CAL = CAL * (1 - Corr) \quad (13)$$

This results in an improved performance of the retrieval, especially in higher latitudes (Pfeifroth et al., 2019). Yet, further empirical studies and RTM calculations are needed to improve the correction of the slant geometry effect. Again this effect
665 is relevant for all methods. The cloud cross section increases also with increasing SZA, but here also the reflection increases as cloud optical thickness is increasing, but the slant viewing geometry of the satellite leads to an artificially increased cloud cover that does not match the ground observations.

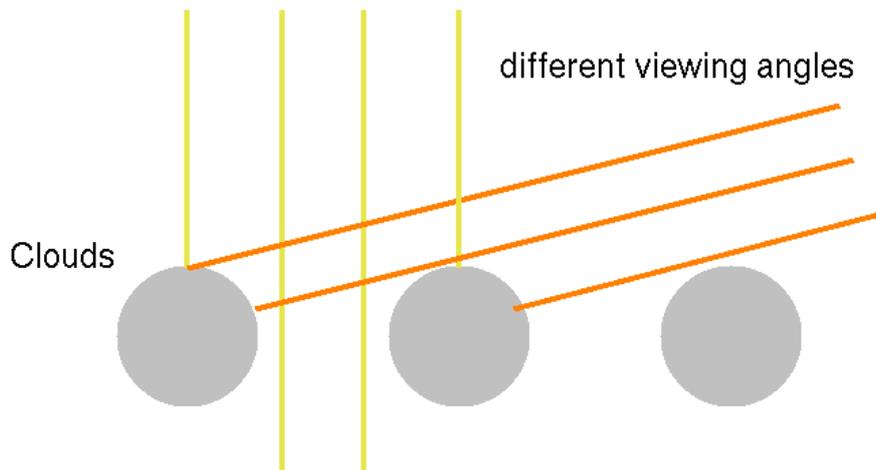


Figure 6. Illustration of the slant geometry effect. For a satellite zenith angle of 0 the cloud coverage would be 0.5, but for the slant geometry it would be 1.

7.1.4 Deep learning - neural networks

Overall, the use of artificial intelligence methods, in particular deep learning (machine learning) with ~~neural networks~~Neural Networks (NN), is also increasing in meteorology. This ~~includes also also includes~~ the estimation of solar surface irradiance from satellites (Senkal, 2009; Yeom et al., 2019; Cornejo-Bueno et al., 2019; Dewitte et al., 2021).

However, a drawback of neural networks is ~~the~~their black box character and the need for retraining for new regions and satellite systems. A neural network is, strictly speaking, only valid for the training framework, as only the behaviour of the training data sets can be reproduced. An application to other regions, periods or satellite instruments typically requires extensive re-training. That is a reason why scientists started to develop spectral transfer functions to ease the adaption of the network to other satellite instruments. However, this means using physical approaches to avoid the need for extensive retraining. Further, the black box character hampers a deeper understanding of the involved physics and consequently the analysis of error sources. Ultimately, it is a complex regression and the term intelligence is somehow misleading. For the retrieval of solar surface irradiance the physics is well defined. Thus, it is not obvious what advantage NN could provide compared to physical approaches. However, a good application of neural networks (NN) might be the replacement of LUTs. This has ~~be~~been done for the retrieval of SIS (e.g. Takenaka et al. (2011)). In this study an algorithm for estimating solar radiation from space using a neural network (NN) to approximate radiative transfer calculations were developed. Similar approaches are also used for other atmospheric variables, e.g. for volcanic ash (Bugliaro et al., 2021). However, with respect to SSI, the burden of cumbersome LUTs, which require hundreds of thousands of RTM calculations, is eliminated by using the hybrid eigenvector LUT concept (Mueller et al., 2009). These LUTs are relatively easy to calculate and to manage. This might reduce the value of NN as re-

placement of LUTs within the scope of SSI. Thus, the authors believe that there is no urgent need to apply neural networks for the retrieval of solar surface radiation, in particular if the CAL approach is used for the retrieval of the cloud transmission.

7.2 The clear sky input data

690 ~~3-Three~~ SAFs are engaged in the retrieval of SSI. EUMETSAT triggered an intensive discussion and interaction between the SAFs in order to exploit synergies. As a consequence, a comparison of the SAF SSI data (Ineichen et al., 2009) was done and several SAF radiation workshops took place. It was discussed that all SAFs use established methods for the retrieval of the cloud transmission, but that there is a need for action on the clear sky input data. Therefore, the clear sky input data is briefly discussed in the following paragraphs.

7.2.1 Ozone:

695 O_3 is a strong absorber and can be well detected from satellites. Data in good quality can be gained from from GOME / SCIAMACHY (Burrows and Chance, 1992), TOMS (Fleig et al., 1986) and the Ozone Measuring Instrument (Ziemke et al., 2011) and the respective follow-up satellites. There is no need to use data in high temporal resolution as the spatial and ~~temporal~~ temporal variation of SSI is dominated by clouds in the meso-scale. Thus, observations based on polar orbiting satellites are not a handicap. Alternatively ozone data from the ECMWF models can be used (Bechtold et al., 2008). However, ~~also climatologies can~~ climatologies can also be used in good approximation for broadband SSI as a deviation of about 150 DU from the US standard atmosphere leads only to changes in SSI of about $\pm 5.5 W/m^2$. This is in the range of the uncertainty of solar irradiance measurements (Müller, 2012b). However, the absorption effect of ozone in the UV is very strong and therefore accurate information about the ozone concentration is required for this spectral range.

700

7.2.2 Water vapour:

705 Water vapour (H_2O_g) is a strong absorber and the total column can be well retrieved from satellites. However, H_2O_g can only be retrieved in cloud free skies ~~without~~ without appropriate profile information. Thus, using H_2O_g from satellite is expected to induce a clear sky bias in H_2O_g . Therefore, data from NWP might be the better option as the water vapour channels are assimilated by modern state of the art NWP models (4d-VAR). Thus, this data source is strongly recommended for H_2O_g , e.g. CM SAF is using water vapour information from the ECMWF ~~European Medium-Range Weather Forecasts NWP model~~ NWP model and from the ERA-5 reanalysis (Dee and Uppala, 2009; Betts et al., 2003). Also OSI SAF uses data from ECMWF. The use of climatologies can lead to significant deviations for daily and hourly SSI (broadband) values and is not recommended as a primary choice.

710

7.2.3 Surface Albedo

Satellites are a good source for gridded Surface Albedo (SAL) data. The optimum accuracy for the retrieval of SAL is ~~of~~ about 5 % (Fell et al., 2021; Riihelä and Kallio-Myers, 2020). The accuracy is limited by uncertainties in ADMs, spectral

response functions and calibration of the visible channels. This could lead to different SAL values for different instruments. ~~E.g. For example,~~ during the CM SAF CDOP-1 phase the SAL values derived from MSG and NOAA polar orbiting satellites showed a difference of several per cent albeit identical retrieval methods were applied. Further, SAL can only be retrieved accurately in cloud free skies. This is ~~particular-of-of particular~~ importance for regions with changing snow cover due to fresh snowfall or melting periods as this are the main ~~driver-drivers~~ for huge short-term changes in SAL. ~~Respective changes can not be detected provided there are long lasting clouds.~~ ~~Corresponding changes cannot be detected in case of long-lasting clouds.~~ Snow is associated with high surface albedos and ~~it's-its~~ miss-classification leads to large errors in the retrieved SSI values. The uncertainties of SAL retrievals are discussed in more detail in Shuai et al. (2020); Carrer et al. (2010, 2018) and Fell et al. (2021). They hamper an accurate retrieval of COD , r_{eff} and aerosols. Surface albedo data is available from LSA-SAF
725 COPERNICUS (Geiger et al., 2008; Carrer et al., 2010, 2018), ~~CM-SAF~~ CM SAF (Schulz et al., 2008), COPERNICUS NOAA / NESDIS (Wang et al., 2013), GEWEX (GEWEX-Quarterly) and several other sources. To the knowledge of the authors the best data source for snow coverage is the IMS snow mask ~~Helfrich et al. (2018)~~ (Helfrich et al., 2018), however this mask is provided only in a daily resolution. Again, data from modern NWP models might be a good alternative as satellite information is assimilated. This option should be investigated in more detail.

730 7.2.4 Aerosols

Aerosol information has the highest uncertainty among the atmospheric clear sky ~~parameter~~ parameters. This results from the gap of a dense ground based network and the limitations of satellite retrieval methods. The Aeronet network ~~provide~~ provides high quality data, but the station density is too low to gain an accurate gridded data set. Satellite based AOD can not fill this gap as the retrieval of aerosols (AOD and type) is ill-posed. The reflection signal is weak compared to that of SAL and
735 clouds. Therefore, quite accurate cloud screening and accurate spectral resolved information of the surface reflection is needed. However, optical thin cirrus clouds are hard to detect and the uncertainty of SAL retrieval is in the same order of magnitude as the signal from aerosols for low to medium aerosol loads (RTM study CM SAF, not published). Further, for a given AOD the reflection depends also on the composition and the shape of the aerosols (aerosol type), and ~~visa-vice~~ versa. Absorbing aerosols (e.g. urban aerosols) tend to lead to a reduction of the reflection for increasing AOD whereas scattering aerosols (desert, rural,
740 maritime...) lead to a significant increase in the reflection (Müller et al., 2016). Unfortunately, the possibilities for the accurate retrieval of aerosol composition and shape from operational satellites is very limited. ADMs/BRDFs are needed for the retrieval as well. Although, significant progress has been made using MODIS data (Lipponen et al., 2018), accurate estimation of aerosol information is still a great challenge. MODIS is ~~equiped~~ equipped with a blue (dark) channel which favours the retrieval of aerosols as SAL is ~~relativ~~ relatively dark over vegetated surfaces in this wavelength region. However, accurate calibration is a
745 serious challenge in the blue channels due to the exposure with UV, leading to ageing of the optical devices (e.g. the diffuser). In summary, satellite based aerosol data comes with serious uncertainties and the aerosol information is only provided for cloud free skies, yet, ~~the AOD depends~~ for hygroscopic aerosols the AOD depends on the relative humidity (Hess et al., 1998) and thus changes with cloudiness. Based on the validation results and RTM studies of CM SAF, the authors are not aware of any aerosol data set that captures the temporal and spatial variation of AOD with ~~a higher accuracy of an accuracy higher~~

750 than approximately ± 0.1 . This might explain why amazingly good accuracy of SSI can be gained over Europe with a fixed visibility of about 23 km (Ineichen et al., 2009). Within this scope it is important to consider that the variation in AOD is on average ~~relative~~ relatively low in many regions compared to its uncertainties, and that 23 km visibility is a reasonable climatological assumption (see Aeronet measurements and Müller et al. (2016)). Thus, accurate information of the spatial and temporal aerosol distribution are needed to beat on average climatological values or fixed visibilities. As a result of the disadvantages of the individual data sources (i.e. ground based measurements, satellite based data sets and chemical transport models) a reasonable way forward might be the use of aerosol information from data assimilation, the combination of numerical modelling, satellites and ground based measurements. At least for the CALSAT methods it has been shown that this approach has ~~a~~ great potential to provide better aerosol data sets (Mueller and Träger-Chatterjee, 2014; Müller et al., 2016). Therefore, MACC reanalysis data (Inness et al., 2013) was used for the generation of the CM SAF SARA data sets e.g. (Müller et al., 2015; Mueller and Trentmann, 2015; Pfeifroth et al., 2019b). The research and developments of the MACC projects went into the Copernicus Atmosphere Monitoring Service (CAMS) ?, which was implemented by ECMWF as part of the Copernicus Programme. Thus, CAMS is some kind of successor of MACC and a very valuable source for aerosol information. CAMS provides reanalysis as well as forecast data. The MACC procedure consists of a forward model for aerosol composition and dynamics (Morcrette et al., 2009) and a data assimilation procedure (Benedetti et al., 2009). The data set is available at MACC- 765 Weblink and has been used to assess the radiative forcing by aerosols (Bellouin et al., 2013). It is recommended to consider this data set for aerosol information within the retrieval of SSI. Yet, for CAL methods, a specific feature enters the door. High fluctuations of desert aerosols (and ~~familiar~~ related types) relative to the background ~~, e.g. as~~ aerosol load, such as those induced by desert storms, are interpreted as clouds ~~, because~~ because the reflection is significantly increased compared to clear sky reflection. This has to be considered and a modification of the used aerosol information might be of benefit for CAL methods. 770 An respective approach is presented and discussed in more detail in Müller et al. (2016).

7.2.5 Turbidity

Until the ~~Helioat-3~~ Heliosat-3 project Linke turbidity was usually used as input for the clear sky model applied within Heliosat methods (Ineichen and Perez, 2002; Beyer et al., 1996; Cano et al., 1986; Rigollier et al., 2004; Perez et al., 2001) instead of separate aerosols and water vapour information. However, the use of Linke turbidity has a serious disadvantage. For the 775 accurate calculation of the ratio between diffuse and direct irradiance, information of the aerosol type and the aerosol optical depth are required (Mueller et al., 2004). An exact ratio of direct and diffuse radiation is essential for an accurate estimation of the irradiation on tilted surfaces that are typical for PV systems. The use of turbidity was therefore in contradiction to the aims of the Heliosat-3 project to support the solar energy community in its efforts for increasing the efficiency and cost-effectiveness of solar energy systems and improving the acceptability of renewables. Therefore, RTM based methods were 780 developed (Mueller et al., 2004) in the Heliosat-3 project, which are able to consider the effect of AOD and aerosols type, water vapour as well as ozone separately. These ~~concept~~ concepts and input information were already used in the climate community (Gupta et al. (1999) and references therein). Thus, nowadays a clear sky model or parameterisation should be able to use the full set of information of the dominant atmospheric variables, aerosol optical depth and aerosol type, water vapour

content and ozone. See Mueller et al. (2004) for further discussions and details. However, as a result of the uncertainties in
785 aerosol information the use of well calibrated ground based turbidity data lead still to remarkable good results.

7.2.6 Satellite

The new satellite generations (GOES, HIMAWARI, Meteosat Third Generation) offer a higher spatial and temporal resolution and are ~~equiped~~equipped with more spectral channels. These features ~~enables~~enable a better distinction between clouds and snow. Overall, it can be expected that the new satellite generations will increase the accuracy of solar surface radiation data. A
790 particular new feature for Remote Sensing in Europe and Africa is the blue channel available with Meteosat Third Generation. In this wavelength spectrum most land surface types can be assumed to be dark surfaces. This in turn enables a more accurate retrieval of aerosol from geostationary satellites, because, their is a better option to estimate the aerosol type and the absolute errors induced by surface albedo are minimised. Further details of the enhanced features can be found on the MTG web page (MTG-Weblink).

795 8 Conclusions

Satellite-based remote sensing of solar surface irradiance (SSI) is a key component in monitoring and predicting the state of the earth's atmosphere and is also of great importance for the planing, monitoring and operation of solar energy systems.

The effective cloud albedo CAL , also ~~reffered~~referred to as cloud index ~~ore~~or effective cloud fraction, can be retrieved directly from the radiances observed by the weather satellites without the need of any modelling or external ~~informaion~~
800 information (Mueller et al., 2011). The respective CALSAT approach was initially developed by Möser and Raschke (1984); Cano et al. (1986) and Diekmann et al. (1988). The basic relationship between observed radiances and the ~~effectiee~~effective cloud albedo (equation 7) is still the basis for state of the art retrievals and for estimating SSI with an accuracy close to that of well-maintained ground-based stations (Dürr and Zelenka, 2009; Posselt et al., 2011b; Mueller et al., 2012a; Müller et al., 2015; Castelli et al., 2014; Pfeifroth et al., 2019b).

805 There are good reasons why the CALSAT approach is still very prominent and widely used. It is based on the physical law of energy conservation and takes full benefit of the satellite observations for the retrieval of the cloud transmission. There is no need for any ADM simulation or external information of the surface albedo or to ~~asssume~~assume that clouds are ~~plane-parall~~plane-parallel. Only the observed reflections are needed to define the effective cloud albedo and thus the cloud transmission. This reduces the uncertainty induced by 3rd party information or assumptions needed to model fluxes, which in
810 turn are necessary for the indirect methods.

Therefore, the authors ~~do not see any~~see no advantage in using indirect ways, e.g. ~~to retrieve using~~using COD and r_{eff} ~~for the estimation of the cloud transmission to estimate cloud transmission as part of the SSI retrieval~~. For the retrieval of COD and r_{eff} at least two visible channels are needed, which are not available for for Meteosat First Generation satellites as the MVIRI instrument is equipped with only ~~on~~one visible channel. This is a serious limitation for the generation of climate data records.
815 CAL can be derived from all Meteosat satellite generations and can be easily adapted to other satellite systems. However,

CALSAT methods provide only information about the cloud transmission, but not about the micro-physical cloud properties. If micro-physical quantities of clouds are needed or of interest then retrieval methods based on COD and r_{eff} are the ~~preliminary~~ first choice. Depending on the area of application, it can then also be useful to use COD and r_{eff} for the determination of the solar surface radiation in order to obtain a consistent data set.

820 Concepts developed within HELIOSAT-3 (Mueller et al., 2004) went eventually ~~in~~ into the development of the methods MAGIC (Mueller et al., 2009, 2011; Posselt et al., 2011b) and SPECMAGIC (Mueller et al., 2012a). In these methods the cloud transmission derived with the CALSAT approach is coupled with RTM-LUT based clear sky model. In this way, the advantages of the CALSAT approach can be fully exploited and at the same time the complete clear sky information can be used instead of only turbidity. The concept of eigenvector hybrid LUTs (Mueller et al., 2009) enable a significant reduction of the needed
825 RTM calculations and is ~~recommended therefore~~ therefore recommended. SPECMAGIC was used for the generation of the first CDR of spectral resolved irradiance and is the basis of all CM SAF SARA data sets.

Of course, satellite retrievals ~~has also~~ also have limitations. That is the reason why during the last decades several extensions ~~has~~ have been done to improve the CALSAT based methods, including a specific and powerful method for mountains, the Heliomont method (Dürr and Zelenka, 2009; Stöckli, 2013). The improvements of the method cover parallax correction,
830 slant geometry correction, snow-cloud differentiation, calibration and correction of shadowing effects. Although, ~~significantly~~ significant improvements have been achieved more studies and ~~works~~ work are needed to gain further improvements. However, it is likely that significant increase of the SSI quality can be gained from an improved accuracy of information in cloud-free skies, in particular concerning aerosol optical depth and type (Müller et al., 2016). For the clear sky input, due to the extension and further development of data assimilation, ECMWF data might be the best choice. Finally, the upcoming satellite genera-
835 tions, having a higher resolution and more spectral channels, will likely contribute to the further improvement of atmospheric input information and retrieval schemes.

Code and data availability. The near real time and forecast data is available at opendata.dwd.de/weather/satellite/radiation/, the CDRs at wui.cmsaf.eu, the code is available on request (GPL license). Please contact Richard.Mueller@dwd.de

Meaning of eigenvector approach

840 Appendix

Meaning of eigenvector approach

A process is called independent of other atmospheric processes if for a given deviation of an atmospheric variable (here water vapour for example) a unique scalar t_{H_2O} can be defined which fulfils the following equation.

$$RTM_{\delta H_2O} I_0 = t_{H_2O} \cdot I_0 \quad (1)$$

845 I_0 is the extraterrestrial irradiance and $RTM_{\delta H_2O}$ is an operator, describing the effect of deviations in water vapour on I_0 . For every $RTM_{\delta H_2O}$ a unique t_{H_2O} exists which depends only on the amount of water vapour and on no other atmospheric variable. The value of t describes the atmospheric transmission. The atmospheric transmission of the operator $RTM_{\delta H_2O}$ depends only on the amount of water vapour. t_{H_2O} can therefore be interpreted as eigen-value of the operator $RTM_{\delta H_2O}$ and I_0 as “eigenvector”.

850 For aerosols this is not the case, because no eigenvalue exists. Hence,

$$RTM_{\delta AOD} I_0 \neq t_{aod} \cdot I_0 \quad (2)$$

For equal δAOD not a unique but different t_{aod} values exist, as t depends on the value of aod (aerosol optical depth), ssa (single scattering albedo) and gg (asymmetry factor). The transmission for a given aod depends also on the values for ssa and gg.

855 For the surface albedo, Equation 1 is also valid not for the extraterrestrial irradiance but the surface irradiance:

$$\delta SAL I_{surf} = t_{H_2O} \cdot I_{surf} \quad (3)$$

C-code calibration method

C-code lines for the calculation of (ρ_{cal}) used for the calibration of the visible channels of the Meteosat instruments.

```
heapsort(kendl,fper);
860 int pm=(int)(0.95*(kendl+1));
int pmm=(int)(0.9999*(kendl+1));
for (kkk=pm; kkk < pmm; kkk += 1){
Rmaxsum += fper[kkk];
Rnum += 1;
865 }
rho_cal=1.1*Rmaxsum/Rnum;
```

Author contributions. Richard Müller wrote the manuscript. Uwe Pfeifroth contributed to the writing.

Competing interests. We declare that we have no competing interest at present.

Acknowledgements. We thank the CM SAF team for ~~the support of the development and generation of the solar surface irradiance data sets~~ assistance in developing and generating the surface solar irradiance datasets and EUMETSAT for ~~the funding of funding~~ CM SAF. ~~Further~~ ~~we~~ We also thank our families for their support, which ~~enabled us to make our studies~~ made our studies possible.

References

- Alexandri, G., Georgoulas, A., and Balis, D.: Effect of Aerosols, Tropospheric NO₂ and Clouds on Surface Solar Radiation over the Eastern Mediterranean (Greece), *Remote Sensing*, 13, <https://doi.org/doi.org/10.3390/rs13132587>, 2021.
- 875 Amillo, A. M. G., Huld, T., and Müller, R.: A New Database of Global and Direct Solar Radiation Using the Eastern Meteosat Satellite, *Remote Sensing*, 6, 8165–8189, <https://doi.org/10.3390/rs6098165>, 2014.
- Amillo, A. M. G., Huld, T., Vourlioti, P., Müller, R., and Norton, M.: Application of Satellite-Based Spectrally-Resolved Solar Radiation Data to PV Performance Studies, *Energies*, 8, 3455–3488, <https://doi.org/10.3390/en8053455>, 2015.
- Amillo, A. M. G., Ntsangwane, L., Huld, T., and Trentmann, J.: Comparison of satellite-retrieved high-resolution solar radiation datasets for
880 South Africa, *Journal of Energy in Southern Africa*, 29, 2018.
- Antonanzas, J., Osorio, N., Escobar, R., Urraca, R., Martinez-de Pison, F., and Antonanzas-Torres, F.: Review of photovoltaic power forecasting, *Solar Energy*, <https://doi.org/10.1016/j.solener.2016.06.069>, 2016.
- Babst, F., Mueller, R., and Hollmann, R.: Verification of NCEP Reanalysis Shortwave Radiation with Mesoscale Remote Sensing Data, *Geosciences and Remote Sensing Letters*, 5, 34–38, <https://doi.org/10.1109/LGRS.2007.907537>, 2008.
- 885 Barbieri, F., Rajakaruna, S., and Gosh, A.: Very short-term photovoltaic power forecasting with cloud modeling: A review, *Renewable and Sustainable Energy Reviews*, 75, 242–263, <https://doi.org/10.1016/j.rser.2016.10.068>, 2017.
- Bechtold, P., Köhler, M., Jung, T., Doblas-Reyes, F., Leutbecher, M., Rodwell, M. J., Vitart, F., and Balsamo, G.: Advances in simulating atmospheric variability with the ECMWF model: From synoptic to decadal time-scales, *Quarterly Journal of the Royal Meteorological Society*, 134, 1337–1351, <https://doi.org/10.1002/qj.289>, 2008.
- 890 Behr, H., Hollmann, R., and Müller, R.: Surface radiation at sea: Validation of satellite-derived data with shipboard measurements, *Meteorologische Zeitschrift*, 18, 61 – 74, <https://doi.org/10.1127/0941-2948/2009/356>, 2009.
- Bellouin, N., Quaas, J., Morcrette, J.-J., and Boucher, O.: Estimates of aerosol radiative forcing from the MACC re-analysis, *Atmos. Chem. Phys.*, 13, 2045–2062, <https://doi.org/10.5194/acp-13-2045-2013>, 2013.
- Benedetti, A., Morcrette, J.-J., Boucher, O., Dethof, A., Engelen, R., Fisher, M., Flentje, H., Huneeus, N., Jones, L., Kaiser, J., Kinne,
895 S., Mangold, A., Razinger, M., Simmons, A., and Suttie, M.: Aerosol analysis and forecast in the European Centre for Medium-Range Weather Forecasts Integrated Forecast System: 2. Data assimilation, *J. Geophys. Res.*, 114, <https://doi.org/10.1029/2008JD011235>, 2009.
- Betcke, J., Kuhlemann, R., Hammer, A., Drews, A., Lorenz, E., Girodo, M., Heinemann, D., Wald, L., Cros, S., Schroedter-Homscheidt, M., Holzer-Popp, T., Gesell, G., Erbertseder, T., Kosmale, M., Hildenbrand, B., Dagestad, K.-F., Olseth, J., Ineichen, P., Reise, C., and Krebs, W.: Energy-Specific Solar Radiation Data from Meteosat Second Generation (MSG): The Heliosat-3 Project, Final Report,
900 <https://doi.org/10.13140/RG.2.1.2054.6406>, 2006.
- Betts, A. K., Ball, J. H., Bosilovich, M., Viterbo, P., Zhang, Y., and Rossow, W. B.: Intercomparison of water and energy budgets for five Mississippi subbasins between ECMWF re-analysis (ERA-40) and NASA Data Assimilation Office fvGCM for 1990-1999, *J. Geophys. Res.*, 108, 000–000, <https://doi.org/10.1029/2002JD003127>, 2003.
- Beyer, H., Costanzo, C., and Heinemann, D.: Modifications of the Heliosat procedure for irradiance estimates from satellite images, *Solar Energy*, 56, 207–212, [https://doi.org/10.1016/0038-092X\(95\)00092-6](https://doi.org/10.1016/0038-092X(95)00092-6), 1996.
- 905 Bird, R. E. and Hulstrom, R. L.: A simplified clear sky model for direct and diffuse insolation on horizontal surfaces, Tech. Rep. Contract No. EG-77-C-01-4042, Solar Energy Research Institute, 1981.

- Bishop, J. and Rossow, W.: Spatial and temporal variability of global surface solar irradiance, *Journal of Geophysical Research*, 96, 839–858, <https://doi.org/10.1029/91JC01754>, 1991.
- 910 Briegleb, B. and Ramanathan, V.: Spectral and Diurnal Variations in Clear Sky Planetary Albedo, *J. Appl. Meteor.*, 1982.
- Bugliaro, L., Piontek, D., Kox, S., Schmidl, M., Mayer, B., Müller, R., Vázquez-Navarro, M., Peters, D. M., Grainger, R. G., Gasteiger, J., and Kar, J.: Combining radiative transfer calculations and a neural network for the remote sensing of volcanic ash using MSG/SEVIRI, *Natural Hazards and Earth System Sciences Discussions*, 2021, 1–42, <https://doi.org/10.5194/nhess-2021-270>, 2021.
- Burrows, J. P. and Chance, K. V.: SCIAMACHY and GOME: The scientific objectives, *J. Atm. Chem.*, 1715, 502–511, <https://doi.org/10.1117/12.140201>, 1992.
- 915 Cano, D., Monget, J., Albuissou, M., Guillard, H., Regas, N., and Wald, L.: A method for the determination of the global solar radiation from meteorological satellite data, *Solar Energy*, 37, 31–39, [https://doi.org/10.1016/0038-092X\(86\)90104-0](https://doi.org/10.1016/0038-092X(86)90104-0), 1986.
- Carrer, D., Roujean, J.-L., and Meurey, C.: Comparing Operational MSG/SEVIRI Land Surface Albedo Products From Land SAF With Ground Measurements and MODIS, *IEEE Transactions on Geoscience and Remote Sensing*, 48, 1714–1728, <https://doi.org/10.1109/TGRS.2009.2034530>, 2010.
- 920 Carrer, D., Smets, B., Ceamanos, X., and Roujean, J.-L.: Copernicus Global Land Operations Vegetation and Energy, Algorithm theoretical baseline document - surface albedo, copernicus Global Land Operations – Lot 1, CGLOPS-1 Framework, 2018.
- Carrer, D., Ceamanos, X., Moparthy, S., Vincent, C., C. Freitas, S., and Trigo, I. F.: Satellite Retrieval of Downwelling Shortwave Surface Flux and Diffuse Fraction under All Sky Conditions in the Framework of the LSA SAF Program (Part 1: Methodology), *Remote Sensing*, 11, <https://doi.org/10.3390/rs11212532>, 2019.
- 925 Carroll, B. W. and Ostlie, D. A.: An introduction to modern astrophysics, ISBN 978-1-108-42216-1, Cambridge University Press, 2017.
- Castelli, M., Stöckli, R., Zardi, D., Tetzlaff, A., Wagner, J., Belluardo, G., Zebisch, M., and Petitta, M.: The HelioMont method for assessing solar irradiance over complex terrain: Validation and improvements, *Remote Sensing of Environment*, 152, 603 – 613, <https://doi.org/10.1016/j.rse.2014.07.018>, 2014.
- 930 CMSAFpubl: www.cmsaf.eu/SiteGlobals/Forms/Suche/EN/JournalSearch_Form.html?nn=1885934, last accessed on the 25th of September, 2021.
- Cornejo-Bueno, L., Casanova-Mateo, J., Sanz-Justo, S., and Salcedo-Sanz, S.: Machine learning regressors for solar radiation estimation from satellite data, *Solar Energy*, 183, 768–775, <https://doi.org/10.1016/j.solener.2019.03.079>, 2019.
- Cox, S., Gupta, S., Mikovitz, J., Chiacchio, M., Zhang, T., and Stackhouse, P.: The NASA/GEWEX Surface Radiation Budget data set: Results and Analysis, in: *IRS 2004: Current Problems in Atmospheric Radiation*, edited by Fischer, H. and Sohn, B.-J., pp. 419–422, A. Deepa, Hampton, Va, 2004.
- 935 Cox, S., Lope, A., Watson, A., and Jennifer, L. E.: Renewable Energy Data, Analysis, and Decisions: A Guide for Practitioners, Tech. Rep. NREL/TP-6A20-68913, NREL, <https://www.nrel.gov/docs/fy18osti/68913.pdf>, prepared under Task No. WFED.10355.08.01.11, Contract Number DE-AC36-08GO28308, 2018.
- 940 Cros, S., Albuissou, M., and Wald, L.: Simulating Meteosat-7 broadband radiances using two visible channels of Meteosat-8, *Solar Energy*, 80, 361–367, <https://doi.org/10.1016/j.solener.2005.01.012>, 2006.
- Daggash, H. A. and Mac Dowell, N.: Delivering low-carbon electricity systems in sub-Saharan Africa: insights from Nigeria, *Energy Environ. Sci.*, 14, 4018–4037, <https://doi.org/10.1039/D1EE00746G>, 2021.
- Darnell, W., Staylor, W., Gupta, S., Ritchey, N., and Wilber, A.: Seasonal variation of surface radiation budget derived from ISCCP-C1 data, *Journal of Geophysical Research*, 97, 15 741–15 760, <https://doi.org/10.1029/92JD00675>, 1992.
- 945

- Dee, D. P. and Uppala, S.: Variational bias correction of satellite radiance data in the ERA-interim reanalysis, *Quarterly Journal of the Royal Meteorological Society*, 135, 1830–1841, <https://doi.org/10.1002/qj.493>, 2009.
- Deneke, H. and Feijt, A.: Estimation surface solar irradiance from METEOSAT SEVIRI-derived cloud properties, *Remote Sensing of Environment*, 112, 3131–3141, <https://doi.org/10.1016/j.rse.2008.03.012>, 2008.
- 950 Dewitte, S., Cornelis, J., Müller, R., and Munteanu, A.: Artificial Intelligence Revolutionises Weather Forecast, Climate Monitoring and Decadal Prediction, *Remote Sensing*, 13:3209, <https://doi.org/10.3390/rs13163209>, 2021.
- Diekmann, F.-J., Happ, S., Rieland, M., Benesch, W., Czeplak, G., and Kasten, F.: An operational estimate of global solar irradiance at ground level from METEOSAT data: results from 1985 to 1987, *Met. Rdsch.* 41, 41, 65–79, 1988.
- Dobler, A., Müller, R., and Ahrens, B.: Development and evaluation of a simple method to estimate evaporation from satellite data, *Meteorologische Zeitschrift*, 20, 615–623, <https://doi.org/10.1127/0941-2948/2011/0256>, 2011.
- 955 Drücke, J., Borsche, M., James, P., Kaspar, F., Pfeifroth, U., Ahrens, B., and Trentmann, J.: Climatological analysis of solar and wind energy in Germany using the Grosswetterlagen classification, *Renewable Energy*, 164, 1254–1266, <https://doi.org/https://doi.org/10.1016/j.renene.2020.10.102>, 2021.
- Dürr, B. and Zelenka, A.: Deriving surface global irradiance over the Alpine region from METEOSAT Second Generation data by supplementing the HELIOSAT method, *Int. J. Rem. Sens.*, 30, 5821–5841, <https://doi.org/10.1080/01431160902744829>, 2009.
- 960 Dürr, B., Zelenka, A., Müller, R., and Philipona, R.: Verification of CM-SAF and MeteoSwiss satellite based retrievals of surface shortwave irradiance over the Alpine region, *International Journal of Remote Sensing*, 31, <https://doi.org/10.1080/01431160903199163>, 2010.
- EC1: Energy for the Future: Renewable Sources of Energy, Commission of the European Communities, Green Paper for a Community Strategy, COM(96) 576 Final, Brussels, 20.11.1996, 1996.
- 965 EC2: A 2030 framework for climate and energy policies, European Commission: Greenpaper, Brussels, COM(2013) 169 Final, 27.03.2013, 2013.
- Emde, C., Buras-Schnell, R., Kylling, R., Mayer, B., Gasteiger, J., Hamann, U., Kylling, J., Richter, B., Pause, C., Dowling, T., and Bugliaro, L.: The libradtran software package for radiative transfer calculations (version 2.0.1), *Geoscientific Model Development*, 9, 1647–1672, 2016.
- 970 Farahat, A., Kambezidis, H., Almazroui, M., and Ramadan, E.: Solar Potential in Saudi Arabia for Southward-Inclined Flat-Plate Surfaces., *Applied Sciences*, 11, <https://doi.org/10.3390/app11094101>, 2021.
- Fell, F., Bennartz, R., Cahill, B., Lattanzio, A., Muller, J.-P., Schulz, J., Shane, N., Trigo, I., and Watson, G. W.: Evaluation of the Meteosat Surface Albedo Climate Data Record, Tech. Rep. Final Report, Commissioned by EUMETSAT, <https://www.eumetsat.int/media/37708>, 2021.
- 975 Fleig, A. J., Bhartia, P. K., Wellemeyer, G., and Silberstein, D. S.: Seven years of total ozone from the TOMS instrument - a report on data quality, *Geophys. Res. Lett.*, 13, 1355–1358, <https://doi.org/10.1029/GL013i012p01355>, 1986.
- Fontoynt, M., Dumortier, D., Heinemann, D., Hammer, A., Olseth, J., Skartveit, A., Ineichen, P., Reise, C., Page, J., Roche, L., Beyer, H., and Wald, L.: Satellight: An European Programme Dedicated to Serving Daylight Data Computed from Meteosat Images, in: *Proceeding of the Lux Europa Conference*, vol. Amsterdam, Netherlands, 05/97, <http://www.satellight.com/indexgT.htm>, 1997.
- 980 Fountoulakis, I., Kosmopoulos, P., Papachristopoulou, K., Raptis, I.-P., Mamouri, R.-E., Nisantzi, A., Gkikas, A., Witthuhn, J., Bley, S., Moustaka, A., Buehl, J., Seifert, P., Hadjimitsis, D., Kontoes, C., and Kazadzis, S.: Effects of Aerosols and Clouds on the Levels of Surface Solar Radiation and Solar Energy in Cyprus., *Remote Sensing*, 13, <https://doi.org/10.3390/rs13122319>, 2021.

- Gallucci, D., Romano, F., Cersosimo, A., Cimini, D., Di Paola, F., Gentile, S., Gerdali, E., Larosa, S., Nilo, S. T., Ricciardelli, E., and Viggiano, M.: Nowcasting Surface Solar Irradiance with AMESIS via Motion Vector Fields of MSG-SEVIRI Data, *Remote Sensing*, 10, 985 <https://doi.org/10.3390/rs10060845>, 2018.
- Gardner, A., Maclean, I., Gaston, K., and Bütikofer, L.: Forecasting future crop suitability with microclimate data, *Agricultural Systems*, 190, 103084, <https://doi.org/https://doi.org/10.1016/j.agsy.2021.103084>, 2021a.
- Gardner, A. S., Gaston, K. J., and Maclean, I. M. D.: Accounting for inter-annual variability alters long-term estimates of climate suitability, *Journal of Biogeography*, 48, 1960–1971, <https://doi.org/10.1111/jbi.14125>, 2021b.
- 990 Gautier, C., Diak, G., and Masse, S.: A simple physical model to estimate incident solar radiation at the surface from GOES satellite data., *Journal of Climate and Applied Meteorology*, 19, 1005–1012, 1980.
- Geiger, B., Carrer, D., Franchisteguy, L., Roujean, J. L., and Meurey, C.: Land Surface Albedo Derived on a Daily Basis From Meteosat Second Generation Observations, *IEEE Transactions on Geoscience and Remote Sensing*, 46, 3841 – 3856, <https://doi.org/10.1109/TGRS.2008.2001798>, 2008.
- 995 GEWEX-Quarterly: GEWEX Quarterly, www.gewex.org, <https://www.gewex.org/resources/gewex-news/>.
- Gilgen, H., Roesch, A., Wild, M., and Ohmura, A.: Decadal changes in shortwave irradiance at the surface in the period from 1960 to 2000 estimated from Global Energy Balance Archive Data, *Journal of Geophysical Research*, 114, <https://doi.org/10.1029/2008JD011383>, 2009.
- Girodo, M.: Untersuchung von 3-D Wolkeneffekten auf die satelliten-gestützte Berechnung der solaren Einstrahlung, Master's thesis, School of Mathematics and Natural Sciences, University of Oldenburg, 2003.
- 1000 Girodo, M., Mueller, R., and Heinemann, D.: Influence of three-dimensional cloud effects on satellite derived solar irradiance estimation - First approaches to improve the Heliosat method, *Solar Energy*, 80, <https://doi.org/10.1016/j.solener.2005.09.005>, 2006.
- GOES: GOES-R Series Data Book, NOAA - NASA, cDRL PM-14, 2019.
- Govaerts, Y., Clerici, M., and Clerbaux, N.: Operational calibration of the meteosat radiometer VIS band, *IEEE Trans. Geosci. Remote Sens.*, 1005 42, 1900–1914, <https://doi.org/10.1109/TGRS.2004.831882>, 2004.
- Gupta, S., Ritchey, N., Wilber, A., and Whitlock, C.: A climatology of Surface Radiation Budget Derived from Satellite Data, *Journal of Climate*, 12, 2691–2709, [https://doi.org/0.1175/1520-0442\(1999\)012<2691:ACOSRB>2.0.CO](https://doi.org/0.1175/1520-0442(1999)012<2691:ACOSRB>2.0.CO), 1999.
- Gupta, S., Kratz, D., Stackhouse, P., and Wilber, A.: The Langley Parameterized Shortwave Algorithm (LPSA) for Surface Radiation Budget Studies, Tech. Rep. NASA/TP-2001-211272, NASA, 2001.
- 1010 Hammer, A.: Anwendungsspezifische Solarstrahlungsinformationen aus Meteosat-Daten, Phd, School of Mathematics and Natural Sciences, University of Oldenburg, 2000.
- Hammer, A., Heinemann, D., Hoyer, C., Kuhlemann, R., Lorenz, E., Mueller, R., and Beyer, H.: Solar Energy Assessment Using Remote Sensing Technologies, *Remote Sensing of the Environment*, 86, 423–432, [https://doi.org/10.1016/S0034-4257\(03\)00083-X](https://doi.org/10.1016/S0034-4257(03)00083-X), 2003.
- Hammer, A., Kühnert, J., K., W., and Lorenz, E.: Short-term forecasting of surface solar irradiance based on Meteosat-SEVIRI data using a nighttime cloud index, *Remote Sensing*, 7, 9070–9090, 2015.
- 1015 Harries, J., Russel, J., Hanafin, J., Brindley, H., Futyán, J., Rufus, J., Kellock, S., Matthews, G., Wrigley, R., Last, A., Mueller, J., Mossavati, R., Ashmall, J., Sawyer, E., Parker, D., Caldwell, P., Allan, P., Smith, A., Bates, J., Coan, B., Stewart, B., Lepine, D., Cornwall, D., Corney, D., Ricketts, M., Drummond, D., Smart, D., Cutler, R., Dewitte, S., Clerbaux, N., Gonzales, A., Ipe, A., Bertrand, C., Joukoff, A., CrommelYnck, D., Nelms, N., D.T., L.-J., Butcher, G., Smith, L., Szewczyk, Z. P., Mlynczak, P., Slingo, A., Allan, R., and Ringer, M.: 1020 The Geostationary Earth Radiation Budget Project, *BAMS*, 86, <https://doi.org/10.1175/BAMS-86-7-945>, 2005.

- Harrison, E. F., Barkstrom, B. R., Ramanathan, V., Cess, R. D., and Gibson, G. G.: Seasonal Variation of Cloud Radiative Forcing Derived From the Earth Radiation Budget Experiment, *Journal of Geophysical Research*, 95, 18.687–18.703, <https://doi.org/10.1029/JD095iD11p18687>, 1990.
- 1025 Helfrich, S., Min, L., Kongoli, C., Nagdimunov, L., and Rodriguez, E.: Interactive Multisensor Snow and Ice Mapping System Version 3 (IMS V3), Algorithm theoretical basis document, version 2.5, NOAA NESDIS Center for Satellite Applications and Research, 2018.
- Helmert, J., Lange, M., Dong, J., de Rosnay, P., Gustafsson, D., Churulin, E., Kurzeneva, E., Müller, R., Trentmann, J., Souverijns, N., Koch, R., Böhm, U., Bartik, M., Osuch, M., Rozinkina, I., Bettems, J.-M., Samuelsson, P., Marcucci, F., and Milelli, M.: 1st Snow Data Assimilation Workshop in the framework of COST HarmoSnow ESSEM 1404, *Meteorologische Zeitschrift*, 27, 325–333, <https://doi.org/10.1127/metz/2018/0906>, 2018.
- 1030 Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., Schepers, D., Simmons, A., Soci, C., Abdalla, S., Abellan, X., Balsamo, G., Bechtold, P., Biavati, G., Bidlot, J., Bonavita, M., De Chiara, G., Dahlgren, P., Dee, D., Diamantakis, M., Dragani, R., Flemming, J., Forbes, R., Fuentes, M., Geer, A., Haimberger, L., Healy, S., Hogan, R. J., Hólm, E., Janisková, M., Keeley, S., Laloyaux, P., Lopez, P., Lupu, C., Radnoti, G., de Rosnay, P., Rozum, I., Vamborg, F., Villaume, S., and Thépaut, J.-N.: The ERA5 global reanalysis, *Quarterly Journal of the Royal Meteorological Society*, 146, 1999–2049, <https://doi.org/https://doi.org/10.1002/qj.3803>, 2020.
- 1035 Hess, M., Koepke, P., and Schult, I.: Optical properties of aerosols and clouds: The software package OPAC, *Bull. Amer. Meteor. Soc.*, 79, 831–844, [https://doi.org/10.1175/1520-0477\(1998\)079<0831:OPOAAC>2.0.CO;2](https://doi.org/10.1175/1520-0477(1998)079<0831:OPOAAC>2.0.CO;2), 1998.
- Hinkelmann, L. M., Stackhouse, P. W., Wielicki, B. A., Zhang, T., and Wilson, S. R.: Surface insolation trends from satellite and ground measurements: Comparison and challenges, *Journal of Geophysical Research*, 114, <https://doi.org/10.1029/2008JD011004>, 2009.
- 1040 Hollmann, R., Müller, R. W., and Gratzki, A.: CM-SAF surface radiation budget: First results with AVHRR data, *Adv. Space Res.*, 37, 2166–2171, 2006.
- Huld, T. and Amillo, A.: Estimating PV Module Performance over Large Geographical Regions: The Role of Irradiance, Air Temperature, Wind Speed and Solar Spectrum, *Energies*, 8, 5159–5181, <https://doi.org/10.3390/en8065159>, 2015.
- Huld, T., Müller, R., and Gambardella, A.: A new solar radiation database for estimating PV performance in Europe and Africa, *Solar Energy*, 86, 1803–1815, <https://doi.org/10.1016/j.solener.2012.03.006>, 2012.
- 1045 Ineichen, P.: A broadband simplified version of the Solis clear sky model, *Solar Energy*, 82, 758 – 762, 2008.
- Ineichen, P. and Perez, R.: A new airmass independent formulation for the Linke turbidity coefficient., *Solar Energy*, 73, 151–157, [https://doi.org/10.1016/S0038-092X\(02\)00045-2](https://doi.org/10.1016/S0038-092X(02)00045-2), 2002.
- Ineichen, P., Barroso, C., Geiger, B., Hollmann, R., and Mueller, R.: Satellite Application Facilities irradiance products: hourly time step comparison and validation, *International Journal of Remote Sensing*, 30, 5549–5571, <https://doi.org/10.1080/01431160802680560>, 2009.
- 1050 Inness, A., Baier, F., Benedetti, A., Bouarar, I., Chabrilat, S., Clark, H., Clerbaux, C., Coheur, P., Engelen, R. J., Errera, Q., Flemming, J., George, M., Granier, C., Hadji-Lazaro, J., Huijnen, V., Hurtmans, D., Jones, L., Kaiser, J. W., Kapsomenakis, J., Lefever, K., Leitão, J., Razinger, M., Richter, A., Schultz, M. G., Simmons, A. J., Suttie, M., Stein, O., Thépaut, J.-N., Thouret, V., Vrekoussis, M., Zerefos, C., and the MACC team: The MACC reanalysis: an 8 yr data set of atmospheric composition, *Atmospheric Chemistry and Physics*, 13, 4073–4109, <https://doi.org/10.5194/acp-13-4073-2013>, 2013.
- 1055 Iqbal, M.: An introduction to solar radiation, ISBN: 0-12-373750-8, Academic press, 1983.
- Jackson, J. D.: Classical Electrodynamics, ISBN-13:978-0471309321, Wiley, 1998.
- Jäger-Waldau: PV Status Report 2019, Tech. Rep. ISBN 978-92-76-12608-9, Joint Research Center, EN EUR 29938 EN, 2019.

- JMA: Himawari-89 - Himawari Standard Data User's Guide, Japan Meteorological Agency, 1-3-4 Otemachi, Chiyoda-ku, Tokyo, 100-8122 Japan, version 1.3 3 July, 2017, 2017.
- 1060 Journée, M., Müller, R., and Bertrand, C.: Solar resource assessment in the Bebelux by merging Meteosat-derived climat data and ground measurements, *Solar Energy*, 86, 3561–3574, <https://doi.org/10.1016/j.solener.2012.06.023>, 2012.
- Kato, S., Ackerman, T., Mather, J., and Clothiaux, E.: The k-distribution method and correlated-k approximation for a short-wave radiative transfer, *J. Quant. Spectrosc. Radiat. Transfer*, 62, [https://doi.org/10.1016/S0022-4073\(98\)00075-2](https://doi.org/10.1016/S0022-4073(98)00075-2), 1999.
- 1065 Kato, S., Hinkelman, L. M., and Cheng, A.: Estimate of satellite-derived cloud optical thickness and effective radius errors and their effect on computed domain-averaged irradiances, *Journal of Geophysical Research*, 111, <https://doi.org/10.1029/2005JD006668>, 2006.
- Kato, S., Loeb, N. G., Rose, F. G., Doelling, D. R., Rutan, D. A., Caldwell, T. E., Yu, L., and Weller, R. A.: Surface Irradiances Consistent with CERES-Derived Top-of-Atmosphere Shortwave and Longwave Irradiances, *Journal of Climate*, 26, 2719–2740, <https://doi.org/10.1175/JCLI-D-12-00436.1>, 2013.
- 1070 Kulesza, K.: Influence of air pressure patterns over Europe on solar radiation variability over Poland (1986–2015), *International Journal of Climatology*, 41, E354–E367, <https://doi.org/10.1002/joc.6689>, 2021.
- Kulesza, K. and Bojanowski, J. S.: Homogenization of incoming solar radiation measurements over Poland with satellite and climate reanalysis data, *Solar Energy*, 225, 184–199, <https://doi.org/10.1016/j.solener.2021.07.031>, 2021.
- Li, Z., Leighton, H., Masuda, K., and Takashima, T.: Estimation of SW Flux Absorbed at the Surface from TOA Reflected Flux, *Journal of Climate*, 6, [https://doi.org/10.1175/1520-0442\(1993\)006<0317:EOSFAA>2.0.CO;2](https://doi.org/10.1175/1520-0442(1993)006<0317:EOSFAA>2.0.CO;2), 1993.
- 1075 Lipponen, A., Mielonen, T., Pitkänen, M. R. A., Levy, R. C. and Sawyer, V. R., Romakkaniemi, S., Kolehmainen, V., and Arola, A.: Bayesian aerosol retrieval algorithm for MODIS AOD retrieval over land, *Atmospheric Measurements Techniques*, 11, 1529–1547, 2018.
- Loeb, N. G., Kato, S., Loukachine, K., and Manalo-Smith, N.: Angular Distribution Models for Top-of-Atmosphere Radiative Flux Estimation from the Clouds and the Earth's Radiant Energy System Instrument on the Terra Satellite. Part I: Methodology, *Journal of Atmospheric and Oceanic Technology*, 22, 338–351, <https://doi.org/10.1175/JTECH1712.1>, 2005.
- 1080 Lorenz, E., Betcke, J., Drews, A., Heinemann, D., Toggweiler, P., Stettler, S., van Sark, W., Heilscher, G., Wiemken, E., Heydenreich, W., and Beyer, H. G.: PVSAT-2: Intelligent performance check of PV system operation based on satellite data, in: 19th European Photovoltaic Solar Energy Conference, Paris, 2004.
- Lorenz, E., Ruiz-Arias, J., and Wilbert, S.: Forecasting Solar Radiation, Tech. Rep. NREL/TP-5D00-68886, National Renewable Energy Laboratory, NREL Technical Report, 35 pages, 2017.
- 1085 MACC-Weblink: apps.ecmwf.int/datasets/data/macc-reanalysis/levtype=ml.
- Marsouin, A.: Algorithms Theoretical Basis Document for the Geostationary Satellite Radiative Fluxes, Tech. Rep. Version 1.1, OSI-SAF, 2019.
- Mayer, B. and Kylling, A.: Technical note: The libRadtran software package for radiative transfer calculations description and examples of use, *Atmos. Chem. Phys.*, 5, 1855–1877, <https://doi.org/10.1680-7324/acp/2005-5-1855>, 2005.
- 1090 Morcrette, J. J., Boucher, O., Jones, L., Salmond, D., Bechtold, P., Beljaars, A., Benedetti, A., Bonet, A., Kaiser, J. W., Razinger, M., Schulz, M., Serrar, S., Simmons, A. J., Sofiev, M., Suttie, M., Tompkins, A. M., and Untch, A.: Aerosol analysis and forecast in the European Centre for Medium-Range Weather Forecasts Integrated Forecast System: Forward modeling, *J. Geophys. Res.*, 114, <https://doi.org/10.1029/2008JD011235>, 2009.
- 1095 Möser, W.: Globalstrahlung aus Satellitenmessungen, Tech. rep., Mitteilungen aus dem Institut für Geophysik und Meteorologie der Universität zu Köln, 1983.

- Möser, W. and Raschke, E.: Incident Solar Radiation over Europe Estimated from METEOSAT Data, *J. Climate Appl. Meteor.*, 23, 166–170, [https://doi.org/10.1175/1520-0450\(1984\)023<0166:ISROEE>2.0.CO;2](https://doi.org/10.1175/1520-0450(1984)023<0166:ISROEE>2.0.CO;2), 1984.
- MTG-Weblink: Meteosat Third Generation, <https://www.eumetsat.int/meteosat-third-generation>.
- 1100 Mueller, R. and Träger-Chatterjee, C.: Brief Accuracy Assessment of Aerosol Climatologies for the Retrieval of Solar Surface Radiation, *Atmosphere*, 1, 9699–9729, <https://doi.org/10.3390/atmos5040959>, 2014.
- Mueller, R. and Trentmann, J.: Algorithm Theoretical Baseline Document - Meteosat Solar Surface Radiation and effective Cloud Albedo Climate Data Records - Heliosat SARA, Tech. Rep. SAF/CM/DWD/ATBD/METEOSAT_HEL 1.3, Eumetsats CM SAF, https://doi.org/10.5676/EUM_SAF_CM/SARA/V001, 2015.
- 1105 Mueller, R., Dagestad, K., Ineichen, P., Schroedter-Homscheidt, M., Cros, S., Dumortier, D., Kuhlemann, R., Olseth, J., Piernavieja, G., Resie, C., Wald, L., and Heinemann, D.: Rethinking satellite based solar irradiance modelling. The SOLIS clear-sky module, *Remote Sensing of the Environment*, 91, 160–174, 2004.
- Mueller, R., Matsoukas, C., Gratzki, A., Hollmann, R., and Behr, H.: The CM-SAF operational scheme for the satellite based retrieval of solar surface irradiance - a LUT based eigenvector hybrid approach, *Remote Sensing of Environment*, 113, 1012–1024, <https://doi.org/10.1016/j.rse.2009.01.012>, 2009.
- 1110 Mueller, R., Trentmann, J., Träger-Chatterjee, C., Posselt, R., and Stöckli, R.: The Role of the Effective Cloud Albedo for Climate Monitoring and Analysis, *Remote Sensing*, 3, 2305–2320, <https://doi.org/10.3390/rs3112305>, 2011.
- Mueller, R., Behrendt, T., Hammer, A., and Kemper, A.: A New Algorithm for the Satellite-Based Retrieval of Solar Surface Irradiance in Spectral Bands, *Remote Sensing*, 4, 622–647, <https://doi.org/10.3390/rs4030622>, 2012a.
- 1115 Müller, R.: Solar Irradiance, Global Distribution, in: *Encyclopedia of Sustainable Science and Technology*, edited by Meyers, R. A., vol. 1, pp. 9699–9729, Springer, New York, https://doi.org/10.1007/978-1-4419-0851-3_447, 2012b.
- Müller, R., Pfeifroth, U., Träger-Chatterjee, C., Trentmann, J., and Cremer, R.: Digging the METEOSAT Treasure - 3 Decades of Solar Surface Radiation, *Remote Sensing*, 7, 8067–8101, <https://doi.org/10.3390/rs70608067>, 2015.
- Müller, R., Pfeifroth, U., and Träger-Chatterjee, C.: Towards Optimal Aerosol Information for the Retrieval of Solar Surface Radiation Using Heliosat, *Atmosphere*, 6, 863–878, <https://doi.org/10.3390/atmos6070863>, 2016.
- 1120 Müller-Schmied, H., Müller, R., Sanchez-Lorenzo, A., Ahrens, B., and Wild, M.: Evaluation of radiation components in a global freshwater model with station-based observations., *Water*, 8, <https://doi.org/10.3390/w8100450>, 2016.
- Müller, R. W.: *Agrar Meteorology and Radiation*, in: *Encyclopedia of Sustainability Science and Technology*, 978-1-4419-0852-0, Springer, accepted for publication, 2021.
- 1125 Nakajima, T. and King, M.: Determination of the Optical Thickness and Effective Particle Radius of Clouds from Reflected Solar Radiation Measurements. Part I: Theory, *Journal of the Atmospheric Sciences*, 47, [https://doi.org/10.1175/1520-0469\(1990\)047<1878:DOTOTA>2.0.CO;2](https://doi.org/10.1175/1520-0469(1990)047<1878:DOTOTA>2.0.CO;2), 1990.
- Nicodemus, F., Richmond, J., Hsia, J., Gimbsberg, I., and Limperis, T.: Geometrical Consideration and Nomenclature for Reflectance, Tech. rep., U.S. Department of Commerce, National Bureau of Standards, 1977.
- 1130 NREL1: <https://www.nrel.gov/gis/solar.html>.
- NREL2: Standard Tables for References Solar Spectral Irradiance at Air Mass 1.5: Direct Normal and Hemispherical for a 37° Tilted Surface (Withdrawn 2005), www.nrel.gov/grid/solar-resource/spectra-am1.5.html, aSTM International, West Conshohocken, PA, 1998.

- Ohmura, A., Dutton, E. G., Forgan, B., Fröhlich, C., Gilgen, H., Hegner, H., Heimo, A., König-Langlo, G., McArthur, B., Müller, G., Philipona, R., Pinker, R., Whitlock, C. H., Dehne, K., and Wild, M.: Baseline Surface Radiation Network (BSRN/WCRP): New precision radiometry for climate research, *Bull. Amer. Meteor. Soc.*, 79, 2115–2136, 1998.
- OpenDEM-link: https://www.opendem.info/link_dem.html.
- Perez, R., Renne, D., Seals, R., and Zelenka, A.: The strength of satellite-based solar resource assessment, in: *Production of Site/Time-specific Irradiances from Satellite and Ground Data*, Report 98-3, New York State Energy Research and Development Authority, Corporate Plaza West, 286 Washington Avenue Extension, Albany, NY 12203-6399, 1998.
- 1140 Perez, R., Aguiar, R., Collares-Pereira, M., Dumortier, D., Estrada-Cajigal, V., Gueymard, C., Ineichen, P., Littlefair, P., Lund, H., Michalsky, J., Olseth, J., Renne, D., Rymes, M., Skartveit, A., Vignola, F., and Zelenka, A.: Solar resource assessment: A review, in: *Solar Energy - The state of the art*, no. ISBN 1 902916239 in ISES Position Papers, pp. 497–562, James & James Science Publishers, London, 2001.
- Perez, R., Ineichen, P., Moore, K., Kmiecik, M., Chain, C., George, R., and Vignola, F.: A new operational model for satellite-derived irradiances: description and validation, *Solar Energy*, 73, 307–317, [https://doi.org/10.1016/S0038-092X\(02\)00122-6](https://doi.org/10.1016/S0038-092X(02)00122-6), 2002.
- 1145 Peura, M. and Hohti, H.: Optical flow in radar images, In *Proceedings of the Third European Conference on Radar Meteorology (ERAD)*, Visby, Island of Gotland, Sweden, 6-10 September, 2004.
- Pfeifroth, U., Sanchez-Lorenzo, A., Manara, V., Trentmann, J., and Hollmann, R.: Trends and Variability of Surface Solar Radiation in Europe Based On Surface-and Satellite-Based Data Records, *Journal of Geophysical Research: Atmospheres*, 123, 1735–1754, <https://doi.org/10.1002/2017JD027418>, 2018.
- 1150 Pfeifroth, U., Trentmann, J., and Kothe, S.: Validation Report - Meteosat Solar Surface Radiation and Effective Cloud Albedo Climate Data Record SARA-2.1 climate data records, Tech. Rep. SAF/CM/DWD/ATBD/METEOSAT/HEL 2.4, EUMETSATS CM SAF, https://doi.org/10.5676/EUM_SAF_CM/SARA/V002_0, 2019.
- Pfeifroth, U., Trentmann, J., and Kothe, S.: Product User Manual Meteosat Solar Surface Radiation and Effective Cloud Albedo Climate Data Record SARA-2.1 climate data records, Tech. Rep. SAF/CM/DWD/VAL/METEOSAT/HEL 2.4, EUMETSATS CM SAF, https://doi.org/10.5676/EUM_SAF_CM/SARA/V002_01, 2019b.
- 1155 Pfeifroth, U., Trentmann, J., and Kothe, S.: Algorithm Theoretical Baseline Document - Meteosat Solar Surface Radiation and Effective Cloud Albedo Climate Data Record SARA-2.1 climate data records, Tech. Rep. SAF/CM/DWD/VAL/METEOSAT/HEL 2.3, EUMETSATS CM SAF, https://doi.org/10.5676/EUM_SAF_CM/SARA/V002_01, 2019c.
- Pincus, R. and Evans, K. F.: Computational cost and accuracy in calculating three-dimensional radiative transfer: Results for new implementations of Monte Carlo and SHDOM., *Journal of Atmospheric Science*, 66, 3131–3146, <https://doi.org/10.1175/2009JAS3137.1>, 2009.
- 1160 Pinker, R. and Laszlo, I.: Modelling Surface Solar Irradiance for Satellite Applications on a Global Scale, *J. Appl. Meteor.*, 31, 166–170, [https://doi.org/10.1175/1520-0450\(1992\)031<0194:MSSIFS>2.0.CO;2](https://doi.org/10.1175/1520-0450(1992)031<0194:MSSIFS>2.0.CO;2), 1992.
- Pinker, R. T., Fouin, R., and Li, Z.: A review of satellite methods to derive surface shortwave irradiance, *Remote Sensing of Environment*, 51, 108–124, 1995.
- 1165 Pinker, R. T., Zhang, B., and Dutton, E. G.: Do satellites detect trends in surface solar radiation ?, *Science*, 308, 850–854, <https://doi.org/10.1126/science.1103159>, 2005.
- Posselt, R., Mueller, R., Stöckli, R., and Trentmann, J.: Spatial and temporal homogeneity of solar surface irradiance across satellite generations, *Remote Sensing*, 3, 1029–1046, <https://doi.org/10.3390/rs3051029>, 2011a.
- Posselt, R., Mueller, R., Stöckli, R., and Trentmann, J.: Remote sensing of solar surface radiation for climate monitoring - the CM-SAF retrieval in international comparison, *Remote Sensing of Environment*, 118, 186–198, <https://doi.org/10.1016/j.rse.2011.11.016>, 2011b.
- 1170

- Ramanathan, R. and Cess, R. a.: Cloud Radiative forcing and Climate: Results from the Earth Radiation Budget Experiment, *Science*, 243, <https://doi.org/10.1126/science.243.4887.57>, 1989.
- Raza, M. Q., Nadarajah, M., and Ekanayake, C.: On recent advances in PV output power forecast, *Solar Energy*, 136, 125 – 144, <https://doi.org/10.1016/j.solener.2016.06.073>, 2016.
- 1175 Rigollier, M., Lefevre, M., and Wald, L.: The method Heliosat-2 for deriving shortwave solar radiation from satellite images, *Solar Energy*, 77, 159–169, <https://doi.org/10.1016/j.solener.2004.04.017>, 2004.
- Riihelä, A. and Kallio-Myers, V.: Validation Report Surface albedo CLARA Edition 2.1, Tech. Rep. SAF/CM/FMI/VAL/CLARA/SAL 2.4, EUMETSATS CM SAF, https://doi.org/10.5676/EUM_SAF_CM/CLARA_AVHRR/V002_01, 2020.
- Riihelä, A., Carlund, T., Trentmann, J., Müller, R., and Lindfors, A. V.: Validation of CM SAF Surface Solar Radiation Datasets over Finland and Sweden, *Remote Sensing*, 7, 6663–6682, <https://doi.org/10.3390/rs70606663>, 2015.
- 1180 Roebeling, R., Feijt, J., and Stammes, P.: Cloud property retrievals for climate monitoring: Implications of differences between SEVIRI and Meteosat-8 and AVHRR on NOAA-17, *Journal of Geophysical Research*, 111, <https://doi.org/10.1029/2005JD006990>, 2005.
- Rossow, W. and Garder, L.: Cloud Detection Using Satellite Measurements of Infrared and Visible Radiances for ISCCP, *Journal of Climate*, pp. 2341–2369, [https://doi.org/10.1175/1520-0442\(1993\)006<2341:CDUSMO>2.0.CO;2](https://doi.org/10.1175/1520-0442(1993)006<2341:CDUSMO>2.0.CO;2), 1993.
- 1185 Rossow, W. B. and Zhang, Y.-Z.: Calculation of surface and top of atmosphere radiative fluxes from physical quantities based on ISCCP data sets: 2. Validation and first results., *Journal of Geophysical Research*, 100, 1167–1197, <https://doi.org/10.1029/94JD02746>, 1995.
- Schmetz, J., Pili, Tjemkes, P. S., Just, D., Kerkmann, J., Rota, S., and Ratier, A.: An introduction to Meteosat Second Generation (MSG), *Bull. Am. Met. Soc.*, pp. 977–992, [https://doi.org/10.1175/1520-0477\(2002\)083<0977:AITMSG>2.3.CO;2](https://doi.org/10.1175/1520-0477(2002)083<0977:AITMSG>2.3.CO;2), 2002.
- Schulz, J., Albert, P., Behr, H., Caprion, D., Deneke, H., Dewitte, S., Dürr, B., Fuchs, P., Gratzki, A., Hechler, P., et al.: Operational climate monitoring from space: the EUMETSAT satellite application facility on climate monitoring (CM-SAF), *Atmos. Chem. Phys. Discuss*, 8, 8517–8563, <https://doi.org/10.5194/acp-9-1687-2009>, 2008.
- 1190 Selbach, N. and Thies, B.: Operations Report 2021/1 January–June 2021, Tech. Rep. SAF/CM/DWD/OpsRep202101/1, EUMETSATS CM SAF, www.cmsaf.eu, 2021.
- Sengupta, M. and Peter, G.: Evaluation of Clear Sky Models for Satellite-Based Irradiance Estimates, Tech. Rep. NREL/TP-5D00-60735, National Renewable Energy Laboratory, 2003.
- 1195 Senkal, O. and Kuleli, T.: Estimation of solar radiation over Turkey using artificial neural network and satellite data, *Applied Energy*, 86, 1222–1228, <https://doi.org/10.1016/j.apenergy.2008.06.003>, 2009.
- Shuai, Y., Tuerhanjiang, L., Shao, C., Gao, F., Zhou, Y., Xie, D., Liu, T., Liang, J., and Chu, N.: Re-understanding of land surface albedo and related terms in satellite-based retrieval, *Big Earth Data*, 4, 45–67, <https://doi.org/10.1080/20964471.2020.1716561>, 2020.
- 1200 Sirch, T., Bugliaro, L., Zinner, T., Möhrlein, M., and Vazquez-Navarro, M.: Cloud and DNI nowcasting with MSG/SEVIRI for the optimized operation of concentrating solar power plants, *Atmos. Meas. Tech.*, 10, 409–429, <https://doi.org/10.5194/amt-10-409-2017>, 2017.
- Skartveit, A., Olseth, J., and Tuft, M.: An hourly diffuse fraction model with correction for variability and surface albedo., *Solar Energy*, 63, 173–183, [https://doi.org/10.1016/S0038-092X\(98\)00067-X](https://doi.org/10.1016/S0038-092X(98)00067-X), 1998.
- 1205 Sonka, M., Hlavac, V., and Roger, B.: Image Processing, Analysis, and Machine Vision, International Edition, ISBN-13-978-1-133-59360-7, CENGAGE Learning, 2014.
- Stamnes, K., Tsay, S., Wiscombe, W., and Jayaweera, K.: Numerically stable algorithm for discrete-ordinate-method radiative transfer in multiple scattering and emitting layered media, *Applie Optics*, 27, <https://doi.org/10.1364/AO.27.002502>, 1988.
- Stöckli, R.: The HelioMont Surface Solar Radiation Processing, Tech. Rep. 93, Report MeteoSwiss, ISSN: 1422-1381, 2013.

- Szeliski, R.: Computer Vision Algorithms and Applications, ISBN-13: 978-1848829343, Springer, 2011.
- 1210 Takenaka, H., Nakajima, T. Y., Higurashi, A., Higuchi, A., Takamura, T., Pinker, R. T., and Nakajima, T.: Estimation of solar radiation using a neural network based on radiative transfer, *Journal of Geophysical Research: Atmospheres*, 116, <https://doi.org/10.1029/2009JD013337>, 2011.
- Tournadre, B., Gschwind, B., Saint-Drenan, Y.-M., and Blanc, P.: An improved cloud index for estimating downwelling surface solar irradiance from various satellite imagers in the framework of a Heliosat-V method, *Atmospheric Measurement Techniques Discussions*, 2021, 1–30, <https://doi.org/10.5194/amt-2020-480>, 2021.
- 1215 Träger-Chatterjee, C., Mueller, R. W., Trentmann, J., and Bendix, J.: Evaluation of ERA-40 and ERA-interim re-analysis incoming surface shortwave radiation datasets with mesoscale remote sensing data, *Meteorologische Zeitschrift*, 19, 631–640, <https://doi.org/10.1127/0941-2948/2010/0466>, 2010.
- Träger-Chatterjee, C., Müller, R., and Bendix, J.: Analysis of extreme summers and prior late winter/spring conditions in central Europe, *Natural Hazards and Earth System Sciences*, 13, 1243–1257, <https://doi.org/10.5194/nhess-13-1243-2013>, 2013.
- 1220 Träger-Chatterjee, C., Müller, R., and Bendix, J.: Analysis and Discussion of Atmospheric Precursor of European Heat Summers, 2014, <https://doi.org/10.1155/2014/427916>, 2014.
- Trollet, M., Walawender, J. P., Bourles, B., Boilley, A., Trentmann, J., Blanc, P., Lefevre, M., and Wald, L.: Downwelling surface solar irradiance in the tropical Atlantic Ocean: a comparison of re-analyses and satellite-derived data sets to PIRATA measurements, *Ocean Science*, 14, 1021–1056, <https://doi.org/10.5194/os-14-1021-2018>, 2018.
- 1225 UCARteam: Calculating Planetary Energy Balance and Temperature, <https://scied.ucar.edu/earth-system/planetary-energy-balance-temperature-calculate>.
- Urbich, I., Bendix, J., and Müller, R.: A Novel Approach for the Short-Term Forecast of the Effective Cloud Albedo, *Remote Sensing*, 10, <https://doi.org/10.3390/rs10060955>, 2018.
- 1230 Urbich, I., Bendix, J., and Müller, R.: The Seamless Solar Radiation (SESORA) Forecast for Solar Surface Irradiance - Method and Validation, *Remote Sensing*, 11, <https://doi.org/10.3390/rs11212576>, 2019.
- Urbich, I., Bendix, J., and Müller, R.: Development of a Seamless Forecast for Solar Radiation Using ANAKLIM++, *Remote Sensing*, 12, <https://doi.org/10.3390/rs12213672>, 2020.
- Urraca, R., Gracia-Amillo, A. M., Koubli, E., Huld, T., Trentmann, J., Riihelä, A., Lindfors, A. V., Palmer, D., Gottschalg, R., and Antonanzas-Torres, F.: Extensive validation of CM SAF surface radiation products over Europe, *Remote Sensing of Environment*, 199, 117–186, <https://doi.org/10.1016/j.rse.2017.07.013>, 2007.
- 1235 Urraca, R., Gracia-Amillo, A. M., Huld, T., Martinez-de Pison, F. J., Trentmann, J., Lindfors, A. V., Riihelä, A., and Sanz-Garcia, A.: Quality control of global solar radiation data with satellite-based products, *Solar Energy*, 158, 49–62, <https://doi.org/10.1016/j.solener.2017.09.032>, 2017.
- 1240 Urraca, R., Gracia-Amillo, A. M., Martinez-de Pison, F. J., Kaspar, F., and Sanz-Garcia, A.: Evaluation of global horizontal irradiance estimates from ERA5 and COSMO-REA6 reanalyses using ground and satellite-based data, *Solar Energy*, 164, 339–354, <https://doi.org/10.1016/j.solener.2018.02.059>, 2018.
- Urraca, R., Sanz-Garcia, A., and Sanz-Garcia, I.: BQC: A free web service to quality control solar irradiance measurements across Europe, *Solar Energy*, 211, 1–10, <https://doi.org/10.1016/j.solener.2020.09.055>, 2020.

- 1245 Wang, D. D., Liang, S. L., He, T., and Yu, Y. Y.: Direct Estimation of Land Surface Albedo from VIIRS Data: Algorithm Improvement and Preliminary Validation., *Journal of Geophysical Research-Atmospheres*, 118, 12 577–12 586, <https://doi.org/10.1002/2013JD020417>, data available at: <https://www.star.nesdis.noaa.gov/jpss/albedo.php>, 2013.
- Wang, L. and Qu, J.: NMDI: A normalized multi-band drought index for monitoring soil and vegetation moisture with satellite remote sensing, *Geophysical Research Letters*, 34, <https://doi.org/10.1029/2007GL031021>, 2007.
- 1250 Wang, P., Stammes, P., and Mueller, R.: Surface solar irradiance from SCIAMACHY measurements: algorithm and validation, *Atmospheric Measurement Techniques*, 4, 875–891, <https://doi.org/10.5194/amt-4-875-2011>, 2011.
- Wang, P., Sneep, M., Veeffkind, J., Stammes, P., and Levelt, P.: Evaluation of broadband surface solar irradiance derived from the Ozone Monitoring Instrument, *Remote Sensing of Environment*, 149, 88–99, <https://doi.org/10.1016/j.rse.2014.03.036>, 2014.
- Wang, Y., Trentmann, J., Yuan, W., and Wild, M.: Validation of CM SAF CLARA-A2 and SARA-E surface solar radiation datasets over
1255 China, *Remote Sensing*, 10, <https://doi.org/10.3390/rs10121977>, 2018.
- Whitlock, C., Charlock, T., Staylor, W., Pinker, R., Laszlo, I., Ohmury, A., Gilgen, H., Konzelmann, T., DiPasquale, R., Moats, C., LeCroy, S., and Ritchey, N.: First global WCRP shortwave surface radiation budget data set, *Bulletin of American Meteorological Society*, 76, [https://doi.org/10.1175/1520-0477\(1995\)076<0905:FGWSSR>2.0.CO;2](https://doi.org/10.1175/1520-0477(1995)076<0905:FGWSSR>2.0.CO;2), 1995.
- Wild, M.: Global dimming and brightening: A review, *Journal of Geophysical Research*, 114, <https://doi.org/10.1029/2008JD011470>, 2009.
- 1260 Wild, M., Wacker, S., Yang, S., and Sanchez-Lorenzo, A.: Evidence for Clear-Sky Dimming and Brightening in Central Europe, *Geophysical Research Letters*, 48, <https://doi.org/10.1029/2020GL092216>, 2021.
- Wirth, H.: Recent Facts About Photovoltaics in Germany, Tech. rep., ISE Fraunhofer, 2021.
- WMO: Manual on the Global Observing System, WMO-No. 544, Volume I., Geneva, 2010.
- Woick, H., Dewitte, S., Feijt, A., Gratzki, A., Hechler, P., Hollmann, R., Karlsson, K.-G., Laine, V., Loewe, P., Nitsche, H., Werscheck, M., and Wollenweber, G.: The Satellite Application Facility on Climate Monitoring, *Adv. Space Res.*, 30, 2405–2410, [https://doi.org/10.1016/S0273-1177\(02\)80290-3](https://doi.org/10.1016/S0273-1177(02)80290-3), 2002.
- 1265 Wolff, B., Kühnert, J., Lorenz, E., Kramer, O., and Heinemann, D.: Comparing support vector regression for PV power forecasting to a physical modeling approach using measurement, numerical weather prediction, and cloud motion data, *Solar Energy*, 135, 197 – 208, <https://doi.org/10.1016/j.solener.2016.05.051>, 2016.
- 1270 www.opendata.de: Open data server of the DWD, opendata.dwd.de/weather/satellite/radiation.
- Yang, D. and Gueymard, C. A.: Probabilistic post-processing of gridded atmospheric variables and its application to site adaptation of shortwave solar radiation, *Solar Energy*, 225, 427–443, <https://doi.org/10.1016/j.solener.2021.05.050>, 2021.
- Yeom, J., Park, S., Char, T., Kim, J., and Lee, C.: Spatial Assessment of Solar Radiation by Machine Learning and Deep Neural Network Models Using Data Provided by the COMS MI Geostationary Satellite: A Case Study in South Korea., *Sensors*, 19(9):2082, <https://doi.org/10.3390/s19092082>, 2019.
- 1275 Zach, C., Pock, T., and Bischof, H.: A duality based approach for realtime TV-L1 optical flow, vol. 4713 of *Hamprecht, F.A. and Schnörr, C. and Jähne, B Pattern Recognition. DAGM 2007. Lecture Notes in Computer Science.*, pp. 214–223, Springer, Berlin, Heidelberg, https://doi.org/10.1007/978-3-540-74936-3_22, 2007.
- Zhang, Y. C., Rossow, W. B., and Lacis, A. A.: Calculation of surface and top of atmosphere radiative fluxes from physical quantities
1280 based on ISCCP data sets: 1. Method and sensitivity to input data uncertainties, *Journal of Geophysical Research*, 100, 1149–1165, <https://doi.org/10.1029/94JD027470>, 1995.

Ziemke, J. R., Chandra, S., Labow, G. J., Bhartia, P. K., Froidevaux, L., and Witte, J. C.: A global climatology of tropospheric and stratospheric ozone derived from Aura OMI and MLS measurements, *Atmospheric Chemistry and Physics*, 11, 9237–9251, <https://doi.org/10.5194/acp-11-9237-2011>, 2011.