

Evolution under dark conditions of particles from old and modern diesel vehicles, in a new environmental chamber characterized with fresh exhaust emissions

Boris Vansevenant^{1,2,3}; Cédric Louis^{1,2}; Corinne Ferronato³; Ludovic Fine³; Patrick Tassel¹; Pascal Perret¹; Evangelia Kostenidou⁴; Brice Temime-Roussel⁴; Barbara D'Anna⁴; Karine Sartelet⁵; Véronique Cerezo¹; Yao Liu^{1*}

¹EASE, University Gustave Eiffel, Bron, 69500, France

²French Agency for Ecological Transition, ADEME, 49000, Angers

³IRCELYON, University Claude Bernard Lyon 1, Villeurbanne, 69100, France

⁴LCE, Aix-Marseille University, UMR 7376 CNRS, Marseille, 13331, France

⁵CEREA, Joint Laboratory Ecole des Ponts ParisTech/EdF R&D, University Paris-Est, Marne-la Vallée, France

Correspondence to: Yao Liu (yao.liu@univ-eiffel.fr)

Abstract. Atmospheric particles have several impacts on health and environment, especially in urban areas. Part of those particles is not fresh, and has undergone atmospheric chemical and physical processes. Due to a lack of representativeness in experimental conditions, and experimental artifacts such as particle wall losses in chambers, there are uncertainties on the effects of physical processes (condensation, nucleation and coagulation), and their role in particle evolution from modern vehicles. This study develops a new method to correct wall losses, accounting for size-dependence and experiment-to-experiment variations. It is applied to the evolution of fresh diesel exhaust particles to characterize the physical processes which they undergo. The correction method is based on the black carbon decay and a size-dependent coefficient to correct particle distributions. Six diesel passenger cars, Euro 3 to Euro 6 were driven on a chassis dynamometer with Artemis Urban cold start and Artemis Motorway cycles. Exhaust was injected in an 8 m³ chamber with Teflon walls. The physical evolution of particles was characterized during 6 to 10 hours. Condensation occurs-Increase of particle mass in observed even without photochemical reactions, due to the presence of intermediate volatility organic compounds and semi-volatile organic compounds. These compounds were quantified at emission, and induce a particle mass increase up to 17 %·h⁻¹, mainly for the older vehicles (Euro 3 and Euro 4). Condensation is 4 times faster when the available particle surface is multiplied by 36.5. If initial particle number concentration is below [8-9]×10⁴ #·cm⁻³, a nucleation mode seems to be present, but not measured by the SMPS. The growth of nucleation mode particles results in an increase of measured [PN]. it can increase up to 25 %·h⁻¹ due to nucleation or condensation on particles below 14 nm Above this threshold, particle number concentration decreases due to coagulation, up to -27 %·h⁻¹. In those conditions, the chamber and experimental set up are well suited to characterize and quantify the process of coagulation.

1. Introduction

Air pollution is a major concern due to its impacts on climate, environment and health. It has been classified as carcinogenic to humans by the International Agency for Research on Cancer (IARC, 2016). Its effects are greater in urban areas, where pollutants such as fine particles accumulate and present a serious health risk due to human

exposure. Road traffic is an important source of particles in urban environments (Rivas et al., 2020). Many particle-emitting vehicles such as old diesel cars are still present on roads of several countries (EEA, 2020).

40 Freshly emitted particles and gases undergo physical evolutions in the atmosphere, such as nucleation, coagulation and condensation (Seinfeld and Pandis, 2016). Chemical reactions in the gas phase, enhanced by oxidative processes and photochemistry, form organic compounds with lower volatility (Seinfeld and Pandis, 2016). These compounds can undergo the physical processes of condensation and nucleation, leading to Secondary Organic Aerosols (SOA). SOA is estimated to contribute to 50-85 % of the Organic Aerosol (OA) burden (Zhu et al., 2017),
45 and to 30-77 % of PM_{2.5} during haze pollution in China (Huang et al., 2014). Numerous studies focus on particle evolution and SOA formation in the presence of added oxidants and strong UV lights (Chen et al., 2019; Chu et al., 2016; Lambe et al., 2011; Lu et al., 2019; Sbai et al., 2020; Wang et al., 2018b). They aim at characterizing the photooxidation processes of organic compounds during several hours. This might not be thoroughly representative of all atmospheric conditions (Chen et al., 2019). Several situations exist in which particles evolve
50 with limited light (winter rush hours, nighttime, tunnels), and exposure may occur close to traffic (Harrison et al., 2018), shortly after emissions. In those situations, some physical evolutions took place, but not yet oxidation/photooxidation processes. Some studies focused on physical processes only (Giechaskiel et al., 2005; Harrison et al., 2018; Jeong et al., 2015; Kozawa et al., 2012; Morawska et al., 2008; Zhang et al., 2004; Zhang and Wexler, 2004). They are mainly based on the measurement of particles near freeways or from vehicles exhaust
55 plume. These methods enable the study of emissions in real conditions, but are impacted by the presence of external sources and high dilution due to the wind and distant measurement. The presence of external sources (cooking, building, heater, wood burning, biogenic sources...) creates a mixture with the traffic emission. It induces difficulties to evaluate the impact of traffic on atmospheric aerosol. Moreover, few of these studies were conducted in the last decade, resulting in a lack of knowledge on modern vehicles, motorizations and aftertreatment
60 technologies. Some studies focusing on particle physical evolution use a constant volume sampler (CVS) (Louis et al., 2017), but they are limited by the short residence time.

Moreover, the physical processes of condensation and nucleation depend in part on concentrations of gas-phase particle precursors, such as Semi-volatile and Intermediate-Volatility Organic Compounds (SVOCs and IVOCs, respectively). IVOCs can participate in physical evolutions and SOA formation (Sartelet et al., 2018; Xu et al.,
65 2020), but their quantification is impacted by sampling methodology. The uncertainties arise from the effects that dilution and temperature have on the gas-particle partitioning. They also come from the chemical identification to quantify total IVOCs (Xu et al., 2020; Zhao et al., 2016, 2015). This results in a lack of knowledge on their emissions and on the effect of motorization and aftertreatment technologies (Drozd et al., 2019; Zhao et al., 2015). This also impacts the understanding of their role in particle evolutions and the accuracy of atmospheric models
70 (Sartelet et al., 2018; Zhao et al., 2018). More investigations should consequently be conducted to characterize the IVOC and SVOC emissions from modern vehicles equipped with different aftertreatment technologies. The particle physical evolutions during several hours and under controlled experimental conditions should also be investigated. The studies focusing only on vehicle emissions are complementary to those performed near freeways with presence of other sources and with photochemistry. This would help better understand the actual contribution
75 of road traffic to particle pollution.

Laboratory studies on particle evolutions are often performed in atmospheric chambers. They are a good mean of investigating the physical processes of nucleation, condensation and coagulation. The study of those processes

requires information on particle concentrations, size and distributions (Leskinen et al., 2015; Nah et al., 2017; Pierce et al., 2008; Wang et al., 2018a). However, these parameters are affected by leakage and wall deposition due to Brownian diffusion, gravitational settling, turbulence and electrostatic charge of the Teflon walls (Leskinen et al., 2015; Nah et al., 2017; Pierce et al., 2008; Seinfeld and Pandis, 2016; Wang et al., 2018a, 2014). Leakage and wall deposition of particles induce a decrease in particle mass over time. This prevents the analysis of the mass evolutions from condensation or evaporation of organic material onto or from pre-existing particles. Moreover, since wall deposition depends on particle diameter, it affects the distribution evolutions and therefore the ability to quantify the role of coagulation. It also affects the observation of nucleation mode particles. Particle data in chambers therefore need to be corrected for leakage and wall losses.

Some studies (Grieshop et al., 2009; Nah et al., 2017; Pathak et al., 2007) have used size-independent wall losses correction methods. It is usually done with the help of a tracer, such as black carbon, assumed to be reliable, and enabling the consideration of the experiment-to-experiment variations. However, particle wall losses are known to be size-dependent (Charan et al., 2018; La et al., 2016; Leskinen et al., 2015; Pierce et al., 2008; Wang et al., 2018a; Weitkamp et al., 2007). The use of the same correction coefficient to the whole distribution can mislead the observation of processes such as coagulation. Other studies have therefore used size-dependent correction methods (Nah et al., 2017; Pierce et al., 2008; Wang et al., 2018a). They enable a more precise analysis of the processes affecting the size distribution. However, those methods are usually based on the decay of ammonium sulphate particles (Wang et al., 2018a). They assume that their loss rates are the same as those of the studied particles. Furthermore, the loss rate studies cannot be conducted simultaneously with the actual experiments. They are therefore usually carried out before and after the campaign, thus preventing the experiment-to-experiment variations from being accounted for (Wang et al., 2018a).

Firstly, this study presents the characterization of a new 8 m³ cubic chamber with Teflon walls, aimed at studying the physical particle evolutions from a wide range of on-road vehicles. Six diesel vehicles (2 without diesel particle filter (DPF) Euro 3 and Euro 4; 3 Euro 5 with additive DPF or catalyzed DPF; 1 Euro 6 with additive DPF and selective catalytic reducer (SCR)) were tested to develop the new leakage and size-dependent wall loss correction method. Five gasoline vehicles (3 with port fuel injection Euro 3, 4 and 5; 2 Euro 5 with direct injection) were also used. The new leakage and wall loss correction method is based on the complementarity of a tracer (black carbon) and a size-dependent equation to correct wall losses. It accounts for experiment-to-experiment variations.

Secondly, this study presents the emissions and evolutions of particles from the 6 diesel vehicles, Euro 3 to Euro 6, in urban and motorway conditions. Emission factors (EFs) of particle number (PN), particle mass (PM), black carbon (BC), non-methane hydrocarbons (NMHCs) and IVOCs are estimated. They are used to discuss the impact of aftertreatment technologies on emissions and particle evolutions. Moreover, the results of the diesel particle physical evolutions in the chamber under dark conditions are presented. Data are corrected for leakage and wall losses using the new correction method. The physical processes are characterized in the dark in order to better understand their share in particle evolution mechanisms. This study is complementary to those focusing on photochemical processes, to better evaluate the total contribution of road traffic to atmospheric particle pollution.

2. Methods

2.1. Chassis dynamometer

The vehicles are tested on a chassis dynamometer, used to reproduce different driving conditions. The 2 non-power wheels are fixed to the floor, while the 2 power wheels are placed on a rotating 48" roller. The speed can go up to 200 km.h⁻¹, and is given by the driving guide in front of the vehicle. The dynamometer can apply traction or resistance to the wheels to reproduce the effects of inertia, vehicle load, slope, rolling resistance and aerodynamic resistance. A ventilation system is placed in front of the vehicle to avoid over heating of the engine. The air is blown with a flow proportional to the vehicle speed to cool the engine similarly as it would be on road.

2.2. Artemis cycles

The vehicles are tested with the Artemis Urban Cold start (UC) cycle and the Artemis Motorway (MW) cycle (André, 2004). They represent specific driving conditions, typical of urban environments and highways, and are chosen to simulate emissions found within big cities (small streets and urban highways). The speed profiles are given in Fig. A1 for the UC cycle and the MW cycle.

2.3. Vehicles

Dynamometer tests are performed with diesel and gasoline passenger cars (PCs), whose characteristics are given in Table 1. Six diesel vehicles are used in this study: 2 vehicles without DPF, Euro 3 (D1) and Euro 4 (D2); 3 Euro 5 vehicles, 2 with an additive DPFs (D3 and D4) and 1 with a catalyzed DPF (D5); and 1 Euro 6 vehicle (D6) equipped with an additive DPF and a SCR. Five gasoline vehicles are tested: 3 with port fuel injection (PFI), G1 to G3 with standards Euro 3, 4 and 5; 2 Euro 5 with direct injection (DI), G4 and G5.

Table 1: Characteristics of the diesel and gasoline vehicles used in this study for the chamber characterization and the particle evolution.

Diesel vehicles						
Vehicle	D1	D2	D3 (add DPF)	D4 (add DPF)	D5 (cat DPF)	D6 (add DPF and SCR)
Standard	Euro 3	Euro 4	Euro 5	Euro 5	Euro 5	Euro 6
Mass (kg)	1290	1085	1080	1515	1200	1090
Mileage (km)	191612	95982	105823	103000	85617	43919
Aftertreatment technologies	DOC ⁽¹⁾	DOC	DOC + add DPF ⁽²⁾	DOC + add DPF	DOC + cat DPF	DOC + SCR ⁽³⁾ + add DPF
Gasoline vehicles						
Vehicle	G1 (PFI)	G2 (PFI)	G3 (PFI)	G4 (DI)	G5 (DI)	
Injection	PFI ⁽⁴⁾	PFI	PFI	DI ⁽⁵⁾	DI	
Standard	Euro 3	Euro 4	Euro 5	Euro 5	Euro 5	
Mass (kg)	1185	1170	1030	1100	1285	
Mileage (km)	195305	95096	27712	97089	92550	
Aftertreatment technologies	TWC ⁽⁶⁾	TWC	TWC	TWC	TWC	

⁽¹⁾ DOC = Diesel Oxidation Catalyst

⁽²⁾ DPF = Diesel Particle Filter

⁽³⁾ SCR = Selective Catalyst Reducer

⁽⁴⁾ PFI = Port Fuel Injection

⁽⁵⁾ DI = Direct Injection

⁽⁶⁾ TWC = Three-Way Catalyst

2.4. Exhaust gas sampling and injection into the chamber

Exhaust gas is sampled from the tailpipe by an ejector dilutor (Dekati L7, Sapelem 50 NL.min⁻¹, Sapelem 1 NL.min⁻¹). The dilutor works with air which is dehumidified, filtered using HEPA particle filters and activated carbon, and heated at 120 ° using a Fine Particle Sampler (FPS Dekati, 4000). Exhaust gas is diluted between 3 and 20 times, depending on air pressure and ejector dilutor type. The air and exhaust gas are injected into the chamber at the height of 90 cm, through a 2 to 4 m long stainless-steel line. The line is heated at 120 °C to avoid condensation and deposition on its inner surface. The heated line is cleaned after each injection with hot dry clean air, during a couple of hours.

2.5. Environmental chamber

The study of the exhaust particle evolution is performed inside the University Gustave Eiffel UGE 8 m³ cubic chamber. The structure of the chamber is made of aluminum, and the walls are made with a 70 µm thin Teflon film, used because chemically inert. However, it can be electrostatically charged and influence the wall deposition of gas and particles inside the chamber. The theoretical total volume is 8000 L, but it can vary (± 300 L) due to deformation of the walls, depending on inner pressure. To avoid contamination from the outside, the chamber is always kept at a slight overpressure (~ 5 Pa) by injection of clean air. This also compensates the losses by leakage and instrument sampling. This injection induces dilution inside the chamber. The temperature, humidity and relative pressure are continuously monitored. Instruments sample the air of the chamber at the center, at 5 different heights: 20 cm, 60 cm, 100 cm, 140 and 180 cm.

2.6. Cleaning

Before the first experiment, the inner walls of the chamber were cleaned by hand with microfiber cloth. While this removes most particles and gaseous species on the walls, it also induces high electrostatic charge due to friction of the cloth on Teflon. Manual cleaning was therefore only done once. At the end of each experiment, cleaning is performed with injection of dry clean air, with flowrates varying between 150 and 300 L.min⁻¹. Cleaning lasts a minimum of 12 hours, thus renewing the air inside the chamber at least 13 times. Since dilution induces an exponential decrease of the pollutant concentrations, this gives a minimum theoretical percentage of clean air inside the chamber of 99 %.

2.7. Instruments

2.7.1. Gas-phase analysis

Non-Methane Hydrocarbons (NMHCs) are measured either directly from the tailpipe with a Horiba Portable Emissions Measurement System (PEMS) or after a CVS by flame ionization detection with a Horiba analysis system.

IVOCs are collected from the heated line (prior injection into the chamber) by sampling diluted exhaust through stainless steel tubes filled with Tenax TA at a flow rate of 45 mL.min⁻¹. The samples are collected during the entire driving cycle. Collected samples are further analyzed by Automatic Thermal Desorption coupled with Gas Chromatography-Mass Spectrometry detector (ATD-GC-MS). The Markes Unity thermodesorber and a GC6890 gas chromatograph from Agilent fitted with the MS5973 mass spectrometer from Agilent are used. The thermal desorption system consists in a 2-stage desorption. During the first desorption step, the compounds are desorbed

by heating the Tenax TA under a stream of helium and are condensed on a trap filled with adsorbent and maintained at -5 °C. During the second desorption, the second trap is flash-heated to 300 °C for a rapid introduction of the compounds into the chromatographic column. The chromatographic column used is an Agilent HP1MS 30 m × 0.25 mm, 0.25 µm. The mass spectrometer operates in scanning mode at an electron ionization of 70 eV. Mass spectral data are acquired over a mass range of 33-450 amu. Qualitative identification of compounds is based on the match of the retention time and confirmed by matching their mass spectra with those of standards and from the NIST mass spectral library. Quantification is conducted by the external standard method. Known amount (1 µL) of standard solutions of volatile organic compounds (VOCs) and IVOCs are introduced into cleaned Tenax TA tubes, using an automatic heated GC injector. The calibration tubes are analyzed in the same conditions as mentioned before. The chromatogram shows an unresolved complex mixture, mainly composed of co-eluted hydrocarbons which cannot be further separated by a single-dimensional GC. The alkanes (linear and branched) are quantified by SIR-based response factor of these compounds using the fragment of $m/z=57$. The response factor used for quantification of branched alkanes is the one of the compounds with the same number of carbon as its parent chain. The fragment $m/z=83$ is used for the quantification of cyclohexane and of the other cyclic compounds. The fragment $m/z=78$ is used for the quantification of benzene, and $m/z=91$ for other aromatics. The fragment $m/z=128$ is used for the quantification of naphthalene. The compounds from the standard solutions taken for quantification of each identified compound are listed in Table 2. The use of response factors from different compounds than the identified ones can induce some error in their quantification. Over the whole range of IVOCs, this error is estimated to be below 8 % (7.8 % and 0.4 % respectively for 2 urban cycles). For single SVOCs, the errors range from 90 to 98 %. Since all compounds above C22 are quantified using compounds with different carbon numbers (C20 for vehicles D1, D5, and C16 for vehicles D2, D3, D6), the impact on their quantification is important. They are however of the same order for all vehicles, and allow comparison between vehicles and driving conditions.

Table 2: List of the compounds from the standard solutions whose response factors were chosen for quantification of the identified compounds, for vehicles D1, D4 and D5 as well as vehicles D2, D3 and D6. The identified alkanes are sorted by number of carbon atoms in their parent chain: C12 to C16, C17 to C20 and C>20.

Identified compounds	Compounds from standard solutions whose response factor were taken for quantification	
	Vehicles D1 and D5	Vehicles D2, D3 and D6
n-alkanes C12 to C16 b-alkanes with parent chain C12 to C16	dodecane tridecane tetradecane pentadecane hexadecane	dodecane tridecane tetradecane pentadecane hexadecane
n-alkanes C17 to C20 b-alkanes with parent chain C17 to C20	heptadecane octadecane nonadecane eicosane	hexadecane
n-alkanes C>20 b-alkanes with parent chain C>20	eicosane	hexadecane
naphthalene	naphthalene	toluene
cycloalkanes in the IVOC retention time range	cyclohexane	R-cyclohexane
aromatics in the IVOC retention time range with $C \leq 9$	branched benzene (C9)	branched benzene (C9)
aromatics in the IVOC retention time range with $C \geq 10$	branched benzene (C10)	branched benzene (C10)

Linear (n-) and branched (b-) alkanes are classified according to their number of carbon C as an indicator of their effective saturation concentration, according to Zhao et al. (2015). Alkanes with $C < 12$ are considered as VOCs, alkanes from C12 to C22 are considered as IVOCs, and alkanes with $C > 22$ are considered as SVOCs. Also according to Zhao et al. (2015), IVOCs are considered to be the sum of n- and b- alkanes (from C12 to C22), naphthalene, as well as aromatics and cycloalkanes in the same retention time bin as C12-C22 alkanes.

The CO_2 concentration is measured from the chamber using a MIR2M (Environment SA), which samples air at 1.5 L.min^{-1} . The temporal resolution is 1 second, and the analytical uncertainty is 0.001 %.

2.7.2. Particle-phase analysis

Particle concentrations and size distributions are measured with a Scanning Mobility Particle Sizer (SMPS, TSI), composed of an advanced aerosol neutralizer (3087), a Differential Mobility Analyzer (DMA, 3081) column, and a Condensation Particle Counter (CPC, 3775). The sampling flow is 0.3 L.min^{-1} . Classification is based on the particle electrical mobility, and the measurement range goes from 14 to 615 nm. The particle mass is computed, with the assumption that particles are spherical, with an arbitrary density of 1.2 (Barone et al., 2011; Totton et al., 2010). Data are given with a 5 minute time scale, with a 5 % analytic uncertainty.

The black carbon concentration is measured using an AE33-7 aethalometer from Magee Scientific. Air is sampled at 2 L.min^{-1} on filter tape. The black carbon concentration is given by absorption measurements at 880 nm (Andreae and Gelencser, 2006). Data are given with a time-scale of 1 minute.

2.8. Ammonium sulphate experiments

In order to test the wall losses correction method with non-volatile inert seeds, experiments are performed with ammonium sulphate particles. Particles are generated from diluted solutions using an atomizer aerosol generator (TSI, 3079A) at a flow rate of 5 L.min^{-1} during 20 min to 2.5 hours. After injections, particles reached concentrations ranging from 5500 to 50600 $\#.\text{cm}^{-3}$. Characteristics of these experiments are given in Table 3.

Table 3: Characteristics of the ammonium sulphate experiments.

Concentration of solution (mg.L^{-1})	Injection duration (min)	Initial [PN] ⁽¹⁾ ($\#.\text{cm}^{-3}$)	Initial [PM] ⁽²⁾ ($\#.\text{cm}^{-3}$)	Initial mode (nm)
25.0	33	5589	0.5	40.0
50.0	60	8100	0.9	40.0
10.0	24	19197	2.3	41.4
50.0	120	37931	7.2	59.4
10.0	167	50622	17.2	68.5

⁽¹⁾ [PN] = Particle Number concentration ⁽²⁾ [PM] = Particle Mass concentration

2.9. Sum up of the experiments

Table 4 summarizes the experimental conditions for the 6 diesel and the 5 gasoline vehicles. Most experiments are performed under similar conditions and are repeated at least twice. For the D4 and the G3 vehicles, different conditions are tested. The line was heated once at 80°C instead of 120°C , showing no specific influence on particle concentration in the chamber. Also, different ejector dilutions are tested, and show a great impact on the initial particle concentrations in the chamber. An ideal dilution of 8.4 is found, leading to total dilution in the

chamber between 65 and 130. It is considered ideal for the sake of this study since it enables to have diluted exhaust giving particles concentrations covering a wide range, depending on emissions. This variety in initial particle concentration is important to study the influence of initial concentration on particle evolution.

Table 4: Sum up of the conditions for the diesel and gasoline experiments.

Vehicle	Standard	Line temp (°C)	Ejector dilution	Artemis Urban Cold Start		Artemis Motorway	
				Number of cycles	Total dilution	Number of cycles	Total dilution
Diesel vehicles							
D1	Euro 3	120	8.4	2	97	3	65
D2	Euro 4	120	8.4	2	97	3	130
D3 (add DPF)	Euro 5	120	8.4	2	97	2	65-130
D4 (add DPF)	Euro 5	80-120	2.3-15.0	2	19-387	1	26
D5 (cat DPF)	Euro 5	120	8.4	2	97	2	65
D6 (add DPF and SCR)	Euro 6	120	8.4	1	97	1	65
Gasoline vehicles							
G1 (PFI)	Euro 3	120	8.4	1	97	3	65
G2 (PFI)	Euro 4	120	8.4			1	130
G3 (PFI)	Euro 5	120	2.3-8.4	3	19	4	13-130
G4 (DI)	Euro 5	120	8.4	2	97	2	130
G5 (DI)	Euro 5	120	8.4	2	97	1	130

2.10. Chamber characterization

2.10.1. Mixing time

During injection inside the chamber, turbulence is induced due to the flow of exhaust gas, and the mixture is not homogeneous right after the end of injection. Moreover, to avoid the increase of particle deposition surface and turbulence (Crump et al., 1982; Nomura et al., 1997), there is no fan system to make the mixture homogeneous. To determine the necessary time to have a homogeneous mixture inside the chamber, CO₂ is injected, and the concentration is measured at 3 of the 5 sampling heights of the chamber: the bottom one (20 cm), the middle one (100 cm) and the top one (180 cm). The average concentration over the 5 sampling heights is also monitored during injection of CO₂.

2.10.2. Leakage

Leakage describes the loss of pollutants and air due to overpressure, through the corners and door of the chamber. The leak rate is quantified experimentally using 2 complementary methods. The first method, called “pressure method”, uses injection of air inside the chamber. A constant flow of air is injected at a precise value. Simultaneously, pressure is monitored, and when it gets stable, it means that the flow of air exiting the chamber (e.g. leak flow) is the same as the one injected. This experiment is realized with different flow rates from 0.1 L.min⁻¹ up to 6.0 L.min⁻¹.

The second method uses measurement of the CO₂ concentration, and is referred to as the “CO₂ method”. High concentrations of CO₂ are injected inside the chamber, and the concentration decay is observed at constant

pressure. This method was used by Papapostolou et al. (2011) with the CO decay. The CO₂ concentration decreases exponentially due to dilution by compensation of air injected into the chamber, and to leakage at a given relative pressure varying between 0.17 Pa and 18.42 Pa. The decay coefficient is converted into a leak flow, expressed in L.min⁻¹, thus allowing comparison with the “pressure-method” results. The leak flow (F_{leak}) can also be expressed as a leak rate ($Rate_{leak}$), given as the percentage of the total volume exiting the chamber in 1 hour, according to Eq. (1).

$$Rate_{leak}(\%vol. h^{-1}) = \frac{100 \times 60 \times F_{leak}}{8000} \quad (1)$$

2.10.3. Wall losses

The leakage and size-dependent wall loss correction method presented in this study is based on 4 consecutive steps. Step 1 consists in correcting total [PM] using the decay of the black carbon concentration [BC]. During step 2, the particle distribution is corrected using a size-dependent wall loss coefficient. This coefficient is based on the theory of Crump and Seinfeld (1981), with an arbitrary estimation of the turbulence. Step 3 consists in optimizing the turbulence parameter k_e to fit corrected data with results of step 1. Finally, step 4 is the computation of the total particle number and mass corrected concentrations.

- **Step 1: [PM] correction using [BC]**

The first step consists in correcting the total particle mass, using BC as a tracer for primary particle emissions, as done by Grieshop et al. (2009). As BC is an inert compound (Platt et al., 2013; Wang et al., 2018a), the decay of its concentration is due to leakage and wall deposition, with a loss rate k_{BC} . By assuming that particles are internally mixed, total particle mass has the same loss rate as BC (Grieshop et al., 2009; Hennigan et al., 2011; Platt et al., 2013). This assumption can induce some uncertainty if the loss rate is size-dependent (Wang et al., 2018a). Still, it appears to be a good estimation of the [PM] losses due to leakage and wall losses, and has been used in several chamber studies (Grieshop et al., 2009; Hennigan et al., 2011; Platt et al., 2013). A corrected PM concentration can thus be obtained at all times of each experiment (~~Grieshop et al., 2009; Hennigan et al., 2011; Platt et al., 2013~~) with Eq. (2).

$$[PM]_{corrected}^{step1}(t) = [PM]_{measured}(t) \times \exp(k_{BC} \times t) \quad (2)$$

For some experiments, the decay of [BC] cannot accurately be fitted by a 1st order exponential decay. In those cases, the term $\exp(k_{BC} t)$ is replaced by $[BC]_{t0}/[BC]_t$. This has no consequences on the corrected [PM], since the term $\exp(k_{BC} \times t)$ in Eq. (2) is equal to $[BC]_{t0}/[BC]_t$ assuming a 1st order exponential decay. Both corrections are therefore equivalent, the only goal being to simulate the [BC] evolution as well as possible.

This corrected concentration $[PM]_{corrected}^{step1}(t)$ represents the evolution of particle mass due to nucleation or condensation/evaporation of organic material. Particles lost to the walls are assumed to be at equilibrium with suspended ones (Grieshop et al., 2009).

- **Step 2: Particle-size-dependent correction**

The second step consists in correcting particle mass and number concentration, accounting for the size-dependence of wall deposition (Charan et al., 2018; Leskinen et al., 2015; Pierce et al., 2008; Wang et al., 2018b, 2018a). The aerosol wall deposition rate due to turbulent diffusion, Brownian diffusion and gravitational sedimentation is given

in Eq. (3) (Corner and Pendlebury, 1951; Crump and Seinfeld, 1981). It is given for a cubic chamber of side length L, as a function of particle diameter D_p .

$$\beta_i(D_p) = \frac{1}{L} \times \left[\frac{8\sqrt{k_e D(D_p)}}{\pi} + v(D_p) \times \coth\left(\frac{\pi v(D_p)}{4\sqrt{k_e D(D_p)}}\right) \right] \quad (3)$$

With:

- i the SMPS particle size channel of geometric midpoint diameter D_p
- k_e the eddy diffusivity coefficient (sec^{-1})
- $D(D_p) = \frac{k_{boltz} T C_c}{3\pi\mu D_p}$ the Brownian diffusivity ($\text{m}^2.\text{sec}^{-1}$)
- $v(D_p) = \frac{D_p^2 \rho_p g C_c}{18\mu}$ the terminal particle velocity ($\text{m}.\text{sec}^{-1}$)
- C_c the Cunningham slip-correction factor $C_c = 1 + \frac{2\lambda}{D_p} \times \left[1.257 + 0.4 \times \exp\left(-\frac{1.1 \times D_p}{2\lambda}\right) \right]$

All terms of this equation, except for k_e , can be found using literature (Crump and Seinfeld, 1981; Seinfeld and Pandis, 2016) and experimental data. They are listed in Appendix B. The k_e coefficient represents the turbulence inside the chamber, induced by the exhaust gas injection, the air flow to compensate leakage and sampling, and electrostatic forces near the walls (Charan et al., 2018; Crump and Seinfeld, 1981; Pierce et al., 2008; Seinfeld and Pandis, 2016; Wang et al., 2018a). As it cannot be measured (Charan et al., 2018), k_e will in a first instance be given an arbitrary value in order to compute $\beta_i(D_p)$. The rate of leakage is taken as defined by Schnell et al. (2006) as the ratio of the flows entering (or exiting) the chamber \dot{V} by the volume of the chamber V : $\alpha = \dot{V}/V$. It follows similar basis to the “pressure method” defined above. It assumes that at constant pressure, the flow of air injected into the chamber is equal to the sum of leakage and of what is sampled by the instruments. It is determined for each experiment, using the flow of air injected into the chamber \dot{V} ($\text{L}.\text{sec}^{-1}$) and the total volume of the chamber V . The loss of particles due to leakage and wall deposition in each size bin can then be estimated for the arbitrary value of k_e . Assuming that the coefficients α and $\beta_i(D_p)$ are constant over the course of each experiment, the loss process is a first-order exponential decay (Leskinen et al., 2015; Nah et al., 2017; Pierce et al., 2008; Verheggen and Mozurkewich, 2006; Wang et al., 2018a, 2018b, 2014) given by Eq. (4).

$$[PM_i]_{lost}^{step2}(t) \big|_{arbitrary\ k_e} = [PM_i]_{measured}(t_0) \times (1 - e^{-(\alpha + \beta_i) \times t}) \quad (4)$$

By adding this to the measured distribution at time t ($[PM_i]_{measured}(t)$), a distribution corrected for leakage and wall deposition can be obtained. It represents the particle mass distribution evolution, solely due to photochemical and physical processes (Eq. (5)).

$$[PM_i]_{corrected}^{step2}(t) \big|_{arbitrary\ k_e} = [PM_i]_{measured}(t) + [PM_i]_{lost}^{step2}(t) \quad (5)$$

The corresponding total mass concentration can be computed with Eq. (6). The factor 64 comes from the fact that multiple charge corrections are based on a 64-channel resolution (TSI, 2010).

$$[PM]_{corrected}^{step2}(t)|_{arbitrary\ k_e} = \frac{\sum [PM_i]_{corrected}^{step2}(t)|_{arbitrary\ k_e}}{64} \quad (6)$$

• **Step 3: Optimization using least square error algorithm**

So far, the evolution of the total particle mass corrected for leakage and wall deposition has 2 different expressions. They both represent the evolution of total particle mass in the chamber solely due to photochemical and physical processes of nucleation and condensation (coagulation can also occur, but has no effect on particle mass). However, the expression obtained during step 2 ($[PM]_{corrected}^{step2}(t)|_{arbitrary\ k_e}$) is attached to high uncertainties as it is found for an arbitrary value of k_e . Charan et al. (2018) realized an optimal fitting of experimental data to determine the parameter k_e . Following the same idea, an optimization of k_e is performed to minimize the difference between the corrected PM concentrations obtained during step 1 (considered as the reference) and during step 2 (Eq. (7)).

$$\sum_{t=t_0}^{t=t_{final}} \left\{ [PM]_{corrected}^{step1}(t) - [PM]_{corrected}^{step2}(t)|_{optimized\ k_e} \right\}^2 \xrightarrow{k_e} minimum \quad (7)$$

This operation results in an optimized expression of β_i (D_p), for each chamber experiment. It is used in the equations of step 2 (Eq. (3), Eq. (4), Eq. (5), Eq. (6)), to obtain corrected distributions and total concentrations. The values of β_i (D_p) are used to compute a mean wall loss coefficient $\beta_{k_e}^{mean}$, depending on the k_e value found after optimization. To account for the SMPS bins, each β_i (D_p) is weighted with the relative size of the channel i (D_p), according to Eq. (8).

$$\beta_{k_e}^{mean} = \sum_{D_{p,min}}^{D_{p,max}} \left[\beta_i(D_p) \times \frac{D_{p,i+1} - D_{p,i}}{D_{p,max+1} - D_{p,min}} \right] \quad (8)$$

With:

- $D_{p,i}$ the diameter associated with the bin i , with D_p ranging from 14.1 nm to 615.3 nm
- $D_{p,i+1} - D_{p,i}$ the size of the bin i , where $D_{p,max+1} = 637.8$ nm
- $\sum (D_{p,i+1} - D_{p,i}) = 623.7$ nm the total measurement range considered in this study

The optimized coefficient $\alpha + \beta_{k_e}^{mean}$ represents the rate of particle losses due to leakage and size-dependent wall deposition. It is an indicator of total losses, but it is never actually applied ($\alpha + \beta_i$ is the applied coefficient).

• **Step 4: Corrected number distribution and number concentration**

The size-dependent optimized loss coefficient $\alpha + \beta_i$ (D_p) can be applied to the number distribution to determine what is lost due to leakage and wall deposition (Eq. (9)).

$$[PN_i]_{lost}(t) = [PN_i]_{measured}(t_0) \times (1 - e^{-(\alpha + \beta_i) \times t}) \quad (9)$$

This lost distribution can be added to the measured one, to obtain a corrected number distribution (Eq. (10)). The corresponding corrected total number concentration can be computed (TSI, 2010) with Eq. (11).

$$[PN_i]_{corrected}(t) = [PN_i]_{measured}(t) + [PN_i]_{lost}(t) \quad (10)$$

$$[PN]_{corrected}(t) = \frac{\sum [PN_i]_{corrected}(t)}{64} \quad (11)$$

This method can also be used to determine the size-dependent loss rate $\beta_i(D_p)$ for seed only experiments, with ammonium sulphate particles. The evolution of those particles is not impacted by effects of condensation or evaporation. This means that the corrected total mass of ammonium sulphate particles should be a constant, equal to the concentration at time t_0 , as expressed in Eq. (12). This corrected mass is used as the reference in Eq. (7) of step 3. The mass concentration decay is associated to a rate $k_{PM}^{amm\ sul}$, which represents the losses due to leakage and wall deposition only. It can therefore be compared to the rate k_{BC} found for exhaust particle experiments.

$$[PM]_{corrected}^{step1}(t) = [PM]_{measured}^{seed\ only}(t_0) \quad (12)$$

3. Results

3.1. Chamber characterization

3.1.1. Mixing time

Mixing time is investigated using CO_2 measurements at 3 sampling heights as presented in Figure 1a. They show that just 1 min after the end of the CO_2 injection, the vertical gradient of CO_2 is important. The mean CO_2 concentration is 0.977 ± 0.013 %, but this value reaches 0.964 % at the top of the chamber and 0.990 % at the bottom. After 20 minutes, the mean concentration is 0.972 ± 0.003 %, with a minimum value of 0.969 % at the top and 0.975 % at the bottom. From that time, the concentration variability is less than 1 % between the minimum and maximum values, and the mixture can be considered homogeneous. After 1 hour, the mixture is homogeneous if the instrument uncertainties are accounted for.

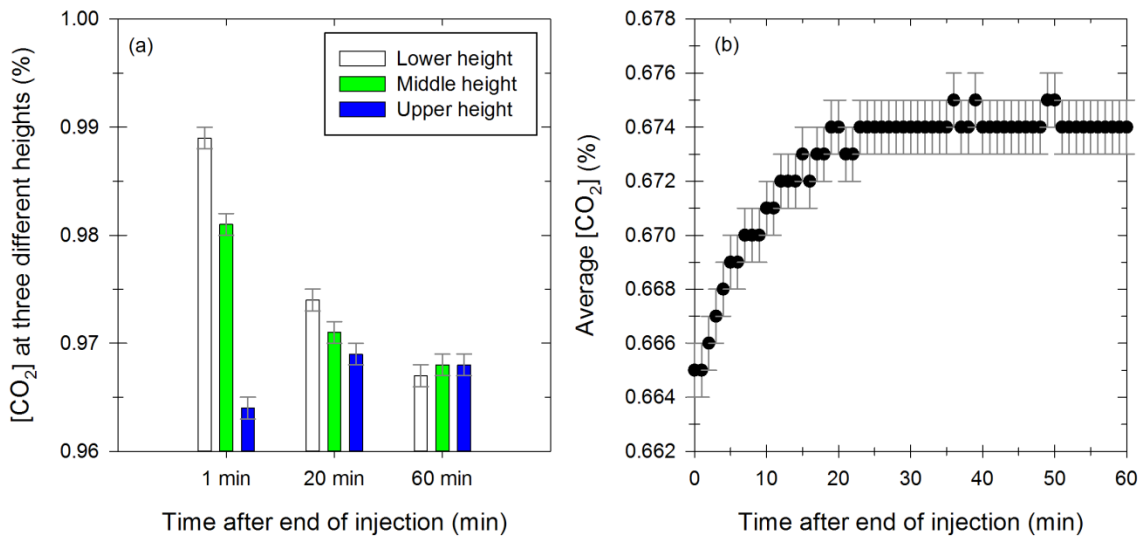


Figure 1: Determination of the mixing time in the chamber, using injection of CO_2 , with measurements of the concentration at 3 different heights 1 min, 20 min and 60 min after injection (a), and with evolution of the average concentration during 60 min after injection (b).

The CO₂ concentration averaged over the 5 sampling heights is shown in Figure 1b. Results show that the mean concentration increases rapidly during the first 20 minutes following injection. Then it reaches its maximum and remains stable. At this stage, the mixture can be considered as homogeneous.

The results of the CO₂ tests indicate that the mixture inside the chamber can be considered as homogeneous 20 minutes after the end of injection. Therefore, in this study, all the chamber analysis will start 20 minutes after the end of the exhaust gas injection.

3.1.2. Leakage

The leak flows obtained with the “pressure method” and the “CO₂ method” are presented in Figure 2 with the green and black curves respectively.

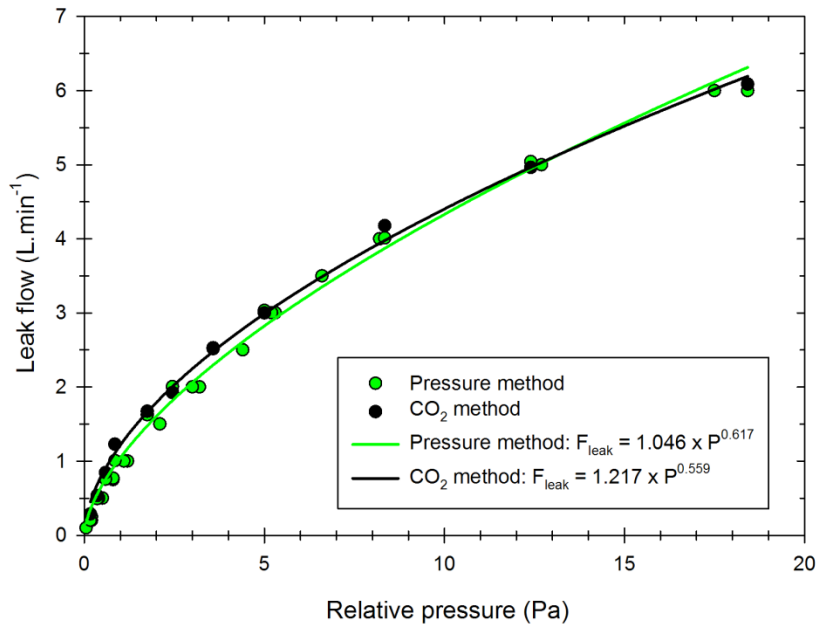


Figure 2 : Values of the leak flow as a function of relative pressure, obtained with the “pressure method” (green) of the “CO₂ method” (black). The dots represent the experimental results, and the curves represent the mathematical simulation for both methods.

Both methods give similar results. A numerical fit of the curves gives a mathematical expression (Eq. (13)) for the leak flow F_{leak} (L.min⁻¹) as a function of the relative pressure ΔP (Pa) between the chamber and outside.

$$F_{leak} (L.min^{-1}) = (1.13 \pm 0.12) \times \Delta P^{0.59 \pm 0.04} \quad (13)$$

For values of relative pressure between 0.2 and 5 Pa, the leak flow is between 0.4 and 2.9 L.min⁻¹, corresponding to a leak rate between 0.3 and 2.2 % vol.h⁻¹. Platt et al. (2013) reported for the PSI chamber an average leak rate of 0.08 % vol.h⁻¹. This is lower than the one found in this study, probably due to fact that the chamber is operated

under overpressure conditions. This leak rate can be used to estimate gas and particle phase leakage from the measured relative pressure. For this study, a leak rate is estimated for each experiment, without the dependency on the relative pressure. Indeed, it can change between the end of injection and the remaining of the chamber experiment (the leakage due to high overpressure measured right after injection is not accounted for, but decreases rapidly). Another leak definition is given in the wall losses section, with similar basis as the “pressure method”, and taking into account the instruments sampling flows.

3.1.3. Wall losses

The 4-step correction method is applied to more than 50 experiments using particles from passenger car exhausts (diesel or gasoline) and ammonium sulphate particles. The associated experimental protocols are described in the part Methods. The optimization processes give k_e values between 0.001 and 27.32 sec^{-1} , with an average of 2.41 sec^{-1} . The corresponding wall loss coefficients are respectively 1.05×10^{-4} , 1.58×10^{-2} and $4.69 \times 10^{-3} \text{ min}^{-1}$ for a particle of diameter 100 nm. These values are similar to those reported by Leskinen et al. (2015) and Babar et al. (2017), of 7.50×10^{-4} and $3.96 \times 10^{-3} \text{ min}^{-1}$, respectively. Figure 3 shows the size distribution of the wall loss coefficient $\beta_i(D_p)$ as well as the corresponding mean wall loss coefficient β_{ke}^{mean} for 3 values of k_e in this range: $k_e = 0.36 \text{ sec}^{-1}$; $k_e = 2.57 \text{ sec}^{-1}$; $k_e = 16.70 \text{ sec}^{-1}$. These values are chosen to represent the lower part of the range, the average, and the upper part of the range, respectively. The mean wall loss coefficients are respectively $1.31 \times 10^{-3} \text{ min}^{-1}$; $8.44 \times 10^{-3} \text{ min}^{-1}$; and $2.13 \times 10^{-2} \text{ min}^{-1}$.

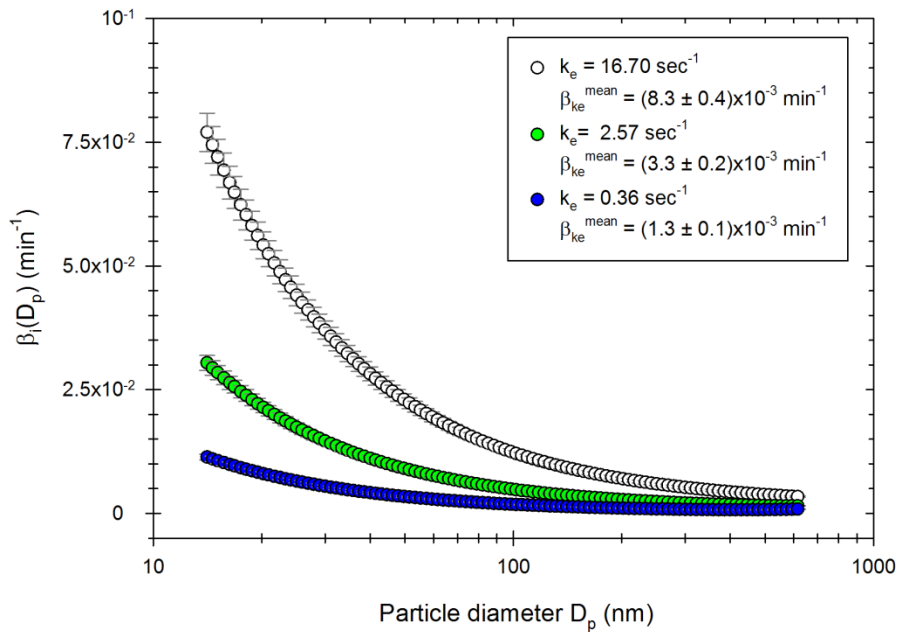


Figure 3: Distribution of the wall loss coefficient $\beta_i(D_p)$ for 3 values of k_e obtained experimentally: 16.70 sec^{-1} (white); 2.57 sec^{-1} (green) and 0.36 sec^{-1} (blue).

Figure 3 shows that for a given k_e , wall losses vary greatly as a function of the particle diameter in the range 15-600 nm. They are higher for smaller particles, due to higher Brownian diffusion. These results also show that the wall loss coefficients are very sensitive to the parameter k_e . Differences increase as the particle diameters decrease. The value of the eddy diffusivity k_e depends on the turbulence induced by the injection into the chamber and the electrostaticity of the Teflon walls, which can change between 2 experiments. Since experimental conditions greatly influence the turbulence and the wall deposition (Nah et al., 2017; Wang et al., 2018a), it is important to account for experiment-to-experiment variations when correcting particle losses.

In about a third of the chamber experiments, total particle losses cannot be approximated by a simple exponential decay of [BC]. These experiments usually took place shortly after the chamber walls were manually cleaned. These actions resulted in an important electrostatic charge induced to the walls, thus increasing particle losses. For these “charged walls” experiments, the optimized values of k_e range from 0.62 to 27.32 sec^{-1} , with an average of 7.98 sec^{-1} . These values are high but still lower than some values (36 and 269.4 sec^{-1}) found in literature (Crump and Seinfeld, 1981; Okuyama et al., 1986). The associated values of the total-wall loss coefficient $\alpha + \beta_{ke}^{\text{mean}}$ and

the total loss coefficient $\alpha + \beta_{ke}^{mean}$ are shown in Figure 4 with the hatched boxes, for diesel (light grey) and gasoline (white). Values of β_{ke}^{mean} are in the range $[3.82-10.67] \times 10^{-3} \text{ min}^{-1}$ for diesel and $[1.66-4.26] \times 10^{-3} \text{ min}^{-1}$ for gasoline. Respective mean values are $7.13 \times 10^{-3} \text{ min}^{-1}$ and $2.92 \times 10^{-3} \text{ min}^{-1}$. Values of $\alpha + \beta_{ke}^{mean}$ are in the range $[4.19-11.05] \times 10^{-3} \text{ min}^{-1}$ for diesel and $[2.04-5.01] \times 10^{-3} \text{ min}^{-1}$ for gasoline. Respective mean values are $7.69 \times 10^{-3} \text{ min}^{-1}$ and $3.73 \times 10^{-3} \text{ min}^{-1}$. The high values of k_e show the importance of accounting for size-dependent losses. Also, the average agreement between [PM] corrections of step 3 (see Appendix E) is $(94.7 \pm 2.6) \%$.

For the remaining experiments (69 %), total particle losses are well approximated by a simple exponential decay of [BC]. Values of k_{BC} range from 1.11×10^{-3} to $3.15 \times 10^{-3} \text{ min}^{-1}$ for vehicle exhaust experiments. Values of $k_{PM}^{amm sul}$ range from 5.27×10^{-4} to $1.17 \times 10^{-3} \text{ min}^{-1}$ for ammonium sulphate experiments. For those experiments, the average agreement between [PM] corrections obtained during step 3 (according to the calculation of Appendix E) is $(97.2 \pm 2.5) \%$. The losses found for these experiments are lower than for the “charged walls” experiments. This is because the wall electrostatic charges have been neutralized with deposition of particles during previous experiments. The associated values of k_e for those “neutralized walls” experiments range from 0.04 to 3.23 sec^{-1} (vehicle exhaust) and from 0.001 to 0.06 sec^{-1} (ammonium sulphate). These values are in the range of what has been found in previous studies. Charan et al. (2018) found values of k_e between 0.015 and 8.06 sec^{-1} in simulations of wall losses in Teflon environmental chambers. The values of the wall loss coefficient β_{ke}^{mean} and of the total loss coefficient $\alpha + \beta_{ke}^{mean}$ associated to those “neutralized walls” experiments are shown in Figure 4 (dotted boxes), for diesel (light grey), gasoline (white) and ammonium sulphate (dark grey). Values of β_{ke}^{mean} are in the range $[0.76-3.72] \times 10^{-3} \text{ min}^{-1}$ for diesel, $[0.55-3.55] \times 10^{-3} \text{ min}^{-1}$ for gasoline and $[0.25-0.63] \times 10^{-3} \text{ min}^{-1}$ for ammonium sulphate. Respective mean values are $1.82 \times 10^{-3} \text{ min}^{-1}$, $1.63 \times 10^{-3} \text{ min}^{-1}$ and $0.46 \times 10^{-3} \text{ min}^{-1}$. Values of $\alpha + \beta_{ke}^{mean}$ are in the range $[1.25-4.09] \times 10^{-3} \text{ min}^{-1}$ for diesel, $[0.93-3.93] \times 10^{-3} \text{ min}^{-1}$ for gasoline and $[0.63-1.01] \times 10^{-3} \text{ min}^{-1}$ for ammonium sulphate. Respective mean values are $2.24 \times 10^{-3} \text{ min}^{-1}$, $2.16 \times 10^{-3} \text{ min}^{-1}$ and $0.83 \times 10^{-3} \text{ min}^{-1}$. The mean wall loss coefficients β_{ke}^{mean} for the “neutralized walls” experiments are 3.9 (diesel) and 1.8 (gasoline) times lower than for the “charged walls” experiments. The mean $\alpha + \beta_{ke}^{mean}$ values for the “neutralized walls” experiments are 3.4 (diesel) and 1.7 (gasoline) times lower than for the “charged walls” experiments. This is close to what was found by Wang et al. (2018a), with particle loss rates 3-4 times higher between “undisturbed” and “disturbed” experiments.

Over all the chamber experiments, the obtained values of k_e range over 4 orders of magnitude. Among those experiments, the ones with ammonium sulphate particles are those with k_e of the order of 10^{-3} to 10^{-2} sec^{-1} . These values are low, which could be attributed to the nature of the particles. Moreover, the values of the order of magnitude 10^1 sec^{-1} were all found for experiments associated to highly electrostatically charged walls (e.g. with high wall losses). It could explain the high values of k_e . Finally, without considering those specific conditions (ammonium sulphate and highly charged wall experiments), the values of k_e range over 2 orders of magnitude. In the simulations of particle wall deposition made by (Charan et al., (2018)), the values of k_e used in the model also range over 2 orders of magnitude (from 0.015 to 8.06 sec^{-1}). The values found in the standard conditions of this study are in a similar range (from 0.04 to 3.23 sec^{-1}). The diversity of k_e values therefore seems reasonable.

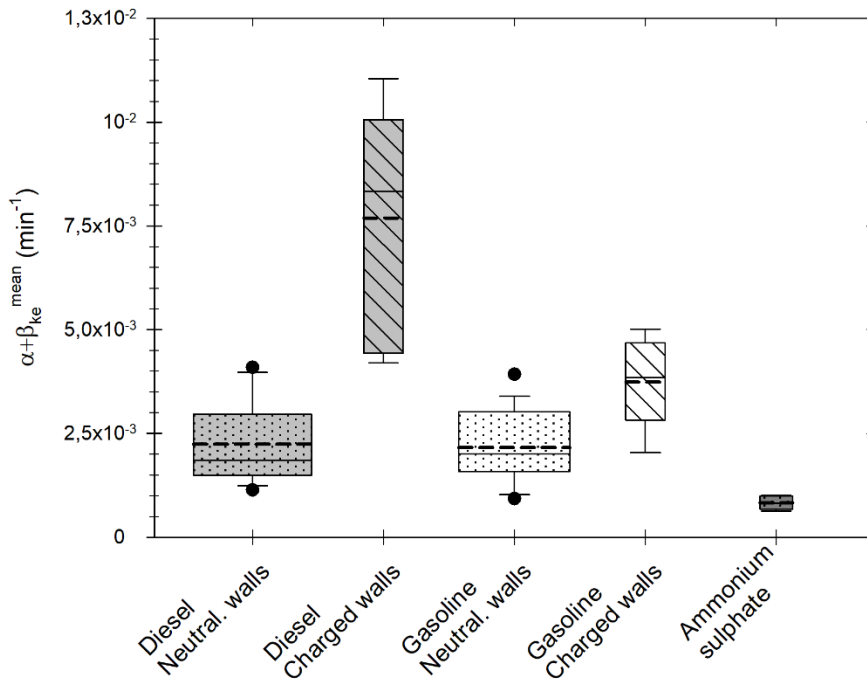
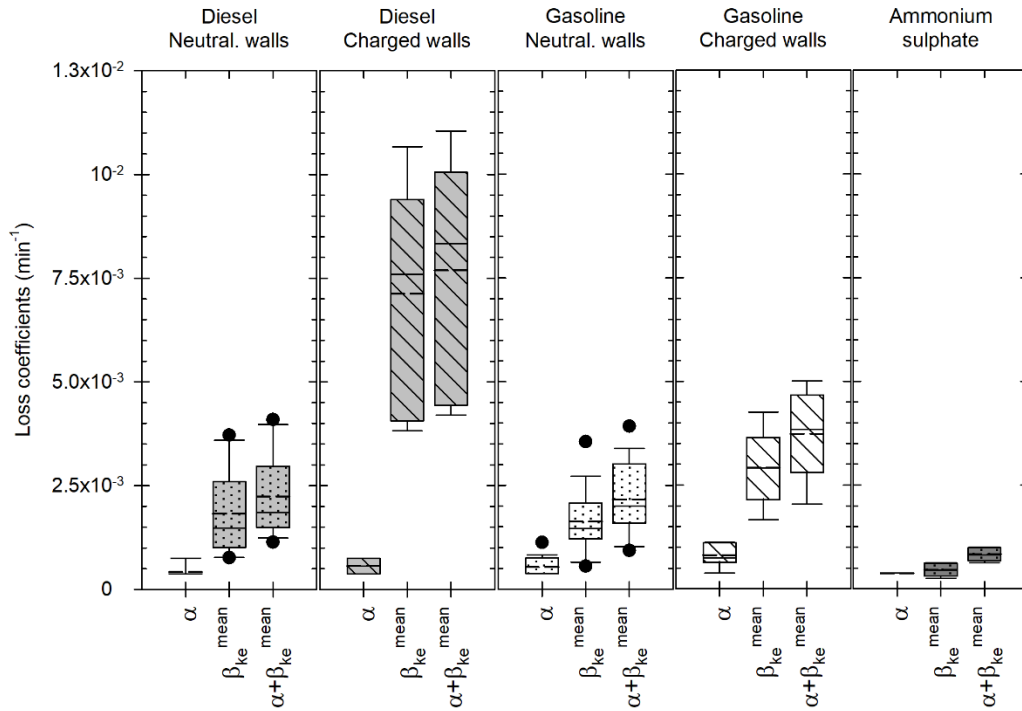


Figure 4: Mean loss Leakage coefficient α , wall loss coefficient β_{ke}^{mean} (accounting for channel size) and total loss coefficient $\alpha + \beta_{ke}^{mean}$ for the chamber experiments performed with particles from diesel (light grey) and gasoline (white) engines, as well as ammonium sulphate particles (dark grey). Coefficients for the diesel and gasoline experiments are sorted in 2 categories: “neutralized walls” experiments for which [BC] evolution follows a simple-1st order exponential decay (dotted boxplots) or “charged walls” experiments for which [BC] evolutions follows a double-2nd order exponential decay (hatched boxplots). The boxes represent the 25th and 75th percentile. The solid line in the center represents the median; the dashed line represents the mean. The whiskers are the 10th and 90th percentiles. The width of the boxes is proportional to the box’s data set.

Figure 4 shows that the leakage coefficients α are of the same order for all conditions. They only vary from $0.38 \times 10^{-3} \text{ min}^{-1}$ to $1.13 \times 10^{-3} \text{ min}^{-1}$. This is because the dilution air was injected with flows varying only between 3 and 9 L.min⁻¹. Moreover, leakage coefficients are much smaller than the wall loss coefficients for the diesel and

gasoline experiments. They represent 19 % and 7 % of the total loss coefficients for diesel experiments with neutralized and charged walls respectively. For gasoline experiments, these values are 24 % and 22 % respectively. Wall losses therefore appear to be the main contribution of total particle losses in the chamber for exhaust experiments. For ammonium sulphate experiments, total loss coefficients are smaller than for exhaust experiments. Leakage therefore represents a bigger share, and accounts for 45 % of the total losses.

Figure 4 also shows that particles from diesel and gasoline engines cover a wide range of $\alpha + \beta_{ke}^{mean}$ coefficients, especially for some diesel experiments. This is mostly due to the fact that some of those experiments took place when the walls were electrostatically charged. The first experiments performed with charged walls (e.g. with the highest electrostatic charge) were with diesel engine particles. This explains the very high values reached by the diesel “charged walls” coefficients. Ammonium sulphate particles have lower loss coefficients than engine particles, and remain in a narrow range. This could be explained by their nature and chemical composition. Also, the flow at which they are introduced in the chamber (5.6 L.m^{-1}) is much lower than for vehicle exhaust experiments ($20\text{--}60 \text{ L.min}^{-1}$). The turbulence and Brownian diffusion are therefore lower, and wall deposition decrease. For the ammonium sulphate experiments, the total loss coefficient (leak + wall losses) found with the 4-step correction method range from $8 \times 10^{-6} \text{ sec}^{-1}$ to $2 \times 10^{-5} \text{ sec}^{-1}$, for particles of diameter 100 nm. Nah et al. (2017) studied the wall loss coefficient ammonium sulphate of particles in a 12 m^3 chamber. They found values of β at 100 nm around $1.5 \times 10^{-5} \text{ sec}^{-1}$. The values found in this study are in pretty good agreement with what was found by Nah et al. (2017). Also, the magnitude of the corrections was computed for each cycle, using the average ratio of corrected [PM] divided by measured [PM]. For the neutralized wall experiments, corrected [PM] is on average (1.5 ± 0.4) times higher than measured [PM]. For the charged wall experiments, corrected [PM] is on average (2.8 ± 1.5) times higher than measured [PM]. For the ammonium sulphate experiments, corrected [PM] is on average (1.3 ± 0.2) times higher than measured [PM]. Moreover, (Platt et al., (2013) found particle half-life between 3.3 and 4 hours. This is equivalent to having [BC] decay coefficients of 3.5×10^{-3} and $2.9 \times 10^{-3} \text{ min}^{-1}$ respectively. Over a 10-hour long experiment, this would give corrected [PM] 3.4 and 2.7 times higher than measured [PM] (respectively). The corrections applied in our study therefore appear to be in a reasonable range. This-These elements indicates that the correction method developed in this study gives good results, consistent with what is found for other chambers of comparable size. Figure 4 shows that the nature of the particles is likely to impact the loss coefficients. This shows the advantage of the 4-step correction method, which isn’t based on the assumption that the particles of the study have the same losses as ammonium sulphate particles. Figure 4 also shows that the electrostatic state of the walls appears to be the most important factor determining particle losses to the walls.

The coefficients $\alpha + \beta_{ke}^{mean}$ and k_{BC} both represent the rate at which particles are lost due to leakage and wall deposition, and should in theory be correlated. To investigate this, $\alpha + \beta_{ke}^{mean}$ coefficients of “neutralized walls” experiments (e.g. for which [BC] follows a simple exponential decay giving a k_{BC} coefficient) are plotted in Figure 5 as a function of k_{BC} or $k_{PM}^{amm sul}$.

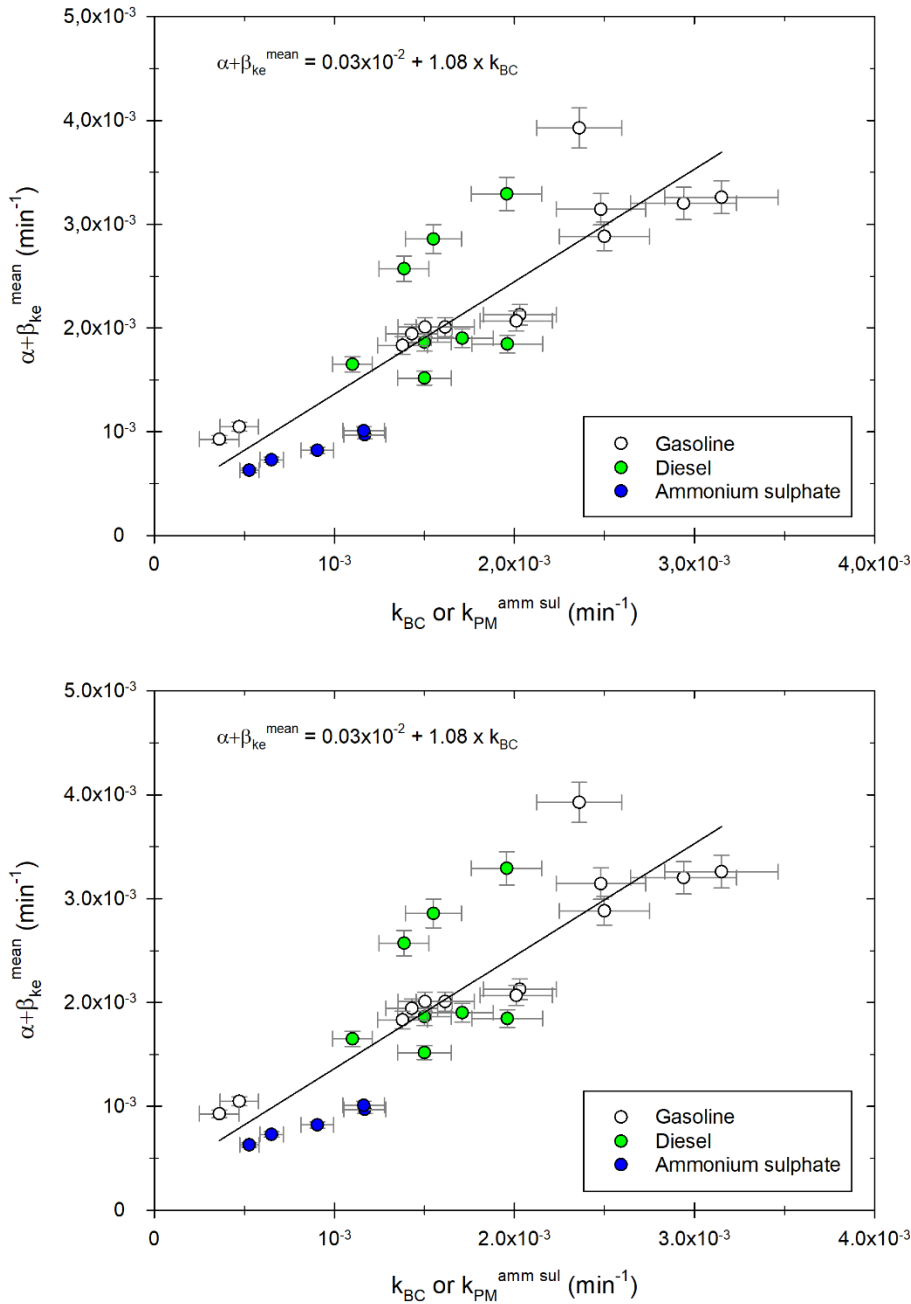


Figure 5 : Mean loss coefficient $\alpha + \beta_{ke}^{mean}$ as a function of the decay coefficient k_{BC} or $k_{PM}^{amm sul}$ obtained for the “neutralized walls” chamber experiments performed with particles from diesel (green) and gasoline (white) engines or ammonium sulphate particles (blue). A linear fit of the data is shown (black line).


Figure 5 shows that there is a good correlation between both loss rates $\alpha + \beta_{ke}^{mean}$ and k_{BC} . The correlation is also good for ammonium sulphate experiments, between $\alpha + \beta_{ke}^{mean}$ and $k_{PM}^{amm sul}$. The average ratio of these 2 coefficients for ammonium sulphate experiments is 1.04. A linear regression is performed over all the exhaust and ammonium sulphate experiments. It and gives a slope of 1.08 ± 0.15 . The fact that values of $\alpha + \beta_{ke}^{mean}$ are slightly higher than values of k_{BC} could be due to the size-dependence of wall losses, which results in different total loss coefficient depending on the size distribution. Overall, the correlation This shows that the optimized value $\alpha + \beta_{ke}^{mean}$ gives a good representation of total losses due to leakage and wall deposition. This result indicates that the complementarity of the [PM] correction using [BC], and the size-dependent correction, is relevant. Results of Figure 5 also show that loss rates of ammonium sulphate particles are generally lower than those from diesel or

gasoline experiments, as found previously (Figure 4). Even though wall charge appears as the dominant factor for particle wall losses, the nature of the particles also seems to have an impact. This shows the interest of using the 4-step correction method described above.

3.2. Emission factors of particles, BC and IVOCs from diesel vehicles

Vehicle emissions are quantified in order to discuss the impact of each vehicle type and driving condition on initial chamber concentration and associated physical evolutions. Emission factors of PN, PM and BC are estimated from initial concentrations in the chamber by applying the dilution ratio. Initial concentrations are taken right after the chamber is well mixed. At that moment, no corrections for leakage or wall losses have yet been applied. This means that the concentrations taken for the computation of emission factors are those directly measured by the instruments. Moreover, as described above, some experiments occurred while the walls were highly electrostatically charged, meaning that particles can deposit onto the walls during the injection phase. This can therefore impact the initial concentrations of PN, PM and BC, and thus the computed emission factors. It is difficult to estimate the associated losses. PN emission factors found in literature for Euro 5 diesel vehicles in UC and MW conditions (Louis et al., 2016) are on the same range as those of this study. This indicates that the possible effects of wall charge are negligible. No specific correction was therefore applied to the initial concentrations. The concerned cycles are clearly identified on Figure 6.

Moreover, since condensation and nucleation partly depend on the concentration of organic material, emissions of IVOCs and certain SVOCs are quantified. They are measured directly from exhaust to estimate the quantity of available organic material in the chamber. Finally, NMHC emissions are measured from the CVS, to discuss the share of IVOCs which is identified. Six diesel vehicles (Euro 3 to Euro 6) are tested in both UC and MW conditions. Results are shown in Figure 6: EFs of PN (a), PM (b), BC (c), IVOCs (d), NMHCs (e), and the ratio (%) of the IVOC EFs over the NMHC EFs.

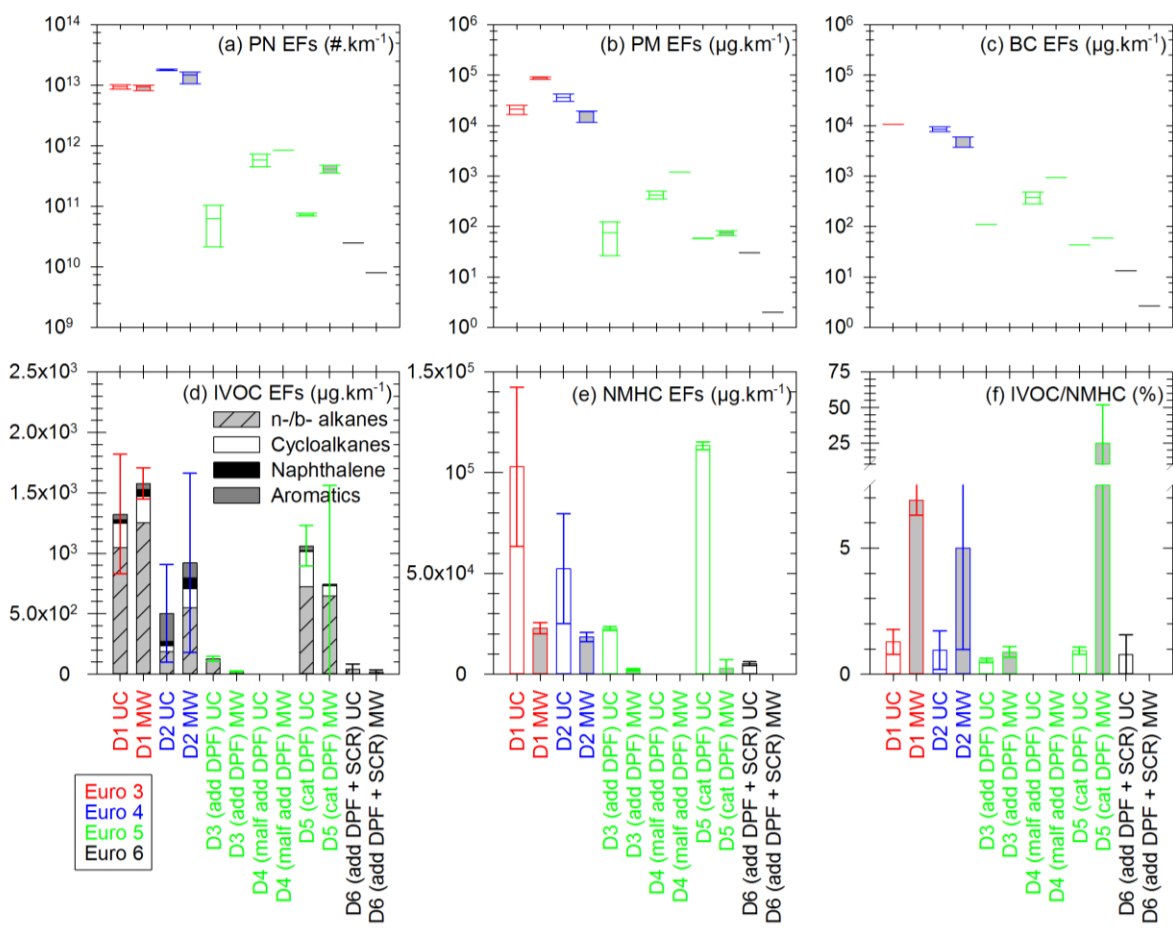

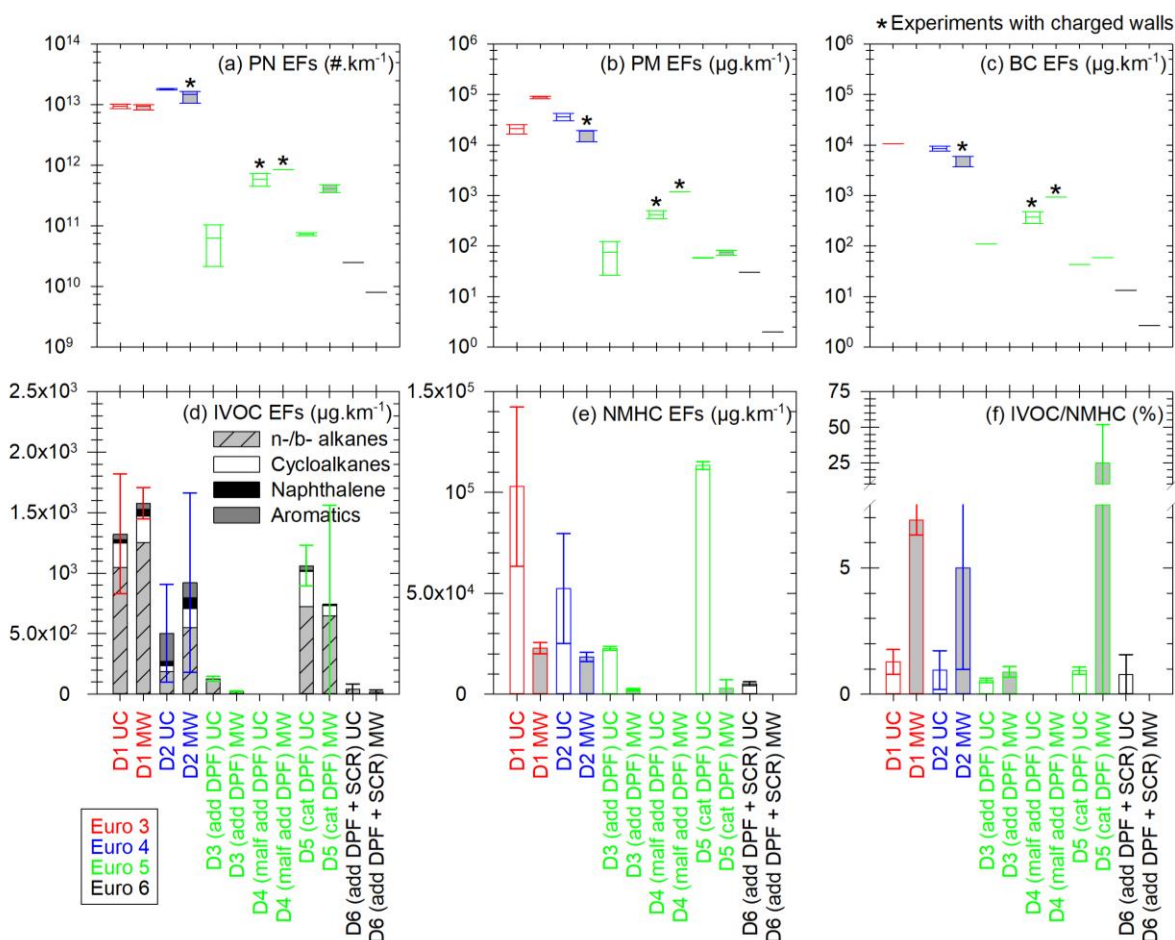


Figure 6: Emission factors of PN (a), PM (b), BC (c), IVOCs (d) and NMHCs (e), and IVOC/NMHC ratio (f) for the 6 tested Euro 3-6 diesel vehicles UC (white) and MW (light grey) conditions. IVOC EFs (d) are the sum of EFs of linear and branched (n- and b- respectively) alkanes (hatched grey), cycloalkanes (white), naphthalene (black) and aromatics (dark grey), with retention times in the range corresponding to C12-C22 alkanes. EFs are given in $\mu\text{g.km}^{-1}$, and the IVOC/NMHC ratio in %. Vehicles are sorted by Euro norm: Euro 3 in red; Euro 4 in blue; Euro 5 with add or cat DPF in green and Euro 6 in black. The Euro 5 vehicle showing signs of malfunctioning DPF is referred to as “D4 (malfunctioning DPF)”. The boxes represent the 25th and 75th percentile. The solid line in the center represents the median. The whiskers are the 10th and 90th percentile. Error bars represent 1 standard variation on figures (d) to (f). Figure (f) has a broken axis to better show the smaller values. The box plots with the sign * represent the cycles for which chamber initial concentrations can be impacted by electrostatic charge on the walls. It could only impact PN, PM and BC, since IVOCs and NMHCs were sampled directly from emissions.

Figure 6 shows that PM and BC EFs have a good correlation for all vehicles and driving conditions, with slightly higher emissions for PM than BC. BC accounts on average for $(62 \pm 34) \%$ of PM, which is consistent with particle composition. The Euro 3 (D1) and Euro 4 (D2) vehicles emit more PN, PM and BC than the Euro 5 (D3, D4, D5) and Euro 6 (D6) ones, with factors 10–70000 (PN), 10–50000 (PM) and 4–4000 (BC). In urban conditions the Euro 5 (D3 to D5) vehicles EFs of BC, PN and PM cover a large range of values. This can be explained by the diversity and proper functioning of aftertreatment technologies for this category of vehicles (cat and add DPFs). DPFs are more effective at a certain exhaust temperature, usually not reached during a cold start urban cycle. This can lead to variations in the particle emissions. The Euro 5 vehicle with cat DPF (D5) shows PN emissions much higher in MW than in UC conditions (factor 5.7). For those cycles, the PN mode is below 19 nm, which could indicate a DPF regeneration.

IVOC and NMHC EFs are the highest for the Euro 3 (D1), Euro 4 (D2), and Euro 5 with cat DPF (D5) vehicles. They are in the range $501\text{--}1576 \mu\text{g.km}^{-1}$ and $(3\text{--}113) \times 10^3 \mu\text{g.km}^{-1}$ for IVOCs and NMHCs respectively. IVOC

emissions from the Euro 5 vehicle with cat DPF (D5) are 5.3 times and 26.8 times higher than those from the vehicles with add DPFs (the Euro 5 D3 and the Euro 6 D6, respectively). The additive and catalyzed DPFs seem to have different impacts on IVOC and NMHC emissions. In UC conditions, the Euro 3 vehicle (D1) emits more IVOCs than the add DPF Euro 5 vehicle (D3) and the cat DPF vehicle (D5), with respective factors 10.7 and 1.2. This is close to what was reported by Zhao et al. (2015), with a ratio 7 in creep conditions between cat DPF-equipped and nonaftertreatment vehicles. Moreover, the driving conditions also impact IVOC emissions. For the DPF-equipped vehicles, IVOC EFs are 1.4 to 6.2 times higher in UC conditions than in MW conditions. This is due to more complete combustion at high temperature operations. This follows the same trend as what was reported by Zhao et al. (2015) for diesel vehicles, with ratios from 6 to 23 between creep/idle and high speed conditions. For the Euro 3 (D1) and the Euro 4 (D2) vehicles, IVOC emissions are respectively 1.2 and 1.8 times higher in UC conditions. This could be due to the cold start.

Moreover, for non-DPF vehicles (D1 and D2), IVOC emissions are dominated by n- and b- alkanes, which account for 64 %. Naphthalene accounts for 6 % of IVOC emissions. Cycloalkanes and aromatics account respectively for 14 and 16 % of IVOC emissions. These results are consistent with those obtained by Lu et al. (2018) and Zhao et al. (2015). They found IVOC emissions of non-DPF diesel vehicles to be dominated by cyclic compounds and alkanes (mainly unspciated), with also a fraction of aromatics. For the cat DPF vehicle (D5), alkanes represent 78 % of IVOCs, followed by cycloalkanes (19 %) and then aromatics and naphthalene (2 and 1 % respectively). For the vehicles with add DPFs (D3 and D6), only alkanes are identified in the IVOC retention time range.

The IVOC/NMHC ratios range from $(0.5 \pm 0.1) \%$ to $(6.9 \pm 0.6) \%$ for all vehicles, except for the cat DPF Euro 5 (D5) one in MW conditions, with a ratio of $(24.7 \pm 27.1) \%$. The possible regeneration observed from PN emissions for this vehicle in MW conditions could explain high IVOC emissions, and therefore a high IVOC/NMHC ratio. The average IVOC/NMHC ratio is $(3.5 \pm 2.9) \%$ for the vehicles without DPF (D1 and D2), and $(0.8 \pm 0.2) \%$ for the DPF-equipped vehicles (D3, D5, D6), without the possible regeneration value. This is substantially lower than the values of $(60 \pm 10) \%$ and $(150 \pm 80) \%$ found by Zhao et al. (2015), respectively for nonaftertreatment and DPF-equipped diesel vehicles. However, respectively only about $(8.1 \pm 2.3) \%$ and $(5.6 \pm 3.1) \%$ of the total IVOC mass given by Zhao et al. (2015) was identified. This brings the IVOC/NMHC ratios to $(4.9 \pm 2.2) \%$ (nonaftertreatment) and $(8.4 \pm 9.1) \%$ (DPF-equipped), if considering only the identified portion of IVOCs. This is higher than what is found in this study, but remains in the same range if uncertainties are accounted for.

Certain n- and b- alkanes corresponding to SVOCs are also sampled on the sorbent tubes. Their emissions are higher for the Euro 3 (D1), Euro 4 (D2) and cat DPF Euro 5 (D5) vehicles, with average EFs of 1093 and 1520 $\mu\text{g.km}^{-1}$ in UC and MW conditions respectively. For the Euro 5 (D3) and Euro 6 (D6) vehicles, both equipped with add DPFs, the average SVOC EFs are 263 and 247 $\mu\text{g.km}^{-1}$ in UC and MW conditions respectively. However, their quantification is performed with response factors from compounds with different carbon numbers (C20 for vehicles D1, D5 and C16 for vehicles D2, D3, D6). This can induce important uncertainties in their EFs.

Considering the French fleet (André M. et al., 2014) and EFs of Figure 6, the contribution of each Euro norm to particle and IVOC emissions from diesel passenger cars is estimated. Since no vehicle of norms pre-Euro, Euro 1 and Euro 2 was tested, their emissions are assumed to be in the same range as those from Euro 3 vehicles. They are grouped in a category named Euro pre-1-2-3. Figure 7a gives the French passenger car fleets from 2015 to 2030 (André M. et al., 2014). Figure 7b and Figure 7c give the evolution of total PM and IVOC emissions,

computed as the product of emission factors and fleet composition (assuming a constant number of vehicles).

Figure 7d and Figure 7e show the contribution of each Euro norm to total diesel passenger car emissions of PM and IVOCs.

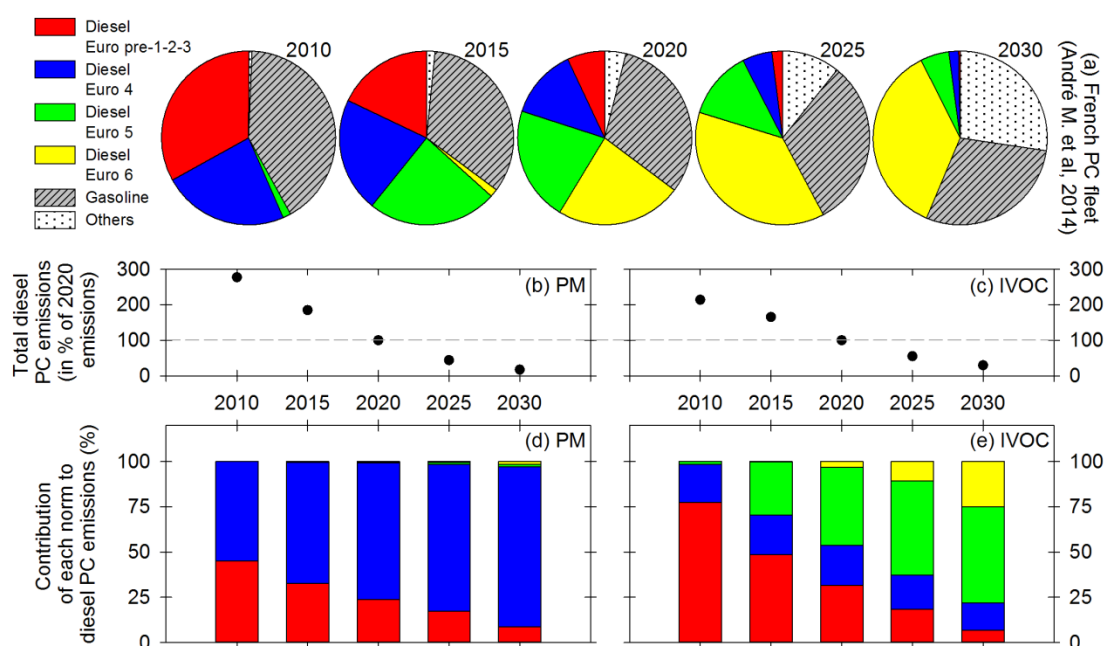


Figure 7. Evolution of the French passenger car fleet (a) given by André M. et al. (2014), for diesel vehicles of norm Euro pre-1-2-3 (red), Euro 4 (blue), Euro 5 (green) and Euro 6 (yellow), as well as gasoline vehicles (hatched grey) and vehicles with other motorization like hybrid or electrical (dotted white). Total emissions of PM (b) and IVOCs (c) by diesel PCs, given as % of the 2020 emissions. Contribution of each Euro norm to diesel PC emissions of PM (d) and IVOCs (e). Results are given for the years 2010, 2015, 2020, 2025 and 2030.

Results show that total diesel PC emissions decrease by a factor 15.8 for PM and 7.2 for IVOCs between 2010 and 2030, assuming the total number of vehicles remains constant. This is due to evolution in the PC fleet composition, with diesel vehicles representing 58 % of the PC fleet in 2010, 65 % in 2020 and 44 % in 2030. Moreover, the share of more polluting diesel PCs (Euro pre-1-2-3 and Euro 4) evolves, representing 56 % of the fleet in 2010, 20 % in 2020 and 2 % in 2030. However, due to their much higher PM emissions (compared to Euro 5 and Euro 6 diesel vehicles), their share in total PM emissions remains dominant: almost 100 % in 2010, 99 % in 2020 and still 97 % in 2030.

For IVOCs, emissions are also due to DPF-equipped vehicles (Euro 5 and Euro 6). The share of those vehicles in IVOC emissions by diesel PCs is less than 1 % in 2010, 46 % in 2020 and 78 % in 2030. More modern vehicles will be the main contributor to IVOC emissions in 2030, with effects on particle physical and photochemical evolutions. More investigations should therefore be conducted to estimate their emissions and evolutions.

3.3. Evolution of particles from diesel exhaust

In this part, the physical processes having effects on particle number, mass and size are investigated, for the 6 diesel vehicles (Euro 3 to Euro 6) in both UC and MW conditions. Data are corrected for leakage and wall losses, using the new 4-step correction method.

Figure 8a gives the hourly increase of [PM], for the vehicles classified by Euro norm. It shows that the Euro 3 and Euro 4 vehicles have the higher [PM] hourly increases. The increase of [PM] observed in this section is not likely to be an artifact induced by the correction method, as indicated by the observation of measured (e.g. uncorrected)

data. This is discussed in Appendix F. Increases are at least of 5 %·h⁻¹ during more than 500 min, and up to 17 %·h⁻¹ during 100 minutes for the Euro 3. The Euro 4 vehicle has hourly [PM] increases in the same range, and undergoes an increase during an average of 400 minutes. This increase in [PM] ~~can~~ could in part be explained by condensation of organic material onto preexisting particles (IVOCs and SVOCs). The partitioning of IVOCs, and potential role in [PM] evolution is discussed in Appendix G. The emissions of IVOCs observed in Figure 6 for the Euro 3 and Euro 4 vehicles seem to confirm this explanation. The IVOC emissions from the Euro 5 vehicles could explain the slight increase in particle mass during evolution, presented in Figure 8a. This increase for the Euro 5 vehicles can go up to 5 %·h⁻¹ during almost 5 hours. The Euro 6 vehicle however, does not undergo any [PM] increase, which is consistent with the very low emissions of precursors. The observed [PM] increase trends can be explained by different processes. First of all, condensation of organics (SVOCs and IVOCs) onto preexisting particles is the most obvious explanation. However, it is not likely to occur during several hours without the presence of a source. One hypothesis could be to consider the walls as a source. Indeed, organics deposit onto Teflon walls, and this process is known to be reversible (Matsunaga and Ziemann *et al.*, 2010). In addition to being a sink for the gas-phase, the walls could also represent a source of pollutants (Kaltsonoudis *et al.*, 2019). Even though deposition is generally estimated to lower SOA formation, the impact of vapor deposition of organics onto the walls is not well described yet, and many parameters remain uncertain (Pratap *et al.*, 2020; Yeh and Ziemann, 2015). Namely, (Zhang *et al.*, 2015) observed evaporation from the walls when the temperature increases from 25 to 45 °C. In the Euro 3 and Euro 4 experiments, the temperature increases slowly during evolution time (due to instrumentation in the laboratory), of 5 °C on average. This is a slight increase, and even though it is to this day impossible to quantify the mass of organics which could evaporate, the walls of the chamber may in some cases be a source of organic material. Moreover, vapor wall deposition is a competing process with condensation onto particles. At high particle concentrations, vapor wall deposition becomes less significant (Zhang *et al.*, 2015, 2014). This could explain why [PM] increase is higher when initial particle concentrations are high. Since for low particle concentrations the share of organics depositing onto the walls is more important, it has more impact on [PM] evolution. Overall, the walls could play the role of source of organic material, which might partly explain the increase of [PM] during several hours. Finally, when concentrations of organics are high enough, nucleation may occur, leading to nucleation mode particles. If those particles are too small to be detected by the SMPS, they can grow due to coagulation or condensation and at some point, be detected by the SMPS. This would result in an increase of particle number and particle mass. This phenomenon is discussed in Appendix H. It can be part of the interpretation of [PM] increase. However, considering the size of such particles, and their low relative mass (compared to bigger particles), this phenomenon is not likely to be responsible for much of the total [PM] increase.

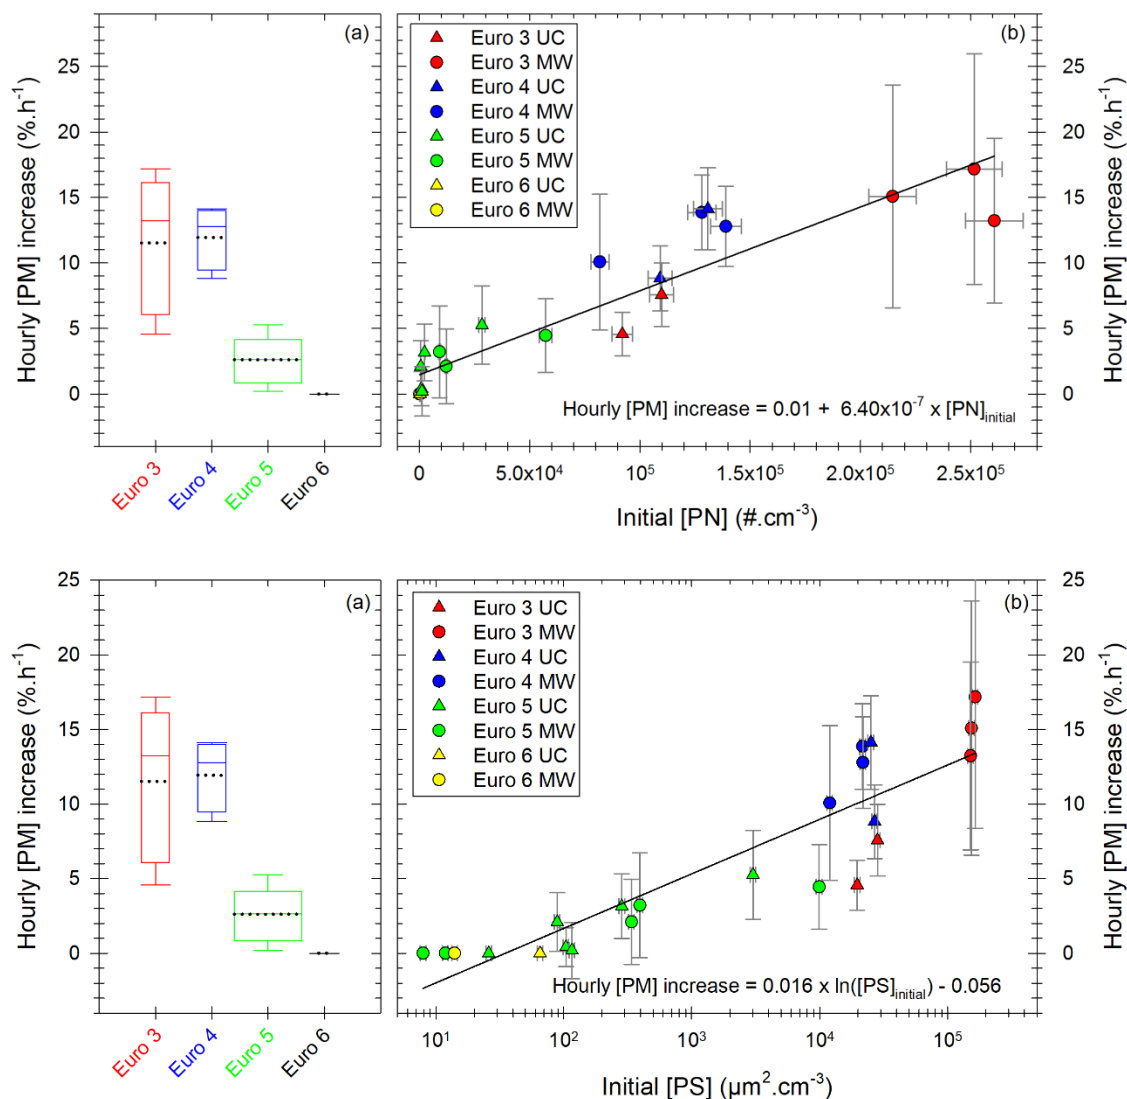


Figure 8: Particle mass hourly increase in % of initial [PM] per hour. Results in (a) are given for all the diesel vehicles sorted by Euro norm. The boxes represent the 25th and 75th percentile. The solid line in the center represents the median; the dashed line represents the mean. The whiskers are the 10th and 90th percentiles. The width of the boxes is proportional to the data set of the box. Results in (b) are given as a function of initial particle surface [PNPS] for all Euro norms (Euro 3 in red; Euro 4 in blue; Euro 5 in green; Euro 6 in yellow or black) and in both UC (triangles) and MW (circles) conditions. The x-axis is presented with a logarithmic scale. A linear fit of the data is performed (black line) with equation written in figure (b). Error bars on figure (b) represent 1 standard variation.

Figure 8b shows the [PM] hourly increase as a function of initial particle surface [PNPS]. A linear-logarithmic correlation appears, indicating that conditions with large-high initial particle surface amounts of particles initially are more likely to lead to an increase in [PM]. The high hourly [PM] increases (5-17 %·h⁻¹) are mainly due to Euro 3 and Euro 4 vehicles, whereas Euro 5 and Euro 6 vehicle experiments results in lower [PM] increases (0-5 %·h⁻¹). This trend is consistent with the PN EFs observed in Figure 6a, since [PM] increases and initial [PN] seem to be correlated. The correlation could-can be explained by the fact that high initial [PNPS] usually-results in high probability for organic material to find available surface for condensation. The logarithmic shape indicates that at some point, [PM] increase is limited by other factors. This regime is reached when [PS] is above ~ 10⁴ μm².cm⁻³. A limiting factor could be the availability of organic material. Similar trends were observed by (Charan et al., (2020), with initial surface areas above ~ 1800 μm².cm⁻³ becoming insignificant for SOA yields (the numerical difference is not surprising considering the fact that the experimental protocol is quite different

675 from that of this study). This could explain why the 3 points with higher initial [PS] (1 order of magnitude above the preceding ones) have hourly [PM] increase in the same order of magnitude as the preceding points. The presence of organic material is a limiting factor, which could also explain (Figure 6) why the Euro 6 (D6) and the add DPF Euro 5 (D3) vehicles have [PM] increases around 0.

In addition to the hourly [PM] increase, the time during which condensation occurs is an important piece of information. Results giving the time needed to reach the maximum of PM concentration are displayed in Figure 9a. It is plotted as a function of the initial particle surface, and the labels give the hourly [PM] increase.

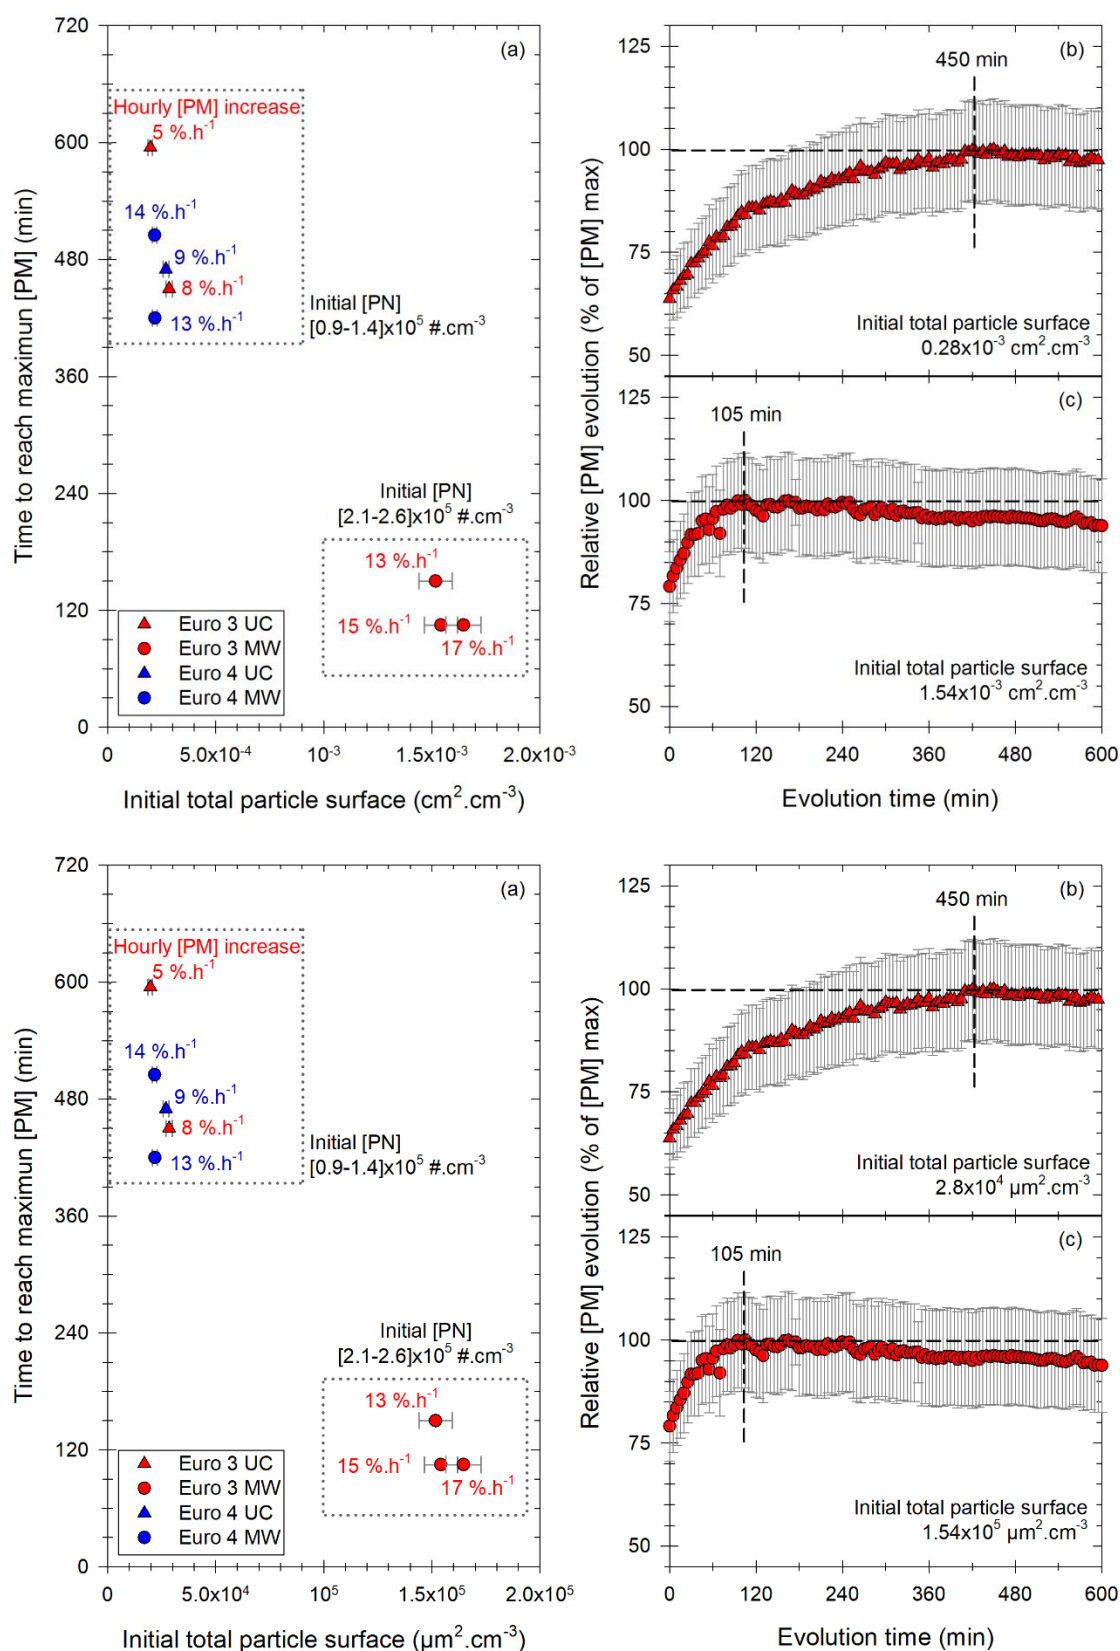


Figure 9: Results of the study of the [PM] evolution in the chamber for experiments showing a significant increase with the Euro 3 (red) and the Euro 4 (blue) vehicles, in UC (triangles) or MW (circles) conditions. Figure (a) gives the time to reach the maximum of [PM] as a function of initial total particle surface. Each point has a label giving the hourly [PM] increase in % of initial [PM] per hour. Two groups are found: the first one (top) for initial [PN] between 0.9 and $1.4 \times 10^5 \text{ \#} \cdot \text{cm}^{-3}$; the second one (bottom) for initial [PN] between 2.1 and $2.6 \times 10^5 \text{ \#} \cdot \text{cm}^{-3}$. Figures (b) and (c) give 2 examples of those [PM] evolutions with time, plotted as relative evolution of the maximum [PM]. Examples are taken:

(b) from the first group of figure (a) with initial surface of $0.282.8 \times 10^{-34} \text{ cm}^2 \mu\text{m}^2 \cdot \text{cm}^{-3}$ and a maximum [PM] reached in 450 min; and (b) from the second group of figure (a) with initial surface of $1.54 \times 10^{-35} \text{ cm}^2 \mu\text{m}^2 \cdot \text{cm}^{-3}$ and a maximum [PM] reached in 105 min.

Figure 9 clearly shows that when the available particle surface is high ($> 10^{-35} \text{ cm}^2 \mu\text{m}^2 \cdot \text{cm}^{-3}$), the time to reach the maximum [PM] is quite short, and doesn't exceed 2.5 hours. However, for initial surfaces below $4 \times 10^{-44} \text{ cm}^2 \mu\text{m}^2 \cdot \text{cm}^{-3}$, condensation-[PM] increase seems to be a very slow process. Even though uncertainties become large after 6 hours of evolution, it seems that condensation-[PM] increase can occur slowly during 7 to 10 hours. This difference between fast and slow [PM] increases is shown in Figure 9b and Figure 9c, for 2 examples of [PM] evolution with time. [PM] evolution is given relatively, as a percentage of [PM] max, for 2 experiments with low (Figure 9b) and high (Figure 9c) initial particle surface. The first curve (Figure 9b) shows slow [PM] increase, with the maximum reached after 450 min. The second curve (Figure 9c) however shows a fast evolution, with an increase occurring during 105 minutes. This fast condensation-[PM] increase seems to be mostly determined by the high particle surface available. By taking the average initial particle surface and the average time to reach maximum [PM] for both groups (fast and slow [PM] increases), it appears that [PM] increase is 4 times faster when the initial total particle surface is multiplied by 6.5.

Other than condensation, nucleation and coagulation are 2 processes that can have important effects on particle concentrations and distributions. Both of those processes are investigated, and results are shown in Figure 10.

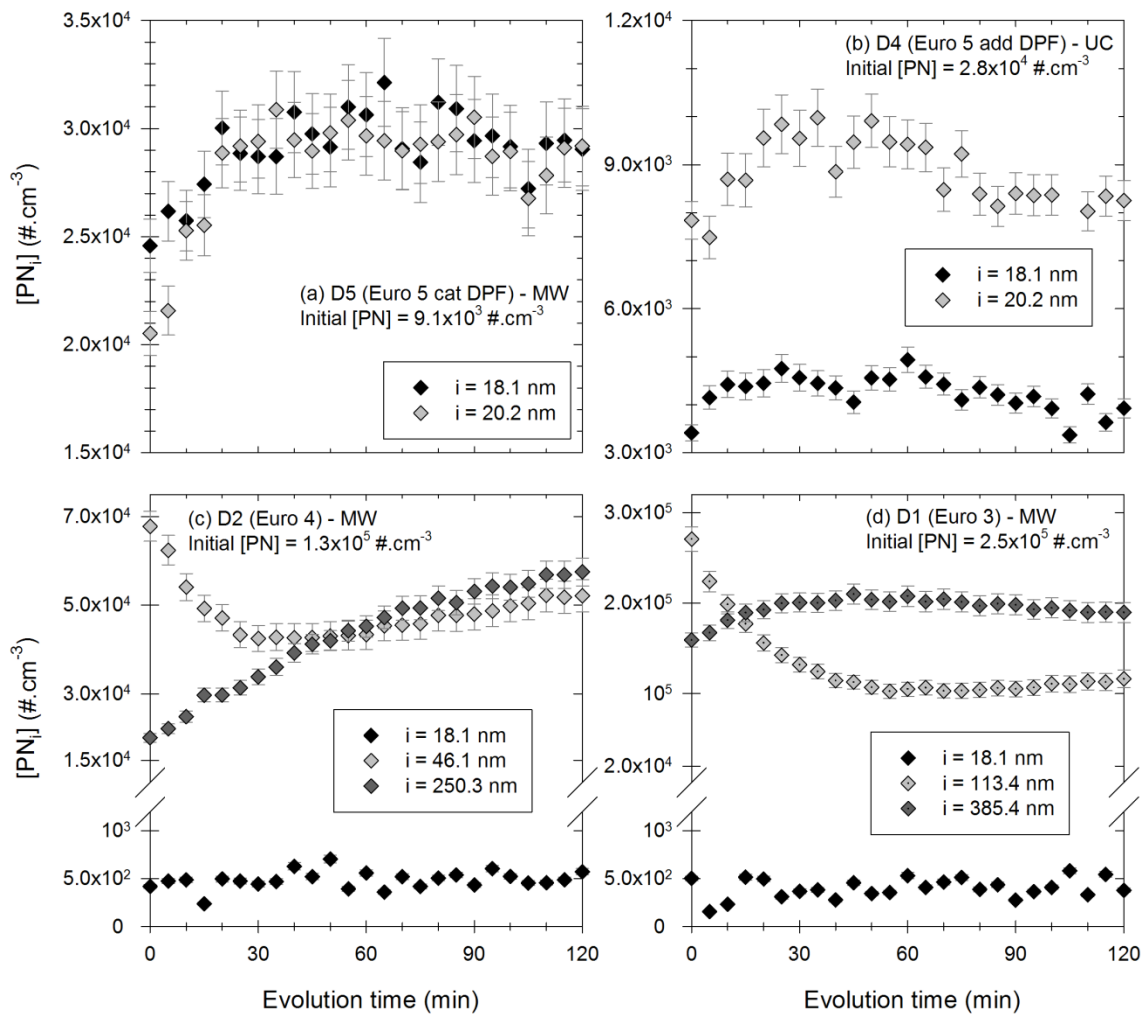



Figure 10: Evolution with time of the particles [PN_i] in certain diameter bins during 2 hours. Figures (a) and (b) show particles in the bins 18.1 nm (black) and 20.2 nm (light grey), for experiments with the vehicle D5 in MW conditions

with an initial [PN] of $9.1 \times 10^3 \text{ \#} \cdot \text{cm}^{-3}$ and with the vehicle D4 in UC conditions with an initial [PN] of $2.8 \times 10^4 \text{ \#} \cdot \text{cm}^{-3}$, respectively. Figure (c) shows particles in the bins 18.1 nm (black), 46.1 nm (light grey) and 250.3 nm (dark grey) with the vehicle D2 in MW conditions with an initial [PN] of $1.3 \times 10^5 \text{ \#} \cdot \text{cm}^{-3}$. Figure (d) shows particles in the bins 18.1 nm (black), 113.4 nm (light grey) and 385.4 nm (dark grey) with the vehicle D1 in MW conditions with an initial [PN] of $2.5 \times 10^5 \text{ \#} \cdot \text{cm}^{-3}$.

Figure 10a and Figure 10b show the evolution of small particles (in the bins centered at 18.1 and 20.2 nm), for 2 experiments with respective initial [PN] of $9.1 \times 10^3 \text{ \#} \cdot \text{cm}^{-3}$ and $2.8 \times 10^4 \text{ \#} \cdot \text{cm}^{-3}$. In both cases, concentrations increase during the first 30 to 60 minutes of the evolution. The increase of particles with such small diameters could be due to growth of smaller particles, which are initially too small to be detectable by the SMPS. Such particles could be nucleation particles, formed shortly after injection. Their growth due to coagulation or condensation could explain the increase of 18-20 nm particles of Figure 10a and Figure 10b. These figures seem to indicate the presence of nucleation mode particles formed shortly after injection. This is discussed below with results of Figure 11, could indicate the occurrence of nucleation or evaporation of organic compounds as particles are diluted into the chamber. (Guo et al., 2020)

Figure 10c and Figure 10d give the evolution of the particles in 3 diameter bins, for experiments with initial [PN] of $1.3 \times 10^5 \text{ \#} \cdot \text{cm}^{-3}$ and $2.5 \times 10^5 \text{ \#} \cdot \text{cm}^{-3}$ respectively. In Figure 10c, ~~the smaller particles (around 18.1 nm) have a constant concentration.~~ This could mean that they coagulate, and that this coagulation is compensated by the growth of smaller particles, initially undetected by the SMPS. This means that there might also be nucleation mode particles in those conditions. This is consistent with particle size distributions presented in Appendix H. It would however have limited impact on particle number evolution. A small nucleation mode in those high concentration conditions is also consistent with the [PM] increase. Indeed, at high particle concentrations, organic material is more likely to condense rather than nucleate. Moreover, the concentration of the particles in the bin 46.1 nm decrease rapidly during 20 to 30 minutes. Simultaneously, the concentration of larger particles (in the bin 250.3 nm) increases. This seems to indicate that particles around 46.1 nm coagulate to form larger particles. ~~The smaller particles (around 18.1 nm) have a constant concentration. Assuming that those particles should also undergo the process of coagulation, their constant concentration could be explained by the process of nucleation. It would compensate the loss due to coagulation. It could also be compensated by evaporation of organics from larger particles. This last explanation is however unlikely since total mass tends to increase and concentrations of larger particles also increase.~~ The same trends are observed in Figure 10d, with coagulation of larger particles (around 113.4 nm) forming particles with diameters around 385.4 nm. In both cases (Figure 10c and Figure 10d), there might be nucleation mode particles formed at the beginning of the evolution, without a significant impact on particle number evolution. Coagulation of particles is however an important process. ~~both nucleation and coagulation seem to have effects on particles.~~

As those 2 processes (coagulation of the particles in the SMPS range and growth of nucleation mode particles) impact the total number of particles, the conditions in which they occur are investigated with regards to total [PN] evolutions. ~~For some experiments, [PN] would start by increasing, probably due to nucleation or evaporation of organic materials from ultrafine particles. [PN] can also decrease, thus showing that coagulation is the dominant process.~~ Figure 11 shows the [PN] evolution (at the beginning of the evolution) as a function of initial [PN], and the time after which this evolution is completed. It also illustrates the different profiles that [PN] evolutions can have for several initial PN concentrations.

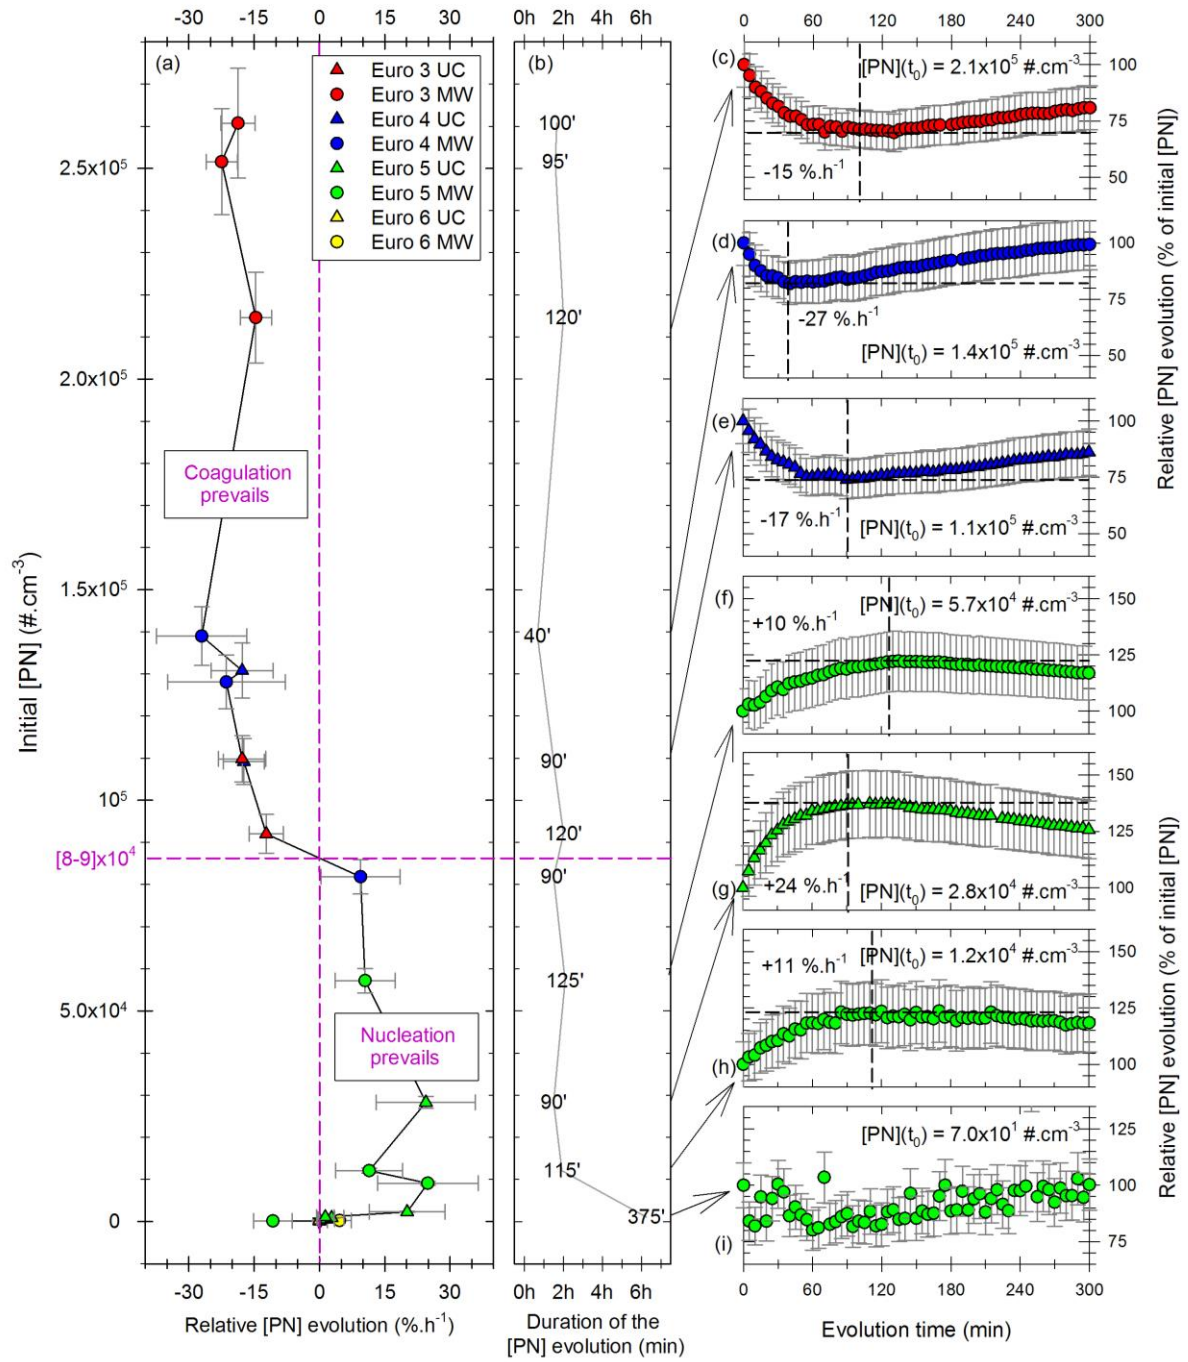

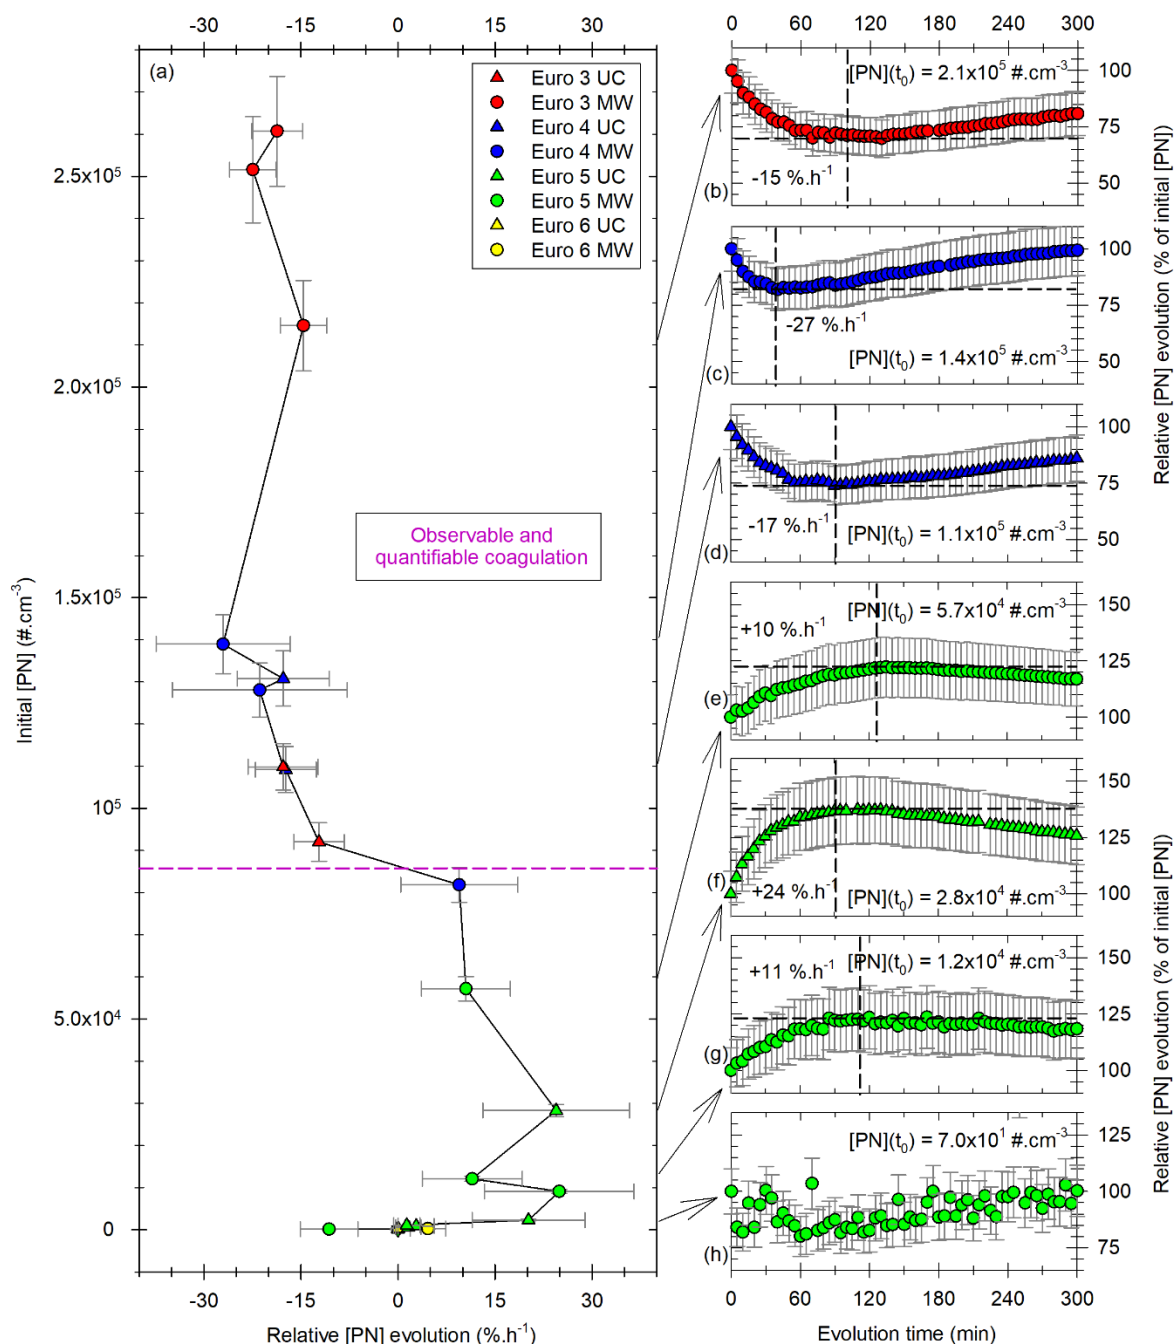


Figure 11: Evolutions of total [PN] for the vehicles of all Euro norms (Euro 3 in red; Euro 4 in blue; Euro 5 in green; Euro 6 in yellow) and in both UC (triangles) and MW (circles) driving. Figure (a) on the y-axis the initial particle concentration, plotted versus the [PN] evolution, expressed in % of the initial concentration per hour. The horizontal pink dashed line shows the concentration for above which it is estimated that coagulation becomes observable and quantifiable with this chamber. the [PN] evolution trend changes between positive and negative (separated with the vertical pink dashed line). Figure (b) gives on the same vertical scale the time in minutes after which the [PN] evolution is completed. Figures (eb) to (ih) show examples of such [PN] evolutions with time, expressed relatively as a percentage of initial [PN], for several initial concentrations ranging between 7.0×10^1 and $2.1 \times 10^5 \# \cdot \text{cm}^{-3}$. The vertical dashed lines indicate the time at which the [PN] evolution stops or changes, with the percentage of initial [PN] reached at this time shown by the horizontal dashed line, and with the average hourly evolution during this period.

Figure 11a shows on the x-axis the relative [PN] evolution, in % of the initial concentration per hour, for different initial particle concentrations on the y-axis. It shows that at low initial PN concentrations (up to $\sim 10^3 \# \cdot \text{cm}^{-3}$), [PN] evolution is not significant, and is either positive or negative, but remains low. Figure 11h shows an evolution with low initial concentration. [PN] remains quite steady during the 5 hours of evolutions. When initial [PN]

increases, in the range 10^3 up to $[8-9] \times 10^4 \text{ \#.cm}^{-3}$, PN concentrations increase as well, up to $24 \text{ \%} \cdot \text{h}^{-1}$. Figure 11fe, Figure 11gf and Figure 11hg show relative [PN] evolution with initial [PN] in ~~the~~that range (10^3 to $[8-9-8] \times 10^4 \text{ \#.cm}^{-3}$). ~~They, and, show medium to high particle increase. This can occur between 1h30 and 2h90 and 120 min. During this period of time, nucleation seems to have an important effect, increasing particle number. However, nucleation alone is not likely to occur during 2 hours.~~ This increase ~~can~~ could also be explained by the growth of ~~small-nucleation mode~~ particles (formed at the beginning of the evolution) ~~that-which became-are~~ initially not detectable ~~in-by~~ the SMPS (as mentioned above)-range. Ning and Sioutas (2010) showed that organic vapors nucleate more easily when particle concentrations are low, and condense more easily when particle concentrations are high. Imhof et al. (2006) showed that nucleation would occur more easily under low traffic density (e.g. with lower initial particle concentrations). Moreover, they found that nucleation mode particles increase until the surface area of soot particles reaches a threshold of $0.5 \times 10^4 \text{ \mu m}^2 \cdot \text{cm}^{-3}$. In this study, nucleation particles seem to be observed and significant for initial [PN] below $[8-9] \times 10^4 \text{ \#.cm}^{-3}$. The equivalent surface concentration is $[1.2-2] \times 10^4 \text{ \mu m}^2 \cdot \text{cm}^{-3}$. This is in the same order of magnitude (factor 2-4) as the threshold found experimentally by Imhof et al. (2006). This confirms that a nucleation mode can be present in our experimental conditions. This nucleation mode would grow due to coagulation or condensation, and become detectable by the SMPS. It would explain the increase of [PN] in those conditions, during 90 to 120 min. -Guo et al. (2020) observed growth of nucleation particles during about 2 hours. This seems to confirm the interpretation of [PN] increase due to the growth of nucleation mode particles becoming detectable by the SMPS. Therefore, the observed [PN] increase in this work is not a physical creation of particles during several hours, since nucleation would occur rapidly after injection. Once the nucleation mode is formed, the actual trend of total particle evolution would be a decrease due to coagulation. The increase of [PN] which is observed is therefore an artifact due to the measurement range of the SMPS. This artifact is predominant for initial concentrations below $[8-9] \times 10^4 \text{ \#.cm}^{-3}$. In those conditions, the process of coagulation cannot be quantified with this chamber and the experimental set up described in this study.

When initial particle concentration ~~goes-is~~ over $[8-9] \times 10^4 \text{ \#.cm}^{-3}$, the main evolution becomes negative. It remains negative during 40 to 120 minutes. It can reach $-27 \text{ \%} \cdot \text{h}^{-1}$, clearly showing that coagulation is occurring. Figure 11eb, Figure 11dc and Figure 11ed gives examples of the [PN] decrease for those high PN initial concentration conditions. In those conditions of initial concentrations, growth of nucleation particles doesn't seem to be significant, as seen in Figure 10. The evolution of [PN] is therefore mainly explained by the process of coagulation of the particles in the SMPS range. In those conditions, this process can be observed and quantified with this chamber and experimental set up. A slight increase can also be observed in the second half of the experiments. It could in part be explained by growth of nucleation mode particles. As discussed for Figure 10c and d, the nucleation mode would be relatively small in those conditions, with limited effects. It would therefore coagulate slowly, thus explaining why the increase is observed at the end of the experiments. Also, considering the error bars, which are more important when the [PN] becomes lower (e.g. when time increases), the slight increase doesn't seem to be significant.

Moreover, the characteristic timescale for coagulation (time necessary for reduction of initial [PN] by a factor 2) was computed using Eq. (13.67) from (Seinfeld and Pandis (-2016), assuming monodisperse distributions, and considering initial particle concentration. For the experiments with initial concentrations below $[8-9] \times 10^4 \text{ \#.cm}^{-3}$, the range of characteristic timescale indicates that the time needed to reach 50 % of the initial concentration is

between 11 and 40 000 hours. This could explain why coagulation is not observed for low initial concentrations in Figure 11a. For the experiments with initial concentrations above $[8-9] \times 10^4 \text{ \#} \cdot \text{cm}^{-3}$, the characteristic timescale ranges between 3.4 and 9.7 hours. This means that significant [PN] decrease due to coagulation can occur in a few hours. It confirms that coagulation is observable in our experimental conditions with high initial concentrations, as shown in Figure 11a. Coagulation therefore seems to be more significant for initial concentrations above $[8-9] \times 10^4 \text{ \#} \cdot \text{cm}^{-3}$. With the chamber and experimental set up of this study, coagulation is observable and quantifiable only for initial concentrations above this value.

~~There seems to be a breakthrough around $[8-9] \times 10^4 \text{ \#} \cdot \text{cm}^{-3}$, where the evolution trend changes. The equivalent surface concentrations are $[1.2-2] \times 10^{-4} \text{ cm}^2 \cdot \text{cm}^{-3}$. Under this threshold, the particle number increase prevails, partially due to nucleation. This is consistent with Ning and Sioutas (2010), who show that organic vapors nucleate more easily when particle concentrations are low, and condense more easily when particle concentrations are high. This is also consistent with Figure 8, which shows that high initial [PN] leads to higher hourly [PM] increases. Above this threshold, particle number decreases over time, and coagulation becomes important, and the most significant process affecting particle number.~~

~~These results are in good agreement with tunnel measurements performed by Imhof et al. (2006). They showed that nucleation would occur more easily under low traffic density (e.g. with lower initial particle concentrations). They also showed that PN nucleation mode concentrations decrease when soot mode particle concentrations are high. Moreover, they found that nucleation mode particles increase until the surface area of soot particles reaches a threshold of $5 \times 10^{-5} \text{ cm}^2 \cdot \text{cm}^{-3}$. This threshold found experimentally in 2 tunnels is close (factor 2-4) to the one found in this study ($[1.2-2] \times 10^{-4} \text{ cm}^2 \cdot \text{cm}^{-3}$) in laboratory conditions.~~

~~Finally, Imhof et al. (2006) found similar trends of traffic influence on particle evolutions as in this study. Condensation is more likely to occur in the presence of highly particle emitting vehicles. Nucleation may be more important when traffic is composed of less polluting vehicles. Results of this study show that the processes affecting particle evolutions is greatly influenced by atmospheric concentrations, which is dependent on traffic density and fleet composition.~~

4. Conclusion

This study presents the characterization of a new 8 m³ environmental chamber with Teflon walls, meant to study the physical evolution of primary pollutants emitted by road traffic. A new size-dependent method to correct particle losses due to leakage and wall deposition was developed and applied. It accounts for experiment-to-experiment variations. It consists in 4 steps, using the [BC] decay and wall loss coefficients from the theory of Crump and Seinfeld (1981). These 2 complementary parts are in good agreement. The total loss coefficients $\alpha + \beta_{\text{ke}}^{\text{mean}}$ of “charged walls” experiments are in the range $[4.19-11.05] \times 10^{-3} \text{ min}^{-1}$ for diesel and $[2.04-5.01] \times 10^{-3} \text{ min}^{-1}$ for gasoline. For “neutral walls” experiments, they are in the range $[1.25-4.09] \times 10^{-3} \text{ min}^{-1}$ for diesel, $[0.93-3.93] \times 10^{-3} \text{ min}^{-1}$ for gasoline and $[0.63-1.01] \times 10^{-3} \text{ min}^{-1}$ for ammonium sulphate. The wall charges appear to be the most important factor affecting particle wall losses. It is responsible for 76 to 93 % of total losses for exhaust experiments, and for 55 % in the case of ammonium sulphate experiments. Results of wall losses obtained from ammonium sulphate particle experiments show similar trends as those found in the literature for a chamber of comparable size.

EFs of PN, PM, BC and IVOCs for Euro 3 to Euro 6 diesel vehicles were studied in detail in order to understand their role on particle evolution in dark conditions. For non-DPF vehicles (D1 and D2), IVOC emissions are dominated by n- and b- alkanes, (64 %), followed by cycloalkanes (14 %) and aromatics (16 %). For the cat DPF vehicle (D5), alkanes represent 78 % of IVOCs, followed by cycloalkanes (19 %) and then aromatics (2 %). For the vehicles with add DPFs (D3 and D6), only alkanes were identified in the IVOCs.

Moreover, this study presents results of evolution in the dark of particles emitted by diesel passenger cars. It is shown that [PM] increase can reach $17 \text{ \%} \cdot \text{h}^{-1}$, without the effects of photochemistry. Uncorrected measurements confirm that this is not an artifact induced by the correction method. It could in part be explained by the walls playing the role of source of organic material. [PM] increase appears to ~~be have a logarithmic correlation~~ with initial [PNPS]. The [PM] increase of older diesel vehicles (Euro 3 and Euro 4) is enhanced in comparison to modern vehicles. This is due to their higher emissions of BC, PN and PM, compared to DPF-equipped vehicles, as well as their emissions of IVOCs. In several cases with high initial [PM], a fraction of IVOCs (0.8 to 34.0 %) and SVOCs (85.5 to 99.9 %) can be found in the particle phase, and participate in the physical evolution of particles. Also, the condensation process is shown to be highly dependent on the available particle surface. ~~Condensation~~ The increase of [PM] is also found to be 4 times faster when the available surface is multiplied by 36.5. However, when initial [PS] is above $\sim 10^4 \mu\text{m}^2 \cdot \text{cm}^{-3}$, [PM] increase seems to be limited. The quantity of organic material available could be a limiting factor. Finally, this study shows that nucleation mode particles are likely to be present for initial concentrations below $[8-9] \times 10^4 \# \cdot \text{cm}^{-3}$. The growth of those particles results in an increase of measured [PN]. This is an artifact of the experimental set up, due to the measurement range of the SMPS, and not an actual creation of particles during several hours. This artifact prevents the study of the process of coagulation in this chamber when initial concentrations are below $[8-9] \times 10^4 \# \cdot \text{cm}^{-3}$. However, above this value, coagulation is the dominant process for [PN] evolutions. It leads to [PN] decrease up to $-27 \text{ \%} \cdot \text{h}^{-1}$. In those conditions, this chamber and experimental set up are well suited for the observation and quantification of the coagulation process.

~~the [PN] decrease (by coagulation) or [PN] increase (by nucleation or condensation on particles below 14 nm) is dependent on the particle concentration. For initial [PN] below $[8-9] \times 10^4 \# \cdot \text{cm}^{-3}$, nucleation or condensation on particles below 14 nm are probably the main processes affecting particle number. Above this threshold, coagulation prevails, due to higher probability for particles to collide. This is also explained by the fact that at high PN concentrations, gas-phase organics are more likely to condense onto preexisting particles than to nucleate.~~

Results found in this study under laboratory conditions are in good agreement with tunnel observations described in the literature. They can help better understand the conditions under which physical processes are more likely to occur. They can be applied to several conditions in the dark, such as winter rush hours or tunnel evolutions.

Data availability. All data from this study are available from the authors upon request.

Supplement.

Author contribution. YL, BD, CF, KS, CL and BV designed the research. YL, CL and BV performed and analyzed the characterization experiments. YL and BV performed and analyzed the emission and evolution experiments. CF, LF and BV performed the ATD-GC-MS analysis. EK, BTR, BD contributed to the experimental set up and

the experimental procedure. PT and PP drove the cars and helped with experimental set up. BV synthesized all the data and wrote the paper with contributions from CL, VC, BD, EK, BTR, KS, CF and YL.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements.

Financial support. This work was supported by the ADEME CORTEA program with the project CAPVEREA and MAESTRO and the ANR program with the project POLEMICS.

References

- André, M., 2004. The ARTEMIS European driving cycles for measuring car pollutant emissions. *Science of The Total Environment* 334–335, 73–84. <https://doi.org/10.1016/j.scitotenv.2004.04.070>
- André, M., Roche, A.-L., Bourcier, L., 2014. Statistiques de parcs et trafic pour le calcul des émissions de polluants des transports routiers en France. IFSTTAR.
- Andreae, M.O., Gelencser, A., 2006. Black carbon or brown carbon? The nature of light-absorbing carbonaceous aerosols. *Atmos. Chem. Phys.* 18.
- Babar, Z.B., Park, J.-H., Kang, J., Lim, H.-J., 2017. Characterization of a Smog Chamber for Studying Formation and Physicochemical Properties of Secondary Organic Aerosol. *Aerosol Air Qual. Res.* 16, 3102–3113. <https://doi.org/10.4209/aaqr.2015.10.0580>
- Barone, T.L., Lall, A.A., Storey, J.M.E., Mulholland, G.W., Prikhodko, V.Y., Frankland, J.H., Parks, J.E., Zachariah, M.R., 2011. Size-Resolved Density Measurements of Particle Emissions from an Advanced Combustion Diesel Engine: Effect of Aggregate Morphology. *Energy & Fuels* 25, 1978–1988. <https://doi.org/10.1021/ef200084k>
- Charan, S.M., Buenconsejo, R.S., Seinfeld, J.H., 2020. Secondary Organic Aerosol Yields from the Oxidation of Benzyl Alcohol (preprint). *Aerosols/Laboratory Studies/Troposphere/Chemistry (chemical composition and reactions)*. <https://doi.org/10.5194/acp-2020-492>
- Charan, S.M., Kong, W., Flagan, R.C., Seinfeld, J.H., 2018. Effect of particle charge on aerosol dynamics in Teflon environmental chambers. *Aerosol Science and Technology* 52, 854–871. <https://doi.org/10.1080/02786826.2018.1474167>
- Chen, T., Liu, Y., Chu, B., Liu, C., Liu, J., Ge, Y., Ma, Q., Ma, J., He, H., 2019. Differences of the oxidation process and secondary organic aerosol formation at low and high precursor concentrations. *Journal of Environmental Sciences* 79, 256–263. <https://doi.org/10.1016/j.jes.2018.11.011>
- Chu, B., Liu, Y., Ma, Q., Ma, J., He, H., Wang, G., Cheng, S., Wang, X., 2016. Distinct potential aerosol masses under different scenarios of transport at a suburban site of Beijing. *Journal of Environmental Sciences* 39, 52–61. <https://doi.org/10.1016/j.jes.2015.11.003>
- Corner, J., Pendlebury, E.D., 1951. The Coagulation and Deposition of a Stirred Aerosol. *Proceedings of the Physical Society. Section B* 64, 645–654. <https://doi.org/10.1088/0370-1301/64/8/304>
- Crump, J.G., Flagan, R.C., Seinfeld, J.H., 1982. Particle Wall Loss Rates in Vessels. *Aerosol Science and Technology* 2, 303–309. <https://doi.org/10.1080/02786828308958636>
- Crump, J.G., Seinfeld, J.H., 1981. Turbulent deposition and gravitational sedimentation of an aerosol in a vessel of arbitrary shape. *Journal of Aerosol Science* 12, 405–415. [https://doi.org/10.1016/0021-8502\(81\)90036-7](https://doi.org/10.1016/0021-8502(81)90036-7)
- Drozd, G.T., Zhao, Y., Saliba, G., Frodin, B., Maddox, C., Oliver Chang, M.-C., Maldonado, H., Sardar, S., Weber, R.J., Robinson, A.L., Goldstein, A.H., 2019. Detailed Speciation of Intermediate Volatility and Semivolatile Organic Compound Emissions from Gasoline Vehicles: Effects of Cold-Starts and Implications for Secondary Organic Aerosol Formation. *Environ. Sci. Technol.* 53, 1706–1714. <https://doi.org/10.1021/acs.est.8b05600>
- EEA, 2020. Average age of road vehicles per country — European Environment Agency [WWW Document]. URL https://www.eea.europa.eu/data-and-maps/daviz/average-age-of-road-vehicles-6#tab-chart_1 (accessed 11.6.20).

935 Giechaskiel, B., Ntziachristos, L., Samaras, Z., Scheer, V., Casati, R., Vogt, R., 2005. Formation potential of vehicle exhaust nucleation mode particles on-road and in the laboratory. *Atmospheric Environment* 39, 3191–3198. <https://doi.org/10.1016/j.atmosenv.2005.02.019>

Grieshop, A.P., Logue, J.M., Donahue, N.M., Robinson, A.L., 2009. Laboratory investigation of photochemical oxidation of organic aerosol from wood fires 1: measurement and simulation of organic aerosol evolution. *Atmospheric Chemistry and Physics* 9, 1263–1277. <https://doi.org/10.5194/acp-9-1263-2009>

940 Guo, S., Hu, M., Peng, J., Wu, Z., Zamora, M.L., Shang, D., Du, Z., Zheng, J., Fang, X., Tang, R., Wu, Y., Zeng, L., Shuai, S., Zhang, W., Wang, Y., Ji, Y., Li, Y., Zhang, A.L., Wang, W., Zhang, F., Zhao, J., Gong, X., Wang, C., Molina, M.J., Zhang, R., 2020. Remarkable nucleation and growth of ultrafine particles from vehicular exhaust. *Proc Natl Acad Sci USA* 117, 3427–3432. <https://doi.org/10.1073/pnas.1916366117>

945 Harrison, R.M., Rob MacKenzie, A., Xu, H., Alam, M.S., Nikolova, I., Zhong, J., Singh, A., Zeraati-Rezaei, S., Stark, C., Beddows, D.C.S., Liang, Z., Xu, R., Cai, X., 2018. Diesel exhaust nanoparticles and their behaviour in the atmosphere. *Proc. R. Soc. A* 474, 20180492. <https://doi.org/10.1098/rspa.2018.0492>

Hennigan, C.J., Miracolo, M.A., Engelhart, G.J., May, A.A., Presto, A.A., Lee, T., Sullivan, A.P., McMeeking, G.R., Coe, H., Wold, C.E., Hao, W.-M., Gilman, J.B., Kuster, W.C., de Gouw, J., Schichtel, B.A., Collett, J.L., Kreidenweis, S.M., Robinson, A.L., 2011. Chemical and physical transformations of organic aerosol from the photo-oxidation of open biomass burning emissions in an environmental chamber. *Atmos. Chem. Phys.* 11, 7669–7686. <https://doi.org/10.5194/acp-11-7669-2011>

950 Huang, R.-J., Zhang, Y., Bozzetti, C., Ho, K.-F., Cao, J.-J., Han, Y., Daellenbach, K.R., Slowik, J.G., Platt, S.M., Canonaco, F., Zotter, P., Wolf, R., Pieber, S.M., Bruns, E.A., Crippa, M., Ciarelli, G., Piazzalunga, A., Schwikowski, M., Abbaszade, G., Schnelle-Kreis, J., Zimmermann, R., An, Z., Szidat, S., Baltensperger, U., Haddad, I.E., Prévôt, A.S.H., 2014. High secondary aerosol contribution to particulate pollution during haze events in China. *Nature* 514, 218–222. <https://doi.org/10.1038/nature13774>

955 IARC, 2016. Outdoor air pollution (No. 109). IARC.

Imhof, D., Weingartner, E., Prévôt, A., Ordóñez, C., Kurtenbach, R., Wiesen, P., Rodler, J., Sturm, P., Mccrae, I., Ekström, M., Baltensperger, U., 2006. Aerosol and NO_x emission factors and submicron particle number size distributions in two road tunnels with different traffic regimes. *Atmos. Chem. Phys.* 17.

960 Jeong, C.-H., Evans, G.J., Healy, R.M., Jadidian, P., Wentzell, J., Liggio, J., Brook, J.R., 2015. Rapid physical and chemical transformation of traffic-related atmospheric particles near a highway. *Atmospheric Pollution Research* 6, 662–672. <https://doi.org/10.5094/APR.2015.075>

965 Kaltsonoudis, C., Jorga, S.D., Louvaris, E., Florou, K., Pandis, S.N., 2019. A portable dual-smog-chamber system for atmospheric aerosol field studies. *Atmos. Meas. Tech.* 12, 2733–2743. <https://doi.org/10.5194/amt-12-2733-2019>

Kostenidou, E., Martinez-Valiente, A., R'Mili, B., Marques, B., Temime-Roussel, B., Durand, A., André, M., Liu, Y., Louis, C., Vansevenant, B., Ferry, D., Laffon, C., Parent, P., D'Anna, B., 2021. Technical note: Emission factors, chemical composition, and morphology of particles emitted from Euro 5 diesel and gasoline light-duty vehicles during transient cycles. *Atmos. Chem. Phys.* 21, 4779–4796. <https://doi.org/10.5194/acp-21-4779-2021>

970 Kozawa, K.H., Winer, A.M., Fruin, S.A., 2012. Ultrafine particle size distributions near freeways: Effects of differing wind directions on exposure. *Atmospheric Environment* 63, 250–260. <https://doi.org/10.1016/j.atmosenv.2012.09.045>

975 La, Y.S., Camredon, M., Ziemann, P.J., Valorso, R., Matsunaga, A., Lannuque, V., Lee-Taylor, J., Hodzic, A., Madronich, S., Aumont, B., 2016. Impact of chamber wall loss of gaseous organic compounds on secondary organic aerosol formation: explicit modeling of SOA formation from alkane and alkene oxidation. *Atmos. Chem. Phys.* 16, 1417–1431. <https://doi.org/10.5194/acp-16-1417-2016>

980 Lambe, A.T., Onasch, T.B., Massoli, P., Croasdale, D.R., Wright, J.P., Ahern, A.T., Williams, L.R., Worsnop, D.R., Brune, W.H., Davidovits, P., 2011. Laboratory studies of the chemical composition and cloud condensation nuclei (CCN) activity of secondary organic aerosol (SOA) and oxidized primary organic aerosol (OPOA). *Atmos. Chem. Phys.* 16.

Leskinen, A., Yli-Pirilä, P., Kuusalo, K., Sippula, O., Jalava, P., Hirvonen, M.-R., Jokiniemi, J., Virtanen, A., Komppula, M., Lehtinen, K.E.J., 2015. Characterization and testing of a new environmental chamber. *Atmospheric Measurement Techniques* 8, 2267–2278. <https://doi.org/10.5194/amt-8-2267-2015>

985 Louis, C., Liu, Y., Martinet, S., D'Anna, B., Valiente, A.M., Boreave, A., R'Mili, B., Tassel, P., Perret, P., André, M., 2017. Dilution effects on ultrafine particle emissions from Euro 5 and Euro 6 diesel and gasoline vehicles. *Atmospheric Environment* 169, 80–88. <https://doi.org/10.1016/j.atmosenv.2017.09.007>

990 Louis, C., Liu, Y., Tassel, P., Perret, P., Chaumond, A., André, M., 2016. PAH, BTEX, carbonyl compound, black-carbon, NO₂ and ultrafine particle dynamometer bench emissions for Euro 4 and Euro 5 diesel and gasoline passenger cars. *Atmospheric Environment* 141, 80–95. <https://doi.org/10.1016/j.atmosenv.2016.06.055>

Lu, J., Ge, X., Liu, Y., Chen, Y., Xie, X., Ou, Y., Ye, Z., Chen, M., 2019. Significant secondary organic aerosol production from aqueous-phase processing of two intermediate volatility organic compounds. *Atmospheric Environment* 211, 63–68. <https://doi.org/10.1016/j.atmosenv.2019.05.014>

995 Lu, Q., Zhao, Y., Robinson, A.L., 2018. Comprehensive organic emission profiles for gasoline, diesel, and gas-turbine engines including intermediate and semi-volatile organic compound emissions. *Atmos. Chem. Phys.* 18, 17637–17654. <https://doi.org/10.5194/acp-18-17637-2018>

1000 Matsunaga, A., Ziemann [‡], P.J., 2010. Gas-Wall Partitioning of Organic Compounds in a Teflon Film Chamber and Potential Effects on Reaction Product and Aerosol Yield Measurements. *Aerosol Science and Technology* 44, 881–892. <https://doi.org/10.1080/02786826.2010.501044>

1005 May, A.A., Nguyen, N.T., Presto, A.A., Gordon, T.D., Lipsky, E.M., Karve, M., Gutierrez, A., Robertson, W.H., Zhang, M., Brandow, C., Chang, O., Chen, S., Cicero-Fernandez, P., Dinkins, L., Fuentes, M., Huang, S.-M., Ling, R., Long, J., Maddox, C., Massetti, J., McCauley, E., Miguel, A., Na, K., Ong, R., Pang, Y., Rieger, P., Sax, T., Truong, T., Vo, T., Chattopadhyay, S., Maldonado, H., Maricq, M.M., Robinson, A.L., 2014. Gas- and particle-phase primary emissions from in-use, on-road gasoline and diesel vehicles. *Atmospheric Environment* 88, 247–260. <https://doi.org/10.1016/j.atmosenv.2014.01.046>

1010 Morawska, L., Ristovski, Z., Jayaratne, E.R., Keogh, D.U., Ling, X., 2008. Ambient nano and ultrafine particles from motor vehicle emissions: Characteristics, ambient processing and implications on human exposure. *Atmospheric Environment* 42, 8113–8138. <https://doi.org/10.1016/j.atmosenv.2008.07.050>

Nah, T., McVay, R.C., Pierce, J.R., Seinfeld, J.H., Ng, N.L., 2017. Constraining uncertainties in particle-wall deposition correction during SOA formation in chamber experiments. *Atmospheric Chemistry and Physics* 17, 2297–2310. <https://doi.org/10.5194/acp-17-2297-2017>

1015 Ning, Z., Sioutas, C., 2010. Atmospheric Processes Influencing Aerosols Generated by Combustion and the Inference of Their Impact on Public Exposure: A Review. *Aerosol Air Qual. Res.* 10, 43–58. <https://doi.org/10.4209/aaqr.2009.05.0036>

Nomura, Y., Hopke, P.K., Fitzgerald, B., Mesbah, B., 1997. Deposition of Particles in a Chamber as a Function of Ventilation Rate. *Aerosol Science and Technology* 27, 62–72. <https://doi.org/10.1080/02786829708965458>

1020 Okuyama, K., Kousaka, Y., Yamamoto, S., Hosokawa, T., 1986. Particle loss of aerosols with particle diameters between 6 and 2000 nm in stirred tank. *Journal of Colloid and Interface Science* 110, 214–223. [https://doi.org/10.1016/0021-9797\(86\)90370-X](https://doi.org/10.1016/0021-9797(86)90370-X)

Papapostolou, V., Lawrence, J.E., Diaz, E.A., Wolfson, J.M., Ferguson, S.T., Long, M.S., Godleski, J.J., Koutrakis, P., 2011. Laboratory evaluation of a prototype photochemical chamber designed to investigate the health effects of fresh and aged vehicular exhaust emissions. *Inhalation Toxicology* 23, 495–505. <https://doi.org/10.3109/08958378.2011.587034>

1025 Pathak, R.K., Stanier, C.O., Donahue, N.M., Pandis, S.N., 2007. Ozonolysis of α -pinene at atmospherically relevant concentrations: Temperature dependence of aerosol mass fractions (yields). *Journal of Geophysical Research: Atmospheres* 112. <https://doi.org/10.1029/2006JD007436>

1030 Pierce, J.R., Engelhart, G.J., Hildebrandt, L., Weitkamp, E.A., Pathak, R.K., Donahue, N.M., Robinson, A.L., Adams, P.J., Pandis, S.N., 2008. Constraining Particle Evolution from Wall Losses, Coagulation, and Condensation-Evaporation in Smog-Chamber Experiments: Optimal Estimation Based on Size Distribution Measurements. *Aerosol Science and Technology* 42, 1001–1015. <https://doi.org/10.1080/02786820802389251>

1035 Platt, S.M., El Haddad, I., Zardini, A.A., Clairotte, M., Astorga, C., Wolf, R., Slowik, J.G., Temime-Roussel, B., Marchand, N., Ježek, I., Drinovec, L., Močnik, G., Möhler, O., Richter, R., Barmet, P., Bianchi, F., Baltensperger, U., Prévôt, A.S.H., 2013. Secondary organic aerosol formation from gasoline vehicle emissions in a new mobile environmental reaction chamber. *Atmospheric Chemistry and Physics* 13, 9141–9158. <https://doi.org/10.5194/acp-13-9141-2013>

1040 Pratap, V., Kiran, S.A., Bian, Q., Pierce, J.R., Hopke, P.K., Nakao, S., 2020. Observation of Vapor Wall Deposition in a Smog Chamber Using Size Evolution of Pure Organic Particles. *Aerosol Air Qual. Res.* 20, 2705–2714. <https://doi.org/10.4209/aaqr.2020.05.0268>

1045 Rivas, I., Beddows, D.C.S., Amato, F., Green, D.C., Järvi, L., Hueglin, C., Reche, C., Timonen, H., Fuller, G.W., Niemi, J.V., Pérez, N., Aurela, M., Hopke, P.K., Alastuey, A., Kulmala, M., Harrison, R.M., Querol, X., Kelly, F.J., 2020. Source apportionment of particle number size distribution in urban background and traffic stations in four European cities. *Environment International* 135, 105345. <https://doi.org/10.1016/j.envint.2019.105345>

1050 Sartelet, K., Zhu, S., Moukhtar, S., André, M., André, J.M., Gros, V., Favez, O., Brasseur, A., Redaelli, M., 2018. Emission of intermediate, semi and low volatile organic compounds from traffic and their impact on secondary organic aerosol concentrations over Greater Paris. *Atmospheric Environment* 180, 126–137. <https://doi.org/10.1016/j.atmosenv.2018.02.031>

- Sbai, S.E., Li, C., Boreave, A., Charbonnel, N., Perrier, S., Vernoux, P., Bentayeb, F., George, C., Gil, S., 2020. Atmospheric photochemistry and secondary aerosol formation of urban air in Lyon, France. *Journal of Environmental Sciences* 99, 311–323. <https://doi.org/10.1016/j.jes.2020.06.037>
- 1055 Schnell, M., Cheung, C.S., Leung, C.W., 2006. Investigation on the coagulation and deposition of combustion particles in an enclosed chamber with and without stirring. *Journal of Aerosol Science* 37, 1581–1595. <https://doi.org/10.1016/j.jaerosci.2006.06.001>
- Seinfeld, J.H., Pandis, S.N., 2016. *Atmospheric chemistry and physics: from air pollution to climate change*.
- 1060 Totton, T.S., Chakrabarti, D., Misquitta, A.J., Sander, M., Wales, D.J., Kraft, M., 2010. Modelling the internal structure of nascent soot particles. *Combustion and Flame* 157, 909–914. <https://doi.org/10.1016/j.combustflame.2009.11.013>
- TSI, 2010. *Aerosol Instrument Manager Software for Scanning Mobility Particle Sizer (SMPS) Spectrometer User's Manual*.
- 1065 Verheggen, B., Mozurkewich, M., 2006. An inverse modeling procedure to determine particle growth and nucleation rates from measured aerosol size distributions. *Atmos. Chem. Phys.* 16.
- Wang, N., Jorga, S., Pierce, J., Donahue, N., Pandis, S., 2018a. Particle Wall-loss Correction Methods in Smog Chamber Experiments. *Atmospheric Measurement Techniques Discussions* 1–29. <https://doi.org/10.5194/amt-2018-175>
- 1070 Wang, N., Kostenidou, E., Donahue, N.M., Pandis, S.N., 2018b. Multi-generation chemical aging of α -pinene ozonolysis products by reactions with OH. *Atmos. Chem. Phys.* 18, 3589–3601. <https://doi.org/10.5194/acp-18-3589-2018>
- Wang, X., Liu, T., Bernard, F., Ding, X., Wen, S., Zhang, Y., Zhang, Z., He, Q., Lü, S., Chen, J., Saunders, S., Yu, J., 2014. Design and characterization of a smog chamber for studying gas-phase chemical mechanisms and aerosol formation. *Atmospheric Measurement Techniques* 7, 301–313. <https://doi.org/10.5194/amt-7-301-2014>
- 1075 Weitkamp, E.A., Sage, A.M., Pierce, J.R., Donahue, N.M., Robinson, A.L., 2007. Organic Aerosol Formation from Photochemical Oxidation of Diesel Exhaust in a Smog Chamber. *Environmental Science & Technology* 41, 6969–6975. <https://doi.org/10.1021/es070193r>
- 1080 Xu, R., Alam, M.S., Stark, C., Harrison, R.M., 2020. Behaviour of traffic emitted semi-volatile and intermediate volatility organic compounds within the urban atmosphere. *Science of The Total Environment* 720, 137470. <https://doi.org/10.1016/j.scitotenv.2020.137470>
- Yeh, G.K., Ziemann, P.J., 2015. Gas-Wall Partitioning of Oxygenated Organic Compounds: Measurements, Structure–Activity Relationships, and Correlation with Gas Chromatographic Retention Factor. *Aerosol Science and Technology* 49, 727–738. <https://doi.org/10.1080/02786826.2015.1068427>
- 1085 Zhang, K.M., Wexler, A.S., 2004. Evolution of particle number distribution near roadways—Part I: analysis of aerosol dynamics and its implications for engine emission measurement. *Atmospheric Environment* 38, 6643–6653. <https://doi.org/10.1016/j.atmosenv.2004.06.043>
- Zhang, K.M., Wexler, A.S., Zhu, Y.F., Hinds, W.C., Sioutas, C., 2004. Evolution of particle number distribution near roadways. Part II: the ‘Road-to-Ambient’ process. *Atmospheric Environment* 38, 6655–6665. <https://doi.org/10.1016/j.atmosenv.2004.06.044>
- 1090 Zhang, X., Cappa, C.D., Jathar, S.H., McVay, R.C., Ensberg, J.J., Kleeman, M.J., Seinfeld, J.H., 2014. Influence of vapor wall loss in laboratory chambers on yields of secondary organic aerosol. *Proceedings of the National Academy of Sciences* 111, 5802–5807. <https://doi.org/10.1073/pnas.1404727111>
- 1095 Zhang, X., Schwantes, R.H., McVay, R.C., Lignell, H., Coggon, M.M., Flagan, R.C., Seinfeld, J.H., 2015. Vapor wall deposition in Teflon chambers. *Atmos. Chem. Phys.* 15, 4197–4214. <https://doi.org/10.5194/acp-15-4197-2015>
- Zhao, Y., Lambe, A.T., Saleh, R., Saliba, G., Robinson, A.L., 2018. Secondary Organic Aerosol Production from Gasoline Vehicle Exhaust: Effects of Engine Technology, Cold Start, and Emission Certification Standard. *Environ. Sci. Technol.* 52, 1253–1261. <https://doi.org/10.1021/acs.est.7b05045>
- 1100 Zhao, Y., Nguyen, N.T., Presto, A.A., Hennigan, C.J., May, A.A., Robinson, A.L., 2016. Intermediate Volatility Organic Compound Emissions from On-Road Gasoline Vehicles and Small Off-Road Gasoline Engines. *Environmental Science & Technology* 50, 4554–4563. <https://doi.org/10.1021/acs.est.5b06247>
- Zhao, Y., Nguyen, N.T., Presto, A.A., Hennigan, C.J., May, A.A., Robinson, A.L., 2015. Intermediate Volatility Organic Compound Emissions from On-Road Diesel Vehicles: Chemical Composition, Emission Factors, and Estimated Secondary Organic Aerosol Production. *Environ. Sci. Technol.* 49, 11516–11526. <https://doi.org/10.1021/acs.est.5b02841>
- 1105 Zhu, J., Penner, J.E., Lin, G., Zhou, C., Xu, L., Zhuang, B., 2017. Mechanism of SOA formation determines magnitude of radiative effects. *Proc Natl Acad Sci USA* 114, 12685–12690. <https://doi.org/10.1073/pnas.1712273114>
- 1110

Appendix A

Below are shown the speed profiles of the Artemis Urban and Artemis Motorway cycles.

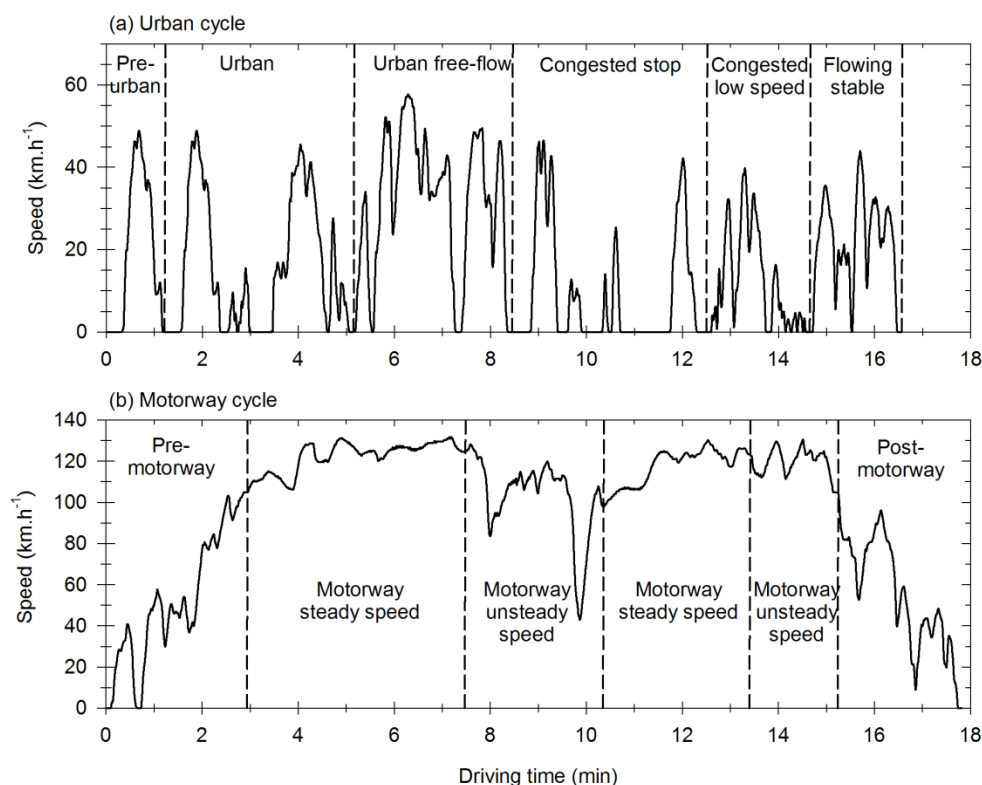


Figure A1: Speed in km.h⁻¹ during the Artemis Urban cycle (a) and the Artemis Motorway cycle (b), with the different types of driving found in those conditions.

Appendix B

Below are listed the constants taken for the calculation of $\beta(D_p)$:

- $k_B=1.381 \times 10^{-23} \text{ J.K}^{-1}$ the Boltzmann constant
- $T \text{ (K)}$ the temperature in the chamber for each experiment
- $\mu=1.8 \times 10^{-5} \text{ kg.m}^{-1}.\text{s}^{-1}$ the viscosity of air
- $\rho_p=1.2 \text{ g.cm}^{-3}$ the particle density
- $g=9.81 \text{ m.s}^{-2}$ the g-force
- $\lambda=6.51 \text{ nm}$ the mean-free path of air

Appendix C

Table C1: Emission factors in mg.km⁻¹ of: linear (n-) and branched (b-) alkanes with carbon number below between 12 and 22 (C12-C22), of naphthalene, cycloalkanes and aromatics measured with the ATD-GC-MS method. The sum of those EFs gives the IVOC EFs. Emission factors of n- and b- alkanes with carbon number above 22. Emission factors of NMHCs measured by flame ionization detection. Emissions below quantification limit are indicated as “< QL”. Ratio of IVOC/NMHC expressed as % of NMHCs. Results are shown for vehicles D1 (Euro 3), D2 (Euro 4), D3 (Euro 5 add DPF), D5 (Euro 5 cat DPF) and D6 (Euro 6 add DPF and SCR), in both UC and MW conditions.

Vehicle	D1		D2		D3 (add DPF)		D5 (cat DPF)		D6 (add DPF and SCR)	
Cycle	UC	MW	UC	MW	UC	MW	UC	MW	UC	MW

n-/b- alkanes C12-C22 (mg.km ⁻¹)	1.05 ± 0.31	1.25 ± 0.08	0.19 ± 0.03	0.55 ± 0.48	0.12 ± 0.02	0.02 ± 0.01	0.72 ± 0.10	0.65 ± 0.68	0.04 ± 0.04	0.02 ± 0.02
Naphthalene (mg.km ⁻¹)	0.03 ± 0.03	0.06 ± 0.02	0.04 ± 0.01	0.09 ± 0.05	<QL	<QL	0.01 ± 0.01	<QL	<QL	<QL
Cycloalkanes (mg.km ⁻¹)	0.2 ± 0.10	0.22 ± 0.01	0.05 ± 0.04	0.16 ± 0.16	<QL	<QL	0.29 ± 0.06	0.08 ± 0.12	<QL	<QL
Aromatics (mg.km ⁻¹)	0.04 ± 0.49	0.05 ± 0.13	0.23 ± 0.40	0.12 ± 0.74	<QL	<QL	0.04 ± 0.17	0.01 ± 0.82	<QL	<QL
IVOCs (mg.km ⁻¹)	1.32 ± 0.93	1.58 ± 0.24	0.5 ± 0.48	0.92 ± 1.42	0.12 ± 0.04	0.02 ± 0.01	1.06 ± 0.34	0.74 ± 1.62	0.04 ± 0.08	0.02 ± 0.04
n-/b- alkanes C>22 (mg.km ⁻¹)	1.56 ± 1.26	1.27 ± 1.35	0.26 ± 0.30	0.66 ± 0.01	0.35 ± 0.06	0.29 ± 0.43	1.46 ± 1.47	2.63 ± 3.17	0.17 ± 0.12	0.2 ± 0.24
NMHCs (mg.km ⁻¹)	102.93 ± 39.43	22.82 ± 2.79	52.31 ± 27.29	18.38 ± 2.29	22.68 ± 0.89	2.25 ± 0.53	113.37 ± 2.00	3.01 ± 4.14	5.18 ± 0.96	No data
IVOC/NMHC (%)	1.28 ± 0.48	6.91 ± 0.59	0.96 ± 0.77	5.00 ± 4.02	0.54 ± 0.09	0.88 ± 0.21	0.93 ± 0.15	24.73 ± 27.10	0.79 ± 0.78	No data

* QL = Quantification Limit

Appendix D

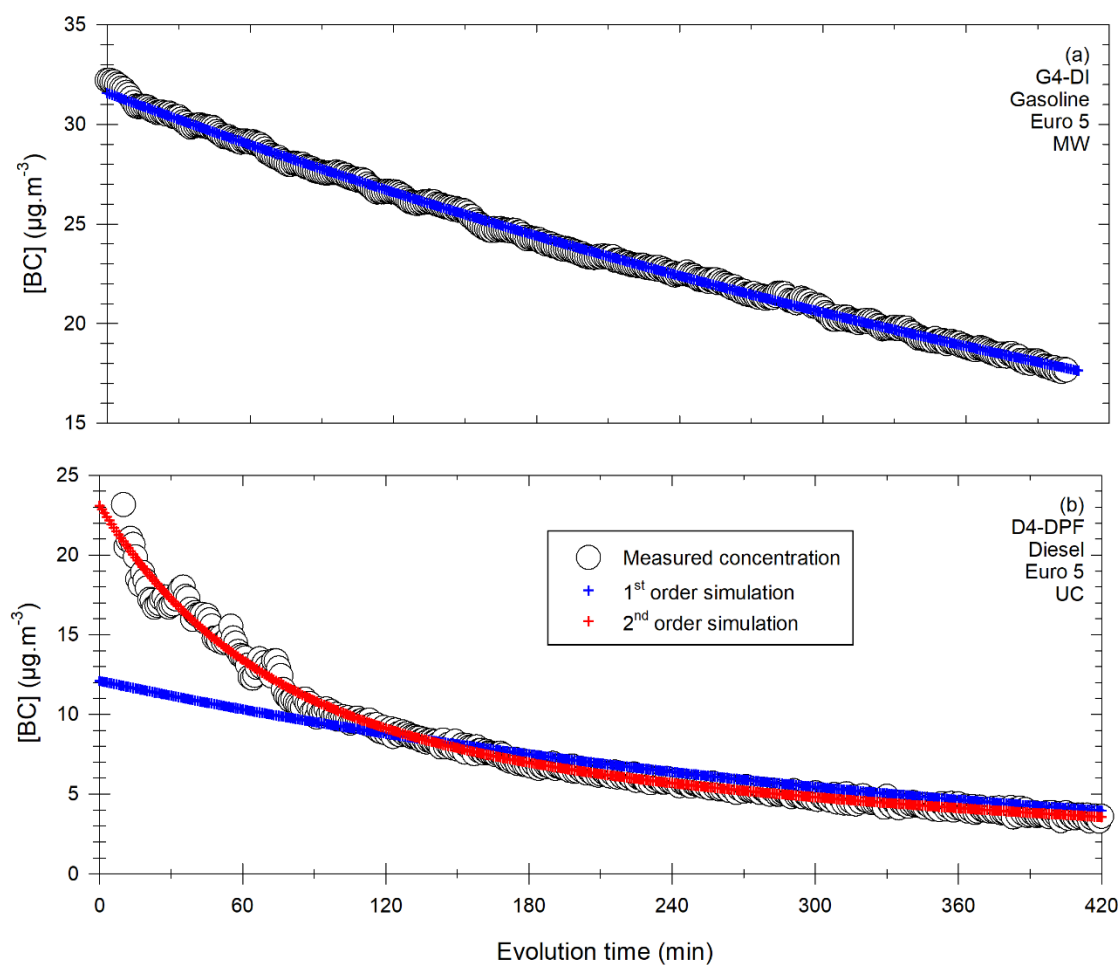


Figure D1: Evolution of the measured BC concentration (white circles) for the G4-DI vehicle in MW conditions (a) and the D4-DPF vehicle in UC conditions (b). The curve is fitted with a 1st order exponential decay (blue) in both cases, and with a 2nd order exponential decay (red) on figure (b).

Figure D1a and Figure D1b show 2 examples of [BC] evolutions and decay fits. Figure D1a is an example of an evolution well fitted by a 1st order exponential decay. Figure D1b shows an evolution not well fitted by a 1st order exponential decay. For instance, the fitted initial concentration is 12.1 µg.m⁻³ whereas the actual initial concentration is 23.2 µg.m⁻³. This means that this fit would induce an error of 48 % on the initial concentration. However, the 2nd order exponential decay matches very well the measured values.

Appendix E

To verify how well [PM] corrections from steps 1 and 2 agree, the average relative difference between $[PM]_{corrected}^{step1}(t)$ and $[PM]_{corrected}^{step2}(t)$ is computed as given in Eq. (E1).

$$\frac{1}{n} \times \left(\sum_{i=0}^n \frac{|[PM]_{corrected}^{step1}(t_i) - [PM]_{corrected}^{step2}(t_i)|}{[PM]_{corrected}^{step1}(t_i)} \times 100 \right) \quad (E1)$$

Appendix F

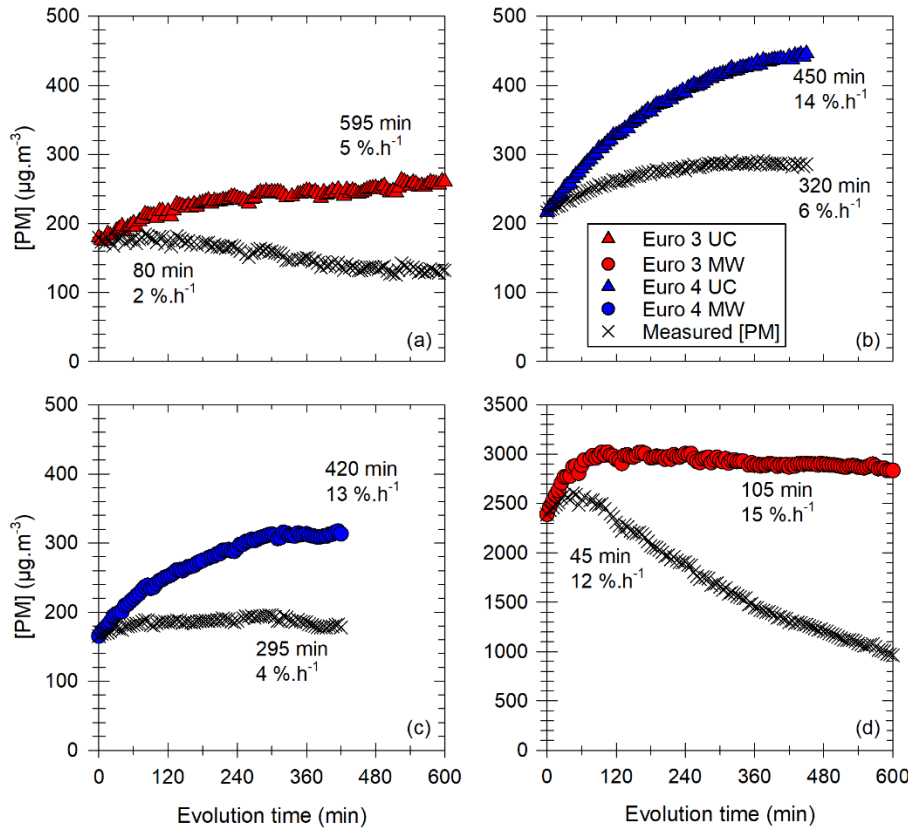


Figure F1: Evolution of the corrected PM concentrations, for the Euro 3 vehicle (red) and Euro 4 vehicle (blue) in both UC (triangles) and MW (circles) conditions. Figures (a), (b) and (c) represent long increases, whereas Figure (d) represents a short increase. The corrected concentrations are compared to the measured (e.g. uncorrected) PM concentrations (black crosses). Labels give for each evolution (measured or corrected) the time at which [PM] reaches its maximum, as well as the associated hourly increase.

Figure F1 shows uncorrected [PM] measurements (black crosses) and corrected [PM] for the Euro 3 (red) and Euro 4 (blue) vehicles, in UC (triangles) and MW (circles) conditions. Figure (a), (b) and (c) show “long” evolutions for which corrected [PM] reaches its maximum after several hours (> 400 min). Those figures

correspond to the points on the upper left side of Figure 9a, with lower initial particle surface. Figure (d) shows a “rapid” [PM] evolution, for which the corrected concentration reaches its maximum in tan 105 minutes. It corresponds to one of the points on the lower right side of Figure 9a, with higher initial particle surface. For the “long” evolution of Figure (a), the measured concentration increases during 80 min. After that, it slightly decreases, with a decrease rate smaller than that of BC (hence the continuous increase in corrected [PM]). Figures (b) and (c) show that measured [PM] steadily increase during 295 to 320 minutes. They then remain pretty constant. Considering the fact that all of these measured concentrations (Figures (a) to (c)) are subject to leakage and wall deposition, the fact that they increase during up to 6 hours and then mostly remain constant shows that continuous increase of [PM] is possible during several hours. Therefore, the continuous increases of corrected [PM] observed on Figures 8 and 9 are not likely to be an artifact induced by the correction algorithm. These increases are obviously more important and longer on corrected concentrations, but this is normal as leakage and wall deposition, which both lower [PM], are corrected. Moreover, the “rapid” evolution of Figure (d) lasts 80 min for measured [PM], with an increase rate of $12\% \cdot h^{-1}$. These values indicate that there is indeed a rapid and significant increase in [PM] during the beginning of the evolution. Then, concentrations start slowly decreasing, before reaching a steady decrease rate (similar to that of BC). This is consistent with the evolution of the corrected concentration, which increases significantly, then increases more slightly, before it reaches a maximum and remains constant. Here again, it seems that the significant and rapid increase observed for corrected [PM] of Figure (d) is not an artifact induced by the correction method.

Appendix G

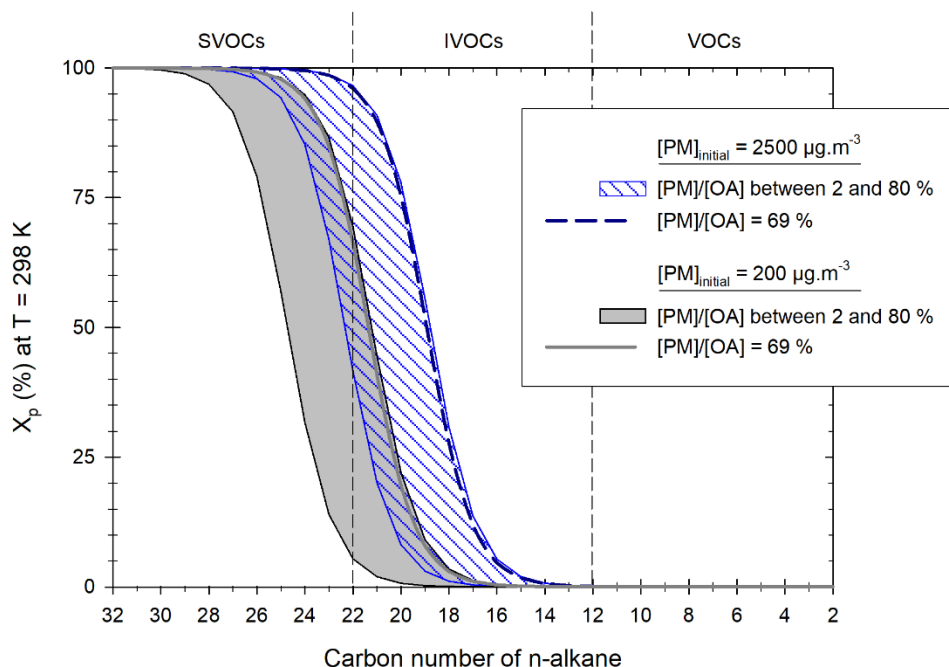


Figure G1: Particle fraction at $T = 298\text{ K}$ of n-alkanes (VOCs, IVOCs and SVOCs), in %, with carbon number between 2 and 32. The repartition is given assuming 2 initial PM concentrations of $200\text{ }\mu\text{g.m}^{-3}$ (grey) and $2500\text{ }\mu\text{g.m}^{-3}$ (blue), typical of significant [PM] increase. X_p is computed with different estimates of organic aerosol concentrations [OA], ranging from 2 to 80 % of initial [PM] (grey area and blue hatched area respectively). It is also computed assuming that [OA] = 69 % of initial [PM], with initial [PM] of $200\text{ }\mu\text{g.m}^{-3}$ (continuous grey line) and $2500\text{ }\mu\text{g.m}^{-3}$ (dashed blue line).

The effective saturation concentrations of n-alkanes up to C32 is obtained with the method described in Lu et al. (2018), for VOCs (C>12), IVOCs (C12-C22) and SVOCs (C23-C32). Using Equation (14.43) from Seinfeld and Pandis (2016), the fraction in particle phase is computed, for 2 conditions of initial [PM] typical of significant [PM] increase observed on Figure 9 (200 $\mu\text{g.m}^{-3}$ and 2500 $\mu\text{g.m}^{-3}$). The organic aerosol concentration [OA] is estimated to range roughly between 2 and 80 % of [PM]. This range is based on studies giving the ratio [PM]/[OA] or the ratio EC/OC, which cover a wide range of values (Kostenidou et al., 2021; May et al., 2014). The wide range is caused by several parameters, such as measurement technique, experimental conditions, driving conditions, vehicle type (motorization and aftertreatment technologies). Results are given on Figure G1, as areas delimited by the lower (2 %) and upper (80 %) estimates of [PM]/[OA]. The grey area is for initial [PM] = 200 $\mu\text{g.m}^{-3}$ (with [OA] ranging from 4 to 160 $\mu\text{g.m}^{-3}$) and the hatched blue area is for initial [PM] = 2500 $\mu\text{g.m}^{-3}$ (with [OA] ranging from 50 to 160 $\mu\text{g.m}^{-3}$). Also, in this study, the Euro 3 and Euro 4 vehicles have differences between initial concentrations of PM and BC of about 69.6 % of initial [PM]. This indicates that [OA] could represent up to 69 % of [PM]. This value is used for another estimation of [OA]. The associated fractions are shown on Figure G1 for initial [PM] = 200 $\mu\text{g.m}^{-3}$ (grey line, associated [OA] = 138 $\mu\text{g.m}^{-3}$) and for initial [PM] = 2500 $\mu\text{g.m}^{-3}$ (dashed blue line, associated [OA] = 1725 $\mu\text{g.m}^{-3}$).

For the condition with initial [PM] = 200 $\mu\text{g.m}^{-3}$, the percentage of n-alkanes IVOCs present in the particle phase ranges from 0.8 % to 13.7 %, for [OA] estimated as 2 % and 80 % of [PM] respectively. The percentage of n-alkanes SVOCs in the particle phase ranges from 85.5 % to 98.7 % respectively. For the estimation with [OA] = 69 % of [PM], 12.7 % of n-alkanes IVOCs and 98.5 % of n-alkanes SVOCs are in the particle phase.

For the condition with initial [PM] = 2500 $\mu\text{g.m}^{-3}$, the percentage of n-alkanes IVOCs present in the particle phase ranges from 6.7 % to 34.0 %, for [OA] estimated as 2 % and 80 % of [PM] respectively. The percentage of n-alkanes SVOCs in the particle phase ranges from 96.5 % to 99.9 % respectively. For the estimation with [OA] = 69 % of [PM], 32.7 % of n-alkanes IVOCs and 99.9 % of n-alkanes SVOCs are in the particle phase.

These results show that at such high particle concentrations, significant fractions of n-alkanes IVOCs and n-alkanes SVOCs could be present in the particle phase. Overall, it indicates that IVOCs can participate in the [PM] evolutions observed on Figure 8 and Figure 9, due to high PM concentrations and presence of IVOCs (Figure 6d) for the Euro 3 and Euro 4 vehicles.

Appendix H

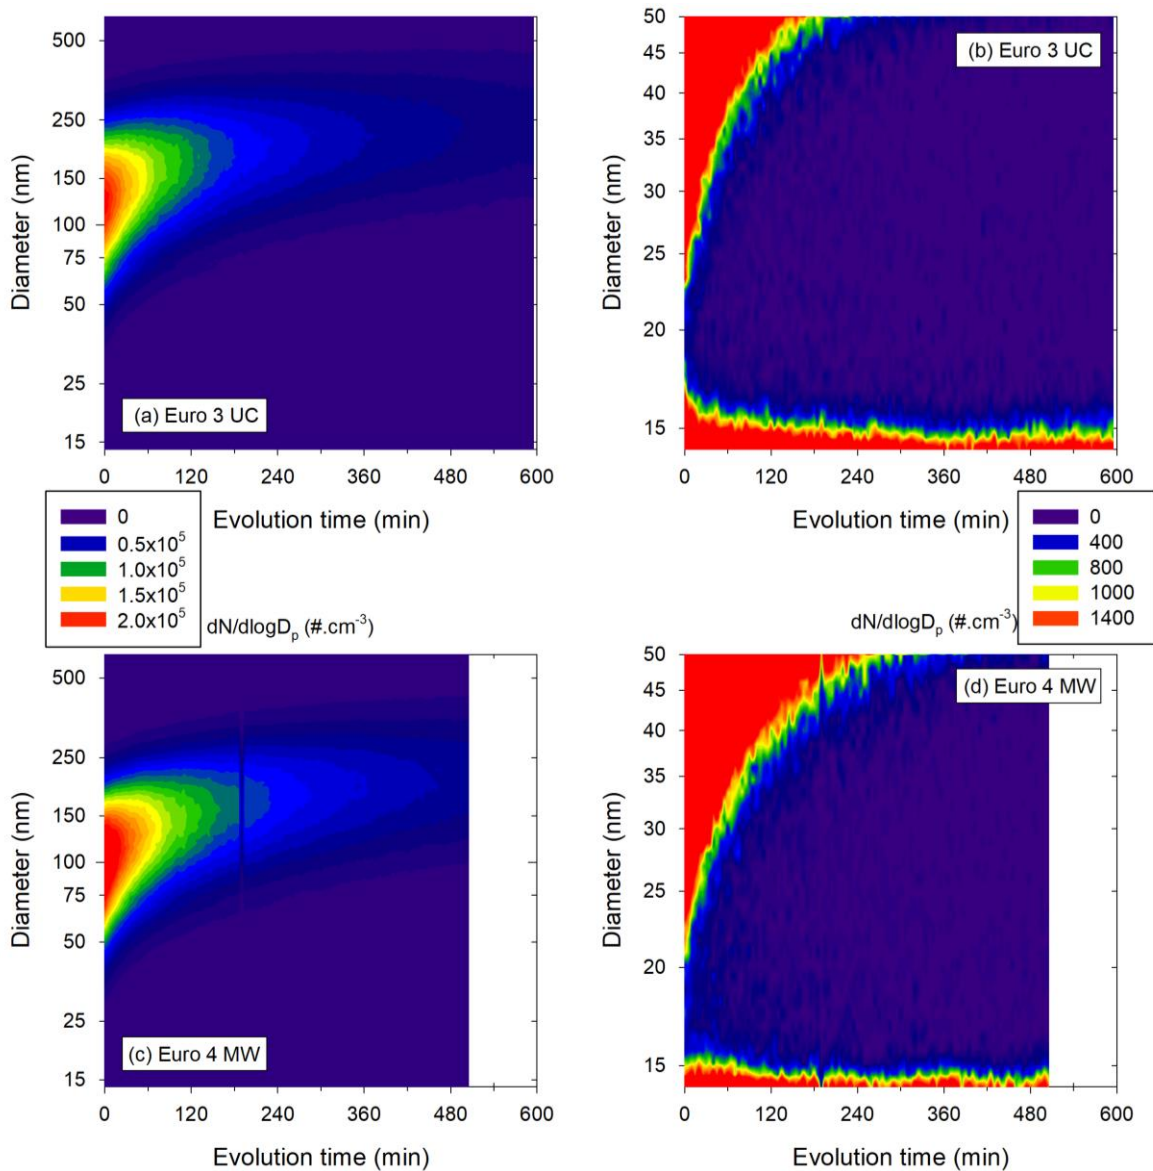


Figure H1: Measured PN distribution evolutions for the Euro 3 UC ((a) and (b)) and the Euro 4 MW ((c) and (d)) conditions. The x-axis gives the evolution time in min. The y-axis gives the diameter in nm. The color scale gives the lognormal concentration. Figures (a) and (c) give the PN distributions for the whole SMPS measurement range. Figures (b) and (d) show the same cycles for the range 14 to 50 nm. The color scales are changed to see the smallest particles.

Figure H1 shows measured lognormal [PN] evolutions (e.g. not corrected) for 2 cycles concerned by continuous [PM] increase during several hours, as seen on Figure 9. The cycles are from the 2 concerned vehicles: Euro 3 UC (Figures (a) and (b)) and Euro 4 MW (Figures (c) and (d)) conditions. On the left are presented the measured [PN] evolutions over the whole SMPS measurement range. On the right are presented the same data, but with a focus on smaller diameters (up to 50 nm), and with a more adapted scale. It shows that in both conditions there is the presence of small particles (below 20 nm). Their concentrations show a slight decrease over the course of the experiments, but they are present until the end. They could come from growth (due to coagulation or condensation) of nucleation mode particles. Their concentrations remaining quite constant could be because they are at the same time increasing (from growth of nucleation mode particles) and decreasing (from their own coagulation). This

phenomenon could partly explain the continuous [PM] increase observed on Figure 8 and Figure 9 for the Euro 3 and Euro 4 vehicles.