

3D trajectories and velocities of rainfall drops in a multifractal turbulent wind field

Auguste Gires¹, Ioulia Tchiguirinskaia¹, and Daniel Schertzer¹

¹Hydrologie Meteorologie et Complexite (HM&Co), Ecole des Ponts Paris-Tech, Champs-sur-Marne, France

Correspondence: Auguste Gires (auguste.gires@enpc.fr)

Abstract. Weather radars measure rainfall in altitude whereas hydro-meteorologists are mainly interested in rainfall at ground level. During their fall, drops are advected by the wind which affects the location of the measured field.

The governing equation of a rain drop motion relates the acceleration to the forces of gravity and buoyancy along with the drag force. It depends non-linearly on the instantaneous relative velocity between the drop and the local wind; which yields to complex behaviour. Here, the drag force is expressed in a standard way with the help of a drag coefficient expressed as a function of Reynolds number. Corrections accounting for the oblateness of drops greater than 1-2 mm are suggested and validated through comparison of retrieved “terminal fall velocity” (i.e. without wind) with commonly used relationships in the literature.

An explicit numerical scheme then is implemented to solve this equation for 3+1D turbulent wind field, and hence analyse the temporal evolution of the velocities and trajectories of rain drops during their fall. It appears that multifractal features of the input wind are simply transferred to drop velocity with an additional fractional integration whose level depends on drop size, and a slight time shift. Using actual high resolution 3D sonic anemometer and a scale invariant approach to simulate realistic fluctuations of wind in space, trajectories of drop of various size falling from ~~1500~~ 1500 m are studied. For a strong wind event, drops located within a radar gate in altitude during 5 min are spread on the ground over an area of size few kilometers. Spread for drops of a given diameter are found to cover few radar pixels. Consequences on measurements of hydro-meteorological extremes which are needed to improve resilience of urban areas are discussed.

Copyright statement. TEXT

1 Introduction

During their fall, drops are advected by wind. Quantitative rainfall estimation with the help of weather radars are affected by this issue since drops can be displaced horizontally between their measurement location in altitude and their ground impact location which is of interest for hydro-meteorologists. This effect is usually called wind drift in the literature and sometimes wind advection. The potential bias and uncertainty introduced in radar measurement is stronger at higher resolution, i.e. typically with pixel size smaller than 1-2 km^2 which are needed for urban applications for example. Collier (1999) suggests that

correction schemes should be implemented for this kind or higher radar resolution. Lauri et al. (2012) reported that far from
25 radar (i.e. typically more than 150 ~~km~~*km*), even with low elevation (0.3°), displacements of few tens of *km* are found, which
actually distort the measured area.

Most correction schemes rely on the use of 4D wind profiles derived from numerical predictions models (Mittermaier et al.,
2004; Lack and Fox, 2007; Lauri et al., 2012; Sandford, 2015) or combination of such with reanalysis (Dai et al., 2013, 2019).
The latter also accounts for drop size distribution (DSD). With such, they report an improvement by $\approx 3\%$ of the correlation
30 between radar and rain gauge measurement and a reduction of discrepancy of $\approx 18\%$ over eight selected events. Lack and Fox
(2007) used directly Doppler radar wind measurement at 2.5 *km* scale to adjust for wind drift effect. In general, correction
schemes use wind data at rather coarse resolution (typically *km*(s)) and assume a constant wind shear. Nevertheless, some
variability at smaller space-time scales is usually acknowledged, especially during convective events, i.e. the ones for which
wind drift causes the greatest uncertainty (Lack and Fox, 2007).

35 Wind effects on rainfall drops is also reported to generate discrepancies between measured vertical velocities and expected
terminal fall ones. For example, Montero-Martinez and Garcia-Garcia (2016) studied events with calm, light and moderate
wind with various rainfall levels, and found a widening of the fall velocity distribution under windy conditions. ~~For example,~~
~~they~~They found super-terminal drops only for diameters < 0.7 *mm* and more often under wind conditions. Sub-terminal fall
velocities for drops of size up to 2 *mm* are reported. Bringi et al. (2018) found that under low wind speed and turbulence,
40 no discrepancies are found with expectations while under high wind speed and turbulence, there is a clear widening of the
distribution. A linear decrease of mean fall velocity with increasing turbulent intensity is reported. Maximum decreases of
25–30 % are observed. Thurai et al. (2019) also found such decrease for drops greater than 2 *mm* in high turbulence intensity
conditions. It is associated to an asymmetry also appearing in the drop shape. They also found that drop horizontal velocities
in both direction and magnitude show “remarkable agreement” with the wind sensor at 10 *m*. Stout et al. (1995) explored
45 the effect of non linear drag coefficient on fall velocity through numerical simulations. They showed that even heavy drops
exhibited a reduced settling velocity in isotropic turbulence.

Turbulence is found to have contradictory effects on the distribution of fall velocity. Indeed increasing turbulence level in
windy and rainfall condition will yield to more collision and breakup, resulting in smaller drops inheriting the speed of larger
parent ones, hence observations of super-terminal velocities. On the other end, turbulence is said to yield to a decrease in fall
50 velocities because drops (especially ones < 1 *mm*) are more affected by eddies.

Such findings on the discrepancies between observed and expected fall velocities has effects on the relation between rainfall
and kinetic energy, i.e. the erosivity ‘power’ of rainfall (Pedersen and Hasholt, 1995) and also building performance to outdoor
conditions (Tian et al., 2018; Blocken et al., 2011).

The studies previously mentioned basically do not account for small scales wind fluctuations in both space and time. In
55 this paper, we suggest to study the behaviour of individual rainfall drops of various sizes in a high resolution turbulent wind
field. The variability of the wind is accounted for through the framework of Universal Multifractals (UM) (see Schertzer and
Tchiguirinskaia, 2020, for a recent review). Such physically based framework is designed to analyse and simulate geophysical
fields exhibiting extreme variability over wide range of space-time scales as wind. Drop oblateness is also accounted for.

The paper is organized as follow. In section 2, a deterministic equation for the fall of individual oblate drops in a 3D field is derived and validated through the comparison of obtained terminal fall velocity with commonly used formulas. In section 3, the framework of Universal Multifractals is briefly reminded. Then, the drops are subjected to simulated multifractal fields as wind input and multifractal behaviour of horizontal drop velocity is assessed. Finally, in section 4, 3D wind is reconstructed from high resolution 3D sonic anemometer data and strong scaling assumptions. This field is used to study the trajectories of drops between falling from ~~1-500-1500~~ 1500 m down to the ground.

65 2 A deterministic equation for oblate drops in a wind field

2.1 Formulation of the equation

Let us denote (x,y,z) the horizontal, lateral and vertical coordinates in a standard Cartesian framework with unit vectors $(\underline{e}_x, \underline{e}_y, \underline{e}_z)$. We aim at writing the motion equation of a particle of water (a drop) of velocity \underline{v}_p , density ρ_p and falling in the atmosphere under the influence of the gravity $\underline{g} = -g\underline{e}_z$ (where $g = 9.81 \text{ m}\cdot\text{s}^{-2}$) and the wind \underline{v}_{wind} (with three components). The density of the atmosphere is denoted ρ_{air} . The water particle is characterized by its equivolumic diameter D_{eq} which corresponds to the diameter of the sphere having the same total volume. Hence we have $Vol = \frac{\pi}{6} D_{eq}^3$. Finally the relative velocity between the wind and the falling particle is $\underline{v}_{rel} = \underline{v}_{wind} - \underline{v}_p$ (\underline{v}_{rel} is the vector with three components while v_{rel} is its euclidean norm).

The drop is subjected to three forces:

- 75 – The gravity equal to $\rho_p Vol \underline{g}$
- The buoyancy equal to $-\rho_{air} Vol \underline{g}$
- The drag, which is commonly written as $\frac{1}{2} \frac{\pi D^2}{4} c_D \rho_{air} v_{rel} \underline{v}_{rel}$. Re is the common Reynolds number $Re = \frac{\rho_{air} v_{rel} D}{\mu_{air}}$ where μ_{air} is the absolute viscosity of air. c_D is the drag coefficient and depends in general of Re and D_{eq} . The next section is devoted to its determination.

80 As a consequence, the equation of motion of the falling particle is given by Newton's second law which equals the mass times the acceleration to the net force (here it was divided by the mass):

$$\frac{d\underline{v}_p}{dt} = \frac{3}{4D} c_D \underline{\rho_{air}} \frac{\rho_{air}}{\rho_p} v_{rel} \underline{v}_{rel} + \underline{g} \quad (1)$$

2.2 Determination of the drag coefficient

Before discussing how the drag coefficient is determined, it should be reminded that rainfall drops which are considered in this paper are not spherical. Indeed drops greater than typically 1.5 mm become oblate in their fall. This oblateness increases with size. A very commonly used model consists in an ellipsoid with an axis ratio varying depending on the size. Thurai et al. (2007) showed that such model is too simplistic since drops are not symmetric in the direction perpendicular to their fall. Following

an in-depth analysis of the drop shape assessed with the help of a 2D-video disdrometer (Kruger and Krajewski, 2002) in the measurement campaign of an artificial rainfall experiment; they suggested the following formula for the shape:

$$90 \quad x = \underbrace{ca_1}_{\text{red}} \sqrt{1 - \left(\frac{z}{c_2}\right)^2} \underbrace{\sqrt{1 - \left(\frac{z}{a_2}\right)^2}}_{\text{blue}} \left[\cos^{-1} \left(\frac{z}{\underbrace{c_2 c_3}_{\text{red}} \underbrace{a_2 a_3}_{\text{blue}}} \right) \right] \left[\underbrace{ca_4}_{\text{red}} \left(\frac{z}{\underbrace{c_2}_{\text{red}} \underbrace{a_2}_{\text{blue}}} \right)^2 + 1 \right] = f(z) \quad (2)$$

with:

$$\begin{aligned} a_1 &= \frac{1}{\pi} (0.02914D_{eq}^2 + 0.9263D_{eq} + 0.07791) \\ a_2 &= -0.01938D_{eq}^2 + 0.4698D_{eq} + 0.09538 \\ a_3 &= -0.06123D_{eq}^3 + 1.3880D_{eq}^2 - 10.41D_{eq} + 28.34 \\ a_4 &= -0.01352D_{eq}^3 + 0.2014D_{eq}^2 - 0.8964D_{eq} + 1.226 \text{ if } D_{eq} > 4 \text{ mm} \\ a_4 &= 0 \text{ if } 1.5 \text{ mm} \leq D_{eq} \leq 4 \text{ mm} \end{aligned} \quad (3)$$

This shape corresponding to a solid of revolution around z axis is used in this paper. It is displayed in Fig. 2.a for drops with equivolumic diameter ranging from 1.5 mm to 5.5 mm. It should be mentioned that computing the volume as an integral of the shape ($Vol = \int_{z_{min}}^{z_{max}} \pi f(z)^2 dz$, see Fig. 1) yields to minor differences with the expected volume of $\frac{\pi D_{eq}^3}{6}$. They are highlighted in Fig. 2.b. As a consequence in order to account for this small difference, once an equivolumic diameter is set, the corresponding one that would lead to the expected volume from Eq. 2 and 3 is computed from a correspondence table. The relationship, which is obviously close to the bisector is displayed in Fig. 2.c with the horizontal axis corresponding to the real D_{eq} of the drop and the vertical axis the D_{eq} to be input in Eq. 2 and 3 to retrieve the correct expected volume. A consequence is that oblateness of drops will be considered only from equivolumic diameter greater than 1.527 mm.

For non spherical shapes, it is quite tricky to compute the corresponding drag coefficient as a function of the Reynolds number. The literature about this issue is quite abundant and the interested reader is referred to chapter 4 of the PhD dissertation of Baheri (2015) or Hölzer and Sommerfeld (2008) for details. In the approach they implemented, three parameters are used to characterize the non spherical shapes of the falling particle with the help of three dimensionless parameters: The sphericity, the crosswise sphericity and the lengthwise sphericity. The two last depend on the orientation of the particle with regards to the flow. Here it is assumed that drops are oriented perpendicularly to the flow, i.e. the 'z' axis of Eq. 2 is parallel to \underline{v}_{rel} . In the general case, these parameters may be complex to assess but with the shape derived from Eq. 2 (Thurai et al., 2007), theoretical formula can be obtained. See Fig. 1 for an illustration of the computations via integral calculus. The three parameters are:

- The sphericity ψ which is equal to ratio between the surface area (SA) of the equivolumic sphere to the actual surface area of the particle. It is equal to one for sphere and decreases for less and less spherical particles. $\psi = \frac{\pi D_{eq}^2}{\text{Surface Area}}$. In the framework of this paper, i.e. we have $SA = \int_{z_{min}}^{z_{max}} 2\pi f(z) \sqrt{1 + f'(z)^2} dz$

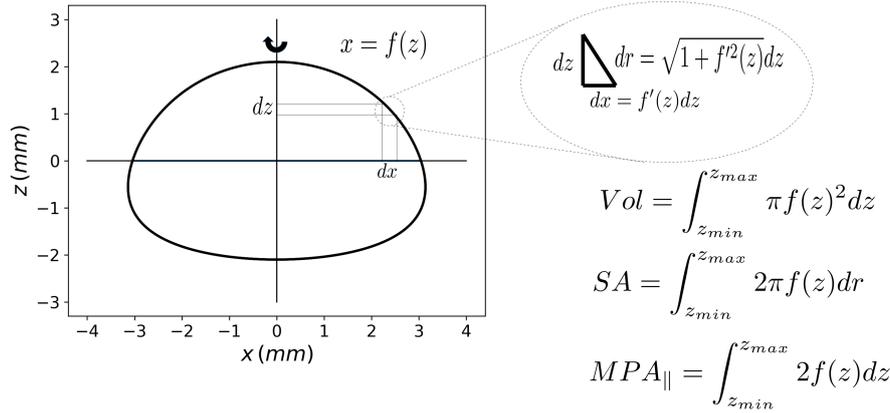


Figure 1. (a) Drop shape model used in this paper; (b) Drop illustration on how the volume vs. equivolumic diameter, (eVol) Diameter relation to retrieved wanted volume, the surface area (dSA) Parameters characterizing non-spherical shape of drops vs. equivolumic diameter, and the mean projected longitudinal cross-sectional area (eMPA_{||}) Drag coefficient C_d vs of the particle used in this paper can be computed via integral calculus. Re -number; (c) Terminal fall velocity vs The drop is actually a solid of revolution around the 'z' axis. equivolumic diameter

- The crosswise sphericity ψ_{\perp} which is equal to ratio between the projected area of the volume equivalent sphere and the projected area of the particle normal to the falling direction (here e_z). $\psi_{\perp} = \frac{D_{eq}^2}{D_{max}^2}$. It is equal to one for sphere and decreases for larger drops since they become oblate.
- 115 – The lengthwise sphericity $\psi_{||}$ which is defined as to the cross-sectional area of the volume equivalent sphere divided by the difference between half the surface area and the mean projected longitudinal cross-sectional area of particle ($MPA_{||}$).
$$\psi_{||} = \frac{\pi(\frac{D_{eq}}{2})^2}{\frac{SA}{2} - MPA_{||}}$$
. In the specific drop model of this paper, we have $MPA_{||} = \int_{z_{min}}^{z_{max}} 2f(z) dz$ (it basically corresponds to the area in 2D of the drop plotted in Fig. 1).

The evolution of these parameters as a function of D_{eq} for the considered drops is in Fig. 2.d. The increasing oblateness of
 120 drops with increasing size is translated through the fact that the parameters are getting further away from 1. In order to define the drag coefficient, the corrections suggested by Hölzer and Sommerfeld (2008) to account for non sphericity of particles are then implemented on the formula of White (1974) previously used by Stout et al. (1995) who worked only on spherical drops. This yields:

$$C_{cD} = \frac{8}{Re\sqrt{\psi_{||}}} + \frac{16}{Re\sqrt{\psi_{\perp}}} + \frac{6}{(1 + \sqrt{Re})\psi^{3/4}} + \frac{0.25 \times 10^{0.4(-\log\psi)^{0.2}}}{\psi_{\perp}} \quad (4)$$

125 The evolution of $C_D - C_{cD}$ as a function of Re for various drop parameters is displayed in Fig. 2.e and follows standard patterns.

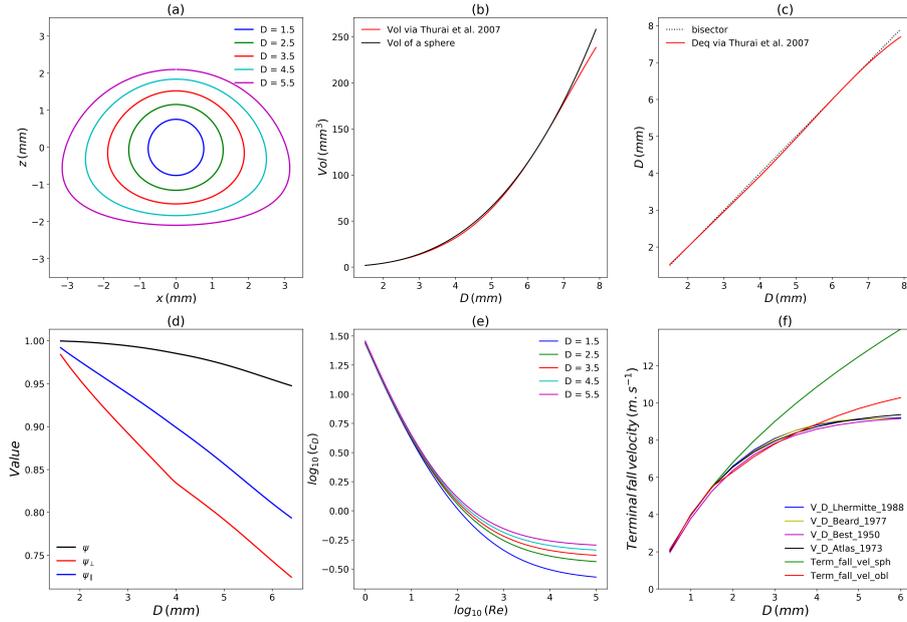


Figure 2. (a) Drop shape model used in this paper; (b) Drop volume vs. equivolumic diameter; (c) Diameter relation to retrieved wanted volume; (d) Parameters characterizing non spherical shape of drops vs. equivolumic diameter; (e) Drag coefficient C_D vs. Re number; (f) Terminal fall velocity vs. equivolumic diameter

2.3 Validation of the formula

In order to validate the developed equation, the retrieved terminal fall velocity is assessed for each equivolumic diameter. It corresponds to the velocity of the permanent regime with no wind, i.e. the drag plus the buoyancy exactly compensate the gravity. Computations are carried out with $\rho_{air} = 1.205 \text{ kg.m}^{-3}$, $\mu_{air} = 1.81 \cdot 10^{-5} \text{ kg.m}^{-1}.m^{-2}$, $\rho_{water} = 998.2 \text{ kg.m}^{-3}$ $g = 9.81 \text{ m.s}^{-2}$ as in Stout et al. (1995).

The relation between obtained terminal fall velocity vs. equivolumic diameter is displayed in red in Fig. 2.f. The developed equations enables to retrieve commonly used relation (Beard, 1977; Lhermitte, 1988; Best, 1950; Atlas et al., 1973) for drops of diameter up to 4 mm. The deviations found when considering spherical drops (in green) are visible for diameter greater than 2 mm which highlights the need to account for drop oblateness.

2.4 Numerical scheme for solving the equation

Eq. 1 is solved numerically through the implementation of a simple Eulerian numerical scheme. In such framework: (i) a discretisation of time with time step Δt is introduced yielding to discrete time steps $t_n = n \times \Delta t$ where n is an integer; (ii) we aim at finding an approximation of v_p at time step n denoted $v_{p,n}$; (iii) the first derivative in Eq. 1 is approximated as $\frac{dv_p}{dt}(t_n) \approx \frac{v_{p,n+1} - v_{p,n}}{\Delta t}$. This yields to the following equation for the numerical scheme:

$$\underline{v}_{p,n+1} = \underline{v}_{p,n} + \Delta t \left[\frac{3}{4D} c_{D,n} \underline{\rho}_{air} \frac{\rho_{air}}{\rho_p} v_{rel,n} \underline{v}_{rel,n} + \underline{g} \frac{\rho_p - \rho_{air}}{\rho_p} \right] \quad (5)$$

where $\underline{v}_{rel,n}$ and $c_{D,n}$ are computed at time step t_n using the formulas discussed in section 2.1 and 2.2. Assuming some initial conditions (always no horizontal velocity and a vertical one equal to the terminal fall for the corresponding diameter), it is then possible to reconstruct the time series of velocity for the drops. From it, the temporal evolution of the position (i.e. the trajectory) is derived. It is needed to properly assess the wind accounting for the current position of the drop. A time step of $\Delta = 0.01 \text{ s}$ and $\Delta t = 0.01 \text{ s}$ is used in this paper, and it was checked that it ensured a stability of the numerical scheme.

3 Behaviour of horizontal drop velocity with multifractal input

3.1 Brief reminder on Universal Multifractal framework

It is outside the scope of the paper to introduce in details the framework of Universal Multifractals (UM). Hence, only the most important elements are reminded here and interested readers are referred to the references mentioned or to a recent review by Schertzer and Tchiguirinskaia Schertzer and Tchiguirinskaia (2020) for more details.

Let us consider a field ϵ_λ at a resolution λ defined as the ratio between the outer scale (L) and observation scale (l); $\lambda = L/l$. For multifractal fields, the moment of order q of the field is power law related to the resolution:

$$\langle \epsilon_\lambda^q \rangle \approx \lambda^{K(q)} \quad (6)$$

where $K(q)$ is the scaling moment function. It fully characterizes the variability across scales of the field. In the specific framework of UM (Schertzer and Lovejoy, 1987, 1997), towards which multiplicative cascades processes converge, only two parameters with physical interpretation are needed to characterize $K(q)$ for conservative fields:

- C_1 , the mean intermittency co-dimension, which measures the clustering of the (average) intensity at smaller and smaller scales. $C_1 = 0$ for an homogeneous field;
- α , the multifractality index ($0 \leq \alpha \leq 2$), which measures the clustering variability with regards to the intensity level.

For UM, we have:

$$K(q) = \frac{C_1}{\alpha - 1} (q^\alpha - q) \quad (7)$$

A non-conservative field (ψ_λ), i.e. whose mean is not preserved across scale can be written as $\psi_\lambda \approx \epsilon_\lambda \lambda^{-H}$, where H is the non-conservativeness parameter. $H = 0$ for conservative fields. Positive values correspond to a fractional integration to go from ϵ_λ to ψ_λ and to stronger correlations within the field ψ_λ . Negative values correspond to a fractional differentiation. H is typically between 0 and 1 for geophysical fields.

The first step of a multifractal analysis usually consists in a spectral analysis. For multifractal fields the power spectra (E) should scale with wave number k :

$$E(k) = k^{-\beta} \quad (8)$$

170 with the spectral slope β

$$\beta = 1 + 2H - K_c(2) \quad (9)$$

where K_c is the scaling moment function (Eq. 7) of the conservative part of the field. To analyse the latter, a Trace Moment (TM) is implemented. It notably enables to assess the quality of the scaling behaviour. It basically consists in plotting Eq. 6 in log-log. Straight lines should be retrieved and the slope gives $K(q)$. Finally, UM parameters are estimated with the help of
175 the Double Trace Moment (DTM) technique which is tailored for UM fields and enables robust estimation of UM parameters (Lavallée et al., 1993).

3.2 Methodology

In this section, the scaling behaviour of horizontal drop velocity is assessed using numerical simulations. Working with such input whose features are fully known is helpful to understand how drops react to wind.

180 More precisely, a horizontal input $v_{x,wind}$ for Eq. 1 is simulated with the help of blunt multifractal discrete cascades (Gires et al., 2020). Such process yields only positive values which is not realistic for wind. Hence a standard 'complex trick' was used to generate a field with both positive and negative values (Schertzer and Lovejoy, 1995). To implement it, two fields X_1 and X_2 are generated with the wanted features, and a third one is obtained with the help of the following equation (~~Re~~ Real is the real part):

$$185 \quad X = \text{ReReal}[exp(\log X_1 + i \log X_2)] \quad (10)$$

Such field divided by two was used as input. 1024 time step long series are generated with UM parameter $\alpha = 1.7$ and $C_1 = 0.2$, which corresponds to typical value for turbulent wind fields (Fitton et al., 2011). The time step is assumed to be of 0.01 s which means that drops are basically studied over 10 s. For the initial conditions, drops are assumed to have no horizontal velocity and a vertical component equal to its corresponding terminal fall velocity. Since scaling is a statistical behaviour, an ensemble
190 of 100 independent samples was generated and the corresponding ensemble of horizontal drop velocity was simulated using Eq. 5 for drops of various sized ($D_{eq} \in [0.1, 0.2, 0.4, 0.6, 0.8, 1, 1.5, 2, 3, 4]$)

3.3 Results and discussion

Fig. 3 displays the temporal evolution of drops' horizontal velocity over 10 s for a sample of wind input (in black). Three drop diameters are displayed (0.1, 0.6 and 2 mm). It can be seen, notably on the zoomed part of the figure (lower panel) that the
195 smaller drop ($D_{eq} = 0.1$ mm, in blue) follows well wind fluctuations with only a limited dampening of the fluctuations. A

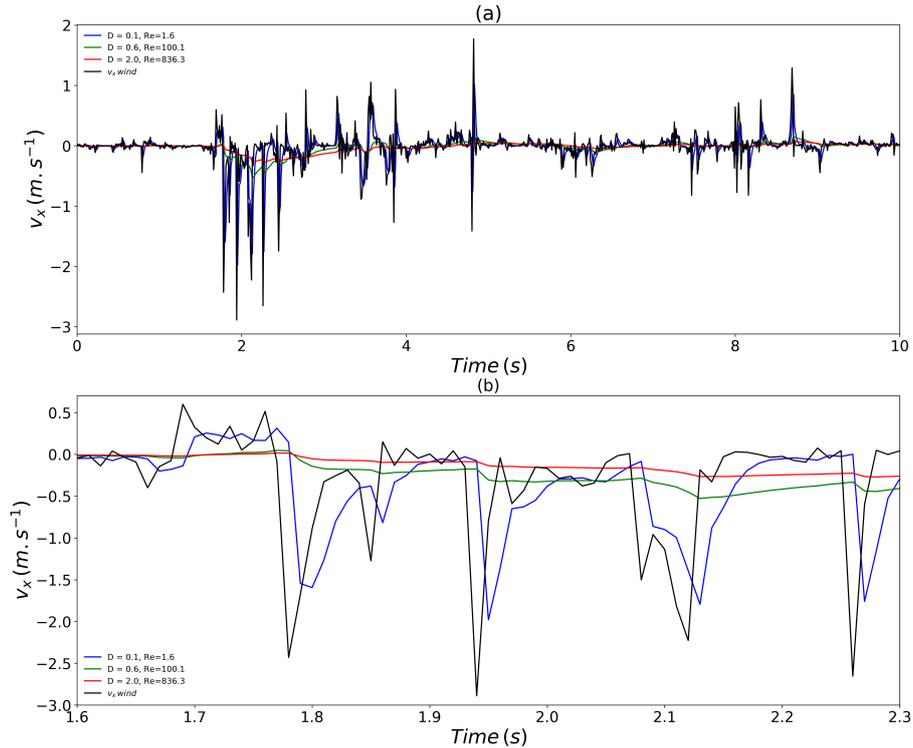


Figure 3. Top: temporal evolution of the drop horizontal velocity during 10 s for various drop diameters (it is the equivolumic diameter that is indicated) with the same multifractal wind input (in black). Bottom: a zoom of the above curve on a shorter period

small delay (≈ 0.01 s) corresponding to a reaction time is noted. As it can be expected larger drops ($D_{eq} = 0.6$ mm, in green; and $D_{eq} = 2$ mm, in red) tend to dampen even more wind fluctuations.

In order to quantify more precisely this qualitative behaviour, a multifractal analysis on the retrieved ensembles was performed. Fig. 4 displays the outcome of spectral and TM analysis for drops of equivolumic diameter equal to ranging from 0.1
200 and to 2 mm. The spectral analysis reflect a good scaling behaviour over the whole range of scales. Spectral slopes (β in Eq. 8) of 0.86 and 2.25 are retrieved respectively. For the 2 mm drop, the value corresponds to non-conservative fields. In order to ensure that a conservative field is studied in TM analysis, which is needed (Lavallée et al., 1993), a fractional differentiation with an exponent $(\beta - 1)/2$ is implemented on the field before implementing this TM analysis. TM analysis is displayed in the right column of Fig. 4. For the +0.1 mm drop, an excellent scaling behaviour is retrieved with coefficient of determination
205 r^2 for $q = 1.5$ greater than 0.99. DTM analysis yields estimates of UM parameters α , C_1 and H equal to 1.68, 0.21 and 0.12 respectively, which is close to the features of the input series. For the 2 mm drop, the scaling is slightly degraded but remains good ($r^2 = 0.95$ for $q = 1.5$) -and we find $\alpha = 1.69$, $C_1 = 0.14$ and $H = 0.79$ is found.

Fig. 5 displays a summary of the UM analysis carried out on the generated series for the various drops. The scaling behaviour is excellent for small drops and remains good for all drop sizes with r^2 for $q = 1.5$ always greater than 0.95 (Fig. 5.e). The need

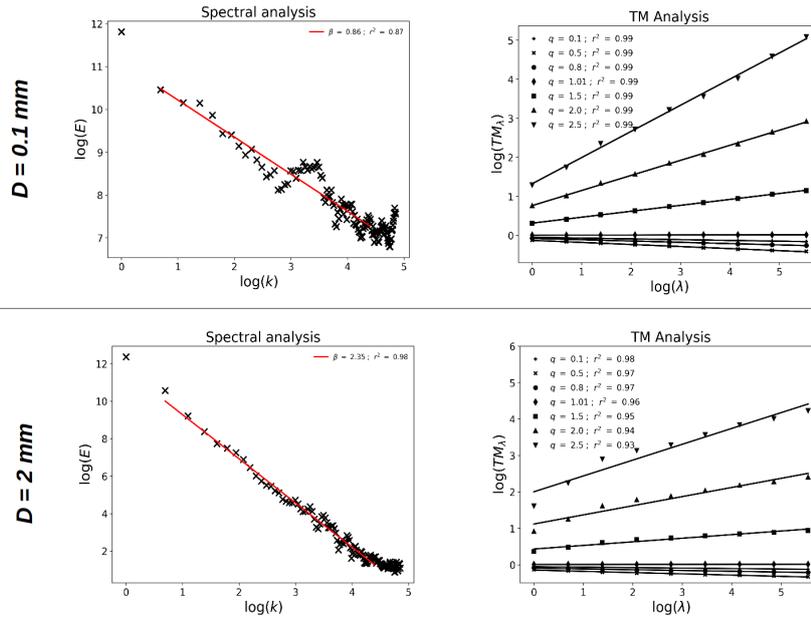


Figure 4. Scaling behaviour of the simulated drop velocity for D_{eq} equal to 0.1 mm (top row) and 2 mm (bottom row). Spectral analysis (i.e. Eq. 8 in log-log) on the direct simulations is displayed in the left column. TM analysis (i.e. eq. 6 in log-log) on the velocity after implementing a fractional integration is displayed in the right column

210 for a fractional differentiation before implementing TM analysis is visible with the very poor scaling found when analysing directly the field. The non-conservativeness parameter rapidly increases from 0.1 to 0.8 with drop size increasing from 0.1 mm to $\approx 1 - 1.5 \text{ mm}$. For larger drops it remains rather stable. This increase of H is basically a quantification of the increased dampening of wind fluctuations observed for larger drops discussed with Fig. 3. With regards to the UM parameters α and C_1 , the former remains stable and close to the input value of 1.7 for all drop size. The latter exhibits a small decrease with larger
 215 drops. It should be reminded that this approach is somehow artificial since all drops are perceiving the same wind, which would not be the case in reality because they do not fall at the same vertical speed. In summary, this investigation shows that horizontal drop velocity basically reproduces the multifractal properties of the wind input with an increased level of non-conservativeness H . H strongly increases for drops smaller than 1 mm and then stabilizes.

4 Ground impact location of drops falling in a turbulent wind field

220 4.1 Methodology

The purpose of this section is to investigate where drops falling from a height of 1500 m reach the ground. Given the time step of 0.01 s used in the equation and the fact that drops are moving in space during their fall, it means that having high

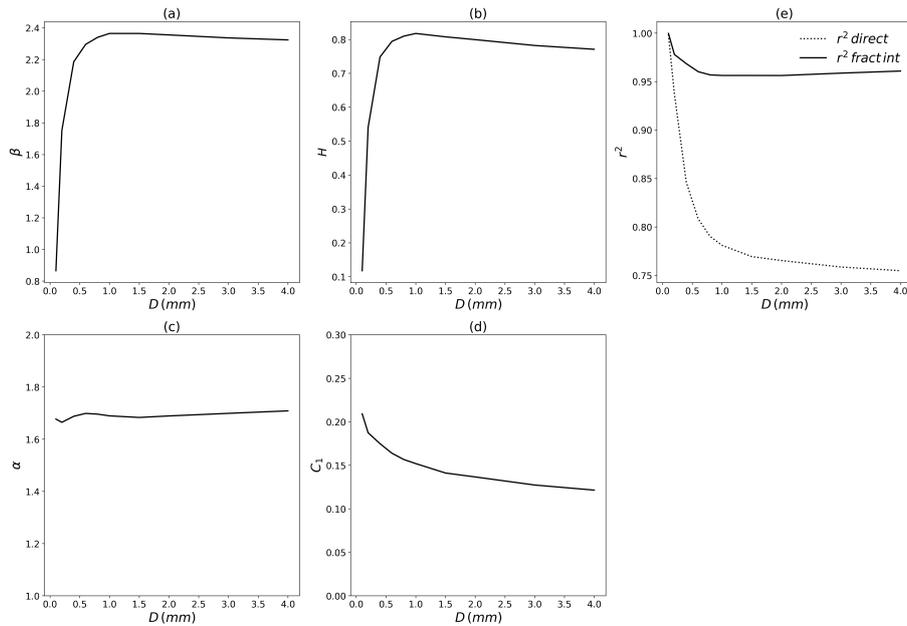


Figure 5. Summary of the multifractal analysis performed on the ensembles of simulated drop horizontal velocities using a wind input with $\alpha = 1.7$, $C_1 = 0.2$. The various multifractal parameters are displayed vs. D (the equivolumic drop diameter)

225 resolution space-time 3D wind data over an area of typical size few kilometers is needed to fully address the issue. Such data is unfortunately not available. Hence we suggest here to reconstruct a somehow realistic wind from a punctual measurement relying on previous findings on turbulence.

4.1.1 Wind data

230 More precisely, we use 100 Hz 3D sonic anemometer data collected at [by a device installed at 78 m on meteorological mast located on the Pays d’Othe wind farm in the framework of the ANR RW-Turb project \(Gires et al. \(2021\), Gires et al. 2021–submitted to HESS\). The wind series corresponding to a rather](#). The wind farm is at roughly 120 km South-East of Paris on a slightly sloppy area. More details can be found in the data paper under discussion at ESSD (Gires et al., 2022) and in the data set (Gires et al., 2021). Two wind series with very different average horizontal wind speed (i.e. 1.8 vs. 11.8 $m.s^{-1}$) were extracted for this study. They are later denoted low wind event and a strong one strong wind event. The corresponding time series of the three components of the wind for both events are displayed in Fig. 6 over approx. 900 s. The low wind event was collected on 20/01/2021 while the strong one occurred on 06/01/2021.

235 ~~In order to generate a realistic wind at a given distance from the anemometer, standard scaling relations between wind fluctuations and distances are used (Lazarev et al. (1994)). In such framework horizontal wind shifts behave as $\Delta u(\Delta x) \approx \epsilon(\Delta x)^{a_h} \Delta x^{H_h}$~~

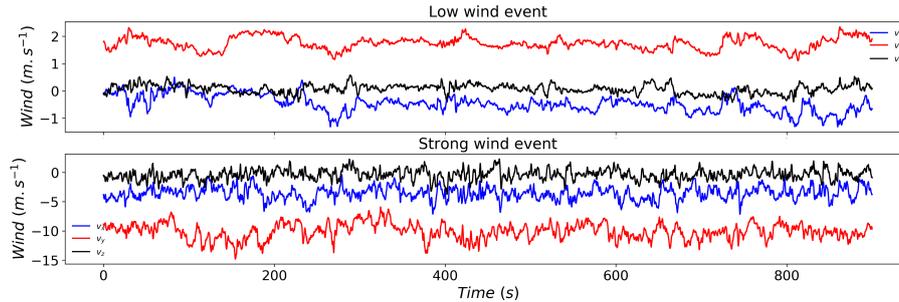


Figure 6. Temporal evolution of the 100 Hz wind data from 3D sonic anemometer for low (top) and strong (bottom) wind event used in this paper

4.1.2 Generation of an anisotropic 3D turbulent field

In this section we discuss how to stochastically generate a turbulent field reproducing as well as possible the physics of such a flow constraint to have the empirical velocity values $v(x, y, z, t)$ of the 3D sonic anemometer located at (x, y, z, t) .

Scaling and anisotropy

It is quite obvious that gravity has such a strong impact on drop trajectories and dynamics of drops that classical scaling approaches just fail because they presuppose isotropy. On the contrary, the anisotropy between the vertical and the horizontal induced by gravity is so ubiquitous in geophysics that it has led to the general concept and framework of ‘generalised scale invariance’ for the analysis and simulation of anisotropic fields (Schertzer and Lovejoy, 1985, 1988, 1989; Lazarev et al., 1994; Schertzer et al., 2000) and new extensions have been developed for vector fields (Schertzer and Tchiguirinskaia, 2015, 2020). While classical approaches consider scaling only after assuming isotropy, general scale invariance first posit scaling and then study the remaining non trivial symmetries. Because this paper deals with scalar discrete cascades, and therefore their limitations, we consider an oversimplification of the generalised scale invariance. Recall that for the simplest case of generalised scale invariance, a horizontal component of a statistically translation invariant velocity field satisfies the following self-affine scale invariance:

$$\Delta v(T_\lambda \Delta \underline{x}) \stackrel{d}{\approx} \lambda^{H_h} \Delta v(\Delta \underline{x}) \quad (11)$$

where $\epsilon(\Delta x)$ is a UM field, $a_h = 1/3$ and $H_h = 1/3$. An anisotropy between horizontal and vertical shifts is accounted for by considering a different scaling relation in the vertical $\Delta u(\Delta z) \approx \epsilon(\Delta z)^{a_v} \Delta z^{H_v}$ with $\epsilon(\Delta z)$ again a UM field, $a_v = 1/5$ and $\stackrel{d}{\approx}$ stands for equality in distribution, Δx for a (vector) pair separation, $\Delta v = |v(x + \Delta x) - v(x)|$ for the induced velocity component shear, H_h for the horizontal scaling exponent ($H_h = 1/3$ for Kolmogorov’s scaling) and T_λ for a self-affine change

of scale:

$$T_\lambda = \lambda^G = \exp(\log(\lambda G)); G = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & H_z \end{pmatrix} \quad (12)$$

260 where G is the generator of T_λ , $H_z = H_h/H_v$ is the scaling anisotropy exponent, H_v the scaling exponent along the vertical. $H_v = 3/5$ for a Bolgiano-Obukhov scaling along the vertical and therefore $H_z = 5/9$, while for isotropic 3D turbulence $H_z = 1, H_h = H_v$. The main property of T_λ is that it broadly generalises in a straightforward manner scales $|\cdot|$ from classical isotropic frameworks ($H_z = 1$) to generalised scales $\|\cdot\|$ of anisotropic frameworks (e.g., $H_z \neq 1$), so that any isotropic cascade can be transformed in this manner into an anisotropic cascade without anything else. Just recall the canonical example of generalised scales for a diagonal generator ($p \geq 1$):

$$G_{i,j} = g_i \delta_{i,j} : \|\underline{x}\|_p = \left(\sum_i |x_i|^{p/g_i} \right)^{1/p} \Rightarrow \|T_\lambda \underline{x}\|_p = \lambda \|\underline{x}\|_p \quad (13)$$

265 which displays the (generalised) scaling property of the generalised scales.

Equation 11 is valid for any direction of Δx ($\underline{x} = (x, y, z)$), in particular along the horizontal Δx and the vertical Δz :

$$\Delta v(\lambda \Delta x) \stackrel{d}{=} \lambda^{H_h} \Delta v(\Delta x); \Delta v(\lambda \Delta z) \stackrel{d}{=} \lambda^{H_v} \Delta v(\Delta v) \quad (14)$$

which can be respectively interpreted like:

$$\Delta v(\Delta x) \stackrel{d}{=} \varepsilon (\Delta x)^{a_h} \Delta x^{H_h}; \Delta v(\Delta z) \stackrel{d}{=} \phi (\Delta z)^{a_v} \Delta z^{H_v} \quad (15)$$

270 with scaling exponents $a_h = 1/3$ for the kinetic energy flux density ε and $a_v = 1/5$ for the buoyancy force flux density ϕ . Due to the fact that eddies can be defined as structures having a given velocity shear Δv , we have in fact the following balance between both flux densities:

$$\varepsilon (\Delta x)^{a_h} \Delta x^{H_h} \stackrel{d}{=} \phi (\Delta z)^{a_v} \Delta z^{H_v} \quad (16)$$

and finally:

$$275 \varepsilon (\Delta x)^{a_h} \stackrel{d}{=} \phi (\Delta z)^{a_v}, \text{ with } : \Delta x^{H_h} \approx \Delta z^{H_v} \quad (17)$$

due to the respective scaling of the horizontal and vertical eddy sizes defined by the scale change T_λ (Eq.12).

280 ~~Relying on this existing framework, the following formulas are used to generate a~~ This confirms that ϕ and ε are both sites of the same coin (Eq.11). In summary, what is only needed is an anisotropic cascade defined by an anisotropic scale compatible (e.g., Eq.14) with the anisotropic scale change T_λ (Eq.12), the intermittency being introduced either by the flux density ε or ϕ (Eq. 15), which respect their equivalence (Eq. 17).

Practical difficulties only occur with discrete scales because they cannot easily deal with arbitrary H_z .

Discrete scales and an ad-hoc approximation

To get around these difficulties, it was tentatively proposed (REF EGU conf.?) to consider the following 3D wind field at a distance $\Delta x, \Delta y$ ($\Delta l = \sqrt{\Delta x^2 + \Delta y^2}$) model:

$$\begin{aligned}
 v_x(x + \Delta x, y + \Delta y, z + \Delta z, t) &= v_x(x, y, z, t) + c_{\epsilon_x} \epsilon_x(x + \Delta x, y + \Delta y, t)^{a_h} \Delta l^{H_h} + c_{\theta_x} \theta_x(z + \Delta z, t)^{a_v} \Delta z^{H_v} \\
 v_y(x + \Delta x, y + \Delta y, z + \Delta z, t) &= v_y(x, y, z, t) + c_{\epsilon_y} \epsilon_y(x + \Delta x, y + \Delta y, t)^{a_h} \Delta l^{H_h} + c_{\theta_y} \theta_y(z + \Delta z, t)^{a_v} \Delta z^{H_v} \\
 v_z(x + \Delta x, y + \Delta y, z + \Delta z, t) &= v_z(x, y, z, t) + c_{\epsilon_z} \epsilon_z(x + \Delta x, y + \Delta y, t)^{a_h} \Delta l^{H_h} + c_{\theta_z} \theta_z(z + \Delta z, t)^{a_v} \Delta z^{H_v}
 \end{aligned} \tag{18}$$

where $\Delta l = \sqrt{\Delta x^2 + \Delta y^2}$ is the (classical), horizontal distance from the anemometer and θ is the buoyancy force flux but it is supposed independent of ϵ contrary to ϕ (Eq.17). Unfortunately, this model suffers from a number of basic problems:

- equalities in distribution are replaced by deterministic equalities, which oversimplify and trivialise the dynamics for each realisation
- the flux density ϵ is defined only along 3 directions instead along all directions (Eq.11), whose corresponding components ($\epsilon_x, \Delta z$ from a point $(x, y, z) \div \epsilon_y, \epsilon_z$) are supposed to be independent, which is not a tenable assumption
- the introduction of θ independent of ϵ is purely ad-hoc to additively (!) introduce a second isotropic scaling (!), therefore the change of scaling is reduced to a linear cross-over
- the scale of the flux densities ϵ and θ are implicitly taken as the scale of the simulation resolution instead of the pair separation scale (Eq.15). The resulting mismatch between both scales will introduce a statistical bias
- moreover the density values are arbitrary taken at the locations $(x + \Delta x, y + \Delta y$ for ϵ) and $z + \Delta z$ for θ . This introduces a dissymmetry that is not without consequences.
- all time steps are fully independent with the exception of the empirical velocity values $v(x, y, z, t)$ measured by the 3D sonic anemometer

$$\begin{aligned}
 u_x(x + \Delta x, y + \Delta y, z + \Delta z, t) &= u_x(x, y, z, t) + c_{\epsilon_x} \epsilon_x(\Delta x, \Delta y, t)^{a_h} \Delta l^{H_h} + c_{\theta_x} \theta_x(\Delta z, t)^{a_v} \Delta z^{H_v} \\
 u_y(x + \Delta x, y + \Delta y, z + \Delta z, t) &= u_y(x, y, z, t) + c_{\epsilon_y} \epsilon_y(\Delta x, \Delta y, t)^{a_h} \Delta l^{H_h} + c_{\theta_y} \theta_y(\Delta z, t)^{a_v} \Delta z^{H_v} \\
 u_z(x + \Delta x, y + \Delta y, z + \Delta z, t) &= u_z(x, y, z, t) + c_{\epsilon_z} \epsilon_z(\Delta x, \Delta y, t)^{a_h} \Delta l^{H_h} + c_{\theta_z} \theta_z(\Delta z, t)^{a_v} \Delta z^{H_v}
 \end{aligned}$$

The limitations of this model are therefore extremely strong. Many of them would have been resolved with the help of scalar anisotropic cascades, recalled above (see previous paragraph). But to fully overcome them would require to consider their extension to vector fields (Schertzer and Tchiguirinskaia, 2015, 2020). This remains outside the scope of this paper and this simplistic approach is used for a sort of exploratory step focused on the interaction of drops and a given velocity field. The obtained results have therefore to be critically examined, since many of them are sensitive to the aforementioned oversimplifications.

4.1.3 Practical implementation

The fields ϵ (i.e. the ones for the horizontal shift) are simulated in space time with a size 729 x 729 x 64 using discrete UM cascades and Eq. 10 to obtain either positive or negative values. ~~A-The 729 refer to space while the 64 refer to time. Before~~
310 ~~stating the physical resolution of the field, it should be explained that a~~ simple anisotropy between space and time is accounted through a scaling anisotropy coefficient H_t . In such framework, when the spatial scale of the data is changed by a ratio of λ_{xy} , then the temporal scale should be changed by a factor of $\lambda_t = \lambda_{xy}^{H_t}$. H_t is expected to be equal to 1/3 (Marsan et al., 1996), hence when the spatial scale is multiplied by 3, the temporal scale should be multiplied by 2 (i.e. $3^{1-1/3} \approx 2.08$) (Biaou et al., 2005; Gires et al., 2014). These fields are assumed to cover an area of size 40 km x 40 km x 1024 s, which is needed for drift
315 of 0.1 mm drops during their fall when wind is strong. It means that a voxel is of size is 53 m x 53 m x 16 s.

The fields θ (i.e. the ones for the vertical shift) are of size 512 x 64 covering a physical are of 1600 m x 1024 s, meaning that a pixel size 3 m x 16 s. All UM fields are simulated with $\alpha = 1.7$, $C_1 = 0.2$ as in the previous section.

~~The strong assumption that there are no correlations between the differences along the horizontal axis and the vertical one is done ! No correlation between the shifts for the various components are also assumed.~~ Finally, at any point (x,y,z,t) a bi
320 or tri-linear interpolation is implemented to obtain the value of the field from the nearest points. The value of the prefactor were set to $c_{\epsilon_x} = c_{\epsilon_y} = 0.3$, $c_{\epsilon_z} = 0.1$ and $c_{\theta_x} = c_{\theta_y} = c_{\theta_z} = 0.01$, through an heuristic approach of trial and error to get some realistic fluctuations. In the future, it would obviously be needed to tune them to local wind properties. However such tuning is outside the scope of this section, which aims more at being a proof of concept.

4.2 Illustration

325 In order to illustrate the suggested process, let us consider a 0.5 mm drop during the low wind event. Its initial position is (0,0,1500) in m. It is 'dropped' with no horizontal velocity and a vertical one equal to its terminal fall one. The anemometer is assumed to be located at at (0,0,100) m. Then Eq. 5 is implemented. At each time step the local wind is assessed using the methodology described in the previous paragraphs.

The actual total wind perceived by the drop (i.e. input in Eq. 5) is recorded and displayed in last row of Fig. 87. It corresponds
330 to the sum of the wind from the anemometer (first row in Fig. 87) plus a wind shift field (middle row in Fig. 87). This yields to a given trajectory in space which is shown in Fig. 8. Projected trajectory on the plans (x,y) and (x,z) are also shown. This trajectory exhibits a non linear complex pattern which results from the turbulent nature of the wind. It should be mentioned that not accounting for oblateness affects not only the vertical velocity but the whole trajectory as well. Depending on the model (spheres or oblate drops), shifts of more than few hundreds meters are found even for large drops for some events.

4.3 Sensitivity to the wind shift field

The process to generate an estimation of a 3D wind field is actually stochastic through the UM fields ϵ and θ used in Eq. 18. In this section, the sensitivity to the given realization of the process is discussed. In order to achieve that, 10 wind samples are

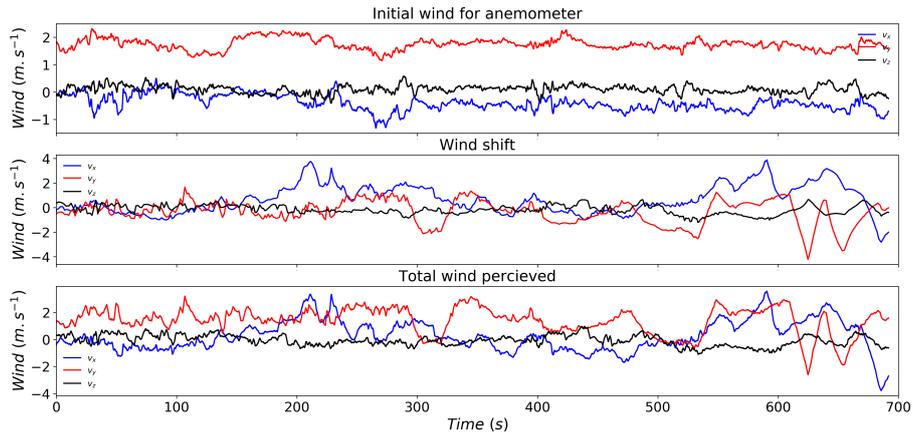


Figure 7. Temporal evolution with 0.01 s time steps of the wind data from 3D sonic anemometer (a), the wind shift (b) and the total wind perceived (c) by the 0.5 mm drop falling from the position $(0,0,1500)$ during the low wind event. (c) is actually the wind input used to obtain the trajectory of Fig. 8.

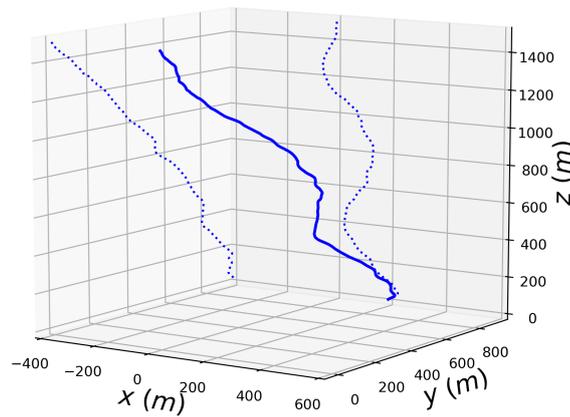


Figure 8. Trajectory (solid line) of a 0.5 mm drop in a turbulent wind field for the low wind event. The dotted lines correspond to the trajectory projected on the (x,z) and (y,z) plan

generated [with the same input parameters \(described in section 4.1\)](#) and the corresponding trajectories for drops of size 0.5 , 1 , 2 and 3 mm are computed.

340 For the low wind event, the projected trajectories are displayed in Fig. 9.a and b. The position of the drop when they reach the ground is in Fig. 9.c. The spread of the drops strongly depends on their size, with a decrease as drop size increases. Indeed

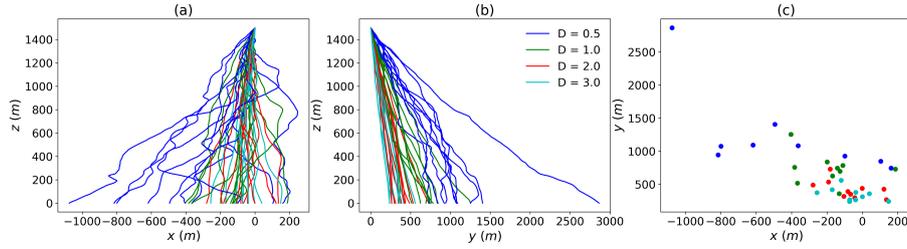


Figure 9. (a) and (b) Trajectories of drops of various sizes falling from the (0,0,1500) position, projected on the (x,z) and (y,z) plan respectively. Low wind event is used. The 10 curves correspond to different realizations of the wind shift field. (c) Position of the ground impact of the various drops

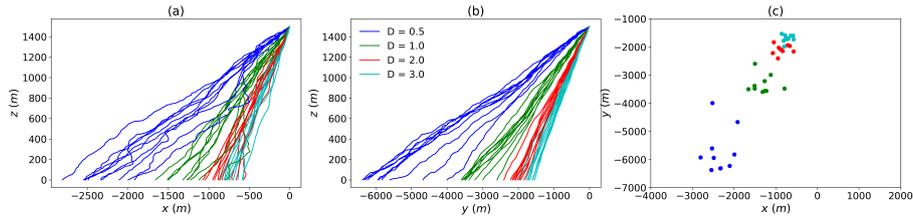


Figure 10. Same as in Fig. 9 but for the strong wind event

$\Delta x (x_{max} - x_{min})$ is equal to 1238, 591, 415 and 404 m for drop of size 0.5, 1, 2 and 3 mm respectively. For Δy the values are 2123, 897, 461 and 322 m. Such decrease is due to a combination of the fact that smaller drops are more subject to wind fluctuations (Section 3), and that they spend more time in the atmosphere (section 2) before they reach the ground. Similar trends are retrieved for the strong wind event (Fig. 10) with a stronger absolute shift. In that case the value for Δx are 890, 868, 500 and 448 m respectively. For Δy they are 2382, 1003, 568 and 448 m.

4.4 Illustration of impact on rainfall retrieval with weather radars

In this last section, initial investigations toward understanding the consequence of previous work on quantitative rainfall measurement with weather radars are carried out. Indeed, weather radar measure rainfall at a given altitude while hydro-meteorologist are interested about rainfall at ground level. During their fall, significant shift can occur. In order to study it, the following process is implemented. During five minutes, one rainfall drop is dropped every 15 s from a random position withing-within a voxel of size 100 m centered on (0,0,1450) m. Hence it covers a total duration of 5 min. The trajectories and positions on the ground of the drops is then studied. This enables to basically mimic the measurement of a weather radar at its typical gate size and temporal resolution.

Fig. 11 displays the trajectories and ground impact location in the case of the low wind event for a given realisation of the stochastic wind shift. A shift of more than 1 km for small drops is found and more than 300 m for 3 mm drops. As noted in the previous section, the spread of drops at ground level tends to decrease with increasing drop size. Indeed $\Delta x (x_{max} - x_{min})$

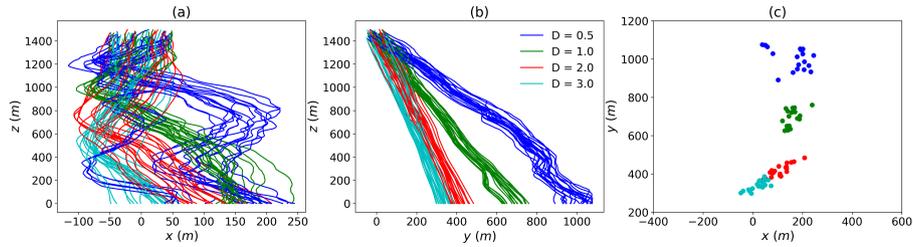


Figure 11. (a) and (b) Trajectories of drops of various sizes falling from a 100 m cubic voxel centered on (0,0,1450) position, projected on the (x,z) and (y,z) plan respectively. Low wind event is used. For each size, the 20 drops are dropped every 15 s (hence over a total duration of 5 min). A single realization of the wind shift field is used. (c) Position of the ground impact of the various drops

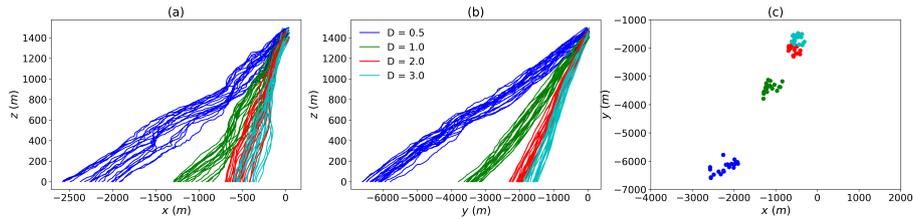


Figure 12. Same as in Fig. 11 but for the strong wind event

is equal to 206, 119, 165 and 121 m for drop of size 0.5, 1, 2 and 3 mm respectively. For Δy the values are 184, 134, 112 and 88 m. For the strong wind event (Fig. 12), shifts of more than 6 km and 1.5 km are reported for drops of size 0.5 mm and 3 mm are retrieved. Similar results as for the low wind event are found with regards to the spread. The corresponding figures are of 665, 450, 284 and 307 m for Δx , and of 819, 664, 429 and 420 m for Δy .

As previously pointed out, this spread is due to the fact that smaller drop spend more time in the atmosphere and are more sensitive to wind fluctuations. Indeed the duration of fall from 1500 m to the ground at 0 m is equal to 716, 378, 238 and 192 s for drops of size 0.5, 1, 2 and 3 mm respectively. Given that high resolution radar pixels are typically of size few hundred meters, one should note that drops within a given voxel at measurement height can reach ground within an area of size 3 km x 6 km. Even within a drop diameters class, shifts are of few radar pixels. Given that drop size distribution also varies, such shift can significantly affect rainfall retrieval, even in low wind conditions.

5 Conclusions

In this paper we aimed at better understanding the behaviour of individual rainfall drops falling from typically 1500 m. In a first step we developed a new approach to compute the drag coefficient accounting for drop oblateness and findings in fluid mechanics. This was validated for drop of equivolumic size of up to 4 mm through the comparison between retrieved terminal fall velocity and commonly used formula.

Then the temporal evolution of horizontal drop velocity under turbulent wind constraints was studied. It appears that multifractal features of the input wind are simply transferred to drop velocity with an additional fractional integration and slight time shift. UM parameter α and C_1 are basically conserved while H is increased. The increase ranges from 0.1 for 0.1 mm size ~~drop drops~~ to 0.8 for ~~drops of size~~ 1-1.5 mm size drops. It remains rather constant for larger drops.

Finally the trajectories of drop of various size falling from ~~1-500-1500~~ 1500 m was studied as a proof of concept. For this, 100 Hz anemometer data was used and an approach to simulate realistic fluctuations of wind in space was developed. It notably enables to analyse how drop are shifting during their fall between their location measurement by weather radars and ground impact. For a strong wind event, drops located within a radar gate in altitude during 5 min are spread on the ground over an area of size few kilometers. Spread for drops of a given diameter are found to cover few radar pixels.

In order to explore further the consequences of these findings on quantitative rainfall estimation with weather radars, further investigations are needed. More precisely (i) the model to simulate wind fluctuations should be improved, notably to use vector simulations and tune the prefactors ~~to local~~ according to local wind conditions; (ii) space-time outputs of numerical weather prediction models could also be tested to retrieve wind fields; (iii) actual drop size distribution should be used to assess better the impact for ground estimation of precipitation; ~~(iv, which implies making some simulations for a much larger number of drops. ;~~ (v) longer period of time should be tested to investigate where the water volume (i.e. all the drops) of a given radar gate fell during an event. For the two last points, data is available within the RW-Turb project. Such step would then need to be repeated over various radar gates to derive updated radar maps. Given limited computation power that will not allow to simulate the trajectories of all the drops, some statistical behaviour according to each radar gate and wind conditions would need to be designed and then computed. It should also be stressed that only individual drop are currently handled. This means that the developed methodology does not account neither for collision, aggregation between drops, nor for breakup. Such processes are also known to affect drop velocities by changing their size and shape. Future investigations should also aim at accounting for them.

395 *Acknowledgements.* The authors gratefully acknowledge partial financial support from the Chair “Hydrology for Resilient Cities” (endowed by Veolia) of Ecole des Ponts ParisTech, the Île-de-France region RadX@IdF Project, and the ANR JCJC RW-Turb project (ANR-19-CE05-0022-01)

References

- Atlas, D., Srivastava, R. C., and Sekhon, R. S.: Doppler radar characteristics of precipitation at vertical incidence, *Reviews of Geophysics*, 11, 1–35, <https://doi.org/https://doi.org/10.1029/RG011i001p00001>, 1973.
- 400 Baheri, G.: Numerical and experimental investigation of particle terminal velocity and aggregation in volcanic plumes. Thèse de doctorat no. Sc. 4844, Ph.D. thesis, Univ. Genève, 2015.
- Beard, K. V.: Terminal velocity adjustment for cloud and precipitation aloft, *J. Atmos. Sci.*, 34, 1293–1298, 1977.
- Best, A. C.: Empirical formulae for the terminal velocity of water drops falling through the atmosphere, *Quarterly Journal of the Royal Meteorological Society*, 76, 302–311, <https://doi.org/https://doi.org/10.1002/qj.49707632905>, 1950.
- 405 Biauou, A., Chauvin, F., Royer, J.-F., and Schertzer, D.: Analyse multifractale des précipitations dans un scénario GIEC du CNRM, Note de centre GMGEC, CNRM, 101, 45, 2005.
- Blocken, B., Stathopoulos, T., Carmeliet, J., and Hensen, J. L.: Application of computational fluid dynamics in building performance simulation for the outdoor environment: an overview, *Journal of Building Performance Simulation*, 4, 157–184, <https://doi.org/10.1080/19401493.2010.513740>, 2011.
- 410 Bringi, V., Thurai, M., and Baumgardner, D.: Raindrop fall velocities from an optical array probe and 2-D video disdrometer, *Atmospheric Measurement Techniques*, 11, 1377–1384, <https://doi.org/10.5194/amt-11-1377-2018>, 2018.
- Collier, C.: The impact of wind drift on the utility of very high spatial resolution radar data over urban areas, *Physics and Chemistry of the Earth, Part B: Hydrology, Oceans and Atmosphere*, 24, 889–893, [https://doi.org/https://doi.org/10.1016/S1464-1909\(99\)00099-4](https://doi.org/https://doi.org/10.1016/S1464-1909(99)00099-4), 1999.
- 415 Dai, Q., Han, D., Rico-Ramirez, M. A., and Islam, T.: The impact of raindrop drift in a three-dimensional wind field on a radar–gauge rainfall comparison, *International Journal of Remote Sensing*, 34, 7739–7760, <https://doi.org/10.1080/01431161.2013.826838>, 2013.
- Dai, Q., Yang, Q., Han, D., Rico-Ramirez, M. A., and Zhang, S.: Adjustment of Radar-Gauge Rainfall Discrepancy Due to Raindrop Drift and Evaporation Using the Weather Research and Forecasting Model and Dual-Polarization Radar, *Water Resources Research*, 55, 9211–9233, <https://doi.org/https://doi.org/10.1029/2019WR025517>, 2019.
- 420 Fitton, G., Tchiguirinskaia, I., Schertzer, D., and Lovejoy, S.: Scaling Of Turbulence In The Atmospheric Surface-Layer: Which Anisotropy?, *Journal of Physics: Conference Series*, 318, 072 008, <https://doi.org/10.1088/1742-6596/318/7/072008>, 2011.
- Gires, A., Tchiguirinskaia, I., Schertzer, D., Schellart, A., Berne, A., and Lovejoy, S.: Influence of small scale rainfall variability on standard comparison tools between radar and rain gauge data, *Atmospheric Research*, 138, 125–138, <http://www.sciencedirect.com/science/article/pii/S0169809513003293>, 2014.
- 425 Gires, A., Tchiguirinskaia, I., and Schertzer, D.: Blunt extension of discrete universal multifractal cascades: development and application to downscaling, *Hydrological Sciences Journal*, 0, 1–17, <https://doi.org/10.1080/02626667.2020.1736297>, 2020.
- Gires, A., Jose, J., Tchiguirinskaia, I., and Schertzer, D.: Data for : "Three months of combined high resolution rainfall and wind data collected on a wind farm", <https://doi.org/10.5281/zenodo.5801900>, 2021.
- Gires, A., Jose, J., Tchiguirinskaia, I., and Schertzer, D.: Three months of combined high resolution rainfall and wind data collected on a 430 wind farm, *Earth System Science Data Discussions*, 2022, 1–19, <https://doi.org/10.5194/essd-2021-463>, 2022.
- Hölzer, A. and Sommerfeld, M.: New simple correlation formula for the drag coefficient of non-spherical particles, *Powder Technology*, 184, 361–365, <https://doi.org/https://doi.org/10.1016/j.powtec.2007.08.021>, 2008.
- Kruger, A. and Krajewski, W. F.: Two-Dimensional Video Disdrometer: A Description, *Journal of Atmospheric and Oceanic Technology*, 19, 602–617, [http://dx.doi.org/10.1175/1520-0426\(2002\)019<0602:TDVDAD>2.0.CO;2](http://dx.doi.org/10.1175/1520-0426(2002)019<0602:TDVDAD>2.0.CO;2), 2002.

- 435 Lack, S. A. and Fox, N. I.: An examination of the effect of wind-drift on radar-derived surface rainfall estimations, *Atmospheric Research*, 85, 217–229, <https://doi.org/https://doi.org/10.1016/j.atmosres.2006.09.010>, 2007.
- Lauri, T., Koistinen, J., and Moisseev, D.: Advection-Based Adjustment of Radar Measurements, *Monthly Weather Review*, 140, 1014 – 1022, <https://doi.org/10.1175/MWR-D-11-00045.1>, 2012.
- Lavallée, D., Lovejoy, S., and Ladoy, P.: Nonlinear variability and landscape topography: analysis and simulation, in: *Fractals in geography*,
440 edited by de Cola, L. and Lam, N., pp. 171–205, Prentice-Hall, 1993.
- Lazarev, A., Schertzer, D., Lovejoy, S., and Chigirinskaya, Y.: Unified multifractal atmospheric dynamics tested in the tropics: part II, vertical scaling and Generalized Scale Invariance, *Nonlinear Processes in Geophysics*, 1, 115–123, 1994.
- Lhermitte, R. M.: Cloud and precipitation remote sensing at 94 GHz, *Geoscience and Remote Sensing, IEEE Transactions on*, 26, 207–216, 1988.
- 445 Marsan, D., Schertzer, D., and Lovejoy, S.: Causal space-time multifractal processes: Predictability and forecasting of rain fields, *J. Geophys. Res.*, 101, 26 333–26 346, 1996.
- Mittermaier, M. P., Hogan, R. J., and Illingworth, A. J.: Using mesoscale model winds for correcting wind-drift errors in radar estimates of surface rainfall, *Quarterly Journal of the Royal Meteorological Society*, 130, 2105–2123, <https://doi.org/https://doi.org/10.1256/qj.03.156>, 2004.
- 450 Montero-Martinez, G. and Garcia-Garcia, F.: On the behaviour of raindrop fall speed due to wind, *Quarterly Journal of the Royal Meteorological Society*, 2016.
- Pedersen, H. S. and Hasholt, B.: Influence of wind speed on rainsplash erosion, *CATENA*, 24, 39 – 54, [https://doi.org/https://doi.org/10.1016/0341-8162\(94\)00024-9](https://doi.org/https://doi.org/10.1016/0341-8162(94)00024-9), 1995.
- Sandford, C.: Correcting for wind drift in high resolution radar rainfall products: a feasibility study, *Journal of Hydrology*, 531, 284–295,
455 <https://doi.org/https://doi.org/10.1016/j.jhydrol.2015.03.023>, hydrologic Applications of Weather Radar, 2015.
- Schertzer, D. and Lovejoy, S.: The dimension and intermittency of atmospheric dynamics, in: *Turbulent shear flow 4. Selected papers from the Fourth International Symposium on "Turbulent Shear Flow"*, edited by Bradbury, L. J. S., Durst, F., Launder, E., Schmidt, F. W., and Whitelaw, J. H., pp. 7–33, Springer-Verlag, Berlin, 1985.
- Schertzer, D. and Lovejoy, S.: Physical modelling and analysis of rain and clouds by anisotropic scaling and multiplicative processes, *J. Geophys. Res.*, 92, 9693–9714, 1987.
460
- Schertzer, D. and Lovejoy, S.: Nonlinear variability in geophysics multifractal analysis and simulations, in: *Fractals Physical Origin and properties*, edited by L., P., pp. 41–82, Plenum Press, New-York, 1988.
- Schertzer, D. and Lovejoy, S.: Generalised scale invariance and multiplicative processes in the atmosphere, *Pure and Applied Geophysics*, 130, 57–81, <https://doi.org/10.1007/BF00877737>, 1989.
- 465 Schertzer, D. and Lovejoy, S.: From scalar cascades to lie cascades: joint multifractal analysis of rain and cloud processes, in: *Space/time variability and interdependence for various hydrological processes*, edited by Feddes, R., pp. 153–173, Cambridge University Press, 1995.
- Schertzer, D. and Lovejoy, S.: Universal multifractals do exist!: Comments, *Journal of Applied Meteorology*, 36, 1296–1303, <GotoISI>: //WOS:A1997XU62400016, *J. Appl. Meteorol.*, 1997.
- Schertzer, D. and Tchiguirinskaia, I.: Multifractal vector fields and stochastic Clifford algebra, *Chaos*, 25, 123 127,
470 <https://doi.org/DOI:http://dx.doi.org/10.1063/1.4937364>, 2015.
- Schertzer, D. and Tchiguirinskaia, I.: A Century of Turbulent Cascades and the Emergence of Multifractal Operators, *Earth and Space Science*, 7, e2019EA000 608, <https://doi.org/10.1029/2019EA000608>, e2019EA000608 10.1029/2019EA000608, 2020.

- Schertzer, D., Tchiguirinskaia, I., Lovejoy, S., and Tuck, A. F.: Quasi-geostrophic turbulence and generalized scale invariance, a theoretical reply, *Atmospheric Chemistry and Physics*, 12, 327–336, <https://doi.org/10.5194/acp-12-327-2012>, 2012.
- 475 Stout, J. E., Arya, S. P., and Genikhovich, E. L.: The Effect of Nonlinear Drag on the Motion and Settling Velocity of Heavy Particles, *Journal of the Atmospheric Sciences*, 52, 3836–3848, [https://doi.org/10.1175/1520-0469\(1995\)052<3836:TEONDO>2.0.CO;2](https://doi.org/10.1175/1520-0469(1995)052<3836:TEONDO>2.0.CO;2), 1995.
- Thurai, M., Huang, G. J., Bringi, V. N., Randeu, W. L., and Schönhuber, M.: Drop Shapes, Model Comparisons, and Calculations of Polarimetric Radar Parameters in Rain, *Journal of Atmospheric and Oceanic Technology*, 24, 1019–1032, <http://dx.doi.org/10.1175/JTECH2051.1>, 2007.
- 480 Thurai, M., Schönhuber, M., Lammer, G., and Bringi, V.: Raindrop shapes and fall velocities in “turbulent times”, *Advances in Science and Research*, 16, 95–101, <https://doi.org/10.5194/asr-16-95-2019>, 2019.
- Tian, L., Zeng, Y.-J., and Fu, X.: Velocity Ratio of Wind-Driven Rain and Its Application on a Transmission Tower Subjected to Wind and Rain Loads, *Journal of Performance of Constructed Facilities*, 32, 04018065, [https://doi.org/10.1061/\(ASCE\)CF.1943-5509.0001210](https://doi.org/10.1061/(ASCE)CF.1943-5509.0001210), 2018.
- 485 White, F.: *Viscous Fluid Flow*, McGraw-Hill, 1974.