

# Climatology of estimated LWC and scaling factor for warm clouds using radar - microwave radiometer synergy

Pragya Vishwakarma<sup>1</sup>, Julien Delanoë<sup>1</sup>, Susana Jorquera<sup>1</sup>, Pauline Martinet<sup>2</sup>, Frederic Burnet<sup>2</sup>, Alistair Bell<sup>2</sup>, and Jean-Charles Dupont<sup>3</sup>

<sup>1</sup>LATMOS, IPSL, UVSQ Université Paris-Saclay, Guyancourt, France

<sup>2</sup>CNRM, Université de Toulouse, Météo-France, CNRS, Toulouse, France

<sup>3</sup>LMD, IPSL, École Polytechnique, Palaiseau, France

**Correspondence:** Pragya Vishwakarma (pragya.vishwakarma@latmos.ipsl.fr)

**Abstract.** Cloud radars are capable of providing continuous high-resolution observations of clouds and now offer new capabilities within fog layers thanks to the development of frequency modulated continuous wave 95 GHz cloud radars. These observations are related to the microphysical properties of clouds. Power law relations in the form of  $Z = a \cdot LWC^b$  are generally used to estimate liquid water content (LWC) profiles. The constants  $a$  and  $b$  from the power-law relation vary with the cloud type and cloud characteristics. Due to the variety of such parameterizations, selecting the most appropriate Z-LWC relation for a continuous cloud system is complicated. Additional information such as Liquid water path (LWP) from a co-located microwave radiometer (MWR) is used to scale the LWC of the cloud profile. An algorithm for estimating the LWC of fog and warm clouds using 95 GHz cloud radar-microwave radiometer synergy in a variational framework is presented. This paper also aims to propose an algorithm configuration that retrieves the LWC of clouds and fog using radar reflectivity and a climatology of the power law parameters. To do so, variations of the scaling factor  $\ln a$  (the logarithm of pre-factor  $a$  from power-law relation) when MWR observations are available are allowed in each cloud profile to build a climatology of the scaling factor  $\ln a$  that can be used when MWR observations are not available. The algorithm also accounts for attenuation due to cloud droplets. In this algorithm formulation, the measure of uncertainty in observations, forward model, and *a priori* information of desired variables acts as weights in the retrieved quantities. These uncertainties in the retrieval are analyzed in the sensitivity analysis of the algorithm. The retrieval algorithm is first tested on a synthetic profile for different perturbations in sensitivity parameters. The sensitivity study has shown that this method is susceptible to LWP information because LWP is point information for the whole cloud column. By further investigating the sensitivity analysis of various biases in LWP information, it was found that it is beneficial to incorporate LWP, even if it is biased, rather than not assimilating any LWP.

The algorithm is then implemented to various cloud and fog cases at the SIRTa observatory to estimate LWC and the scaling factor. The scaling factor ( $\ln a$ ) changes for each cloud profile, and the range of  $\ln a$  is consistent with suggested values in the literature. The validation of such an algorithm is challenging, as we need reference measurements of LWC co-located with the retrieved values. During the SOFOG-3D campaign (South-West of France, October 2019 to March 2020), in-situ measurements of LWC were collected in the vicinity of a cloud radar and a microwave radiometer, allowing comparison of retrieved and measured LWC. The comparison demonstrated that the cloud-fog heterogeneity was playing a key role in the assessment.

The proposed synergistic retrieval algorithm is applied to 39 cloud and fog cases at SIRTA, and the behavior of the scaling factor is studied. This statistical analysis of scaling is carried out to develop a radar-only retrieval method. The climatology revealed that the scaling factor can be linked to the maximum reflectivity of the profile. From climatology, the statistical relations for scaling factor are proposed for fog and cloud. Thanks to the variational framework, a stand-alone radar version of the algorithm is adapted from the synergistic retrieval algorithm, which incorporates the climatology of scaling factor as *a priori* information to estimate the LWC of warm cloud. This method allows the LWC estimation using only radar reflectivity and climatology of scaling factor.

## 1 Introduction

Low-level clouds cover a significant area globally and contribute to 60% of net radiative forcing in Earth's radiation budget (Hartmann et al., 1992). Among all the uncertainties in climate sensitivity estimates, the representation of boundary layer clouds has a significant contribution, specifically in the sensitivity of boundary layer clouds to changing surface and boundary layer properties (Bony and Dufresne, 2005). The impact of clouds on climate is further complicated by feedback mechanisms involving cloud and temperature (Stephens, 2005) and cloud-aerosol interactions (Rosenfeld et al., 2014; Fan et al., 2016). Understanding boundary layer cloud dynamics under changing atmospheric circumstances will help to minimize model uncertainty and climate sensitivity (Bony and Dufresne, 2005). On the other hand, low visibility phenomena like fog and haze have economic implications in transportation, especially in the aviation sector. Short-range fog forecasts are still inaccurate due to the complexity of fine-scale processes involved in the fog life cycle (Martinet et al., 2020).

Active and passive remote sensing instruments are suitable for long-term cloud observations from space and the ground (Zhu et al., 2017). Such spaceborne (e.g. CloudSat (Stephens et al., 2002), CALIPSO (Winker et al., 2010)) and ground based sensors provide observations of various macro and microphysical properties of clouds at different temporal and spatial resolution (Illingworth et al., 2007). Earlier studies demonstrated the quantification of cloud microphysical parameters such as effective radius ( $r_e$ ) and cloud liquid water content (LWC) using different parameterization with single or multi-sensor observations as input. The mass of water content in each cubic meter of dry air at a given altitude is defined as LWC, which is an important parameter for understanding the cloud lifetime and evolution processes.

At 95 GHz (3.2 mm), the Rayleigh regime is still valid as the radar wavelength is nearly two orders of magnitude larger than the observed cloud droplet size, which is invariably less than 50  $\mu\text{m}$  (Miles et al., 2000). The cloud droplets larger than this size have appreciable terminal velocity, fall out of the cloud, and are termed drizzle droplets. Therefore, radar reflectivity can be considered proportional to the sixth moment of the droplet spectrum and LWC is proportional to the third moment of the droplet spectrum. However, Mie scattering becomes significant at larger sizes, such as drizzle droplets. An empirical approach of estimating LWC using radar reflectivity factor by assuming the shape of DSDs, is demonstrated in the literature. Z-LWC relationships derived using in-situ measured droplet spectra collected from a research aircraft are proposed in Atlas (1954); Sauvageot and Omar (1987); Fox and Illingworth (1997). Table 1 shows details of empirical relations between the radar reflectivity factor Z and the LWC from literature for a given cloud type. Typically, radar reflectivity Z and cloud liquid

**Table 1.** Z-LWC relation from literature

Reference	Z-LWC relation	$\ln a$	Cloud type	Assumption
Atlas (1954)	$Z = 0.048 \cdot LWC^{2.0}$	-3.0365	Clouds without Drizzle	Empirical
Sauvageot and Omar (1987)	$Z = 0.03 \cdot LWC^{1.31}$	-3.5065	Non-precipitating stratocumulus and cumulus	Empirical
Fox and Illingworth (1997)	$Z = 0.012 \cdot LWC^{1.16}$	-4.4228	Non-precipitating marine stratocumulus	Empirical
Baedi et al. (2000)	$Z = 0.015 \cdot LWC^{1.17}$	-4.1997	Stratocumulus clouds	Empirical
Wang and Geerts (2003)	$Z = 0.044 \cdot LWC^{1.34}$	-3.1235	Non-precipitating marine stratus	Empirical
Krasnov and Russchenberg (2005)	$Z = 323.59 \cdot LWC^{1.58}$	5.7794	Drizzle clouds	Empirical

water content (LWC) are related with a power law equation given as:

$$Z = a \cdot LWC^b \quad (1)$$

where  $a$  and  $b$  are constant coefficients. If  $Z$  is known, LWC can be estimated provided the value of constants  $a$  and  $b$  are correct for the given cloud type.

LWC calculated using any Z-LWC relationships listed in Table 1 depends strongly on cloud microphysics which varies significantly with changing ambient conditions. Due to the inherent heterogeneity of cloud droplet spectra, it is challenging to establish a universal Z-LWC relationship as the value of coefficients  $a$  varies from 0.012 for marine stratocumulus cloud (Fox and Illingworth 1997) to 323.59 for drizzling cloud (Krasnov and Russchenberg 2005), and the exponent  $b$  varies from 1 to 2. As mentioned, the empirical approach is also based on certain approximations in DSDs, which widely vary within the cloud and among different cloud systems. Thus, a small variation in larger droplet size strongly influences both  $Z$  and LWC, which leads to high uncertainties in estimated LWC profile (Löhnert et al., 2001). Since the cloud droplet size changes significantly within the cloud structure, the retrieval of LWC using only  $Z$  information will not be accurate even if the most appropriate empirical relation for the cloud type is used.

To reduce the uncertainties due to unknown droplet spectra, a synergy of two or more active and passive sensors providing additional cloud information with sophisticated retrieval techniques has been used in several studies in the past few decades. Some studies demonstrated the applicability of dual-wavelength radar system, which uses signals from the  $K_a$ -W band (Hogan et al., 2005),  $S - K_a$  band (Ellis and Vivekanandan, 2011) to calculate liquid water profile. Frisch et al. (1995, 1998) used total integrated liquid water path (LWP) measured by microwave radiometer with cloud radar together. LWP is defined as follows:

$$LWP = \Sigma(LWC)dr \quad (2)$$

where  $dr$  is the range resolution in meters if LWP is in  $gm^{-2}$  and LWC is in  $gm^{-3}$ . This radar-radiometer combination constrained the retrieved LWC exactly to the observed LWP. Further, Ovtchinnikov and Kogan (2000) used cloud simulated data to conclude that the combination of radar reflectivity with liquid water path from microwave radiometer can significantly increase the accuracy and the robustness of the retrieval. Thereafter, Löhnert et al. (2001) explained a similar approach of using

LWP derived using brightness temperature ( $T_b$ ) from a passive microwave radiometer, radar reflectivity profile from a 95GHz cloud radar, and cloud model statistics to derive LWC profiles. The limitation of this approach is that the accuracy of LWC profile is reduced in presence of drizzle. This is because a few drizzle droplets dominate the reflectivity without contributing much to LWC. In case of drizzle in the cloud profile, lidar ceilometers are used to determine the actual cloud-base height because lidar ceilometers are more sensitive to small cloud droplets than cloud radars. O'Connor et al. (2005) calculated the drop size, liquid water content, and liquid water flux of drizzle using the synergy of cloud radar and backscattering information from lidar. This technique was applied to the drizzle below the cloud base, as the lidar beam is strongly attenuated when it penetrates the cloud. To improve the quality of LWC retrievals in clouds and drizzle, Löhnert et al. (2008) implements a target classification scheme using certain thresholds determined by radar reflectivity and ceilometer extinction profile. Some LWC profile retrievals in the literature are applicable to both precipitating and non-precipitating clouds, although they may have their own set of limitations. Historically, difficulties with fog retrievals were due to the cloud radar blind zone, which can now be minimized with FMCW radars.

The main goal of this study is to learn from the synergistic retrieval and utilize that knowledge to direct the retrieval when synergy is not possible. The instrumentation used in this paper is described in section 2 and the retrieval methodology to develop climatology is explained in section 3. Section 4 elaborates the sensitivity analysis of the retrieval algorithm using a synthetic profile, and the validation of retrieval with in-situ measurements is discussed in section 5. After evaluating the performance of the retrieval algorithm, section 6 focuses on the derivation of the climatology of the retrieved parameters, and finally, the BASTA standalone retrieval using climatology is discussed in section 7.

## 100 2 Observation sites and instrumentation

Observations for this study are collected from a 95 GHz cloud radar and a microwave radiometer which are co-located in two different locations. The longest observation period, between November 2018 to May 2019, which corresponds to the meteorological conditions of interest including a relatively higher concentration of fog and cloudy days, is from SIRTa (Haefelin et al., 2005, Site Instrumental de Recherche par Télédétection Atmosphérique). SIRTa is a multi-instrumental atmospheric research laboratory located in Palaiseau (49N, 2E), 20 km south of Paris (France) in a semi-urban environment that is 160 m above sea level. The observatory brings together several advanced active and passive remote sensing instruments to study the dynamic and radiative processes of the atmosphere recorded since 2002 (Haefelin et al., 2005). The climatology of liquid cloud retrievals is derived using the observations from SIRTa. Simulations using the French Convective Scale AROME model (Seity et al., 2011; Brousseau et al., 2016) for SIRTa are used for sensitivity analysis of the algorithm.

110 The second site is located in the South-West of France, measurements were collected during the SOFOG-3D (South west FOGs 3D experiment for processes study) field experiment between October 2019 to March 2020. This field experiment was conducted to advance the understanding of fog processes by exploring both horizontal and vertical variability of fog layers. The super-site is located at Saint-Symphorien commune of France and is centered at 44°24'44.5 N, 0°35'51.5 W covering a circular surface of 5 km radius around this point. The territory is part of a farm named Domaine de la Grande Téhoueyre

**Table 2.** BASTA range resolution modes and their applications

Mode	Range	Min to Max reflectivity at 1 <i>km</i>	Target application
12.5 <i>m</i>	12 <i>km</i>	-39.5 to 22 <i>dBZ</i>	Fog, Drizzle, Rain
25 <i>m</i>	18 <i>km</i>	-44 to 22 <i>dBZ</i>	All hydrometeors
100 <i>m</i>	18 <i>km</i>	-50 to 22 <i>dBZ</i>	Thin clouds
100 <i>m</i>	24 <i>km</i>	-51.5 to 22 <i>dBZ</i>	Very thin ice clouds

115 which is 69 *m* above sea level and this site was chosen due to its fog occurrence statistics. Additionally, various measurements  
of fog properties were collected with innovative sensors including in-situ and remote sensing networks across a  $300 \times 200$   
*km* domain around the super-site. In-situ measurements collected during this campaign are used to validate the LWC retrieval  
algorithm in fog conditions. The next part goes into the details about the specifications of instrumentation used in this study.

### 2.1 BASTA cloud radar at SIRTA and SOFOG-3D

120 A vertically pointing 95*GHz* cloud radar called BASTA (Delanoë et al., 2016) is operating at SIRTA to record the time height  
structure of cloud, fog, and light precipitation. BASTA was developed at LATMOS (Laboratoire Atmosphères, Observations  
Spatiales) and it has been operational at SIRTA observatory since 2011. This Doppler cloud radar uses the frequency-modulated  
continuous wave (FMCW) technique rather than pulses, making it less expensive than traditional cloud radars. It measures radar  
reflectivity and Doppler velocity of the atmospheric targets at four different range resolution modes depending on the specific  
125 application.

In particular, the 12.5 *m* vertical resolution mode is dedicated to fog and low clouds and is limited to 12 *km* range height  
with a minimum range of 40 *m*. This radar is calibrated using the approach proposed by Toledo et al. (2020) based on corner  
reflectors. Another product developed by combining three modes providing optimized radar reflectivity, velocity and mask  
indicating the valid signal from noise is also developed. This level 2 (L2 here onwards) processing is a new vertical grid  
130 derived by combining several modes (vertical and temporal resolution) at the same time resolution in order to make the most  
of each mode. Table 2 includes information on the various BASTA radar modes, associated vertical ranges, minimum and  
maximum reflectivity, and target application. The data from the higher range resolution is gridded, while the values from the  
lower resolution range are distributed using the closest value. Due to their higher sensitivity, the largest range resolution data  
are utilised, and background noise is eliminated.

135 In this study, 39 cloud cases with L2 product of BASTA measurements at the SIRTA location are used. During the SOFOG-  
3D field experiment, the vertically pointing BASTA radar was deployed in a fog prone region to acquire high-resolution  
observations of the fog's characteristics. The L2 product of BASTA observation is used to evaluate the performance of the  
algorithm for retrieving the LWC of low-level fog. Due to the coupling of the radar antenna, the minimum detectable range  
was 40 *m* above the ground for the L2 product.

## 140 2.2 HATPRO microwave radiometer at SIRTA and SOFOG-3D

A 14-channel HATPRO (Humidity And Temperature Profiler) MWR manufactured by Radiometer Physics GmbH (RPG) is operational at SIRTA observatory. HATPRO MWR is a passive instrument, converting the naturally emitted downwelling radiative energy emitted from the atmosphere within two spectral bands with seven channels each: the first one focuses on the water vapor absorption band (22.24- 31 GHz) while the second one is centered on the 60 GHz oxygen complex band (51–59 GHz).  
145 Through the use of calibration coefficients, detected intensities are then directly converted into brightness temperatures. A retrieval technique is then needed to convert the brightness temperature spectra into vertical profiles of temperature, humidity as well as liquid water path. MWRs are sensitive to the total liquid water content in the cloud column (Ware et al., 2002). In general, statistical methods (linear, quadratic regressions or neural networks) trained from simulated MWR observations from a database of radiosoundings or model analyses are used (Cimini et al., 2006). Optimal estimation retrievals combining an *a*  
150 *priori* estimate of the atmospheric state with observations through an iterative process can also be used (Martinet et al., 2020). In this study, LWP retrievals based on MWR observations have been retrieved through quadratic regressions trained from a database of radiosoundings for SIRTA, while for SOFOG3D, neural networks trained from AROME short-term-forecasts have been used. Humidity profiles can be retrieved with a limited vertical resolution due to the smoother weighting functions for K-band channels. Temperature profiles show a better vertical resolution, which can be improved through the use of different  
155 elevation angles (generally from 90 to 5.4° above the ground). A detailed description of the SOFOG3D MWR network and the retrieval data processing is available in Martinet et al. (2022).

For a column containing a single liquid layer, MWR provides the LWP for the cloud layer. The LWP measurements of the column are unaffected by ice clouds above liquid clouds. The time resolution of LWP measurements used in this study is 1 second, with brief interruptions due to boundary layer scans. The missing measurements during boundary layer scans are  
160 interpolated to the BASTA observation frequency which is 0.333 sec. The uncertainty of the MWR for LWP is expected to range between  $10 \text{ gm}^{-2}$  and  $20 \text{ gm}^{-2}$  (Crewell and Löhnert, 2003; Marke et al., 2016) particularly dependent on the absolute calibration errors of MWR and uncertainties in retrieval algorithms. This uncertainty is also due to uncertainty in the microwave radiative transfer model.

## 2.3 Cloud Droplet Probe (CDP) on the tethered balloon during SOFOG-3D experiment

165 The tethered balloon mounted with in-situ sensor called Cloud Droplet Probe (CDP) is designed to measure cloud droplet size distribution from  $2 \mu\text{m}$  to  $50 \mu\text{m}$ . The CDP probe housing contains the forward scatter optical system, which includes a laser heating circuit, photodetectors, and analog signal conditioning, and an appropriate data system can also calculate various other parameters, including particle concentrations, effective diameter (ED), Median Volume Diameter (MVD), and Liquid Water Content (LWC) (Lance et al., 2010). This instrument is designed and commercialized by Droplet Measurement Technology,  
170 and the specifications are given in table 3. The sampling rate of CDP was 10 sec and had 50 size bins each with  $1 \mu\text{m}$  resolution during the SOFOG-3D campaign.

**Table 3.** Specifications of in-situ cloud droplet probe mounted on tethered balloon

Laser	658 nm, up to 50 mW
Measured Particle Size Range	2 $\mu\text{m}$ – 50 $\mu\text{m}$
Typical Sample Area	0.24 $\text{mm}^{-2}$
Number Concentration Range	0 – 2,000 $\text{cm}^{-2}$

### 3 Methodology of LWC retrieval


The objective of the algorithm is to retrieve *LWC* using radar reflectivity measurements and *LWP* derived from MWR when the latter is available. The integrated liquid water content in the cloud column constrains the vertical profile of *LWC*, which is strongly related to the reflectivity profile. There are several methodologies for modeling such algorithms, including analytical methods, machine learning techniques, and others. The technique proposed in this paper is framed within the context of optimal estimation theory (Rogers, 2000). This approach combines *a priori* information and uncertainties in the observations, the way we represent them, and is easily expandable to accommodate additional information from multiple instruments. This retrieval method must be able to combine active and passive remote sensing instruments to derive the most possible accurate climatology of liquid cloud properties and also work when only radar observations are available (i.e. stand-alone version). This must be achieved using a common framework. Such a technique has been widely applied in previous studies (Löhnert et al., 2001; Hogan, 2007; Delanoë and Hogan, 2008). Synergistic retrieval combining radar and microwave radiometer in order to estimate liquid cloud properties has already been proposed by Löhnert et al. (2001). In their approach, they directly assimilate brightness temperature ( $T_b$ ) and humidity profiles from the microwave radiometer. The method presented here aims at providing more flexibility when the microwave is not available. Therefore, we do not directly assimilate brightness temperatures, but the microwave radiometer product (*LWP*) and the associated uncertainties are taken into account. In standalone mode, when only radar observations are available, our method relies on *a priori* knowledge of liquid cloud properties and their link with radar measurements. This *a priori* information will be built using climatology derived when radar and microwave radiometer are simultaneously available.

To account for the large dynamic range of the observations within a profile, this algorithm uses the logarithm of the state variables and measured quantities which also prevent the unrealistic retrieval of negative values. Therefore, the linear relation between *Z* and *LWC* in log space in the form of  $y = mx + c$  where  $\ln a$  represents intercept and  $b$  is the gradient of the line can be written as:

$$\ln Z = \ln a + b \times \ln LWC \quad (3)$$

The logarithm of *a priori* coefficient  $a$  is referred to as the scaling factor, and the logarithm also enables visualizing the wide range of  $a$ . Figure 1 illustrates how the input parameters (*Z* and *LWP*) are used to retrieve the output variables (*LWC* and

*lna*). Although the observation vector  $y$  may not incorporate LWP when it is unavailable, however by adding the LWP in the observation with  $Z$ , the forward model allows retrieving *lna* in addition to LWC.

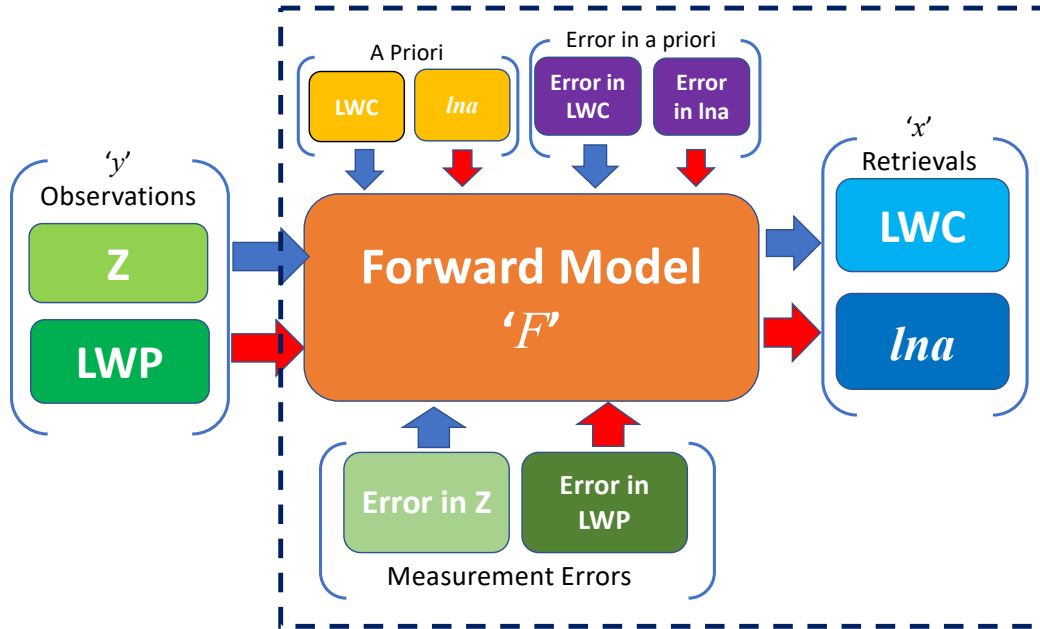

**Figure 1.** Schematic of LWC retrieval algorithm.

### 3.1 Optimal estimation and the configuration of state and observation vectors

200 The optimal estimation (Rodgers, 2000) is a retrieval approach in which the measured quantities are related to unknown atmospheric parameters using a Forward model. If ' $y$ ' is the measurement and ' $x$ ' is the unknown parameter, then the forward model ' $F$ ' and errors ' $\epsilon$ ' can be mathematically written as

$$y = F(x) + \epsilon \quad (4)$$

where error due to measurements and forward model are accounted in  $\epsilon$ . The forward model is a mathematical description of the atmosphere as a function of the measurements and the atmospheric states. The retrieval starts with the 'first guess' (can be 205 *a priori*) of the states, and the forward model is then applied to simulate the values of measurements. The states are updated



until the simulated and measured quantities are close enough and convergence is achieved. To sum up, this technique allows the estimation of the atmospheric state, which is physically consistent with the specified errors.

In the optimal estimation method, minimization of cost function leads to the iterative solution. Convergence is assessed at 210 each iteration using the following variable to estimate the closeness of the observations with the model:

$$G = |J(i) - J(i - 1)|$$

where ' $i$ ' is the iteration number and  $J$  is called the cost function. For every iteration,  $G$  examines the absolute gradient of the cost function and achieves convergence when the difference between two successive cost functions is negligible. In this scenario, the retrieval converges when  $G$  is of the order of  $10^{-7}$  which indicates that the additional iteration is not adding a 215 prominent change in the retrievals.

The state vector ' $X$ ' is the vector of unknowns and must contain all the variables to retrieve. The observation vector ' $Y$ ' is driven by the available observations. In our case, the radar reflectivity and  $LWP$  (when the microwave radiometer is available) are the parameters in the observation vector. These two vectors are also defined in the way that we can link them through the forward model. The forward model accounting for radar attenuation will be described in detail in section 3.2.

220 From the power law relation of Z-LWC in Eq. (1) the constants  $a$  and  $b$  are dependent on many microphysical parameters such as the particle size, number concentration, and other ambient conditions. Through this kind of relationship, we can associate a  $LWC$  value to a reflectivity value by constraining  $LWC$  with the observed  $LWP$  values. The pre-factor  $a$  allows to adjust the whole profile of  $LWC$  regardless of the reflectivity and shows a much higher variability than  $b$ . Note that the impact of variability in  $b$  will be assessed in section 4.1. The state and observational vectors are defined as follows:

$$225 \quad X = \begin{pmatrix} \ln LWC_1 \\ \vdots \\ \ln LWC_n \\ \ln a \end{pmatrix}, \quad (5)$$

$$Y = \begin{pmatrix} \ln Z_1 \\ \vdots \\ \ln Z_n \\ \ln LWP \end{pmatrix} \quad (6)$$

The state and observation vectors are defined as shown in Eq. (5) and (6). The errors in measurement are tested using a synthetic profile of observations and detailed in the section 4.1. The most suitable error in the observation vector is set as 25% and 10% respectively for Z and LWP. As mentioned in section 2.2, LWP estimates from MWRs have an expected 230 uncertainty of  $\pm 20 \text{ gm}^{-2}$ . However, this uncertainty estimation also depends on the MWR calibration and retrieval algorithm uncertainties, an approximate evaluation of the LWP measurements using longwave radiation measurements demonstrates an

RMSE in LWP of around 5–10  $gm^{-2}$  during fog with  $LWP < 40 gm^{-2}$  (Wærsted et al., 2017). Thus, to minimize the errors due to the measurement uncertainties, the LWP is assimilated only when the measured LWP is greater than 10  $gm^{-2}$  because the relative error for low LWP values from HATPRO is significantly higher than for high LWP values. Although 10% error in LWP is very small when compared to the expected error, the profiles with LWP values below 10  $gm^{-2}$  are already excluded from retrievals, implying that there is less error to be considered. A detailed analysis of errors in measurement of Z and LWP are explained in section 4.1, covering the sensitivity analysis of retrieval algorithm using synthetic profile.

Prior knowledge of the state parameters enables the retrieval to be constrained in order to avoid unrealistic solutions, especially when additional measurements are missing. *a priori* information usually consists of long-term climatology or model outputs of state parameters, i.e. LWC and  $lna$ . For example, from various in-situ measurements of LWC in fog or liquid clouds, it is known that LWC in the cloud is not equally distributed vertically and is strongly related to reflectivity. *A priori* of LWC dependent on reflectivity should be more suitable than a constant LWC profile. In this retrieval, a LWC profile derived from the empirical relation is used as the *a priori* with an *a priori* error of 1000% (or 10) for both LWC and  $lna$ . Note that the errors are presented in logarithm, and the error in the *a priori* is considered high because LWP measurements are available to constrain the retrievals. Even so, *a priori* information is vital in case of missing LWP measurements, which plays an important role in the case of LWC retrieval using only radar observations and climatology. In such a case, the expected error in the *a priori* will be considered less. In case of low LWP observations, retrieval depends on *a priori* which is taken from Atlas (1954) empirical relation, and therefore, the scaling factor is not retrieved for such profiles. The retrieval of LWC for the profiles with  $LWP < 10gm^{-2}$  incorporates attenuation in the retrievals rather than just applying empirical relationships.

## 250 3.2 Description of the forward model and Jacobian matrix

The forward model is an approximation of the physical phenomenon represented as a function of measurement and state variables. In order to expand the retrieval when the additional measurement is available, it is recommended to describe the forward model for each element of the observation vector. The forward model for radar links radar reflectivity to LWC using the Eq. (3). Furthermore, LWP as additional information constrains LWC using Eq. (2) and allows the retrieval of scaling factor  $lna$ . When additional information is unavailable, the retrieval constrains LWC using  $lna$  climatology, which is elaborated in section 7. The microphysical model for attenuation consideration is discussed in the next subsection 3.2.1.

### 3.2.1 Forward model for attenuation correction

Water vapor and oxygen are the two primary atmospheric gases that contribute to microwave absorption. Even though W-band radars work in one of the water vapor transmission windows, absorption due to water vapor can exceed 1  $dBkm^{-1}$  depending on temperature and humidity in the lower troposphere. Despite the fact that attenuation by atmospheric gases is relatively small, attenuation due to liquid cloud droplets can diminish the advantages of W-band radar observation, particularly in the liquid cloud case. According to Lhermitte (1990), the attenuation due to liquid droplets is more problematic as it depends on drop size distribution, which is not known in general. Since attenuation due to liquid cloud is dependent on temperature and density of cloud droplets and clouds consist of randomly distributed, spherical droplets of diameter less than 50 microns, the

265 95GHz microwave absorption can be adequately described by the Rayleigh approximation. Tridon et al. (2020) compared the attenuation coefficient as a function of temperature using three different models for computing the liquid water refractive index. In this comparison, the attenuation produced by a 1 km thick liquid cloud containing 1 gm<sup>-3</sup> of liquid water was determined to be around 4 dBkm<sup>-1</sup> at 95GHz. Attenuation due to liquid clouds and drizzle at different temperatures have been studied in many theoretical studies. For example, at 10°C, Lhermitte (1990) calculated 4.2 dBkm<sup>-1</sup> per gm<sup>-3</sup> of liquid  
 270 water attenuation, while Liebe et al. (1989) obtained 4.4 dBkm<sup>-1</sup> by using the Rayleigh approximation. On the other hand, Vali and Haimov (2001) assumed spherical hydrometeor and obtained the general solution for absorption (and scattering) at W-band using Mie approximation. Extinction due to a liquid cloud at 95GHz using simultaneous and co-located cloud measurements of drop-size distribution, liquid water content, temperature, and pressure for maritime stratus clouds was comparable with the theoretical studies mentioned above. This study further concludes that for around 10°C and pressures close to 900 mb, the  
 275 one-way attenuation 'A' in dBkm<sup>-1</sup> was found to be linearly dependent on LWC and expressed as:

$$A = 0.62 + 4.6 \times LWC \text{ in dBkm}^{-1}, \quad (7)$$

where 0.62 dBkm<sup>-1</sup> represents gaseous absorption.

Vivekanandan et al. (2020) calculated attenuation 'A' as a function of reflectivity Z for cloud droplets and drizzle using power law fit. Reflectivity and attenuation are simulated using DSDs collected from VOCALS field experiment (Wood et al., 2011),  
 280 with Z being proportional to sixth moments and attenuation being proportional to third moments of DSDs. The attenuation as a function of simulated reflectivity ( $Z < -17$  dBZ for clouds droplets, and  $Z > -17$  dBZ for drizzle) is given by Eq. (8) and (9) for clouds and drizzle respectively.

$$A = 18.6 \times Z^{0.58} \text{ dB/km} \quad (8)$$

$$285 \quad A = 1.68 \times Z^{0.9} \text{ dB/km} \quad (9)$$

However, even with power law fit, the range of attenuation calculated is 0 to 4 dBkm<sup>-1</sup>, which is almost the same order of attenuation per kilometer calculated using linear relations proposed in previous studies. Equation (7) is used to calculate attenuation due to liquid water in the forward model. As this study is focusing on the retrieval of LWC and its climatology, attenuation as a function of LWC will adjust with retrieved LWC for cloud and drizzle without categorizing the hydrometeor  
 290 on the basis of forward modelled reflectivity. Finally, a sensitivity test for considering inconsistent attenuation in the forward model will be discussed in section 4.3.

The attenuation correction is achieved within the forward model by correcting at a particular gate to estimate the associated attenuation and then using it to correct at all subsequent gates. Therefore, the forward model estimates the two-way attenuation corresponding to LWC using Eq. (7) and then corrects the forward modelled reflectivity to account for the estimated attenuation.  
 295 Since the radar is vertically pointing, it is presumed that the lowest gate (closest to the radar) remains unattenuated due to the liquid droplets, whereas all gates above are affected by liquid droplets present in the preceding gates. As the radar beam passes

through the cloud profile, it gets attenuated due to liquid; as a result, the top most cloud pixels of the profile are the most attenuated. To summarize, each cloud pixel is corrected for the two-way attenuation caused by liquid clouds along the path of the radar beam.

### 300 3.2.2 The Jacobian formulation

The Jacobian is a matrix representing the sensitivity of the forward model. It consists of partial derivatives of all the elements of the  $Y$  vector with respect to the  $X$  vector. Since the forward model updates the element of measurement vector at each iteration, thus, at each iteration step, the Jacobian  $K$  is re-evaluated and for a profile of ' $n$ ' cloud pixels as

$$K_i = \begin{pmatrix} \frac{\partial \ln Z_1}{\partial \ln LWC_1} & \cdots & \frac{\partial \ln Z_1}{\partial \ln LWC_n} & \frac{\partial \ln Z_1}{\partial \ln a} \\ \vdots & \ddots & \vdots & \vdots \\ \frac{\partial \ln Z_n}{\partial \ln LWC_1} & \cdots & \frac{\partial \ln Z_n}{\partial \ln LWC_n} & \frac{\partial \ln Z_n}{\partial \ln a} \\ \frac{\partial \ln LWP}{\partial \ln LWC_1} & \cdots & \frac{\partial \ln LWP}{\partial \ln LWC_n} & \frac{\partial \ln LWP}{\partial \ln a} \end{pmatrix} \quad (10)$$

305  $K$  consist of  $(n + 1) \times (n + 1)$  elements with top  $n \times n$  elements are partial derivative of reflectivity with LWC and last row corresponds to constrain LWC at each cloud pixel with total LWP. The  $(n + 1)^{th}$  column corresponds to the relation between radar reflectivity and scaling factor ( $\ln a$ ), and the very last element is set to zero because  $\ln a$  is not related to LWP measurements. Therefore, for  $n$  cloud pixels in a profile, the forward model will evaluate a Jacobian of  $(n + 1) \times (n + 1)$  to retrieve the state vector corresponding to radar reflectivity and LWP measurements. The attenuation in forward modelled reflectivity  
310 due to liquid cloud droplets is accounted at every iteration. The Jacobian matrix incorporates the two-way attenuation ' $A$ ' at each cloud pixel by calculating the partial derivatives of ' $A$ ' with respect to LWC at each cloud pixel. It is worth noting that the attenuation due to gaseous absorption is not accounted in the Jacobian matrix because L2 reflectivity is already corrected for it using the model proposed in Liebe (1989). The value of attenuation corresponding to the  $\ln a$  parameter is assumed to be zero.

The forward model errors are the errors associated to the mathematical model which relates measurements with atmospheric  
315 physical parameters. The relationships described in the forward model are not necessarily perfect and incorporate errors in the retrieval. As mentioned already,  $Z$  is closely related to the LWC of the cloud, and hence forward model for reflectivity is represented by Eq. (3). In this equation, the errors in  $Z$  are taken into error in measurement for  $Z$ , whereas  $\ln a$  and  $LWC$  are retrieved parameters. As exponent  $b$  is taken constant, there is a possibility to incorporate error in forward model due to  $b$ , which is discussed in sensitivity analysis in section 4.6. The error incorporated because of model representation of attenuation  
320 due to the liquid cloud is also discussed in the sensitivity analysis. The cloud liquid water is also constrained by LWP as the summation of LWC for the given cloud column, as shown in Eq. (2). Therefore, the forward model for LWP is simple and therefore, error in the estimation of LWC due to the forward model is neglected.

### 3.3 Discussion of the retrieval uncertainty

Other sources of error in the retrieval algorithm are discussed in this section. Doppler radars also detect boundary layer insects,  
325 large dust particles, and pollens suspended in the air as a result of the convective boundary layer that grows in the morning

hours and matures shortly after the midday (Geerts and Miao, 2005). These so-called airborne planktons contaminate the reflectivity profile as a result of the formation of the convective boundary layer. Therefore, the unwanted signal in the radar reflectivity due to airborne planktons must be removed before estimating LWC. In this data set, the majority of liquid clouds are observed below 2500 *m*. We selected the cloud cases where cloud height remained below 2500 *m* as the clouds above are anticipated to be mixed phase or ice clouds. However, because the height of the melting layer changes with the season and geographical location, it would be appropriate to determine the height of the melting layer to differentiate between liquid and mixed phase clouds. As the LWP measurements from MWR are unaffected by the overlying ice cloud but account for liquid in the overlying mixed-phase cloud, which adds error in the LWC retrieval. Therefore, all such cloud profiles are removed before deriving climatology. In the profiles with LWP less than or equal to 10  $gm^{-2}$ , the retrieved LWC is not used for climatology due to high relative error in low LWP values.

Fog on the other hand, causes droplet deposition on the radome and hence contributes towards a substantial amount of attenuation in the radar reflectivity which is not accounted in the retrieval. It is worth noting that a blower to remove the droplet deposition on BASTA at SIRTAs is installed since 2019 which has substantially reduced the wet radome attenuation after rain. The retrieval assumes completely dry radome for all the cases, including clouds immediately after rain and drizzle. The measured LWP is interpolated over the radar temporal resolution because the radar and microwave radiometer operates at distinct observation frequencies. This measurement interpolation is also an additional source of error in the retrieval.

Due to the coupling of transmitting and receiving antennas of radar, the vertically pointing radar misses a few lowest gates close to the ground. These unavailable gates do not impact the information about the clouds aloft, but the missing information of thin fog causes over estimation in LWC for the first few available gates. The overestimation is due to the fact that retrieval forces the assimilated LWP of the profile by constraining it over available range gates and hence overestimates the LWC for available gates. The most appropriate way to overcome this issue is to use scanning radar, but for vertically pointing radar we assume that the properties of fog remain the same between the first available gates and the ground, and thus reflectivity is extrapolated (extended) downwards for the unavailable range gates. The extension of range gates is particularly significant for SOFOG-3D experiment cases, which are specifically concerned with fog processes. However, the extension of range gates may introduce inaccuracy into LWC retrieval for fog, as the reflectivity of fog at the surface is not always equal to the reflectivity of the first available gates, particularly for dissipating fog.

### **3.4 Analysis of the method when microwave radiometer is available**

This section describes the analysis of retrieval when applied to various cloud types. As detailed in section 3, the retrieval technique is applied to reflectivity data from 95 GHz BASTA radar with LWP estimates from co-located RPG HATPRO microwave radiometer for various cloud cases from SIRTAs. Between November 2018 to May 2019, 39 cloud and fog cases at SIRTAs observatory are selected to address the algorithm's implementation on warm clouds. The data set contains a relatively large number of cloudy cases, including fog and light drizzle. A detailed discussion of retrieval and algorithm implementation is elaborated for a typical example of a liquid cloud in the next subsection.


### 3.4.1 Illustration of the retrieval for the 05 February 2019 case at SIRT

360 A case study of one of the selected cloudy cases from SIRT on 05 February 2019 is presented in figure 2. There were no overlapping clouds observed in this instance, and the airborne planktons were removed manually. A dense cloud from midnight with a cloud base close to the ground dissipates before noon, and the formation stage of fog is initiated after the sunset. Throughout the day, the liquid water path remains below  $100 \text{ gm}^{-2}$ . Reflectivity values reach  $0 \text{ dBZ}$  for a few profiles indicating drizzle in the beginning (between 00:00 to 03:00 hrs). As indicated by radar observations, higher reflectivity values  
365 are due to drizzle, yet LWP is nearly identical for the cloud with reflectivity as low as  $-35 \text{ dBZ}$  and contributes the least to LWP. This also explains why it is critical to have LWP information to constrain LWC retrievals, particularly for profiles with drizzle within the cloud and when it evaporates fully before reaching the ground. Figure 2(c) indicates a general increase in LWC towards the cloud top, and the retrieved LWC is less than  $0.3 \text{ gm}^{-3}$ . The scaling parameter has a wide range from  $-6$  to  $+3$  which supports empirical values of  $a$  in table 1. The value of  $\ln a$  changes for each profile. Therefore, this case illustration  
370 shows that the retrieval of LWC and scaling factor can be utilized to derive a climatology of scaling factor for different cloud types. It is worth noticing that the retrieval algorithm deals with all the variations of cloud types, and the behavior of scaling factors must be studied. The next section elaborates the robustness of the retrieval algorithm for various sensitivity parameters.


## 4 Sensitivity analysis of retrieval algorithm using synthetic data

The goal of this section is to verify the consistency of the retrieval behavior and to assess the sensitivity of the algorithm to  
375 inputs, errors, and hypotheses. Sensitivity analysis does not replace a proper validation of algorithm retrievals. In section 5, a comparison with in-situ measurement is discussed. Like every other algorithm, this retrieval algorithm also suffers from some fundamental uncertainties which must be addressed. To do so, we use a sensitivity analysis approach. It can also be referred to as ‘what-if’ analysis, where the input parameters of the model are varied one by one. As shown in the schematic of the retrieval algorithm in figure 1, the retrieval is sensitive to not only input parameters but also other settings like the *a priori*, expected  
380 errors in measurement, and *a priori* information. To quantify the sensitivity of the retrieval algorithm, real observations are not used because the true profile of LWC from an in-situ sensor is not always available. Instead, synthetic data that contains all the characteristics of real observations, are used to evaluate the performance of the algorithm. Maahn et al. (2020) highlighted the major benefits of using synthetic data to test algorithms and models. First and foremost, systematic forward model errors cancel each other, and second, we know the true atmospheric state  $X_{truth}$ , which can be compared with the retrieved optimal result  
385  $X_{ret}$ . Hence, considering the mentioned advantages, we are using synthetic data for the sensitivity analysis of the retrieval algorithm.

The flowchart of sensitivity analysis is presented in figure 3 where sensitivity parameters are the parameters in the retrieval algorithm which are perturbed, and the impact is tested. The objective is to formulate input parameters from the truth and by feeding synthetic observation to the retrieval algorithm, the result should match the truth. In the block diagram, synthetic  
390 observations (Z and LWP) are fabricated using the forward model.

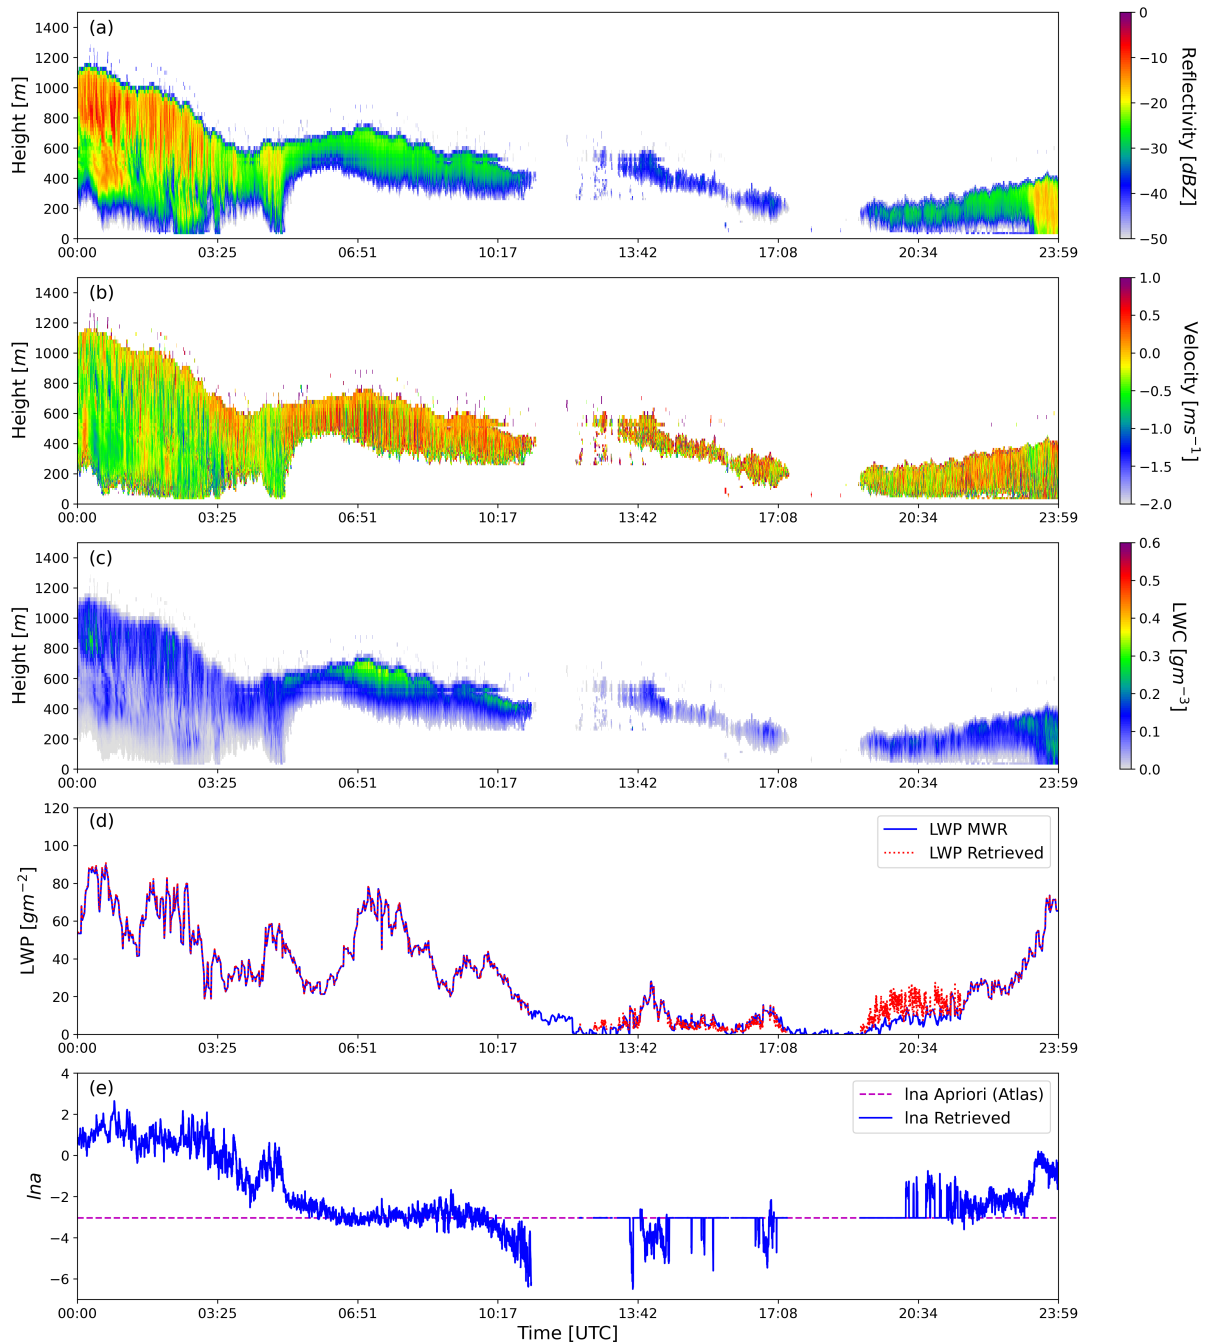

**Figure 2.** (a) Time-height plot of radar reflectivity (b) Time-height plot of vertical velocity (c) Time-height plot of retrieved LWC, (d) LWC estimated by the radiometer alone through quadratic regression, interpolated at radar time and (e) Retrieved scaling factor  $Ina$  of each profile for 05 February 2019 case at SIRTa.

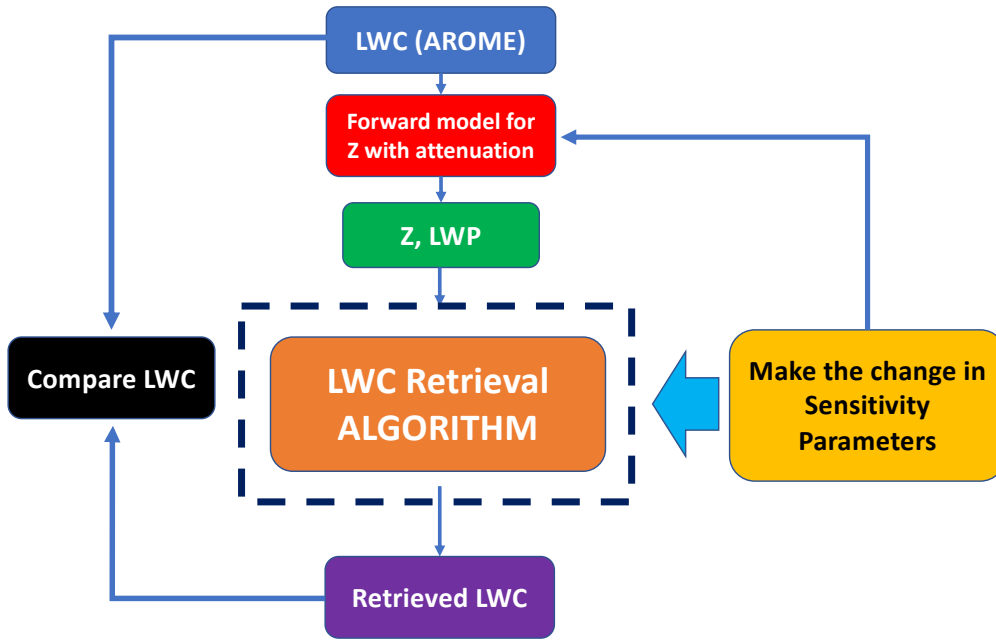

**Figure 3.** Flow chart for sensitivity analysis of retrieval algorithm. The block inside the dashed line is the same as shown inside the dashed line in figure 1 with all the sensitivity parameters.

However, we are aware of the fact that the retrieval errors might be different when observed in real observation scenarios, which is already discussed in the section 3.2 for real observations. The error in retrieved LWC from with respect to what we consider as true LWC is calculated using the Eq. (11), (12), and (13) for all the sensitivity test.

1. Root mean squared error

$$RMSE = \sqrt{\frac{\sum_0^n (LWC_{ret} - LWC_{true})^2}{n}} \quad (11)$$

2.  $R^2$  (coefficient of determination) quantifies the degree of any linear correlation between observations ( $LWC_{true}$ ) and retrievals ( $LWC_{ret}$ ). The general definition of  $R^2$  regression score function is:

$$R^2 = 1 - \frac{SS_{res}}{SS_{tot}} \quad (12)$$

where  $SS_{res}$  is residual sum of squares and  $SS_{tot}$  is total sum of squares.



400 3. Mean absolute percentage error: It measures the accuracy of the retrieval in percentage.

$$MAPE = \frac{100}{n} \sum_0^n \left| \frac{LWC_{true} - LWC_{ret}}{LWC_{true}} \right| \quad (13)$$

where  $LWC_{ret}$  and  $LWC_{true}$  are retrieved and true LWC respectively, and  $n$  is the number of data points. Analysis of each sensitivity parameter is presented in the next section.

#### 4.1 Description of synthetic data

405 Synthetic data of LWC can be prepared from empirical relations, theoretical adiabatic LWC, or model forecasts. For this sensitivity analysis, we opted to include physical parameters of the 16 November 2018 fog structure simulated by the AROME model of the retrieval algorithm. The selection requirement for this instance is that it contains a sufficient number of LWC profiles to evaluate the behavior of the algorithm.


AROME is a French convective scale NWP model, operational since 2008 covering France and western Europe providing  
410 high-resolution simulations of fog forecasts at 1.3 km of horizontal resolution and 90 vertical levels of 144 profiles. The detailed setup of the AROME model and fog forecast is explained in Bell et al. (2021). LWC of a fog structure from AROME short-term forecasts at the nearest grid location of SIRTAs is considered the true atmospheric state. In this case, we are considering only liquid droplets, with no overlapping of liquid or ice clouds aloft. Profiles of true LWC are used to synthesize observation parameters like radar reflectivity using the previously defined power law relation and the liquid water path of each  
415 profile by integrating true LWC at each pixel. The forward model (block in red) consisting of the power law relation and attenuation correction model for deriving the synthetic profile of  $Z$  using coefficients  $a$  and exponent  $b$  is taken from Atlas (1954) the empirical relation. The two-way attenuation correction applied to  $Z$  is calculated from Eq. (7)(see figure 4).

One of the most obvious sources of uncertainty in the retrieval is the observation (calibration errors and instrumental noise) and forward model errors. The forward model errors tested in this sensitivity analysis are the variation in attenuation consider-  
420 ation and the variation in exponent  $b$ . As the observation vector,  $Y$  contains measurements from two independent instruments, bringing random and uncorrelated errors within the elements of  $Y$  (Maahn et al., 2020). The deposition of liquid droplets on the radome introduces an additional bias in radar observations. This is tested by analyzing the impact of possible biases in  $Z$ . The next sections cover the sensitivity analysis of the retrieval algorithm for perturbations in different parameters.

#### 4.2 Sensitivity analysis of impact of error in observation

425 The input for synergistic retrieval in the observation vector  $Y$  consists of concatenated observations from the cloud radar and the radiometer. Each instrument has different errors, and it is worth mentioning that in case of radar observations, instrumental errors are considered for each gate whereas for the LWP measurement from the radiometer the observation error is estimated over the entire cloud profile i.e., an integrated measurement. By varying the weight of instrumental error from each observation ( $Z$  and LWP) and keeping the rest constant, the impact on the retrieved LWC is compared with the true LWC.

430 Observation errors are assumed to be independent, and the synthetic observations of  $Z$  and LWP are calculated using true LWC, as shown in figure 4. Equation (7) is used to calculate attenuation due to liquid water in the synthetic profile as well

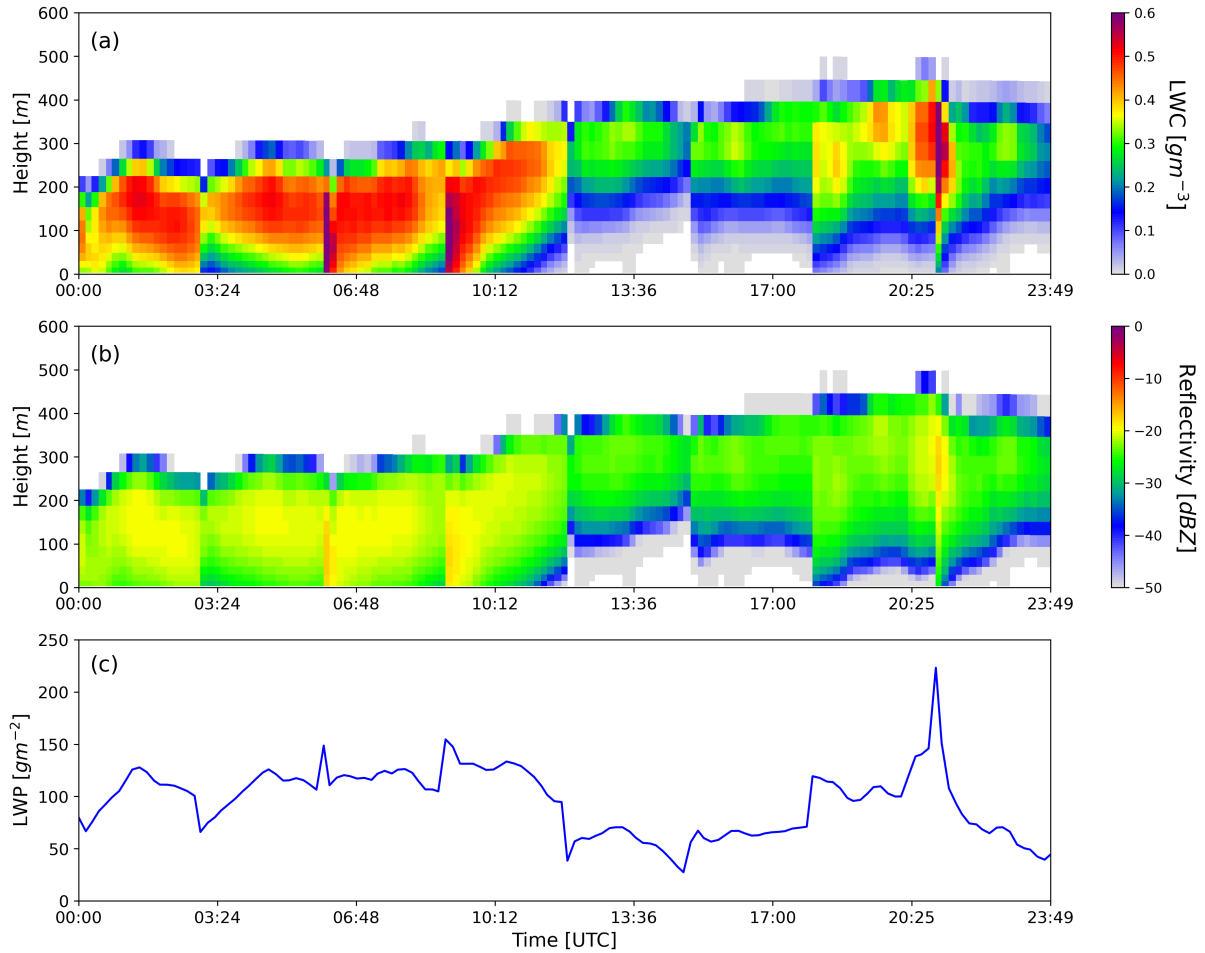

**Figure 4.** Simulations from AROME model for 16 November 2018 showing (a) Distribution of true LWC as a function of time and height in  $gm^{-3}$ , (b) Synthetic profile of reflectivity and (c) LWP calculated by integrating true LWC.

as in the forward model. *A priori* for LWC is calculated using synthetic reflectivity and scaling factor from empirical relation proposed by Fox and Illingworth (1997). Since we are looking at the impact of observation error, the retrieved parameters should have the least contribution from *a priori* and therefore high error in *a priori* (1000% in this case) is considered. Because  
 435 *a priori* of LWC is calculated from synthetic Z, *a priori* of LWC must be different from true LWC to minimize the contribution of *a priori* which forces retrieval to be close to true LWC.

Table 4 shows the combinations of errors in measurements of Z and LWP considered in the retrieval, and the errors are calculated for retrieved LWC with reference to true LWC. Cases 3 and 4 in table 4 are indicating that the retrieval is more sensitive to errors in LWP as compared to errors in Z with approximately the same mean absolute percentage error in LWC of  
 440 7% whatever the assumed errors in Z. This is because for each profile there is only one LWP value which impacts the whole

profile for given error but for error in reflectivity, only the associated pixel is impacted. With the increase in percentage errors in LWP measurement from 1 to 100%, the RMSE in LWC is also increased approximately 100 times, further demonstrating the high sensitivity of the algorithm to the LWP.

(Delanoë and Hogan, 2008) likewise incorporates a 1 *dBZ* uncertainty in the measurement of Z for ice cloud retrieval using 95 GHz radar with lidar and microwave radiometer. However, error in LWP has a very low difference in MAPE and RMSE when 1% to 10% error is considered. Therefore case 6 in table 4, is an optimum balance of observational error for Z and LWP. This combination of errors in measurement is used in all the retrieval cases presented in section 3.4 and 5.1.

**Table 4.** Different configurations of error in measurement and respective statistical errors in retrieved LWC w.r.t. true LWC

Case	Error in Z	Error in LWP	RMSE(LWC)	$R^2(LWC)$	MAPE(LWC)(%)
1.	1% (0.043 dB)	1% (1.01 $gm^{-2}$ )	0.000209	0.99999	0.05783
2.	100% (4.34 dB)	1% (1.01 $gm^{-2}$ )	0.000245	0.99999	0.15286
3.	1% (0.043 dB)	100% (2.71 $gm^{-2}$ )	0.021870	0.98495	7.37329
4.	100% (4.34 dB)	100% (2.71 $gm^{-2}$ )	0.021832	0.98499	7.43851
5.	25% (1.08dB)	50% (1.64 $gm^{-2}$ )	0.006013	0.99874	2.05276
6.	25% (1.08dB)	10% (1.1 $gm^{-2}$ )	0.000454	0.99999	0.17123

### 4.3 Sensitivity analysis of impact of attenuation due to liquid droplets model

In this section, the sensitivity of the attenuation model considered in the algorithm to retrieve LWC is highlighted. Wet radome can cause up to 20 *dBZ* of two-way attenuation due to rain in the reflectivity (Delanoë et al., 2016), but attenuation due to fog is far less than 20 *dBZ*. Two attenuation relations for liquid clouds from literature are used to test the sensitivity of the algorithm. Equation (7) is proposed by Vali and Haimov (2001) in which attenuation is a function of LWC (abbreviated as att(LWC) in table 5) and the relationship in Eq. (8) is proposed by Vivekanandan et al. (2020) where attenuation is the function of radar reflectivity factor (abbreviated as att(Z) in table 5). Both of these relationships are derived using in-situ observation from 95 GHz radar mounted on a research aircraft. The forward model with different attenuation relationships in the algorithm is tested for synthetic Z and LWC. To fabricate synthetic Z, the power law relation with  $a = 0.012$  and  $b = 2$  (in Eq. (1)) is used. Different combinations of attenuation correction in synthetic profile and in the retrieval algorithm are tested, as shown in table 5. *a priori* for state parameters is calculated from Atlas (1954) empirical relation with error in *a priori* as 1000% and the measurement errors for Z and LWP are considered 25% and 10% as discussed in section 4.2. The comparison of bias in LWC for the attenuation model is shown in figure A1(see appendix).

Retrieved LWC considering same attenuation correction in synthetic Z profile and in forward model, RMSE is 0.0002 and MAPE is as low as 0.05% as all the parameters are identical. But when the attenuation relation is exchanged for the synthetic profile and the forward model, MAPE increase to 2.7%. The distribution of bias in LWC over the profile is different because

**Table 5.** Variation in error in *a priori* and different errors calculated w.r.t. true LWC

Attenuation correction in synthetic profile	Forward model attenuation	RMSE(LWC)	$R^2$ (LWC)	MAPE(LWC)%
Z (attLWC)	Att (LWC)	0.000204	0.999998	0.056426
Z (attLWC)	Att (Z)	0.008286	0.997535	2.780574
Z (attZ)	Att (LWC)	0.008012	0.997687	2.660039
Z (attZ)	Att (Z)	0.000206	0.999998	0.057094

attenuation due to LWC estimated by two relations is different, and thus the estimated LWC is also different. A similar test for  
465 attenuation with different ‘*a*’ in the power law relation gives the same errors when the retrieved LWC is compared with true  
LWC. Bias in LWC for considering the same attenuation relation in synthetic profile and forward model is found close to zero.  
Therefore, the sensitivity test for attenuation indicates that attenuation correction of Z has very low impact, and it can bring up  
to 2.7% mean absolute percentage error in retrieved LWC when the wrong attenuation model is used.

#### 4.4 Sensitivity analysis of bias in Z and LWP

470 Bias in observation is the systematic error added in measurement, which can be due to the error in calibration of any instrument  
or transfer function of the measurement. Therefore, it is necessary to test the behavior of the retrieval algorithm for such  
systematic biases in measurement. For the test cases of biases, error in observation vector is considered 25% and 10% for Z  
and LWP with *a priori* of LWC is calculated using  $a = 0.012$  proposed in Fox and Illingworth (1997) and  $a = 0.012$  is used  
as *lna a priori*. This test is to analyze the impact of bias in measurement on retrieval. Therefore, the *a priori* should have a  
475 minimum contribution, and hence 1000% error in *a priori* of LWC and *lna* is considered. In this analysis, only one of the two  
observations is biased at a time to see the individual impact on retrieval. It is assumed that the bias in Z is 2 *dBZ* considering  
that error in calibration in BASTA radar measurements is around 1 to 2 *dBZ* (Toledo et al., 2020). The bias in LWP estimation  
is considered 10  $gm^{-2}$  which is supported by Wærsted et al. (2017) for this sensitivity test.

**Table 6.** Error in retrieved LWC due to bias in Z and LWP

Case	Bias	RMSE(LWC)	$R^2$ (LWC)	MAPE(LWC)%
1.	LWP-10 ( $gm^{-2}$ )	0.029413	0.96343	11.246633
2.	LWP+10 ( $gm^{-2}$ )	0.030236	0.97184	11.542570
3.	Z-2 (dBZ)	0.000355	0.99999	0.131603
4.	Z+2 (dBZ)	0.000558	0.99998	0.210887

The order of error in retrieved LWC with respect to true LWC is much higher for  $10 \text{ gm}^{-2}$  bias in LWP than  $2 \text{ dBZ}$  bias in  
 480 Z. However, bias in the two measurements is not comparable because parameter Z is measured over each pixel and LWP is a  
 single point measurement for the whole column. Since the bias applied on Z applies on each cloud pixel and the bias applied in  
 LWP is integrated for the whole profile, however, 11% MAPE in LWC is observed which is again indicating the sensitivity of  
 retrieval for LWP. Another reason for the difference in LWC is due to the fact that Z is in the log scale and error in observation  
 allows more spread in Z (25%) than in LWP (10%) therefore, the impact on LWP is larger. The bias in Z is propagated in  $\ln a$ ,  
 485 but the bias in LWP directly impacts LWC. The simultaneous biases in Z and LWP have also been tested, which reveals that  
 the bias in LWP dominates over the bias in Z with 11% MAPE when mentioned biases are considered in Z and LWP.

#### 4.5 Sensitivity analysis of LWP assimilation

The impact of adding LWP information in the retrieval is evaluated by comparing LWC retrievals in the situation where LWP  
 information is assimilated with those in the case where it is not assimilated. For the case when LWP is not assimilated, the  
 490 prefactor  $a$  is not retrieved and hence kept constant. Different values of scaling factor  $\ln a$  are selected from various empirical  
 relations listed in the table 1, and the error in retrieved LWC is calculated with respect to true LWC for each fixed value of  
 scaling factor  $\ln a$ .

In this subsection, the synthetic profile of Z is fabricated using the power law with constant  $a$  and  $b$  proposed by (Atlas,  
 1954) and LWC provided by the AROME model. The table 7 contains the scaling factors taken from the empirical relations  
 495 used to retrieve LWC without LWP assimilation. The MAPE is calculated for retrieved LWC for each  $\ln a$  value. In the table 7  
 the highest value of MAPE is observed when  $a = 0.012$ , and the lowest value is for  $a = 0.048$  which is the exact value of  $\ln a$   
 used to fabricate Z. As the value of scaling factor  $\ln a$  differs from the scaling factor used to fabricate the synthetic profile (here  
 $\ln a$  from (Atlas, 1954) relation), the error in retrieved LWC w.r.t. true LWC also increases.

**Table 7.** Error in retrieved LWC for fixed  $a$  and LWP is not assimilated


Empirical relation	$a$	$\ln a$	MAPE (LWC)%
Fox and Illingworth (1997)	0.012	-4.42	109.48
Sauvageot and Omar (1987)	0.03	-3.50	27.956
Krasnov and Russchenberg (2005)	323.59	5.77	98.82
Atlas (1954)	0.048	-3.05	0.0021

On the other hand, when the LWP information is assimilated in the retrieval, the MAPE in retrieved LWC compared to  
 500 true LWC is decreased down to 0.171%. However, it is not likely that the LWP is always accurate, as LWP is not a direct  
 measurement but obtained from a retrieval algorithm and can have both random and systematic errors. Therefore, one must test  
 the retrieval algorithm when the LWP information is biased. The retrieval technique is now evaluated for different biases in  
 LWP information. As already mentioned, when we assimilate LWP information, the scaling factor is allowed to vary. We tested  
 the retrieval with varying biases, as shown in table 8 where case 2 has the same error as cases 1 and 2 of table 6. The highest  
 505 value of LWP in the synthetic profile is approximately  $240 \text{ gm}^{-2}$ . We added the biases in LWP from  $\pm 5 \text{ gm}^{-2}$  to  $\pm 50 \text{ gm}^{-2}$

which shows 5.5% to 56 % MAPE in LWC. These errors are summarised in the figure 5 where the olive green bars indicate the MAPE in LWC for different values of  $lna$  obtained from the retrieval without LWP assimilation. The blue color bars are the MAPE in LWC for various biases when the MWR LWP is assimilated. It is clear from this comparison that the assimilated LWP, even if the product is biased, has a lower error than the retrieval case that does not assimilate LWP.

**Table 8.** Error in retrieved LWC for various biases in assimilated LWP

Case	Bias ( $\text{gm}^{-2}$ )	MAPE [LWC] (%)
1.	LWP $\pm 5$	5.5
2.	LWP $\pm 10$	11.23
3.	LWP $\pm 20$	22.71
4.	LWP $\pm 50$	56

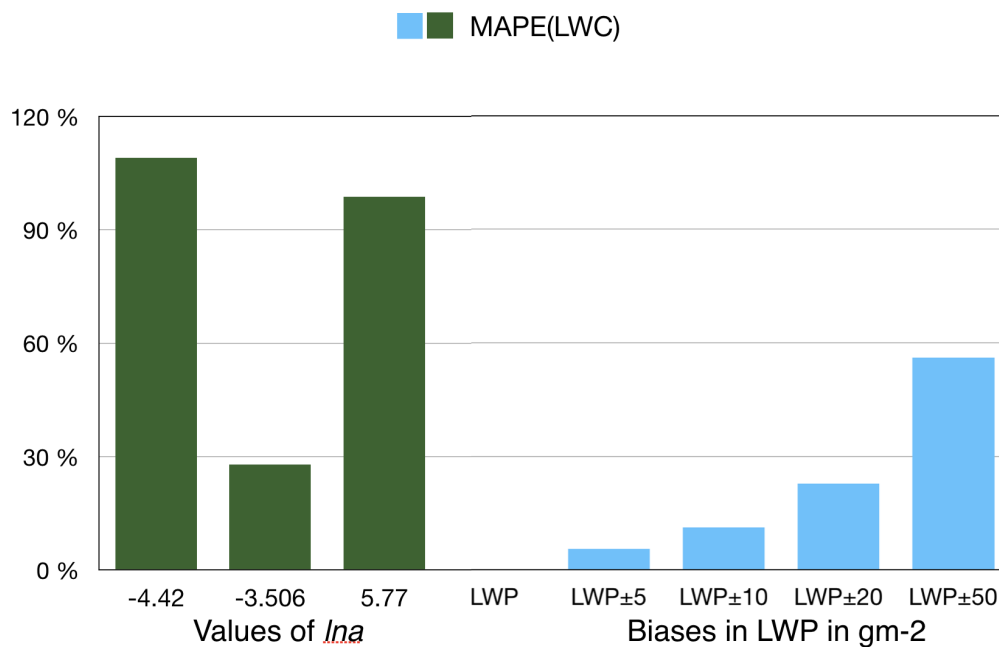

**Figure 5.** Errors in retrieved LWC when LWP is not assimilated (green bars), as compared to those when LWP is assimilated and affected by different values of biases (blue bars). The Y-axis represents the MAPE in LWC, and the X-axis shows the value of  $lna$  taken from empirical relations and assumed biases in LWP.

## 510 4.6 Sensitivity of parameter $b$

The exponent  $b$  from the power law Eq. (1) is considered 2 for all the cases discussed in this paper, however, the range of parameter  $b$  in the literature is proposed from 1 to 2. To test the impact of variation in  $b$  on the retrieval algorithm, the value of  $b$  was used to fabricate synthetic observations  $Z$  and LWP, and  $b$  in the forward model are the same. Keeping all the other settings constant, the error in retrieved LWC should be due to changing  $b$ . Table 9 shows the range of  $b$  and the respective error in retrieved LWC with respect to true LWC. The retrieved LWP matches with the assimilated LWP only the distribution of LWC is changed observed least for  $b = 2$ . Figure A2(see appendix) shows that the cost function is also least for  $b = 2$  and MAPE in LWC is twice when the value of  $b$  is taken 1.

There is negligible impact of variation in  $b$  over  $\ln a$  as shown in figure and the error in LWC is between 0.35% to 0.17%. The convergence is achieved with less cost function and MAPE in LWC is also least for  $b = 2$  case. Because  $\ln a$  is allowed to be variable in the forward model, it is most likely that the change in  $b$  is compensated by the change in  $\ln a$ .

## 4.7 Analysis of the sensitivity exercise

In conclusion, since this sensitivity test was performed on a synthetic profile, the overall impact of uncertainty of each parameter on the retrieval can be very different when applied to a real profile. However, an estimate of errors can be made using this exercise. The error in observation must be chosen very carefully for retrievals. 25% error in  $Z$  is also supported by realistic calibration error of BASTA radar which was calculated between 1 and 2  $dBZ$  using 20  $m$  mast (Toledo et al., 2020) where 25% error in  $Z$  corresponds to 1.08  $dBZ$ . This combination of 25% and 10% error in measurement has only 0.17% MAPE when tested with a synthetic profile, which is why this combination is used in the algorithm. *a priori* must be considered only to stabilize the retrievals for unavailable measurements, otherwise the error in *a priori* can be kept high. A prior is a constraint for the entire retrieval hence the uncertainty in the retrieval must be smaller than the error in *a priori*. Otherwise, the retrieval does not add any information from the observations (Maahn et al., 2020). Retrieval is very sensitive to the bias in LWP as LWP is point information for the whole cloud column, therefore error in observation and biases in  $Z$  and LWP both play a very critical role in the retrieval. Furthermore, the sensitivity analysis also revealed that incorporating LWP even if it is affected by

**Table 9.** Error in retrieved LWC for different  $b$  values

Case	$b$ value	RMSE (LWC)	$R^2(LWC)$	MAPE (LWC)
1.	$b=1$	0.00069	0.99998	0.35599
2.	$b=1.2$	0.00064	0.99998	0.301158
3.	$b=1.4$	0.00059	0.99998	0.260569
4.	$b=1.6$	0.00054	0.99998	0.227267
5.	$b=1.8$	0.00050	0.99999	0.198041
6.	$b=2$	0.00045	0.99999	0.171237

a bias is better than not assimilating LWP information. The sensitivity of retrievals for parameter  $b$  shows the least error when  $b = 2$  because this is the same used to fabricate  $Z$  synthetic from the true LWC. Nevertheless, it is worth noting even with other values of  $b$  the MAPE is not exceeding 0.35%.


## 5 Comparison of LWC retrieval with in-situ data

In-situ measurements of cloud and fog are required to validate the distribution of LWC with time and height. In general, in-situ measurements of cloud microphysical parameters are collected using a research aircraft mounted with sensors flying inside the cloud. During the SOFOG-3D field experiment, a tethered balloon equipped with in-situ sensors was used to collect the microphysical parameters of fog. This approach is much more economical than the research aircraft flying inside the cloud however, the trajectory of the balloon cannot be fully controlled, and the measurements are limited to the lowermost 1–2  $km$  level. Simultaneous measurements using remote sensing instruments like BASTA cloud radar, microwave radiometer, and automatic weather stations were also collected for various fog cases (Martinet et al., 2020). Since the LWC retrieval algorithm described in previous sections essentially works with liquid clouds including fog, measurements collected during the SOFOG-3D experiment are well suited to validate the algorithm. The input for the algorithm is taken from vertically pointing cloud radar reflectivity and LWP estimates from MWR measurements. Retrieved LWCs are then compared with the measured LWC using in-situ sensors.


### 5.1 Presentation of the case study of 09 February 2020

One fog case study observed at the super-site ( $44.4^{\circ}\text{N}, -0.6^{\circ}\text{E}$ ) on 9th February 2020 is presented to compare retrieved LWC with in-situ measurements collected from the tethered balloon. This case is selected because fog and stratus were observed, allowing us to establish a comparison of retrievals with in-situ observations for two different cloud types at once. The observations from vertically pointing radar and MWR are used to retrieve LWC with exactly the same algorithm described in previous sections. During this experiment, MWR was set up to collect boundary layer scan at lower elevation angle down to  $4^{\circ}$  every 10 minutes, and therefore the LWP is interpolated for such gaps. Relying on the previously led sensitivity study, error in observations for  $Z$  and LWP is taken as 25% and 10% respectively, with *a priori* information calculated from Atlas (1954) empirical relation. Error in *a priori* is considered 1000% which is the same as mentioned in section 3.2 when MWR information is available. As stated in section 3.2, radar misses a few low level gates near the ground due to antenna coupling, which contains critical fog information. The properties of fog are assumed to remain constant between the first available gates and the ground, and thus reflectivity is extrapolated (extended) downwards for the unavailable range gates. The fog shown in figure 6 sustained for 4 hours and then started dissipating to form a stratus cloud. The visibility observed at the super-site is also less than 1000  $m$  until 04:00 hours. The discontinuity in radar reflectivity close to 200  $m$  is due to the beam overlap correction used in the L2 product of BASTA.



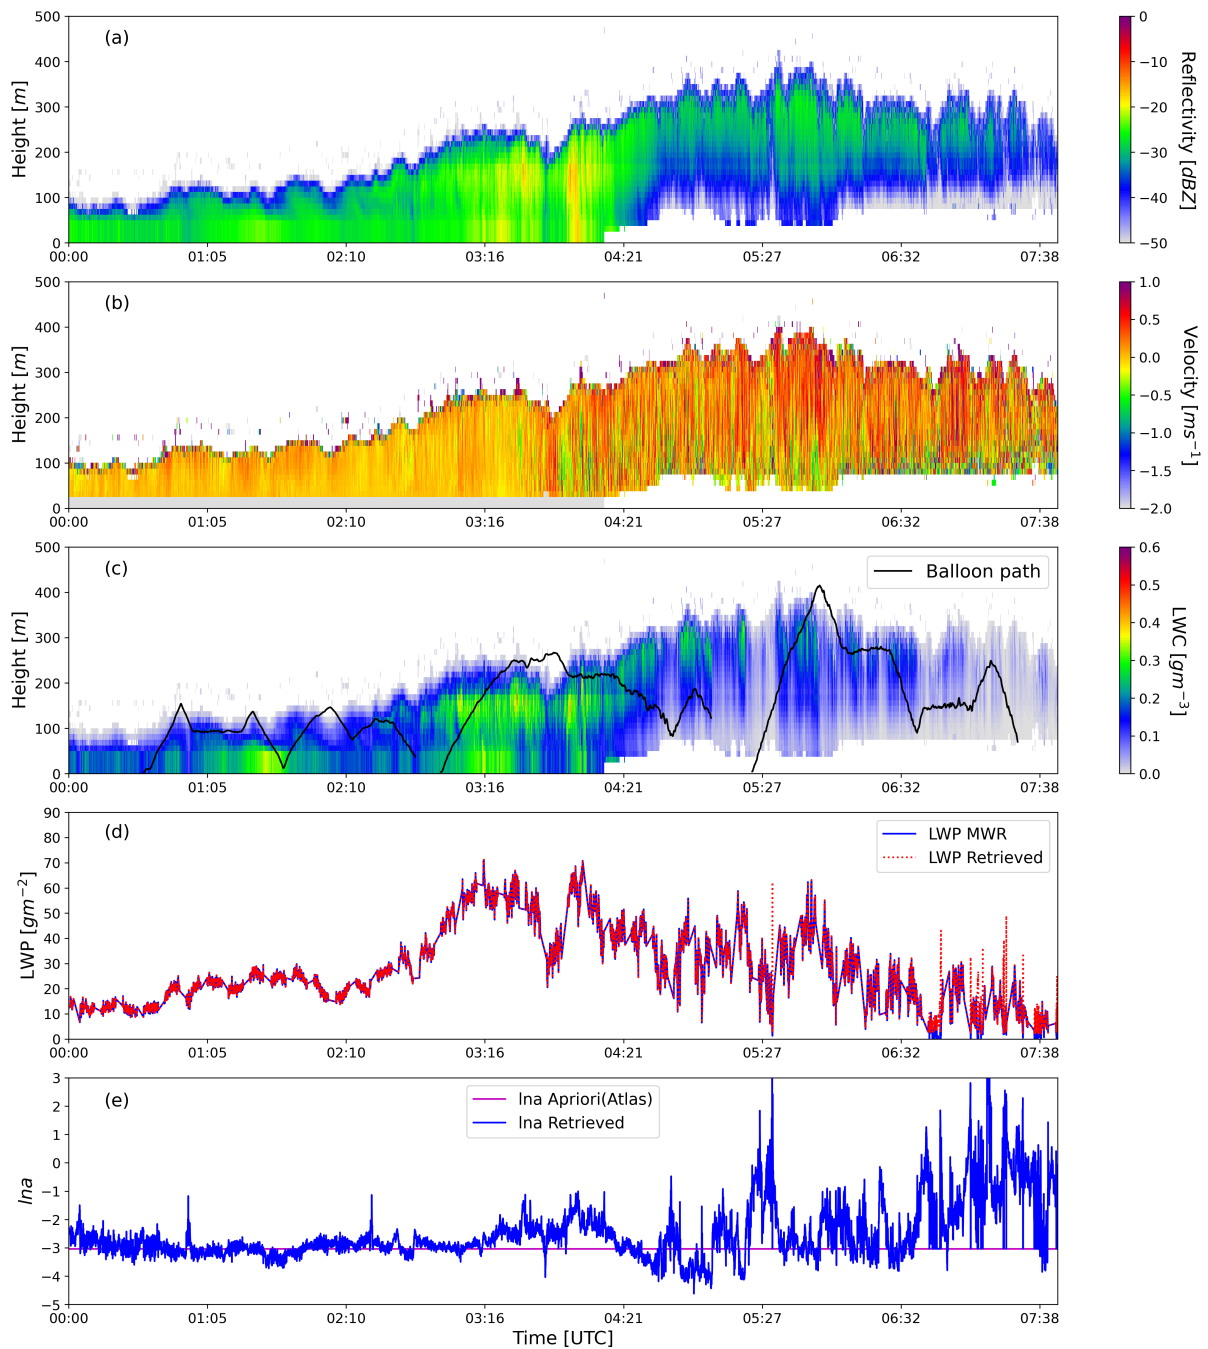

**Figure 6.** (a) Radar reflectivity  $Z$  extended to the lowest gates (b) Doppler velocity plotted only for the available gates (c) Retrieved LWC, (d) LWP and (e) Retrieved  $lna$  for 09 February 2020 case at SOFOG-3D super-site. Tethered balloon trajectory over retrieved LWC is shown in the black line.

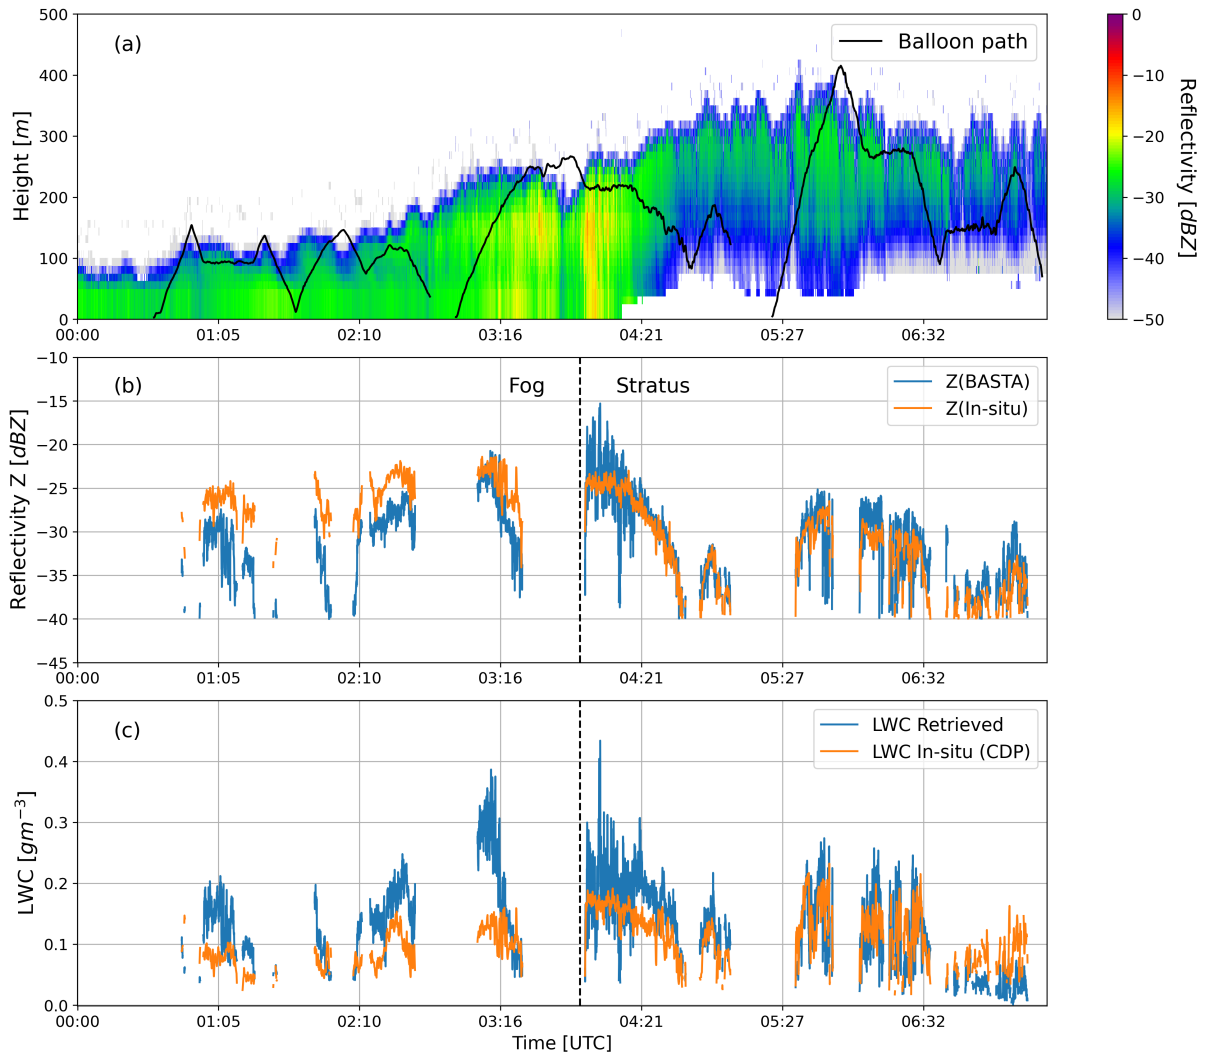

**Figure 7.** (a) Radar reflectivity and balloon path (b) Comparison of radar reflectivity with reflectivity calculated from CDP using DSD (c) Comparison of retrieved LWC with in-situ LWC

## 5.2 Comparison between in-situ and radar measurements

To compare the retrieved LWC with in-situ measurement, the co-location of tethered balloon data with BASTA reflectivity points is accomplished by determining the closest radar gate that corresponds to the balloon height. 565

In figure 7(b) and (c), the black dashed line indicates that the visibility is more than 1000 m from 04:00 hours onwards and therefore separates fog and stratus cloud. Since the balloon also contaminates the radar measurement, all the co-located points when the tethered balloon was within the radar detection range are eliminated. The maximum distance observed between the tethered balloon and BASTA radar was 700 m. The radar reflectivity factor from in-situ measurements is calculated using the

570 6th moment of the droplet distribution measured by CDP. Note that the radar reflectivity is still in the Rayleigh regime as the measurements from CDP cannot exceed  $50 \mu m$ . The co-located points with reflectivity less than  $-40 \text{ dBZ}$  are masked because the signal-to-noise ratio for radar is low.


In figure 7(b) the radar reflectivity from BASTA and CDP are compared for the co-located points and indicates a clear bias for fog and relatively much better agreement for stratus cloud with  $-4.44 \text{ dBZ}$  mean bias for fog and  $0.89 \text{ dBZ}$  for stratus  
575 cloud. The bias is calculated as the difference between  $Z_{BASTA}$  and  $Z_{in-situ}$ . The root mean square error (RMSE) in  $Z$  is  $5.2 \text{ dBZ}$  for fog and  $2.8 \text{ dBZ}$  for stratus. Figure 7 (c) shows the comparison of the retrieved LWC values with LWC observed by CDP at the co-located points of the balloon trajectory. The mean bias in LWC for fog is  $0.06 \text{ gm}^{-3}$  and for stratus cloud is  $0.009 \text{ gm}^{-3}$ . The root mean square error (RMSE) in LWC for fog is  $0.082 \text{ gm}^{-3}$  and  $0.056 \text{ gm}^{-3}$  for stratus. The comparison of retrieved LWC with in-situ observations of LWC from CDP resulted in a root-mean-square error of  $0.067 \text{ gm}^{-3}$  including  
580 fog and stratus.

If a well-calibrated radar is sampling the same cloud column and has a similar sensitivity to DSDs, the in-situ reflectivity estimate should match the radar reflectivity. However, the sensitivity of the CDP sensor is limited to sampling the droplet diameters from  $2$  to  $50 \mu m$ , while radar can sample a wider range of DSDs and is more sensitive to the largest droplets. The variations in comparison with in-situ observations are noticed when the balloon is close to the cloud edge, where a slight  
585 difference in altitude can significantly impact  $Z$  and LWC due to the heterogeneity of this area.

The observed differences in simulated  $Z$  and radar measurements could be explained by the vertical and horizontal heterogeneity of the fog, which strongly depends on the fog maturity. To further investigate the fog stages, a broader perspective beyond the vertical profile of fog is required. Multiple remote sensing and in-situ instruments were operated simultaneously as part of the SOFOG-3D campaign to explore various fog properties. A  $95 \text{ GHz}$  scanning radar called BASTA-mini has been  
590 centered  $1 \text{ km}$  away from the vertically pointing radar, and the  $360^\circ$  scan of fog is presented in figure 8(a) and (b). Plan Position Indicator (PPI) of scanning radar shown in figure 8a and 8b, are collected at  $4^\circ$  elevation angle. Note that this low elevation of radar can also be contaminated by the ground clutter, indicating locally high reflectivity. In the figure 8b, a larger spread of fog is observed, which is due to the development of thicker fog.

Due to the constant evolution of fog stages and the horizontal heterogeneity of fog, the sampled volume away from the  
595 vertically pointing radar will also have distinct  $Z$  and LWC. As shown in figure 8b, the distribution of reflectivity on the left and right-hand sides of scanning radar is different. Therefore, the mismatch in  $Z$  and LWC can be explained by different radar and CDP sampling volumes. As the fog lifted into the stratus cloud around 04:00 hours, we can observe a better agreement in figure 7(b) and (c), which could be explained by a more homogeneous situation. Furthermore, as shown in figure 7 (a), samples are not collected at the cloud edge for stratus and therefore have lesser uncertainties in  $Z$  and LWC.

600 To have a better idea of the representativeness of CDP in-situ data, we compare LWC from BASTA and in-situ measurements with LWC from simulated reflectivities obtained with DSD and empirical  $Z$ -LWC relationships (figure 9). Various  $Z$ -LWC relations for clouds are included in table1 but are not proposed for fog. In Dupont et al. (2018), linear fits for fog are proposed based on in-situ observations from the tethered balloon and BASTA cloud radar at SIRTa. As a reference for fog, Flight1, Flight2, and Flight3 in the figure 9 are the fits for three fog instances computed by relating LWC observations from a light

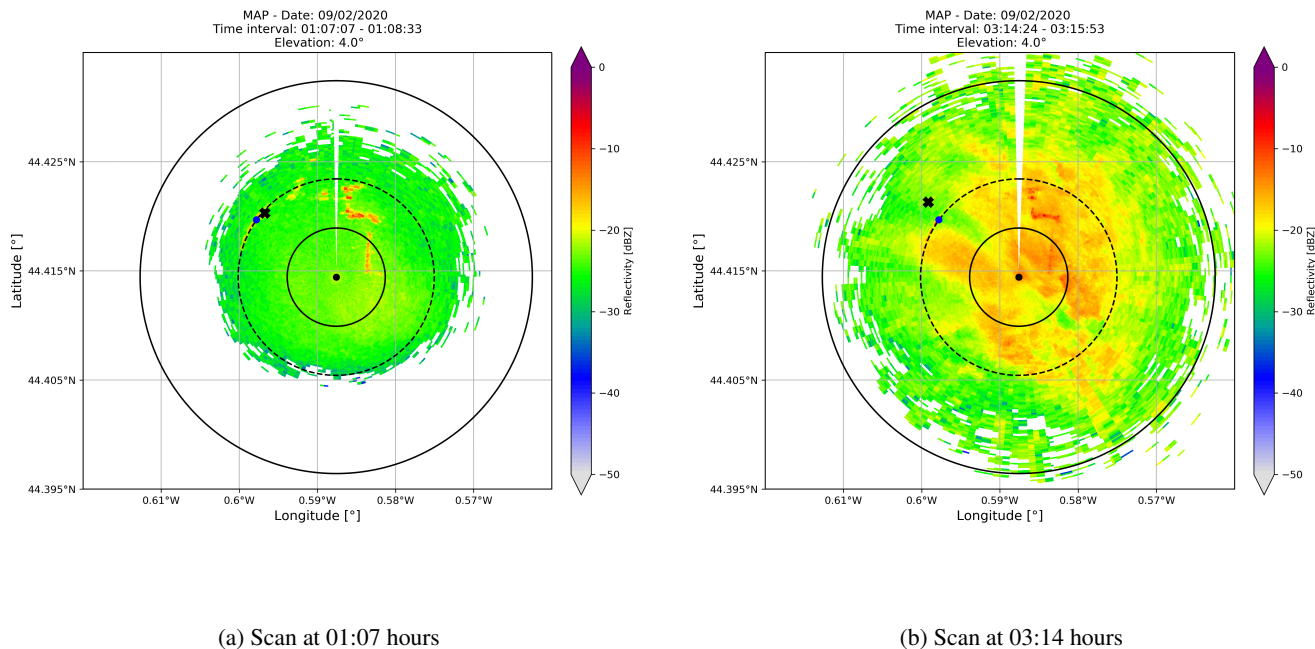

**Figure 8.** Scans of BASTA-mini collected for fog at  $4^\circ$  elevation angle. The vertically pointing radar shown as blue dot was located 1 km away from the scanning radar and cross represents the location of balloon.

605 optical aerosol counter (LOAC) sensor to BASTA measurements, as described in Dupont et al. (2018). These Z-LWC fits for fog are obtained by finding the linear fit of LWC from the LOAC sensor to the radar reflectivity Z of the closest gate from vertically pointing BASTA radar. We compared the behaviour of in-situ fog measurement during the SOFOG-3D campaign to that of other fog relationships. As illustrated in figure 9, no empirical relation from the literature, including the one derived in fog, seems to be able to represent the in-situ observations of this fog situation. However, the scatter for in-situ measurements

610 of stratus represents a good correlation with other empirical relations as well as with the linear fits for fog from Dupont et al. (2018). The in-situ measurements separated for fog and stratus clearly show different characteristics and also indicate that different reflectivity values for the same LWC can be obtained as shown in figure 9a. This could be because of the diverse droplet spectra in stratus and fog.

The impact of various DSD characteristics during the fog stages in the simulation of different radiation fogs is discussed in


615 Maier et al. (2012). In the Raleigh regime Z values might get larger as fog develops due to the increase in droplet radius, while the LWC may remain constant. This introduces a non-linear relation between LWC and radar reflectivity Z. The variability within each fog stage exhibited unique properties depending on the fog event (Maier et al., 2012).

In figure 9b the retrieved LWC from the algorithm with respect to BASTA reflectivity (blue scatter) matches only with the in-situ observations for stratus and other empirical Z-LWC relations. In-situ fog indicates relatively less LWC than stratus

620 cloud at the same radar reflectivity. For the sake of comparison with Dupont et al. (2018), we also related the in-situ LWC obtained during SOFOG-3D with co-located radar reflectivity from BASTA. By correlating in-situ measurements of LWC with cloud radar reflectivity, it is assumed that the radar and in-situ sensor are observing the same cloud volume; however, the distance between the balloon and the nearest gate of cloud radar can incorporate uncertainties. In addition to this, the sensitivity of the in-situ sensor (CDP) and radar (BASTA) is considered the same, despite the fact that the sensitivity varies with DSDs. Generally, the cloud probes undersample the true DSD of the volume due to their limited sensitivity to larger droplets. As shown in figure 10, the Z-LWC fits from in-situ observation are in neighborhood to other empirical relation for reflectivity less than  $-30$  dBZ. Since the power-law relations are valid only in the Rayleigh regime, the in-situ observation agrees with other empirical relations for low reflectivity. Reflectivity values greater than  $-30$  dBZ may be attributed to larger droplets, which may or may not include a higher LWC. However, a significantly better correlation of in-situ fit for stratus cloud with empirical relation by Baedi et al. (2000) (proposed for stratocumulus clouds) indicates representativeness of in-situ observations for stratus. The fit for in-situ fog observation still indicates less LWC at the same reflectivity and does not match with any empirical relation. These observations imply that these are either collected for large droplets beyond the CDP limit or from a sampling volume distinct from the one cloud radar samples.

625


630

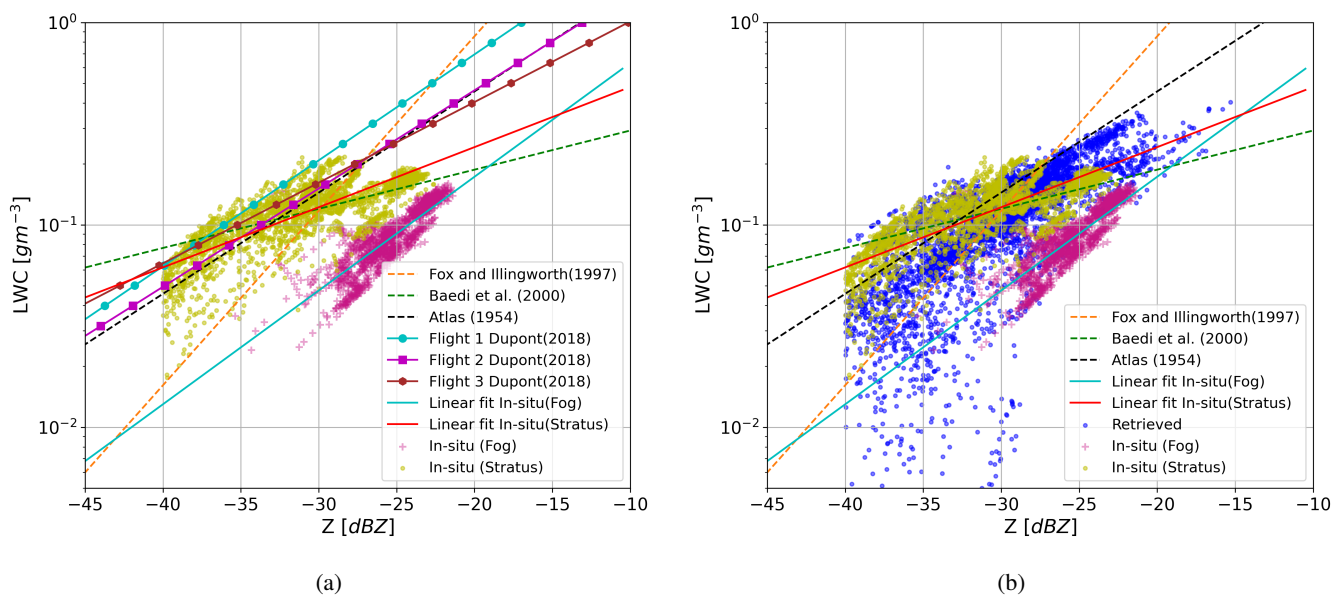

**Figure 9.** Comparison of in-situ LWC and radar reflectivity relation with (a) available literature for fog and clouds, (b) retrieved LWC and BASTA radar reflectivity relation.

Unfortunately, the limited in-situ observations collected for fog and stratus here do not represent a validation of the retrieval; however, this comparison highlights that there are situations more complicated than the other. Due to the non-uniform distribution of LWC in cloud or fog, homogeneity plays a key role while validating with the in-situ measurements. It is unfair to expect LWC to match when simulated reflectivity from in-situ does not match radar measurement. In order to validate such an

635

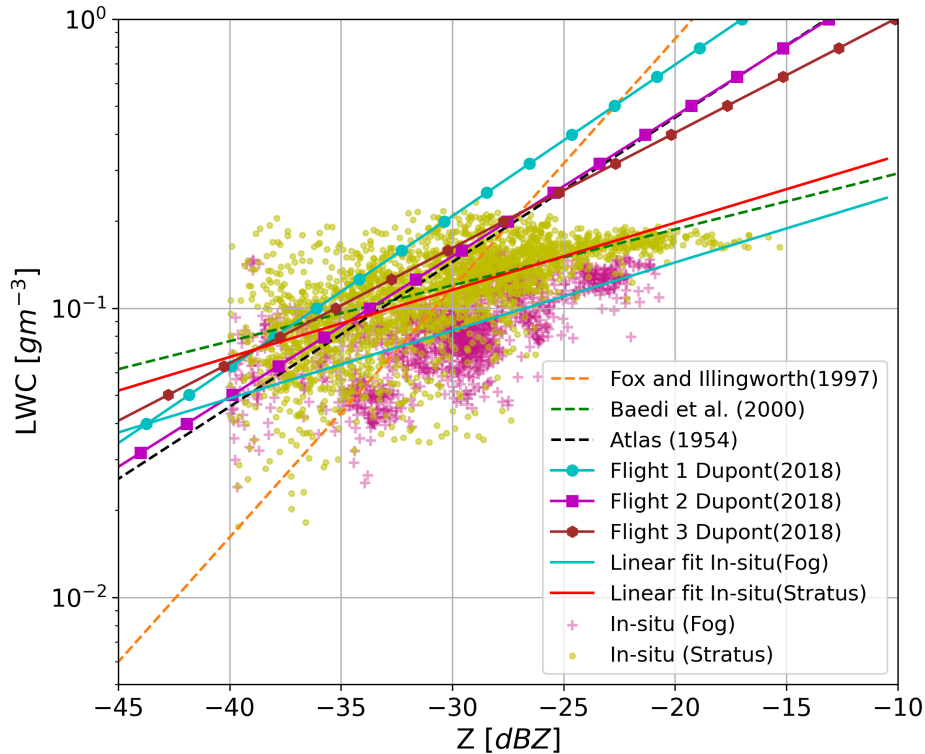


**Figure 10.** Scatter plot for the relation between LWC measured from CDP with radar reflectivity from cloud radar, compared with available literature. In-situ measurements are separated for fog and stratus clouds where magenta colour denotes fog, yellow-green (Chartreuse) colour denotes the stratus cloud, and the respective linear fits are also plotted.

algorithm, in-situ measurements at different heights for the same volume that radar samples are needed. However, if the in-situ observation platform is positioned in proximity to the radar sampling volume, it may also contaminate the radar observations. Therefore, the in-situ measurements must be collected from a homogeneous cloud to compare with the retrievals. Particularly for fog, more continuous DSD measurements, as well as the vertical profiles during distinct fog episodes, are required to produce more significant results.

## 6 Statistical analysis of retrievals to derive climatology

The primary objective of this statistical analysis is to derive a climatology of LWC and  $\ln a$  in order to allow the algorithm to be able to retrieve LWC for fog and low-level liquid clouds even when additional measurements are not available. A comparison of retrieved LWC with in-situ LWC measurements for fog and stratus cloud from the SOFOG-3D experiment is already presented in section 5.1. Therefore, the climatology is developed from the retrieval technique discussed in section 3.4 using the larger

data set from SIRTA measurements for a variety of cloud and fog incidents. Statistical analysis to derive a climatology of LWC and the scaling factor is presented in this section.

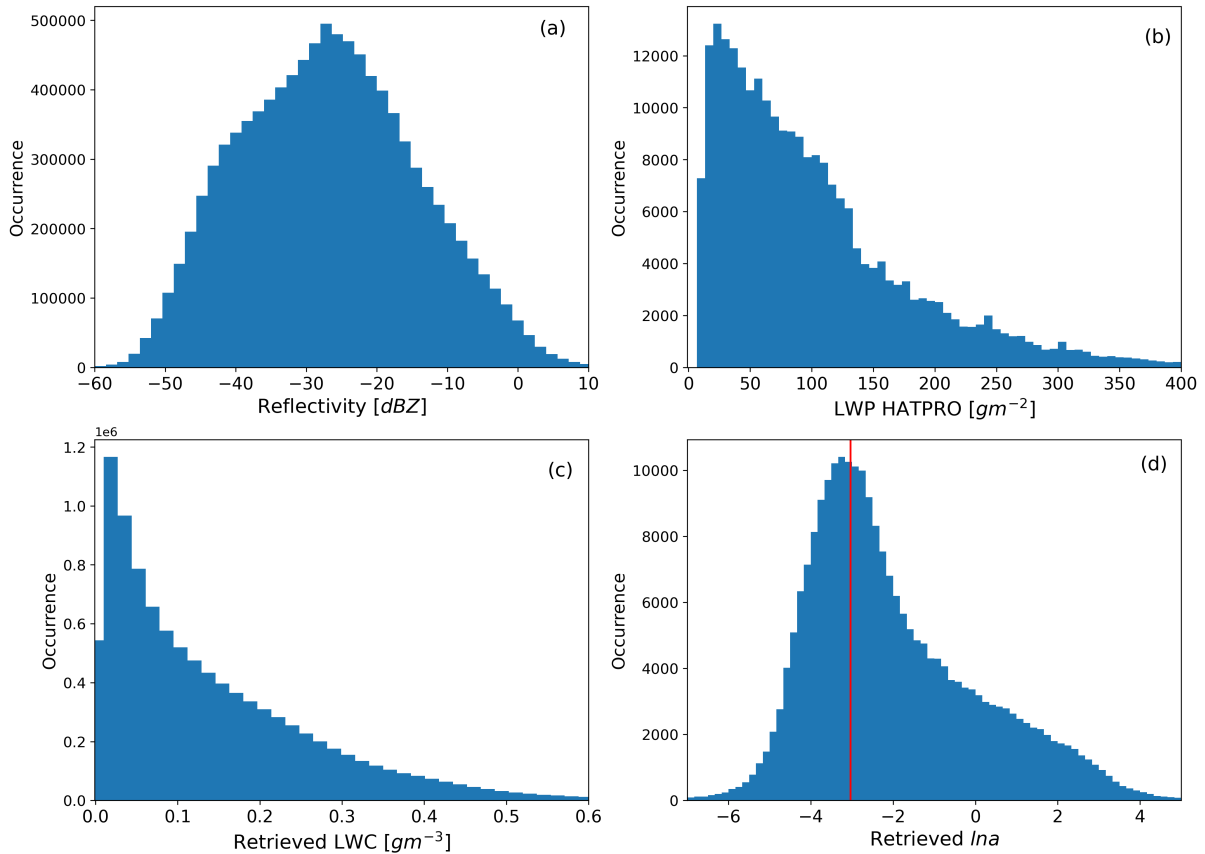


**Figure 11.** Histogram of (a) Radar reflectivity( $Z$ ) (b) LWP from MWR (c) Retrieved LWC (d) Retrieved  $lna$  for 39 cloudy days, and the red line in  $lna$  histogram indicates the *a priori* of  $lna$  from table 1

650 The histogram of the retrieved scaling factor  $lna$  (figure 11(d)) indicates that, the highest values of occurrence are around -3 which is close to the  $lna$  *a priori* value from (Atlas, 1954) the empirical relation plotted as the red line, but it is not precisely the same. The variational framework allows variability in the  $lna$  retrieval. The assimilation of LWP brings enough information to retrieve  $lna$  and the spread around the *a priori* value is directly linked to the *a priori* error value. Table 1 indicates the  $lna$  values for various cloud types proposed in the literature, which agree well with the range of retrieved  $lna$  values. Note that

655 there is one single  $lna$  value for a given profile, but its value can potentially be used to differentiate clouds from the drizzle. All the profiles with rain and drizzle reaching the ground are removed for the statistics, however light drizzle with clouds and fog is discussed.

Since the algorithm does not assimilate LWP for the profiles with LWP less than  $10 \text{ gm}^{-2}$ , LWP histogram in the figure 11(b) has no value below  $10 \text{ gm}^{-2}$  and maximum cloud profiles has the LWP below  $120 \text{ gm}^{-2}$ .

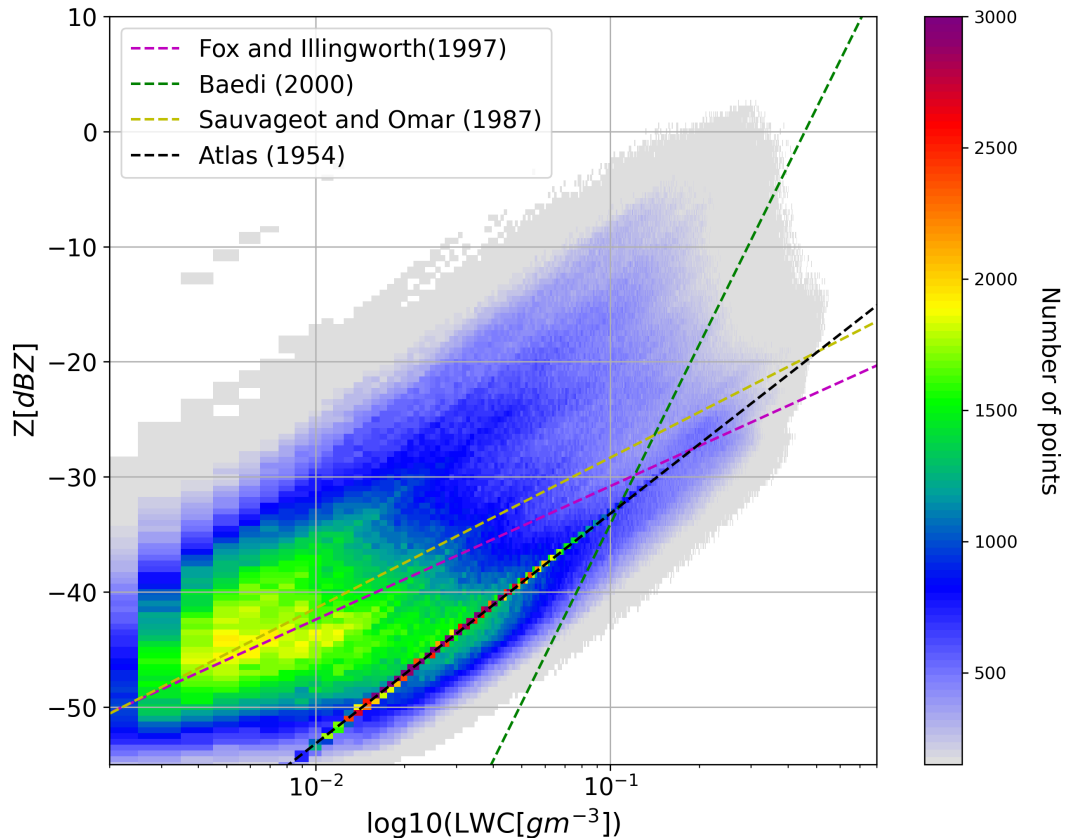

**Figure 12.** Retrieved LWC as a function of radar reflectivity Z for 39 cloudy days, with reference plot of various empirical relations for different cloud types.

660 The parameter LWC is indicating the range up to  $0.6 \text{ gm}^{-3}$ , which includes light drizzle, while the highest number of cloud pixels have an LWC value less than  $0.2 \text{ gm}^{-3}$ . In figure 12, retrieved LWC is plotted as a function of radar reflectivity for the 39 cloud cases, with Z-LWC empirical relationships from literature for various cloud types. The black line represents *a priori* of the retrieval algorithm, and the higher concentration of density points overlaps with the black line is due to the profiles with  $\text{LWP} < 10 \text{ gm}^{-2}$  where the retrieval of LWC is based on only Atlas empirical relation. All these profiles are not considered in

665 the climatology of *lna*. However, the wide range of retrieval points indicates that the algorithm allows LWC retrieval for a variety of cloud types. The slope of Z-LWC relationship is dependent on the value of *b* in equation 3 and because the retrieval method considers  $b = 2$ , the slope of the total retrieval in figure 12 is constant. However, retrieval allows variability in *lna*, which could partly compensate for *b* as well.

As already described, knowing LWP allows us to retrieve *lna* and adjust the relationship between LWC and Z. However,

670 when only BASTA measurements are available, we need to rely on an *a priori* value for *lna*. Thanks to this climatology, we could both define the optimal value for this *a priori* and eventually propose to parametrise this value. For instance, it is



envisioned to relate the scaling factor to radar reflectivity and/or Doppler velocity. As  $Z$  and  $V$  are observed for each cloud pixel and only one value of  $lna$  is retrieved for a given cloud profile, one single reflectivity or velocity information should be associated with  $lna$ . We propose to summarise the reflectivity and velocity information to the mean or maximum value of the profile in order to have one value per profile.

Maximum and minimum velocities of the cloud column are associated with the updrafts and downdrafts, which may not represent the complete profile for  $lna$ . Therefore, we rely on the mean velocity of the profile. The density plot of mean velocity as a function of  $lna$  is plotted in figure 13(a), indicating that the mean velocity of most profiles is concentrated between  $-0.5$  to  $0.1 \text{ ms}^{-1}$  which is compatible with liquid cloud sedimentation velocity. Mean velocity close to  $0 \text{ ms}^{-1}$  with  $lna$  values ranging from  $-4$  to  $-2$  implies pure clouds, whereas few profiles with a mean velocity less than  $-0.5 \text{ ms}^{-1}$  must be impacted by the drizzle droplets in the profile. The standard deviation plotted in the red line indicates that the variability of  $lna$  is very high for the profiles with mean velocity below  $-0.5 \text{ ms}^{-1}$ . Due to the large standard deviation,  $lna$  cannot be associated with mean velocity; however, velocity information can be used to classify drizzle droplets. As illustrated in figure 13(b), a substantially stronger association is observed between maximum radar reflectivity and  $lna$  of the profile. For most of the cloud columns, maximum reflectivity is observed between  $-30$  to  $-15 \text{ dBZ}$ . As maximum reflectivity also represents the drizzle in the cloud, the maximum reflectivity above  $-10 \text{ dBZ}$  is suspected to indicate drizzle in the cloud. High value  $lna$  for reflectivity above  $0 \text{ dBZ}$ , also supports the empirical relation for drizzle by (Sauvageot and Omar, 1987) as shown in table 1 where the  $lna$  is given as 5.77. The standard deviation of  $lna$  is also high for profiles with maximum reflectivity above  $-10 \text{ dBZ}$ . The standard deviation of  $lna$  is lowest between  $-30$  to  $-20 \text{ dBZ}$ . The one-dimensional linear fit relating  $lna$  and maximum radar reflectivity for clouds columns is shown in black dashed line in figure 13 (b). As maximum reflectivity of the profile is showing a better correlation with  $lna$  and the mean  $lna$  (red dashed line) coincides with the linear fit. Therefore, the one dimensional linear equation relation between  $lna$  and maximum reflectivity( $Z_{max}$ ) is given by

$$lna = 0.186 \cdot Z_{max} + 1.829 \quad (14)$$


However, an investigation by selecting 15 fog cases out of 39 cloud cases indicated that the coefficients of linear fit are slightly different for fog profiles.

$$lna = 0.149 \cdot Z_{max} + 0.591 \quad (15)$$

To utilize the above relationships, it is necessary to differentiate between liquid cloud aloft and fog. This can be easily done by determining the cloud base height to identify fog, and hence specific climatology is applied to the profile.

## 7 BASTA standalone LWC retrieval using climatology

In this section, we describe the stand-alone approach and its assessment using MWR LWP retrieval as a reference. The climatological relation of  $lna$  as a function of maximum radar reflectivity in the profile is used for the BASTA standalone retrieval when MWR observations are unavailable.

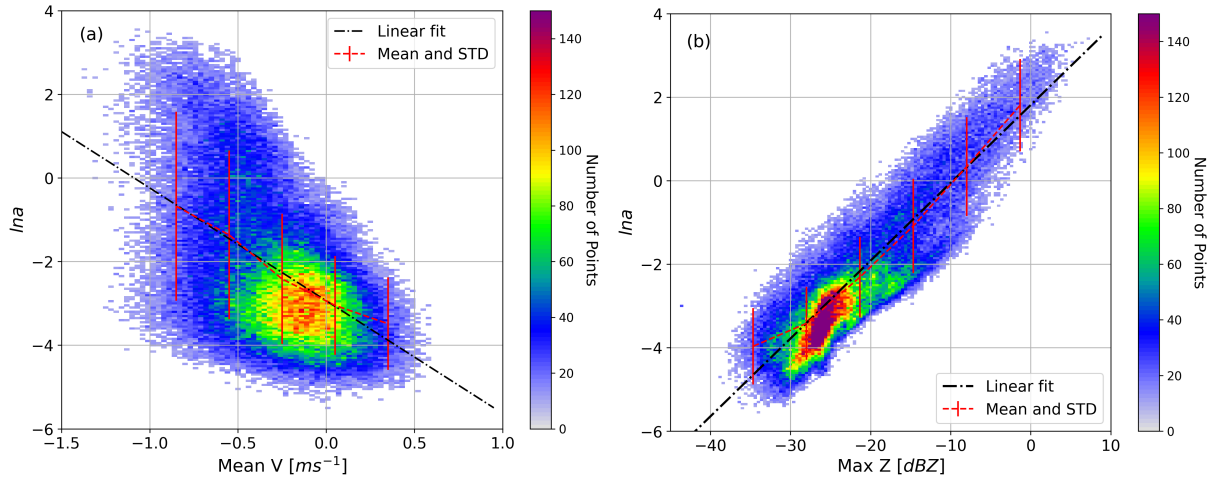

**Figure 13.** Correlation of (a) Mean velocity versus  $\ln a$  and (b) Maximum reflectivity versus  $\ln a$  for cloud profiles, where color bar indicates the number of profiles


### 7.1 BASTA standalone LWC retrieval approach

The radar is not always accompanied by an MWR, and therefore a solution must be proposed to improve the retrieval with  
 705 knowledge of  $\ln a$  *a priori*. Since LWP information is not assimilated, thanks to the  $\ln a$  climatology for clouds and fog derived in section 6, this information can be used as  $\ln a$  *a priori*.  $\ln a$  for the profile can be linked to the maximum value of reflectivity detected in the profile using Eqs. (14) and (15) for clouds and fog respectively.

In this case, the observation vector ' $y$ ' contains only radar reflectivity of each cloud pixel, with 25% error in measurement, whereas the state vector still contains LWC and  $\ln a$  both. Therefore, the Jacobian for a cloud profile with  $n$  cloud pixels will  
 710 have  $n \times (n + 1)$  elements. The variational method also allows us to control the contribution of *a priori* information in the retrieval by providing error in *a priori*. A strong *a priori* of  $\ln a$  is required to constrain LWC retrieval therefore, low error in *a priori* of  $\ln a$  is employed. In these standalone retrieval cases, 100% error in *a priori* of  $\ln a$  is used, because the standard deviation of  $\ln a$  in figure 13 is approximately 1 which is equivalent to 100% error in *a priori*. The climatology of  $\ln a$  for fog from Eq. (15) is applied to the profile with cloud base less than 80 m. Retrieval of LWC should be constrained by LWC *a priori*  
 715 only to avoid non-physical values, therefore the error in *a priori* of LWC is taken 1000%. In BASTA standalone retrieval setup, *a priori* of LWC is calculated using Atlas (1954) relation exactly the same as radar-MWR synergistic retrieval.

### 7.2 BASTA standalone LWC retrieval first assessment using LWP retrieved from MWR


With the details given above, the LWC retrieval algorithm is adapted to utilize the climatology of scaling factor with only radar reflectivity measurements from SIRT. BASTA standalone retrieval algorithm is applied to the 39 selected cloud and fog cases  
 720 from SIRT.

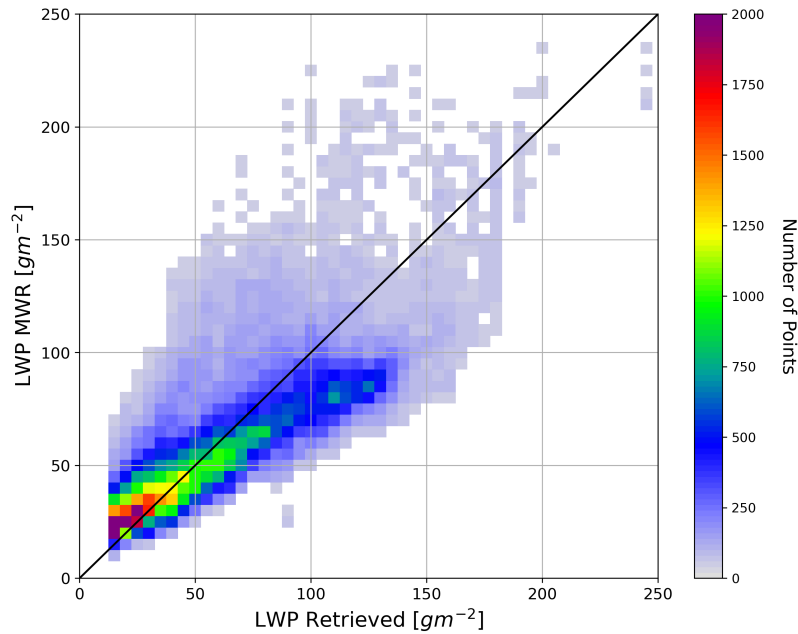

**Figure 14.** Comparison of retrieved LWP from BASTA stand-alone retrieval algorithm with LWP retrieved by HATPRO, where the black line represents the exact match of LWP for the given profile.

Due to the absence of in-situ sensors at SIRTA for recording the distribution of the liquid water content in cloud and fog, the integrated LWP from the HATPRO microwave radiometer is utilized to assess the quality of the retrieved LWC for BASTA stand-alone retrieval. The retrieved LWP is calculated by vertically integrating the retrieved LWC. Because LWP information is not assimilated and strong, *lna a priori* derived from climatology is constraining the retrieval, and hence *lna* is not a retrieved parameter. However, the variational framework allows *lna* to adjust around its climatology depending on radar reflectivity. In this case, *lna* values fall within the range of known values from the literature, as shown in table 1.

Number density of profiles with LWP ranging from 10 to 250  $gm^{-2}$  are compared with LWP from BASTA stand-alone retrieval (figure 14). Profiles with retrieved LWP less than 50  $gm^{-2}$  show good agreement with LWP from HATPRO. For the profiles with higher LWP, an increase in bias is clearly observed in figure 14, and the mean bias in LWP obtained as the difference between LWP from HATPRO and retrieved is  $-21 gm^{-2}$ . The mean absolute percentage error in LWP w.r.t. LWP from HATPRO is 57.15%. The relative error in LWP shown in figure 15 indicates that the majority of clouds have less than 35% error in retrieved LWP. Because the climatology of the scaling factor constrains the retrieval, effective estimation of LWC can be made using only radar information when additional information is unavailable. By investigating the origin of biases, we discovered that the profiles with light drizzle droplets characteristics tend to overestimate the LWP by a large margin. The improvement in standalone retrieval can be made by classifying clouds with and without drizzle and using specific *lna* climatology for them.

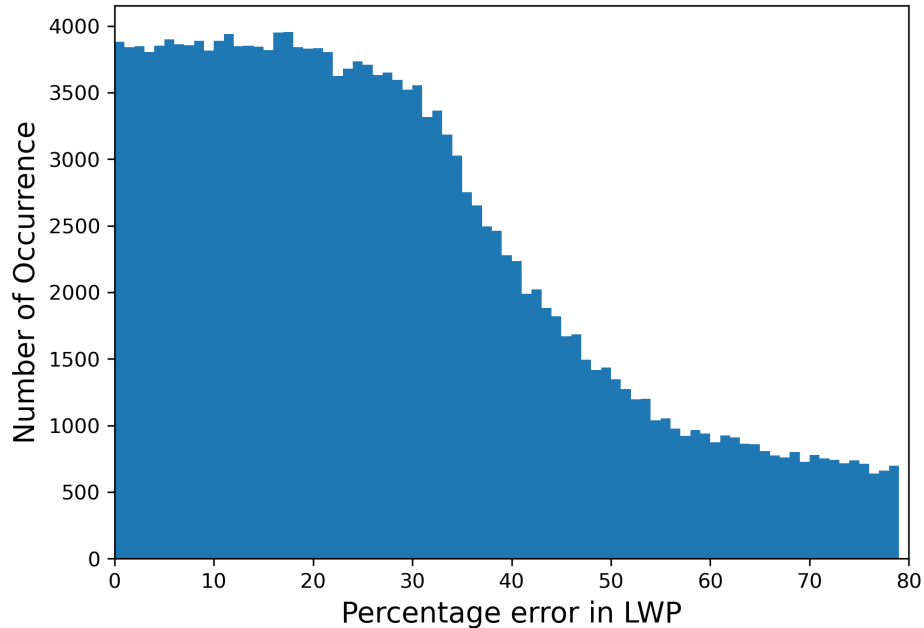

**Figure 15.** Percentage error in retrieved LWP with respect to LWP measured by MWR at SIRT A.

## 8 Summary and conclusions

An algorithm for LWC estimation of warm clouds is proposed using a vertically pointing radar and microwave radiometer synergy. The algorithm also accounts for attenuation due to liquid cloud droplets. This algorithm is based on the hypothesis that LWC is related to reflectivity with a power-law fit, and one of the constants of the Z-LWC relationship is allowed to vary according to LWP retrieved by an MWR of the same cloud profile. The scaling factor  $\ln a$  of the relationship is retrieved, while the exponent  $b$  is assumed constant. Therefore, the technique proposed in this study is equivalent to finding a suitable Z-LWC relationship consistent with the measured LWP for each cloud profile. This synergistic retrieval algorithm works seamlessly for liquid clouds and fog without prescribing the cloud type. The algorithm is implemented to a set of cloud and fog instances observed at SIRT A, and the analysis is discussed in this paper. These retrievals have been used to develop a climatology of LWC and the scaling factor for warm clouds and fog. The application of derived climatology to estimate LWC for stand-alone radar observations is also presented in this paper. By utilizing the climatology of the scaling factor, this radar stand-alone method can provide continuous retrieval of LWC for warm clouds even in the absence of radiometer and other additional measurements. Although this climatology is developed using measurements from SIRT A observatory for limited cloud scenarios, a more extensive data collection from several measurement locations might be used to generate a more robust climatology of scaling factor.


Furthermore, the retrievals are compared against in-situ measurements for a fog and cloud case collected during the SOFOG-3D field campaign. The comparison of LWC values estimated using this synergistic retrieval algorithm revealed that the fog

and clouds were clearly distinct. The retrieved LWC was more consistent with stratus cloud than fog. A homogeneous cloud system is required for the comparison of retrieved LWC with in-situ measurements, or else the in-situ sensors must sample the same cloud or fog volume as radar. To assess the accuracy of the algorithm for LWC estimates in various clouds types, in-situ measurements of several types of warm clouds like fog, low level stratus clouds with and without drizzle are required.


However, drizzle in clouds is a substantial source of error in the retrieval. Because drizzle droplets are significantly larger than cloud droplets, power law may not be applicable in the Mie regime. As a result, the forward model exclusively for drizzle must incorporate Mie scattering or eventually another kind of relationship to link Z and LWC. A prospective work for such cloud columns is planned to separate drizzle and cloud pixels using Doppler velocity information and develop a forward model for drizzle. The variational framework discussed here can be modified to incorporate additional measurements, such as Doppler velocity. Another current limitation of our synergistic retrieval method is that it is applicable to profiles with LWP values greater than  $10 \text{ gm}^{-2}$ . A better *a priori* of  $\ln a$  can be proposed in future to estimate accurate LWC for low LWP profiles. Additionally, this retrieval method is not applicable when a mixed phase cloud overlaps the liquid cloud layer, whereas the ice cloud above the liquid cloud does not impact the LWC retrieval of the liquid layer.

As mentioned in the section 3.3, the radar reflectivity profiles can be contaminated by particles in the boundary layer. In the retrieval method, these airborne planktons must be categorized and hence not processed as hydrometeors. Ultimately, a sophisticated algorithm for the classification of hydrometeors to distinguish between fog, liquid cloud, and drizzle is required. The retrieval algorithm could be updated with an improved target classification scheme to apply two different scaling factors in one profile, especially when drizzle and cloud co-occur. Also, for multi-layered liquid clouds, different  $\ln a$  might be prescribed for each cloud layer with proper classification of hydrometeors. Improved classification of hydrometers for the BASTA stand-alone retrieval will improve the LWC retrieval because the range of scaling factor varies for different categories. Further, the climatology of scaling factor for different cloud types will improve the LWC retrieval.

We know that cloud LWC values can fluctuate both horizontally and vertically. Most liquid clouds, by their very nature, are unlikely to be homogeneous in the sense suggested as suitable here. Maybe a more statistical approach is necessary for some aspects of the retrieval comparisons. The retrieval algorithm can be validated with in-situ measurements from aircraft, balloons, and UAVs flights with in-cloud sensors for diverse liquid clouds. Since UAVs and balloons travel at a slower speed than airplanes, which would allow them to sample the clouds more thoroughly. Note that some sites cannot be overflown by aircraft for safety reasons. UAVs can be more efficient in terms of controlling them remotely, as the path of tethered balloons cannot be controlled. These platforms can, however, interfere with the radar signal. In order to avoid contaminating the radar signal, the samples must be taken from a volume that is close enough and least obstructing the radar. Before comparing the estimated values with in-situ data, it is necessary to verify if the cloud volume represented by radar and in-situ samples are the same. A well-mixed or homogeneous cloud system is ideal for validating such algorithms.

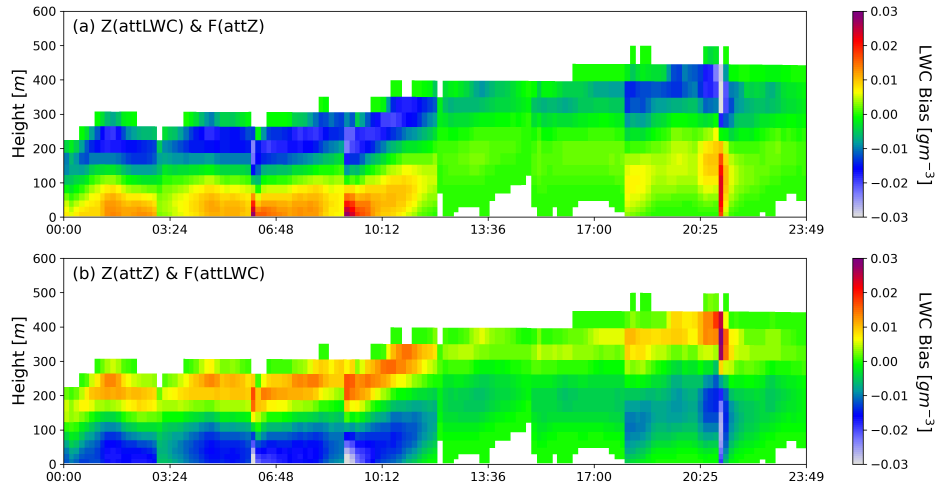

**Figure A1.** Bias in retrieved LWC with respect to true LWC for different attenuation considerations in the retrieval algorithm

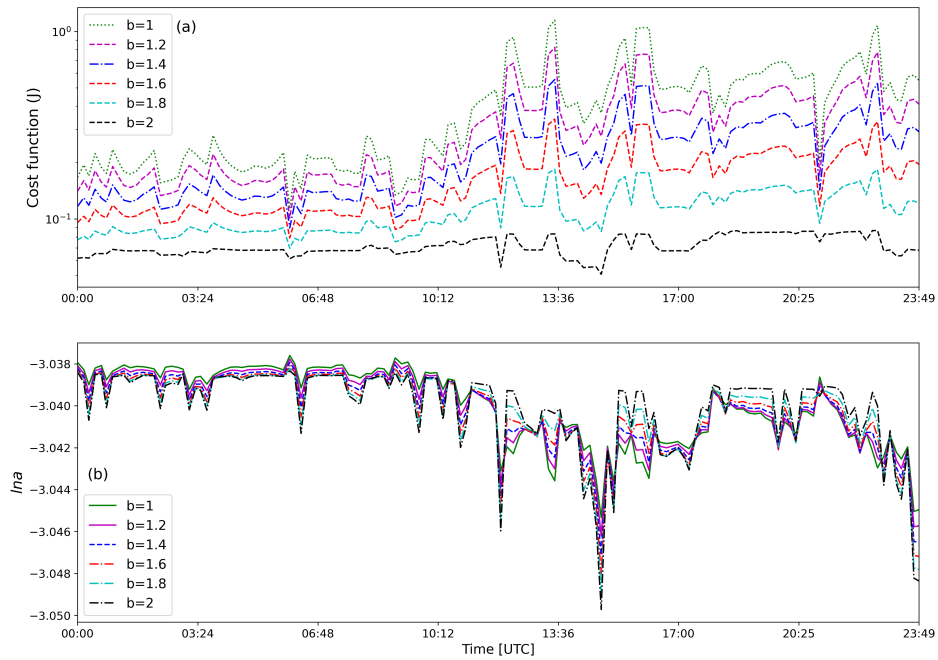

**Figure A2.** (a) Cost function and (b) Retrieved  $lna$  for different  $b$  values

*Data availability.* Data used from SIRTAs and SOFOG-3D are publicly available from <http://sirta.ipsl.fr/> (Site Instrumental de Recherche par Télédétection Atmosphérique, 2021) and <https://sofog3d.aeris-data.fr/> respectively.

*Code and data availability.* The code developed in this study can be made available upon request to the authors.

*Author contributions.* PV developed the retrieval algorithm and analyzed the results with support from JD. SJ organised and preprocessed  
790 the data used in this paper from SOFOG-3D. PM provided information and data from MWR, and FB provided the CDP data from SOFOG-3D and relevant assistance. AB provided data from the AROME model used for sensitivity analysis. JCD provided the data from SIRTAs. PV wrote the paper with contributions from all co-authors.

*Competing interests.* The authors declare that they have no conflict of interest.

*Acknowledgements.* This research has been funded by the French Association Nationale de la Recherche (ANRT) and the company Me-  
795 teomodem. This research has been supported by the Université de Versailles Saint-Quentin-en-Yvelines (UVSQ), Université Paris-Saclay. The authors would like to acknowledge SIRTAs for providing the BASTA radar and MWR data used in this study. The authors would like to acknowledge the assistance team of SOFOG-3D campaign for the execution of the field experiments.

## References

- Atlas, D.: THE ESTIMATION OF CLOUD PARAMETERS BY RADAR, *Journal of the Atmospheric Sciences*, 11, 309–317,  
800 [https://doi.org/10.1175/1520-0469\(1954\)011<0309:TEOCPB>2.0.CO;2](https://doi.org/10.1175/1520-0469(1954)011<0309:TEOCPB>2.0.CO;2), publisher: American Meteorological Society Section: Journal of the Atmospheric Sciences, 1954.
- Baedi, R. J. P., de Wit, J. J. M., Russchenberg, H. W. J., Erkelens, J. S., and Poiare Baptista, J. P. V.: Estimating effective radius and liquid water content from radar and lidar based on the CLARE98 data-set, *Physics and Chemistry of the Earth, Part B: Hydrology, Oceans and Atmosphere*, 25, 1057–1062, [https://doi.org/10.1016/S1464-1909\(00\)00152-0](https://doi.org/10.1016/S1464-1909(00)00152-0), 2000.
- 805 Bell, A., Martinet, P., Caumont, O., Vié, B., Delanoë, J., Dupont, J.-C., and Borderies, M.: W-band radar observations for fog forecast improvement: an analysis of model and forward operator errors, *Atmospheric Measurement Techniques*, 14, 4929–4946, <https://doi.org/10.5194/amt-14-4929-2021>, 2021.
- Bony, S. and Dufresne, J.-L.: Marine boundary layer clouds at the heart of tropical cloud feedback uncertainties in climate models, *Geophysical Research Letters*, 32, <https://doi.org/10.1029/2005GL023851>, [\\_eprint: https://agupubs.onlinelibrary.wiley.com/doi/pdf/10.1029/2005GL023851](https://agupubs.onlinelibrary.wiley.com/doi/pdf/10.1029/2005GL023851), 2005.
- 810 Brousseau, P., Seity, Y., Ricard, D., and Léger, J.: Improvement of the forecast of convective activity from the AROME-France system, *Quarterly Journal of the Royal Meteorological Society*, 142, 2231–2243, <https://doi.org/10.1002/qj.2822>, 2016.
- Cimini, D., Hewison, T. J., Martin, L., Güldner, J., Gaffard, C., and Marzano, F. S.: Temperature and humidity profile retrievals from ground-based microwave radiometers during TUC, *Meteorologische Zeitschrift*, 15, 45–56, 2006.
- 815 Crewell, S. and Löhnert, U.: Accuracy of cloud liquid water path from ground-based microwave radiometry 2. Sensor accuracy and synergy, *Radio Science*, 38, 7–1, 2003.
- Delanoë, J. and Hogan, R. J.: A variational scheme for retrieving ice cloud properties from combined radar, lidar, and infrared radiometer, *Journal of Geophysical Research: Atmospheres*, 113, <https://doi.org/10.1029/2007JD009000>, [\\_eprint: https://onlinelibrary.wiley.com/doi/pdf/10.1029/2007JD009000](https://onlinelibrary.wiley.com/doi/pdf/10.1029/2007JD009000), 2008.
- 820 Delanoë, J., Protat, A., Vinson, J.-P., Brett, W., Caudoux, C., Bertrand, F., Chatelet, J. P. d., Hallali, R., Barthes, L., Haeffelin, M., and Dupont, J.-C.: BASTA: A 95-GHz FMCW Doppler Radar for Cloud and Fog Studies, *Journal of Atmospheric and Oceanic Technology*, 33, 1023–1038, <https://doi.org/10.1175/JTECH-D-15-0104.1>, publisher: American Meteorological Society Section: Journal of Atmospheric and Oceanic Technology, 2016.
- Dupont, J.-C., Haeffelin, M., Wærsted, E., Delanoe, J., Renard, J.-B., Preissler, J., and O’Dowd, C.: Evaluation of Fog and Low  
825 Stratus Cloud Microphysical Properties Derived from In Situ Sensor, Cloud Radar and SYRSOC Algorithm, *Atmosphere*, 9, 169, <https://doi.org/10.3390/atmos9050169>, number: 5 Publisher: Multidisciplinary Digital Publishing Institute, 2018.
- Ellis, S. M. and Vivekanandan, J.: Liquid water content estimates using simultaneous S and K a band radar measurements: DUAL-WAVELENGTH RADAR LWC ESTIMATES, *Radio Science*, 46, n/a–n/a, <https://doi.org/10.1029/2010RS004361>, 2011.
- Fan, J., Wang, Y., Rosenfeld, D., and Liu, X.: Review of Aerosol–Cloud Interactions: Mechanisms, Significance, and Challenges, *Journal of the Atmospheric Sciences*, 73, 4221–4252, <https://doi.org/10.1175/JAS-D-16-0037.1>, publisher: American Meteorological Society  
830 Section: Journal of the Atmospheric Sciences, 2016.
- Fox, N. I. and Illingworth, A. J.: The Retrieval of Stratocumulus Cloud Properties by Ground-Based Cloud Radar, *Journal of Applied Meteorology and Climatology*, 36, 485–492, [https://doi.org/10.1175/1520-0450\(1997\)036<0485:TROSCP>2.0.CO;2](https://doi.org/10.1175/1520-0450(1997)036<0485:TROSCP>2.0.CO;2), publisher: American Meteorological Society Section: Journal of Applied Meteorology and Climatology, 1997.



- 835 Frisch, A. S., Fairall, C. W., and Snider, J. B.: Measurement of Stratus Cloud and Drizzle Parameters in ASTEX with a  $K\alpha$ -Band Doppler Radar and a Microwave Radiometer, *Journal of the Atmospheric Sciences*, 52, 2788–2799, [https://doi.org/10.1175/1520-0469\(1995\)052<2788:MOSCAD>2.0.CO;2](https://doi.org/10.1175/1520-0469(1995)052<2788:MOSCAD>2.0.CO;2), publisher: American Meteorological Society Section: *Journal of the Atmospheric Sciences*, 1995.
- Frisch, A. S., Feingold, G., Fairall, C. W., Uttal, T., and Snider, J. B.: On cloud radar and microwave radiometer  
840 measurements of stratus cloud liquid water profiles, *Journal of Geophysical Research: Atmospheres*, 103, 23 195–23 197, <https://doi.org/https://doi.org/10.1029/98JD01827>, \_eprint: <https://agupubs.onlinelibrary.wiley.com/doi/pdf/10.1029/98JD01827>, 1998.
- Geerts, B. and Miao, Q.: The Use of Millimeter Doppler Radar Echoes to Estimate Vertical Air Velocities in the Fair-Weather Convective Boundary Layer, *Journal of Atmospheric and Oceanic Technology*, 22, 225–246, <https://doi.org/10.1175/JTECH1699.1>, publisher: American Meteorological Society Section: *Journal of Atmospheric and Oceanic Technology*, 2005.
- 845 Haeffelin, M., Barthès, L., Bock, O., Boitel, C., Bony, S., Bouniol, D., Chepfer, H., Chiriaco, M., Cuesta, J., Delanoë, J., Drobinski, P., Dufresne, J.-L., Flamant, C., Grall, M., Hodzic, A., Hourdin, F., Lapouge, F., Lemaître, Y., Mathieu, A., Morille, Y., Naud, C., Noël, V., O’Hirok, W., Pelon, J., Pietras, C., Protat, A., Romand, B., Scialom, G., and Vautard, R.: SIRTa, a ground-based atmospheric observatory for cloud and aerosol research, *Annales Geophysicae*, 23, 253–275, <https://doi.org/10.5194/angeo-23-253-2005>, publisher: Copernicus GmbH, 2005.
- 850 Hartmann, D. L., Ockert-Bell, M. E., and Michelsen, M. L.: The Effect of Cloud Type on Earth’s Energy Balance: Global Analysis, *Journal of Climate*, 5, 1281–1304, [https://doi.org/10.1175/1520-0442\(1992\)005<1281:TEOCTO>2.0.CO;2](https://doi.org/10.1175/1520-0442(1992)005<1281:TEOCTO>2.0.CO;2), publisher: American Meteorological Society Section: *Journal of Climate*, 1992.
- Hogan, R. J.: A Variational Scheme for Retrieving Rainfall Rate and Hail Reflectivity Fraction from Polarization Radar, *Journal of Applied Meteorology and Climatology*, 46, 1544–1564, <https://doi.org/10.1175/JAM2550.1>, publisher: American Meteorological Society Section:  
855 *Journal of Applied Meteorology and Climatology*, 2007.
- Hogan, R. J., Gaussiat, N., and Illingworth, A. J.: Stratocumulus Liquid Water Content from Dual-Wavelength Radar, *Journal of Atmospheric and Oceanic Technology*, 22, 1207–1218, <https://doi.org/10.1175/JTECH1768.1>, 2005.
- Illingworth, A. J., Hogan, R. J., O’Connor, E. J., Bouniol, D., Brooks, M. E., Delanoë, J., Donovan, D. P., Eastment, J. D., Gaussiat, N., Goddard, J. W. F., Haeffelin, M., Baltink, H. K., Krasnov, O. A., Pelon, J., and Tompkins, A. M.: Continuous Evaluation of Cloud Profiles  
860 in Seven Operational Models Using Ground-Based Observations, p. 16, 2007.
- Krasnov, O. and Russchenberg, H.: A synergetic radar-lidar technique for the LWC retrieval in water clouds: Description and application to the Cloudnet data, 2005.
- Lance, S., Brock, C. A., Rogers, D., and Gordon, J. A.: Water droplet calibration of the Cloud Droplet Probe (CDP) and in-flight performance in liquid, ice and mixed-phase clouds during ARCPAC, *Atmospheric Measurement Techniques*, 3, 1683–1706,  
865 <https://doi.org/10.5194/amt-3-1683-2010>, publisher: Copernicus GmbH, 2010.
- Lhermitte, R.: Attenuation and Scattering of Millimeter Wavelength Radiation by Clouds and Precipitation, *Journal of Atmospheric and Oceanic Technology*, 7, 464–479, [https://doi.org/10.1175/1520-0426\(1990\)007<0464:AASOMW>2.0.CO;2](https://doi.org/10.1175/1520-0426(1990)007<0464:AASOMW>2.0.CO;2), publisher: American Meteorological Society Section: *Journal of Atmospheric and Oceanic Technology*, 1990.
- Liebe, H., Manabe, T., and Hufford, G.: Millimeter-wave attenuation and delay rates due to fog/cloud conditions, *IEEE Transactions on Antennas and Propagation*, 37, 1617–1612, <https://doi.org/10.1109/8.45106>, conference Name: *IEEE Transactions on Antennas and Propagation*, 1989.  
870

- Liebe, H. J.: MPM—An atmospheric millimeter-wave propagation model, *International Journal of Infrared and Millimeter Waves*, 10, 631–650, <https://doi.org/10.1007/BF01009565>, 1989.
- 875 Löhnert, U., Crewell, S., Simmer, C., and Macke, A.: Profiling Cloud Liquid Water by Combining Active and Passive Microwave Measurements with Cloud Model Statistics, *Journal of Atmospheric and Oceanic Technology*, 18, 1354–1366, [https://doi.org/10.1175/1520-0426\(2001\)018<1354:PCLWBC>2.0.CO;2](https://doi.org/10.1175/1520-0426(2001)018<1354:PCLWBC>2.0.CO;2), publisher: American Meteorological Society Section: Journal of Atmospheric and Oceanic Technology, 2001.
- Löhnert, U., Crewell, S., Krasnov, O., O'Connor, E., and Russchenberg, H.: Advances in Continuously Profiling the Thermodynamic State of the Boundary Layer: Integration of Measurements and Methods, *Journal of Atmospheric and Oceanic Technology - J ATMOS OCEAN*  
880 *TECHNOL*, 25, <https://doi.org/10.1175/2007JTECHA961.1>, 2008.
- Maahn, M., Turner, D. D., Löhnert, U., Posselt, D. J., Ebell, K., Mace, G. G., and Comstock, J. M.: Optimal Estimation Retrievals and Their Uncertainties: What Every Atmospheric Scientist Should Know, *Bulletin of the American Meteorological Society*, 101, E1512–E1523, <https://doi.org/10.1175/BAMS-D-19-0027.1>, publisher: American Meteorological Society Section: Bulletin of the American Meteorological Society, 2020.
- 885 Maier, F., Bendix, J., and Thies, B.: Simulating Z–LWC Relations in Natural Fogs with Radiative Transfer Calculations for Future Application to a Cloud Radar Profiler, *Pure and Applied Geophysics*, 169, 793–807, <https://doi.org/10.1007/s00024-011-0332-0>, 2012.
- Marke, T., Ebell, K., Löhnert, U., and Turner, D. D.: Statistical retrieval of thin liquid cloud microphysical properties using ground-based infrared and microwave observations, *Journal of Geophysical Research: Atmospheres*, 121, 14–558, 2016.
- Martinet, P., Cimini, D., Burnet, F., Ménérier, B., Michel, Y., and Unger, V.: Improvement of numerical weather prediction model analysis during fog conditions through the assimilation of ground-based microwave radiometer observations: a 1D-Var study, *Atmospheric*  
890 *Measurement Techniques*, 13, 6593–6611, 2020.
- Martinet, P., Unger, V., Frédéric, B., Georgis, J.-F., Hervo, M., Huet, T., Löhnert, U., Miller, E., Orlandi, E., and Price, J.: A new database of temperature, humidity and liquid water path retrievals from a fog dedicated network of ground-based microwave radiometers, *BAST*, in review, 2022.
- 895 Miles, N. L., Verlinde, J., and Clothiaux, E. E.: Cloud droplet size distributions in low-level stratiform clouds, *Journal of the Atmospheric Sciences*, 57, 295–311, [https://doi.org/10.1175/1520-0469\(2000\)057<0295:CDSDIL>2.0.CO;2](https://doi.org/10.1175/1520-0469(2000)057<0295:CDSDIL>2.0.CO;2), publisher: American Meteorological Society, 2000.
- Ovtchinnikov, M. and Kogan, Y. L.: Evaluation of radar retrieval algorithms in stratiform clouds using large-eddy simulations, *Journal of Geophysical Research: Atmospheres*, 105, 17 351–17 359, <https://doi.org/https://doi.org/10.1029/2000JD900216>, \_eprint:  
900 <https://agupubs.onlinelibrary.wiley.com/doi/pdf/10.1029/2000JD900216>, 2000.
- O'Connor, E. J., Hogan, R. J., and Illingworth, A. J.: Retrieving Stratocumulus Drizzle Parameters Using Doppler Radar and Lidar, *Journal of Applied Meteorology and Climatology*, 44, 14–27, <https://doi.org/10.1175/JAM-2181.1>, publisher: American Meteorological Society Section: Journal of Applied Meteorology and Climatology, 2005.
- Rodgers, C. D.: *Inverse Methods for Atmospheric Sounding: Theory and Practice*, WORLD SCIENTIFIC, <https://doi.org/10.1142/3171>,  
905 2000.
- Rosenfeld, D., Sherwood, S., Wood, R., and Donner, L.: Climate Effects of Aerosol-Cloud Interactions, *Science*, 343, 379–380, <https://doi.org/10.1126/science.1247490>, 2014.

- Sauvageot, H. and Omar, J.: Radar Reflectivity of Cumulus Clouds, *Journal of Atmospheric and Oceanic Technology*, 4, 264–272, [https://doi.org/10.1175/1520-0426\(1987\)004<0264:RROCC>2.0.CO;2](https://doi.org/10.1175/1520-0426(1987)004<0264:RROCC>2.0.CO;2), publisher: American Meteorological Society Section: *Journal of Atmospheric and Oceanic Technology*, 1987.
- 910 Seity, Y., Brousseau, P., Malardel, S., Hello, G., Bénard, P., Bouttier, F., Lac, C., and Masson, V.: The AROME-France convective-scale operational model, *Monthly Weather Review*, 139, 976–991, 2011.
- Stephens, G. L.: Cloud Feedbacks in the Climate System: A Critical Review, *Journal of Climate*, 18, 237–273, <https://doi.org/10.1175/JCLI-3243.1>, publisher: American Meteorological Society Section: *Journal of Climate*, 2005.
- 915 Stephens, G. L., Vane, D. G., Boain, R. J., Mace, G. G., Sassen, K., Wang, Z., Illingworth, A. J., O’connor, E. J., Rossow, W. B., Durden, S. L., Miller, S. D., Austin, R. T., Benedetti, A., and Mitrescu, C.: THE CLOUDSAT MISSION AND THE A-TRAIN: A New Dimension of Space-Based Observations of Clouds and Precipitation, *Bulletin of the American Meteorological Society*, 83, 1771–1790, <https://doi.org/10.1175/BAMS-83-12-1771>, publisher: American Meteorological Society Section: *Bulletin of the American Meteorological Society*, 2002.
- 920 Toledo, F., Delanoë, J., Haeffelin, M., Dupont, J.-C., Jorquera, S., and Le Gac, C.: Absolute calibration method for frequency-modulated continuous wave (FMCW) cloud radars based on corner reflectors, *Atmospheric Measurement Techniques*, 13, 6853–6875, <https://doi.org/10.5194/amt-13-6853-2020>, publisher: Copernicus GmbH, 2020.
- Tridon, F., Battaglia, A., and Kneifel, S.: Estimating total attenuation using Rayleigh targets at cloud top: applications in multilayer and mixed-phase clouds observed by ground-based multifrequency radars, *Atmospheric Measurement Techniques*, 13, 5065–5085, <https://doi.org/10.5194/amt-13-5065-2020>, 2020.
- 925 Vali, G. and Haimov, S.: Observed extinction by clouds at 95 GHz, *IEEE Transactions on Geoscience and Remote Sensing*, 39, 190–193, <https://doi.org/10.1109/36.898682>, conference Name: *IEEE Transactions on Geoscience and Remote Sensing*, 2001.
- Vivekanandan, J., Ghate, V. P., Jensen, J. B., Ellis, S. M., and Schwartz, M. C.: A Technique for Estimating Liquid Droplet Diameter and Liquid Water Content in Stratocumulus Clouds Using Radar and Lidar Measurements, *Journal of Atmospheric and Oceanic Technology*, 37, 2145–2161, <https://doi.org/10.1175/JTECH-D-19-0092.1>, publisher: American Meteorological Society Section: *Journal of Atmospheric and Oceanic Technology*, 2020.
- 930 Wang, J. and Geerts, B.: Identifying drizzle within marine stratus with W-band radar reflectivity, *Atmospheric research*, 69, 1–27, publisher: Elsevier, 2003.
- Ware, R., Solheim, F., Carpenter, R., Gueldner, J., Liljegren, J., Nehrkorn, T., and Vandenbergh, F.: Radiometric profiling of tropospheric temperature, humidity and cloud liquid, 2002.
- 935 Winker, D. M., Pelon, J., Coakley, J. A., Ackerman, S. A., Charlson, R. J., Colarco, P. R., Flamant, P., Fu, Q., Hoff, R. M., Kittaka, C., Kubar, T. L., Treut, H. L., McCormick, M. P., Mégie, G., Poole, L., Powell, K., Treppe, C., Vaughan, M. A., and Wielicki, B. A.: The CALIPSO Mission: A Global 3D View of Aerosols and Clouds, *Bulletin of the American Meteorological Society*, 91, 1211–1230, <https://doi.org/10.1175/2010BAMS3009.1>, publisher: American Meteorological Society Section: *Bulletin of the American Meteorological Society*, 2010.
- 940 Wood, R., Mechoso, C. R., Bretherton, C. S., Weller, R. A., Huebert, B., Straneo, F., Albrecht, B. A., Coe, H., Allen, G., Vaughan, G., Daum, P., Fairall, C., Chand, D., Gallardo Klenner, L., Garreaud, R., Grados, C., Covert, D. S., Bates, T. S., Krejci, R., Russell, L. M., de Szoeke, S., Brewer, A., Yuter, S. E., Springston, S. R., Chaigneau, A., Toniazzo, T., Minnis, P., Palikonda, R., Abel, S. J., Brown, W. O. J., Williams, S., Fochesatto, J., Brioude, J., and Bower, K. N.: The VAMOS Ocean-Cloud-Atmosphere-Land Study Regional Experiment (VOCALS-

- 945 REx): goals, platforms, and field operations, *Atmospheric Chemistry and Physics*, 11, 627–654, <https://doi.org/10.5194/acp-11-627-2011>, 2011.
- Wærsted, E. G., Haeffelin, M., Dupont, J.-C., Delanoë, J., and Dubuisson, P.: Radiation in fog: quantification of the impact on fog liquid water based on ground-based remote sensing, *Atmospheric Chemistry and Physics*, 17, 10811–10835, <https://doi.org/10.5194/acp-17-10811-2017>, publisher: Copernicus GmbH, 2017.
- 950 Zhu, L., Suomalainen, J., Liu, J., Hyyppä, J., Kaartinen, H., and Haggren, H.: A Review: Remote Sensing Sensors, IntechOpen, <https://doi.org/10.5772/intechopen.71049>, publication Title: Multi-purposeful Application of Geospatial Data, 2017.