



Across-track Extension of Retrieved Cloud and Aerosol Properties for the EarthCARE Mission: The ACM-3D Product

Zhipeng Qu¹, Howard W. Barker¹, Jason N. S. Cole¹, Mark W. Shephard¹

¹ Environment and Climate Change Canada, Toronto, ON, Canada

5

Correspondence to: Howard W. Barker (howard.barker@canada.ca)

Abstract. The narrow cross-section of cloud and aerosol properties retrieved by L2-algorithms that operate on data from EarthCARE's nadir-pointing sensors gets "broadened" across-track by an algorithm that is described and demonstrated here. This *Scene Construction Algorithm* (SCA) consists of four sub-algorithms. At its core is a radiance-matching procedure that works with measurements made by EarthCARE's Multi-Spectral Imager (MSI). In essence, an off-nadir pixel gets filled with retrieved profiles that are associated with a (nearby) nadir pixel whose MSI radiances best match those of the off-nadir pixel. The SCA constructs a 3D array of cloud and aerosol (and surface) properties for entire *frames* that measure ~6,000 km along-track by 150 km across-track (i.e., the MSI's full swath). Constructed domains out to ~15 km on both sides of nadir are used explicitly downstream as input for 3D radiative transfer models that predict top-of-atmosphere (TOA) broadband solar and thermal fluxes and radiances. These quantities are compared to commensurate measurements made by EarthCARE's BroadBand Radiometer (BBR), thus facilitating a continuous closure assessment of the retrievals. Three 6,000 km x 200 km frames of synthetic EarthCARE observations were used to demonstrate the SCA. The main conclusion is that errors in modelled TOA fluxes that stem from use of 3D domains produced by the SCA are expected to be less than $\pm 5 \text{ W m}^{-2}$ and rarely larger than $\pm 10 \text{ W m}^{-2}$. As such, the SCA, as purveyor of information needed to run 3D radiative transfer models, should help more than hinder the radiative closure assessment of EarthCARE's L2 retrievals.

10
15
20

1. Introduction

The objective of the EarthCARE satellite mission is to help improve numerical predictions of weather, air quality, and climatic change via application of synergistic L2-retrieval algorithms to observational data from its cloud-profiling radar (CPR), backscattering lidar (ATLID), and passive multi-spectral imager (MSI) (Illingworth et al. 2015). EarthCARE's overarching scientific goal (ESA 2001) is to retrieve cloud and aerosol properties with enough accuracy that when used to initialize atmospheric radiative transfer (RT) models, simulated top-of-atmosphere (TOA) broadband radiative fluxes, for domains covering ~100 km², agree with their observational-based counterparts to within $\pm 10 \text{ W m}^{-2}$ more often than not. "Observed" TOA fluxes derive from radiances measured by EarthCARE's multi-angle broadband radiometer (BBR). As the latter are not used by retrieval algorithms, comparing them to modelled values, obtained

25
30



by RT models operating on retrieved quantities, affects a “moderately stringent” verification of the retrievals (Barker et al. 2023); “moderately stringent” because BBR radiances consist, in part, of photons that share the same gaseous pathlength and number of cloud-aerosol-surface scattering event distributions as those that constitute MSI radiances. These imperfections aside, this radiative closure verification is a well-defined and cost-effective final stage in EarthCARE’s formal “production model” (Eisinger et al. 2023).

In light of EarthCARE’s ambitious goal of limiting differences between measured and modelled TOA fluxes to ± 10 W m^{-2} , the usefulness of its radiative closure programme depends much on reducing errors and uncertainties in: BBR measurements; variables needed by RT models that are not provided by EarthCARE observations; and RT models. Included in this are issues of observational geometry that face use of BBR data for EarthCARE’s closure assessment. First, L2-retrieved profiles are ~ 1 km in diameter, while the BBR was designed to perform best for footprints of $\sim 10 \times 10$ km. For this configuration, fluxes and radiances computed for sequences of retrieved profiles contribute only $\sim 10\%$ of the signal to each BBR footprint (or pixel). Second, at only ~ 1 km wide, net horizontal fluxes for each retrieved column, and sequences of them, will rarely be close to zero (e.g., Barker and Li 1997; Marshak et al. 1998). This implies that 3D RT models, as opposed to their ubiquitous 1D counterparts, will be required to make EarthCARE’s radiative closure assessment fruitful. Hence the need for 3D arrays of data that describe the Earth-atmosphere system adjacent to the ~ 1 km-wide retrieved L2-cross-section.

Fortunately, BBR data are not bound to 10 km resolution, as point-spread function widths of its native radiances are ~ 0.7 km. This offers much flexibility to the design of the closure assessment (e.g., Tornow et al. 2018). The extreme case is use a single along-track line of BBR radiances that overlap, at best approximately, the ~ 1 km wide curtain of L2-retrieved profiles, referred to hereinafter as the L2-plane. This would, however, degrade BBR performance, via reduced signal-to-noise ratio and pointing accuracy, and thus weaken closure assessments. Alternatively, one could attempt an across-track “broadening” of the L2-plane so as to cover as many BBR native radiances as deemed necessary. Regardless of the route taken and the size of domains over which closure assessments are to be performed, there is the ever-present related issue of lateral flow of photons both within assessment domains *and* between assessment domains and their adjacent areas. Taking these issues together, EarthCARE’s science team opted for its closure assessment experiment to use 3D RT models applied to assessment domains centred on the L2-plane with across-track widths appreciably greater than 1 km (Illingworth et al. 2015).



The method for approximating 3D geophysical variables adjacent to the L2-plane, in order to safely use both 3D RT models and BBR data, is the radiance-matching *Scene Construction Algorithm* (SCA) (Barker et al. 2011), which forms the basis of the ACM-3D processor. The purpose of the current paper is to recap, in section 2, the SCA, present several operational details associated with it, and demonstrate, in section 3, its overall performance using simulated observations for a virtual Earth-observation system (Qu et al. 2023; Donovan et al. 2023). Application of RT models to SCA products and subsequent radiative closure assessments for the same virtual environments are discussed by Cole et al. (2023) and Barker et al. (2023). A brief discussion is given in section 4.

2. 3D Atmosphere-Surface Scene Construction Algorithm

To begin, EarthCARE’s products are partitioned into $\sim 6,565$ km long “frames”, which makes six frames / orbit. Position in a frame is defined by the Joint Standard Grid (JSG). Each frame contains N_{JSG} L2-retrieved columns along-track. Frame widths are 150 km as defined by the MSI’s swath; 35 km to the right and 115 km to the left of the L2-plane (relative to the satellite’s direction of motion). Some algorithms require data beyond nadir, and so each frame’s files also contain n_ϵ swaths of data from neighbouring frames. JSG coordinates are denoted as (i, j) , with i running along-track from $1 - n_\epsilon$ to $N_{JSG} + n_\epsilon$, and j running perpendicular to the L2-plane, which is located at $j = 0$.

As documented by Cole et al. (2023), EarthCARE’s radiative products are produced by 1D and 3D broadband RT models. Some of these products are used to perform radiative closure assessments of L2-retrievals (see Barker et al. 2023). While 1D RT models are applied, in ACM-RT, to all non-corrupt columns in the L2-plane, their results are averaged, in ACMB-DF, over small domains D , referred to hereinafter as *assessment domains*, whose along-track centres, at $j = 0$, are the L2-plane. Conversely, 3D RT models operate directly on D and domain-average results are computed in ACM-RT and used in ACMB-DF. The structure of D for $j \neq 0$ is defined by the 3D *Scene Construction Algorithm* (SCA), which is explained in the following subsections. Along-track lengths of D , in terms of JSG cells, are n_{assess} columns(pixels), while their across-track half-widths are m_{assess} , making full across-track widths $2m_{\text{assess}} + 1$ columns(pixels). The initial plan is to fix m_{assess} and n_{assess} at 2 and 21, respectively. Thus, D are $\sim 5 \times 21$ km, so their areal extents, regardless of location, are ~ 100 km², which is what the BBR was designed to operate at (see Illingworth et al. 2015).



The operational SCA is made up of several sub-algorithms. At its core is definition of D at $(i, j \neq 0)$ via MSI radiance-matching (Barker et al. 2011). Other crucial components include: definition of buffer-zones around D , as
85 required by the 3D RT models; screening and ranking of D in an attempt to maximize the usefulness of the radiative closure assessment process; and estimation of errors for TOA fluxes and radiances that stem from the radiance-matching algorithm. To improve readability of the main text, many details of these sub-algorithms are presented in Appendices. General results are shown and discussed in Section 3.

2.1. Radiance matching

90 The core of the SCA, and thus the ACM-3D processor, is passive narrowband radiance-matching of an off-nadir MSI pixel's spectral radiances with their nadir counterparts along the L2-plane (Barker et al. 2011). As this methodology has been described and used elsewhere (Barker et al. 2011; 2012; 2014; Sun et al. 2016), it is recapped briefly here, with details reiterated in Appendix A. Note that all independent variables referred to here are available to the ACM-3D processor from other EarthCARE processors; all of which are reported on in this special issue.

95 Let $r_k(i, j)$ be MSI radiances, for the k^{th} channel, where values at position $(i, j = 0)$ align along the L2-plane and have geophysical profiles associated with them. When seeking to populate an off-nadir *recipient* column at $(i, j \neq 0)$ with a suitable *donor* from the L2-plane, the algorithm quantifies how well $r_k(i, j \neq 0)$ match $r_k(m, j = 0)$ for all $m \in [i - M, i + M]$; M being the number of JSG pixels, forward and backward, along the L2-plane one is prepared to allow the algorithm to search. While M could depend on a host of variables, a default value of 200 has been used
100 thus far. As explained in Appendix A, for a nadir pixel to be a potential donor, the recipient's and donor's surface types (land, sea, and snow/ice) must match, and cosine of solar zenith angles μ_0 and azimuth angles between Sun and satellite tracking direction φ_r must differ by less than specified amounts. *Figure 1* shows a schematic of solar-satellite geometry. While the recipient and L2-donor pixels could be required to have the same cloud phase, the intention all along has been for the algorithm to rely just on radiances, not other algorithms.



105 Of those L2-plane pixels whose MSI radiances best resemble those at $(i, j \neq 0)$, the one lying physically closest to
 $(i, j \neq 0)$ becomes the donor, and its profiles of geophysical information get replicated at $(i, j \neq 0)$. This procedure
is performed for all $(i, j \neq 0)$ across the MSI's swath; pixels at $(i, 0)$ donate to themselves. The result is *construction*
of a 3D atmosphere-surface domain made-up of profiles from the L2-plane. Correspondingly, MSI imagery are *recon-*
structed, too. *Figure 2* shows a schematic of the radiance-matching procedure. Hereinafter, values at (i, j) that are
110 based on the SCA are indexed as $(m^*(i, j), 0)$, which ties them back to the $m^*(i, j)$ th column/pixel along the L2-
plane.

2.2. Assessment domains and their buffer-zones

The 3D RT models used for EarthCARE employ cyclic horizontal boundary conditions. Real cloudy domains and those
produced by the SCA are, however, non-cyclical and so when 3D RT models operate on them, adverse effects near the
115 perimeter of D are affected by photon paths crossing discontinuous optical properties. One way to deal with this is to
add atmosphere and surface to all edges of D so as to, not eliminate but rather, displace away from D any adverse
effects set-up by the assumed cyclic boundary conditions. Hereinafter, the domain resulting from the combination of
 D and its buffer-zones is denoted as D^+ .

Buffer-zone also accommodate the fact that the BBR's oblique radiances associated with D consist partly of photons
120 that were scattered by the atmosphere and surface outside of D . Barker et al. (2015) described an adjustment to 3D
RT Monte Carlo models that approximates fractional contributions to a BBR radiance from photons whose last scat-
tering event, by any particular scattering species, took place in D . Their algorithm, however, is too time-consuming
for EarthCARE's official data processing system. Nevertheless, the buffer-zone should adequately capture contribu-
tions to BBR radiances that come from beyond D .

125 Setting the along- and across-track dimensions of buffer-zones is described in detail in Appendix B. *Figure 3* shows
 D , its associated D^+ , and the indices that locate them on the JSG. The number of pixels in the along-track that are
out in front n_{buffer}^{\searrow} and trailing n_{buffer}^{\swarrow} D can vary and depend on the minimum along-track buffer length d_{\parallel}^{\min} ,



assumed to be ~5 km, BBR viewing zenith angle θ_v , and nearby cloudtop altitudes $h(m^*(i, j), 0)$ as defined by the radiance-matching algorithm. *Figure 4* is a schematic of this process which is detailed in Appendix B.

130 Note that n_{buffer}^{\leftarrow} and n_{buffer}^{\rightarrow} are independent of θ_0 . This is because for EarthCARE’s orbit; over 80% of observations with $\theta_0 < 90^\circ$ have $30^\circ < \varphi_r < 150^\circ$ implying that, for most cases, projection of direct-beam (and hence cloud shadows) into the along-track walls of D will be small. Exceptions are for very large θ_0 with $\varphi_r < 30^\circ$ or $\varphi_r > 150^\circ$; but these cases are usually avoided because the RT models rely on the plane-parallel approximation.

Determination of the size of cross-track buffer-zones m_{buffer} depends on $h(m^*(i, j), 0)$ adjacent to the sunlit side
135 of D and minimum size for the across-track buffer-zone d_{\perp}^{\min} . If a cloud to the side of D casts a shadow that falls onto the region formed by D and its along-track buffer-zones, then the cross-track buffer-zone extends to include the cloud doing the shadowing. Unlike the along-track, m_{buffer} gets applied to both sides of D . *Figure 5* summarizes definition of m_{buffer} .

2.3. Screening radiative closure assessment domains

140 Due to computational limitations and time constraints on product production, it is anticipated that only a small number of D per frame will participate in the 3D RT radiative closure exercise (i.e., processor ACMB-DF). Hence, D that emerge from the SCA must be “screened and ranked” to ensure that an adequate range of cases, from “simple” to “complex”, be assessed in order to: i) provide well-rounded pictures of algorithmic performances; ii) gauge whether mission objectives are being met; and iii) provide guidance to data users who wish to focus on select conditions. At
145 the same time, screening and ranking should be flexible enough to be changed during the mission. For instance, “simple” scenarios are likely to be of particular interest during the commissioning phase (e.g., mono-phase, single-layer, overcast clouds).

The screening process eliminates D that are likely to yield uninformative assessments. It has three stages as described in the following subsections. Each frame has two sets of assessment domains that survive screening. The first set D_{1D}



150 contains domains that 1D RT results are averaged over, while the second set D_{3D} contains domains that 3D RT models
get applied to. Domains in D_{1D} and D_{3D} consist, respectively, of *radiative assessment domains* D and *radiative
computation domains* D^+ (see Figure 3).

2.3.1. Screening Stage 1: Failed retrievals and corrupt data

If there are corrupt data or failed retrievals for any column in either D or D^+ , the domain will not be forwarded to
155 subsequent processes. This is because they simply cannot be used by 3D RT models. Examples of failed retrievals
include algorithms that did not converge to a solution or converged to values that are out of bounds. Corrupt data, on
the other hand, includes failure at the L1 level and data corrupted during transmission.

2.3.2. Screening Stage 2: Geophysical conditions

a) Solar zenith angle

160 Generally speaking, solar RT becomes increasingly complicated as solar zenith angle θ_0 increases. This is because: i)
radiances and fluxes for EarthCARE-sized domains will depend increasingly on conditions outside D and D^+ ; and ii)
Earth's sphericity becomes increasingly important; EarthCARE's RT codes are plane-parallel models. Not only do
large θ_0 impact the SCA directly, they stress retrieval algorithms that use MSI data. Hence, D or D^+ must have

$$\min\{\theta_0(i, j)\} < \theta_0^* \quad \forall (i, j) \in D \text{ or } D^+, \quad (1)$$

165 where θ_0^* is the maximum allowed value of θ_0 . Initially, $\theta_0^* = 75^\circ$.

b) Single surface type

To focus closure assessments on retrieved cloud and aerosol properties, and reduce potential complications due to
boundary conditions that are outside the purview of EarthCARE's retrievals, D and D^+ must have at least 90% of its
area occupied by a single broad class of surface type. These types are: water (oceans and lakes), land, and ice.



170 *c) Homogeneous land surfaces*

Each JSG pixel has a land-type designation obtained from the International Geosphere–Biosphere Programme (USGS 2018). Let f_ℓ be the fraction of JSG pixels in either D or D^+ that corresponds to the ℓ^{th} surface-type. For reasons listed above, if D and D^+ is a “land” domain, then for them to be included in D_{1D} and D_{3D} , they must have

$$\max \{f_\ell\} > f^*, \quad (2)$$

175 where f^* is set initially to 0.9.

d) Surface elevation

Uncertainties in spectral bidirectional reflectance and emittance functions as well as albedos and emissivities are complicated by variations in surface elevation. In an attempt to limit uncertainties associated with the setting of these lower boundary conditions in the RT models, only very flat assessment domains are allowed. Hence, if σ_{srf} is standard
 180 deviation of surface elevation for D or D^+ , then for them to be included in D_{1D} and D_{3D} , they must have

$$\sigma_{srf} < \sigma_{sfc}^*, \quad (3)$$

where σ_{sfc}^* is set initially to 0.1 km.

2.3.3. Screening Stage 3: Quality of radiance matching

Where SCA reconstructed MSI radiances are poor, it is reasonable to assume that corresponding constructed 3D domains are, too. Thus, the final screening stage addresses the quality of reconstructed MSI imagery, but it also provides
 185 bias-correction estimates for modelled TOA quantities.

For an assessment domain D of n_{assess} JSG pixels along-track and $j \in [-m_{\text{assess}}, m_{\text{assess}}]$ across-track, the n^{th} moment of r_k over D , excluding the L2-line along $j = 0$, is



$$\langle r_k^n \rangle = \frac{1}{2m_{\text{assess}} n_{\text{assess}}} \sum_{i=i_1}^{i_1+n_{\text{assess}}-1} \sum_{j \in [-m_{\text{assess}}, -1] \cup [1, m_{\text{assess}}]} r_k^n(i, j). \quad (4)$$

190 where i_1 is along-track JSG index at the edge of D . Corresponding reconstructed values are

$$\langle \hat{r}_k^n \rangle = \frac{1}{2m_{\text{assess}} n_{\text{assess}}} \sum_{i=i_1}^{i_1+n_{\text{assess}}-1} \sum_{j \in [-m_{\text{assess}}, -1] \cup [1, m_{\text{assess}}]} r_k^n(m^*(i, j), 0). \quad (5)$$

Therefore, errors stemming from the radiance-matching algorithm, for the k^{th} MSI channel, are

$$\Delta \langle \hat{r}_k^n \rangle = \langle \hat{r}_k^n \rangle - \langle r_k^n \rangle. \quad (6)$$

Let $\langle F_{\text{SW}} \rangle$ and $\langle F_{\text{LW}} \rangle$ be TOA SW and LW fluxes, averaged over D , as estimated by angular direction models in
 195 the BMA-FLX processor (Velázquez-Blázquez et al. 2023). Since MSI radiances r_1 (0.67 μm) and r_6 (10.80 μm) often correlate well with $\langle F_{\text{SW}} \rangle$ and $\langle F_{\text{LW}} \rangle$ (Barker et al. 2014), TOA flux bias errors stemming from the radiance-matching algorithm can be approximated as

$$\Delta \langle \hat{F}_{\text{SW}} \rangle \approx \langle F_{\text{SW}} \rangle \frac{\langle r_1 \rangle - \langle \hat{r}_1 \rangle}{\langle \hat{r}_1 \rangle} \quad \text{and} \quad \Delta \langle \hat{F}_{\text{LW}} \rangle \approx \langle F_{\text{LW}} \rangle \frac{\langle r_6 \rangle - \langle \hat{r}_6 \rangle}{\langle \hat{r}_6 \rangle}. \quad (7)$$

If these values satisfy

$$200 \quad \left| \Delta \langle \hat{F}_{\text{SW}} \rangle \right| > \Delta F_{\text{SW}}^* \mu_0 \quad \text{and} \quad \left| \Delta \langle \hat{F}_{\text{LW}} \rangle \right| > \Delta F_{\text{LW}}^*, \quad (8)$$

where ΔF_{SW}^* and ΔF_{LW}^* are tolerable broadband TOA flux errors arising from the radiance-matching algorithm, D is not included in neither $D_{1\text{D}}$ nor $D_{3\text{D}}$. Both $\Delta \langle \hat{F}_{\text{SW}} \rangle$ and $\Delta \langle \hat{F}_{\text{LW}} \rangle$ get passed to ACMB-DF and used to bias-correct estimated TOA fluxes made by both 1D and 3D RT models. This completes the screening processes leaving $D_{1\text{D}}$ and $D_{3\text{D}}$ with $m_{1\text{D}}$ and $m_{3\text{D}}$ assessment domains, respectively.



205 **2.4. Ranking radiative assessment domains**

As noted above, the EarthCARE mission will provide near-real time products with limited computational resources. The portion of the processing chain constrained most by this involves 3D SW RT models. For them to achieve adequate signal-to-noise ratios, just a small fraction of the thousands of potential D^+ per frame can be assessed. Thus, to enhance efficacy of the radiative assessment process, an algorithm was developed that ranks D^+ in D_{3D} . At any time, ranking can be overruled manually, such as when testing during commissioning phase. The ranking algorithm that was decided upon samples cloud scenarios in proportion to relative frequencies of occurrence.

For the initial version of the algorithm, 1 km resolution MODIS-retrieved values (MYD06_L2) of cloud optical depth τ_{cld} and cloudtop pressure p_{cld} , for 2020, were grouped into 5 x 21 km arrays, to match EarthCARE's planned 5 x 21 km domains D , and for each array mean values $\langle \tau_{cld} \rangle$ and $\langle p_{cld} \rangle$ were computed along with total cloud fraction A_c (Platnick et al. 2015). They were then assigned to bins defined by 10° ranges of latitude and longitude, and ranges for $\langle \tau_{cld} \rangle$, $\langle p_{cld} \rangle$, A_c , and time of observation of

$$\begin{aligned}
 \langle \tau_{cld} \rangle & : (0,4];(4,23];(23,150] \\
 \langle p_{cld} \rangle & : (0,440];(440,680];(680,\infty) \\
 A_c & : (0,0.25];(0.25,0.75];(0.75,0.99];(0.99,1] \\
 time & : DJF;MAM;JJA;SON
 \end{aligned} \tag{9}$$

Since only cloud-bearing domains need be ranked, the number of applicable bins is 23,328, of which the n^{th} has N_n domains. When $\theta_0 \geq 90^\circ$, $\langle \tau_{cld} \rangle$ is not retrieved, so the same ranking procedure uses the remaining three variables only. Radiative closure assessments are not done when $75^\circ < \theta_0 < 90^\circ$ on account of too many overwhelming uncertainties with retrievals and plane-parallel RT modelling. Thus, domains in this range are not ranked.

For EarthCARE frames with 6,400 1-km L2 columns in the L2-plane there is the potential for 6,400 - 21 + 1 = 6,380 (over-sampled) assessment domains, each of which falls into one of the MODIS bins. Now, using only domains with $A_c > 0.01$, form the frame-specific cumulative frequency such that the i^{th} domain has a value



$$225 \quad N(i) = \frac{1}{N(6,380)} \sum_{j=1}^i N_n(j) \quad ; \quad i = 1, \dots, N_{cid} \leq 6,380. \quad (10)$$

Then, generate a uniform pseudo-random number $R \in (0,1]$ and find the closest $N(i)$; this identifies the top-ranked D^+ . This is repeated, without replacement, until (possibly all) the domains are ranked. The resulting lists are passed on to ACM-RT.

3. Results

230 The SCA's sub-algorithms are discussed in series in this section. The only part not evaluated here is the ranking algorithm (see section 2.4). Its performance is demonstrated in Cole et al. (2023; in this issue) where radiative transfer models act on the highest ranked assessment domains.

3.1. Reconstruction of passive radiances

Radiance matching is the essence of the SCA, and a sampling of results is provided here. More details are in Barker et al. (2011; 2012; 2014) and Sun et al. (2016). The largest impediment facing this algorithm is when conditions off the ground-track (GT) differ much from the relatively few samples along the GT (Barker et al. 2011). *Figure 6* shows a full-width segment of the *Hawaii* frame that contains both catastrophic failure due to inadequate conditions along the GT and excellent performance for the opposite reason. Approximately 50 - 100 km east of the GT, between 9.5°N and 13°N , radiances, especially channel 1's, that are associated with much cloud are severely short-changed on account of a long stretch of near-cloudless conditions at nadir. To partially remedy this, the algorithm would have to be permitted to search the GT much further than 200 km, as in this example, but in so doing it would run the risk of identifying donor columns associated with increasingly different meteorological conditions. On the other hand, between 5°N and 8°N performance is extremely good across the entire 150 km wide frame.

Figure 7 shows mean bias errors (MBE) and root mean square errors (RMSE) for reconstructed MSI channels 1 and 4 as functions of distance, east and west, of GT for the full lengths of the three test frames (see Qu et al. 2023). By definition, MBE and RMSE along GT are zero. For channel 1's reconstructions, MBEs out to ± 20 km are generally smaller than $0.05 \text{ W m}^{-2} \text{ sr}^{-1}$, with smaller errors for cloudless pixels. The negative biases for *Baja* and *Hawaii* frames



out past ~ 5 km from GT stem from clouds along the GT being slightly darker than those elsewhere over the frames
(see *Figure 6*). Likewise, MBEs for channel 4 are generally smaller than 0.5 K. Over the 5 km wide assessment domains
250 centred on GT, MBEs for both channels are almost negligible relative to the frame-wide average values that are listed
along the base of each plot.

Unlike MBEs, however, RMSE values jump immediately off the GT. In general, they continue to increase with distance
from GT, but it is difficult to say at what distance they become unusable. It is important to note that RMSE values
plotted here get reduced by at least a factor of 10 when for averages over assessment domains.

255 3.2. Definition of assessment domain buffer-zones

The planned initial default values for both d_{\parallel}^{\min} and d_{\perp}^{\min} is 5 km. Thus, for D measuring 5 x 21 km, 3D RT will be
applied to D^+ that measure at least ~15 km across-track by ~31 km along-track. *Figure 8* shows sizes of D^+ along
the *Hawaii* frame. The most notable feature is that along-track lengths vary much more than across-track lengths. This
is driven by the fixed along-track off-nadir views of the BBR; whenever cloud occurs, especially high cloud, values of
260 n_{buffer}^{\searrow} and n_{buffer}^{\swarrow} exceed 0. Lengths of D^+ maximize between about 3° N and 6° N where mean cloudtop altitudes
 h reach ~17 km; this despite cloud fractions for D^+ being substantially less than 1.

While across-track buffer sizes m_{buffer} depend on h , too, they also depend on φ_r and θ_0 . Near latitude 10° N, while
 $\varphi_r \approx 107^\circ$ (Sun is shining in almost perpendicular to GT), $\theta_0 \approx 30^\circ$ and so lengths of cloud shadows cast perpen-
dicular to GT are small. As such, there is little need to expand the domain across-track, and so $m_{buffer} = 0$ and cross-
265 track size of D^+ equal the default 15 km. Near latitude 21° S, however, where mean h are the same as near 10° N,
clouds are more overcast, but equally important, $\varphi_r \approx 130^\circ$, which is still not far off shining in perpendicular to GT,
and $\theta_0 \approx 50^\circ$. Together these conspire to cast cloud shadows well beyond D resulting in D^+ that are slightly larger
than the default.



3.3. Estimation of SCA-related bias errors for TOA broadband fluxes

270 In a manner similar to cloud radiative effects, estimation of errors for TOA broadband radiative fluxes that arise from
the SCA process provide a simple, integrated indication of SCA performance. *Figure 9* shows cumulative frequency
distributions of $\Delta\langle\hat{F}_{\text{SW}}\rangle$ and $\Delta\langle\hat{F}_{\text{LW}}\rangle$ (see (7)), for the *Hawaii* frame. Errors for this frame are the largest of the
three. As is often the case, errors tend to be largest for SW fluxes, and increase slightly as assessment domain A_c
increases. The latter point basically indicates that the SCA does extremely well in clear-sky conditions; even for the
275 *Baja* frame that was mostly over variable land.

It is encouraging to see that median errors for both bands are negligible for all conditions. Moreover, as *Figure 9* shows,
with ~90% of errors being within $\pm 3 \text{ W m}^{-2}$, and slightly better for the other frames, errors imparted on TOA flux
estimates by the SCA will not hinder assessment of EarthCARE's objective of retrieving cloud-aerosol properties well
enough as to be able to model, on average, TOA fluxes to within $\pm 10 \text{ W m}^{-2}$.

280 4. Summary and discussion

The EarthCARE satellite mission has set itself a very high bar with its plan to infer cloud and aerosol properties, from
its observations, well enough that when used to initialize radiative transfer (RT) models, their estimates of TOA fluxes
will differ from observed values by, typically, less than $\pm 10 \text{ W m}^{-2}$. To realize, and gauge the success of, this *radiative
closure assessment* it will be necessary to employ, operationally, 3D atmospheric RT models. This by itself will set
285 EarthCARE apart from its predecessors, which have relied entirely on 1D RT models. The immediate issue facing this
plan is that L2-retrievals at nadir are just ~1 km wide, and at this scale net fluxes of lateral flowing radiation, not
accounted for by 1D RT models, can be substantial (e.g., Marshak et al. 1998). To justifiably use 3D RT models,
however, the atmosphere-surface system has to be defined on both sides of the narrow L2-plane. The point of this
paper was to demonstrate EarthCARE's method of expanding its L2-retrievals perpendicular to the L2-plane. At the
290 core of this *3D scene construction algorithm* (SCA) is a radiance-matching (RM) scheme that uses EarthCARE's MSI
passive imagery (cf. Barker et al. 2011; 2012; 2014). There are, however, other aspects of this process that have been
documented here for the first time.



Synthetic radiances measured virtually by EarthCARE's MSI for three test frames, which were produced for *end-to-end simulation* of EarthCARE's measurement-processing chain (see Qu et al. 2023), were used here to demonstrate the performance of the SCA. "Reconstruction" of measured MSI radiances forms the foundation of the SCA. Basically, off-nadir pixels are paired with a nadir pixel whose spectral radiances best match theirs. The 3D domains to be used by the 3D RT models are "constructed" by taking columns of geophysical information associated with matching nadir pixels and inserting them at the off-nadir pixels.

Comparing reconstructed radiances to their observed counterparts provides a straightforward indication of the success of the SCA. If observed radiances are reconstructed poorly, one has to also assume that correspondingly constructed 3D surface-atmosphere domains are unfit for both 3D RT models and radiative closure assessment. SCA errors flare-up when conditions needed at off-nadir locations are lacking from the nearby the L2-plane. Typical performances of the SCA were shown in Section 3.1, and as expected, generally erode the further recipient pixels are from their donors. This is not much of an issue for radiative assessment domains themselves, for they extend just 2 km from the L2-plane. Their buffer-zones, however, which were described in section 2.2, can be as much as 10 km from the L2-plane (see *Figure 3*). The reason why assessment domains are so small is because EarthCARE's radiative closure assessment seeks to verify the narrow L2 retrievals, not the SCA; the SCA should help achieve this as invisibly as possible.

Once defined, assessment domains and their buffer-zones get screened (see section 2.3) in an attempt to identify those most likely to realize useful closure assessments. Furthermore, the intersection of EarthCARE's data processing limitations with the computational needs of the 3D solar RT model (Cole et al. 2023), assessment domains must be ranked to ensure that the few that can be assessed per frame amount to a good sampling, over the mission's life, of conditions as they occur over the globe and the year. This process was described in section 2.4.

The simple method of estimating TOA flux bias errors that are likely to arise from the SCA (Barker et al. 2014) was assessed using test frame synthetic observations. Reassuringly, it was shown in Section 3.3 that most TOA flux errors due to the SCA's imperfect atmospheres, for assessment domains measuring 5 x 21 km, can be expected to be much smaller, and rarely larger, than EarthCARE's stated goal of $\pm 10 \text{ W m}^{-2}$.

To conclude, it is tempting to view the SCA as a very cost-effect (i.e., almost free) *scanning active sensor system* (cf. Illingworth et al. 2018). But one almost always gets what one pays for, and the SCA is, when pushed, no exception. Its performance, especially well-removed from the L2-plane, cannot be expected to rival that of an authentic scanning



320 active sensor system (Barker et al. 2021); to use it as a full-up replacement would be cavalier. In its current role,
however, as purveyor of approximate, ancillary information that both facilitates use of 3D RT models and strengthens
verification of L2 retrievals, it appears as though its shortcomings will be tolerable and outweighed by its benefits.

Acknowledgements

In the short-term, data used for this study can be obtained from the corresponding author. By the time of publication,
325 ECCC will have an official data repository from which data used here will be downloadable.

Data availability

The EarthCARE Level-2 demonstration products the ACM-3D products discussed in this paper are available from
<https://doi.org/10.5281/zenodo.7117115> (van Zadelhoff et al., 2022).

330

Financial support

This study is supported by Clouds, Aerosol, Radiation - Development of INtegrated ALgorithms (CARDINAL) for
the EarthCARE Mission.

335



APPENDIX A

Radiance-matching algorithm

Let $r_k(i, j)$ be MSI radiance, for the k^{th} MSI channel, at (i, j) on the joint standard grid (JSG) in which $j = 0$ is along the L2-plane. Following Barker et al. (2011), when seeking to populate a column at $(i, j \neq 0)$ with a suitable proxy
 340 from $(i, j = 0)$, begin by computing, for K_s channels,

$$F(i, j; m) = \sum_{k=1}^{K_s} a_k \Lambda(i, j; m) \left[\frac{r_k(i, j) - r_k(m, 0)}{\max[r_k(i, j), r_k(m, 0)]} \right]^2 ; \quad m \in [i - M, i + M]; j \neq 0, \quad (11)$$

where $(m, 0)$ holds potential *donor* profiles for the *recipient* at $(i, j \neq 0)$, a_k are weights that could depend on channel but were assumed to equal 1, and M is number of pixels, forward and backward, along the L2-plane to be searched for a donor. The function $\Lambda(i, j; m)$ is defined as

$$345 \quad \Lambda(i, j; m) = \begin{cases} 0 & ; \chi = .false. \\ 1 & ; \chi = .true. \end{cases} \quad (12)$$

By requiring

$$\chi = \left\{ \begin{array}{l} \text{surface at } (i, j) = \text{surface at } (m, 0) \\ \quad .\text{and.} \\ |\mu_0(i, j) - \mu_0(m, 0)| < \Delta\mu_0 \\ \quad .\text{and.} \\ \mu_0(i, j) \cdot \mu_0(m, 0) > 0 \\ \quad .\text{and.} \\ |\varphi_r(i, j) - \varphi_r(m, 0)| < \Delta\varphi_r \\ \quad .\text{and.} \\ m \in [1, N_{JSG}], \end{array} \right. \quad (13)$$



it controls whether or not a pixel at $(m, 0)$ is to be considered as a potential donor (see section 2.3). The upper condition means that surface types (land, sea, and snow/ice) must be the same at (i, j) and $(m, 0)$. The next two conditions mean that at (i, j) and $(m, 0)$ cosine of solar zenith angles μ_0 must differ by less than $\Delta\mu_0 = 0.005$, and the Sun must be up or down at both locations. Next, the difference between solar azimuth angles relative to the satellite's tracking direction φ_r must be less than $\Delta\varphi_r = 5^\circ$. The final condition simply means that the search cannot go past the ends of a frame.

For the $1 \leq M' \leq 2M + 1$ values of $F(i, j; m)$ that get computed, define Euclidean distances between the centres of (i, j) and $(m, 0)$ as

$$L(i, j; m) = \Delta L \left[(i - m)^2 + j^2 \right]^{1/2}, \quad (14)$$

where ΔL is horizontal resolution, which for EarthCARE is ~ 1 km, and sort $F(i, j; m)$ from smallest to largest (i.e., best to worst radiance match), with $L(i, j; m)$ going along passively. Denote the reordered sequences as $\{\hat{F}(i, j; m)\}_{m=1}^{M'}$ and $\{\hat{L}(i, j; m)\}_{m=1}^{M'}$. Finally, the donor for location $(i, j \neq 0)$ is deemed to reside at

$$m^*(i, j) = \arg \min_{m \in [1, M'; f]} \{\hat{L}(i, j; m)\} \quad (15)$$

which reads: find m that corresponds to the smallest distance between the recipient at (i, j) and those pixels that constitute the smallest 100 f % of $\hat{F}(i, j; m)$. The tuneable parameter f will be set initially to 0.05, but this could change (see Barker et al 2011). The procedure outlined here is performed for all $(i, j \neq 0)$ across the MSI's swath, with pixels at $(i, 0)$ donating to themselves.

365



APPENDIX B

Calculation of buffer-zone sizes

a. Along-track length

Let $h(i^*(i, j), 0)$ be cloudtop altitude at JSG cell (i, j) using the SCA's field. Using these values, define for each
 370 i in a frame the highest cloudtop in across-track swaths of JSG pixels spanning the assessment domains as

$$h_{\perp}^{\max}(i) = \max\{h(i^*(i, j), 0)\}: j \in [-m_{\text{assess}}, m_{\text{assess}}]. \quad (16)$$

The symbols \perp and \parallel indicate across- and along-tracks, respectively. Thus, maximum cloudtop altitude in an assess-
 ment domain $D(n)$ is

$$h_D^{\max}(n) = \max\{h_{\perp}^{\max}(i)\}: i \in [n, n + n_{\text{assess}} - 1]. \quad (17)$$

375 Consider first the buffer-zone out in front of $D(n)$; applicable most to the BBR's backward view. The minimum
 number of JSG pixels that one need be concerned about searching to see if clouds outside of $D(n)$ obscure part of
 $D(n)$ is

$$n_{\text{buffer}} = \text{rint} \left(\frac{\max\{d_{\parallel}^{\min}, h_D^{\max}(n) \tan \theta_v\}}{\langle \Delta x \rangle} \right), \quad (18)$$

where d_{\parallel}^{\min} is the absolute minimum along-track buffer length, assumed for EarthCARE to be ~ 5 km, θ_v is BBR
 380 viewing zenith angle, and $\langle \Delta x \rangle$ is mean length of JSG pixels in the along-track direction. For EarthCARE, $\langle \Delta x \rangle \approx 1$
 km. If maximum cloudtop altitude across the entire useable part of the 6,000 km frame is

$$h_F^{\max} = \max\{h(i, j)\}: i \in [m_1 + 1, N_{\text{JSG}} - m_2 + 1], j \in [-m_{\text{assess}}, m_{\text{assess}}], \quad (19)$$



then the absolute maximum number of JSG pixels one need search for outside of $D(n)$ that might obscure part of $D(n)$ is

$$385 \quad n_{buffer}^{max} \approx n \text{int} \left(\frac{h_F^{max} \tan \theta_v}{\langle \Delta x \rangle} \right). \quad (20)$$

This can be reduced by knowing the location of the along-track JSG pixel that houses the highest cloud between the last pixel of $D(n)$ and n_{buffer}^{max} pixels out in front of it. This is expressed as

$$n_{buffer}^{max}(n) = \underset{i \in [n+n_{assess}+n_{buffer}(n), n+n_{assess}+n_{buffer}(n)+n_{buffer}^{max}]}{\text{arg max}} h_{\perp}^{max}(i). \quad (21)$$

Proceed then to search

$$390 \quad h_{\perp}^{max}(i) \geq \frac{[i - (n + n_{assess})] \langle \Delta x \rangle}{\tan \theta_v} : i = n + n_{assess} + n_{buffer}, \dots, n + n_{assess} + n_{buffer}^{max}(n), \quad (22)$$

where n_{buffer} comes from (18). Let values of i for which the condition in (22) is met form the set $\{i'\}$. Therefore, the size of the buffer-zone for the back-looking view associated with $D(n)$ is

$$n_{buffer}^{\swarrow}(n) = \begin{cases} n_{buffer} & ; \text{ if (22) is never met} \\ \max\{i'\} & ; \text{ if (22) is met.} \end{cases} \quad (23)$$

To set the size of the buffer-zone for the fore-looking view $n_{buffer}^{\searrow}(n)$, (21) through (23) are reapplied reversing indices. *Figure 4* is a schematic of this process.

Note that determination of $n_{buffer}^{\swarrow}(n)$ and $n_{buffer}^{\searrow}(n)$ are independent of θ_0 . This is because for EarthCARE's orbit over 80% of observations with $\theta_0 < 90^\circ$ have $30^\circ < \varphi_r < 150^\circ$ implying that, for most cases, projection of direct-



beam (and hence cloud shadows) into the along-track ends of $D(n)$ will be small. The exceptions are for very large θ_0 with $150^\circ < \varphi_r < 30^\circ$; but most of these cases will be avoided via the screening process as discussed in section 2.3.2.

b. Across-track length

Next, determine the size of across-track buffer-zones m_{buffer} . They are set using cloud information on the sunlit side of $D(n)$. Here the idea is that if a cloud anywhere to the side of D casts a shadow that falls onto the region formed by D and its along-track buffer-zones, then the across-track buffer-zone extends to include the cloud doing the shadowing. Once m_{buffer} is established, it is applied to the opposing side of $D(n)$, too.

Begin by setting a minimum size for the buffer-zone of d_{\perp}^{\min} , so that searching starts at cross-track JSG pixel $\pm m_{assess} \pm m_{buffer}$, where $m_{buffer} = nint(d_{\perp}^{\min} / \langle \Delta y \rangle)$ is the minimum buffer size in JSG pixels; choice of using + or - depends on which side of D the Sun is on. For EarthCARE, $d_{\perp}^{\min} = 5$ km. One then determines the highest cloud in the row of JSG pixels at distance j pixels from L2-plane as

$$h_{\parallel}(n, j) = \max \{h(i, j) : i \in [n - n_{buffer}^{\leftarrow}(n), n + n_{assess} + n_{buffer}^{\rightarrow}(n)]\}. \quad (24)$$

If it happens that

$$h_{\parallel}(n, j) \geq \frac{abs(j - m_{assess}) \langle \Delta y \rangle}{\tan \theta_0 \sin \varphi_r}, \quad (25)$$

is satisfied at j , the across-track buffer gets reset to $m_{buffer} \leftarrow abs(j - m_{assess})$. This process is continued out to the edge of the MSI's swath. Figure 5 is a schematic of this procedure. The aggregation of an assessment domain D and its buffer-zones is denoted as D^+ .




References

- Barker, H. W. and Z. Li, 1997: Interpreting shortwave albedo-transmittance plots: True or apparent anomalous absorption? *Geophys. Res. Lett.*, **24**, 2023-2026.
- 420 —, M. P. Jerg, T. Wehr, S. Kato, D. Donovan, and R. Hogan, 2011: A 3D Cloud Construction Algorithm for the EarthCARE satellite mission. *Q. J. R. Meteorol. Soc.*, **137**, 1042–1058 DOI:10.1002/qj.824
- , S. Kato, and T. Wehr, 2012: Computation of Solar Radiative Fluxes by 1D and 3D Methods using Cloudy Atmospheres Inferred from A-train Satellite Data. *Surveys in Geophys.* **33**, 657-676.
- , J. N. S. Cole, and M. Shephard, 2014: Estimation of Errors associated with the EarthCARE 3D Scene Construction Algorithm. *Q. J. R. Meteorol. Soc.*, **140**, 2260–2271, DOI:10.1002/qj.2294.
- , C. Domenech, M. Shephard, C. Sioris, F. Tornow, and T. Wehr, 2015: Assessing the Quality of Active-Passive Satellite Retrievals using Broadband Radiances. *Q. J. R. Meteorol. Soc.*, **141**, 1294–1305, DOI:10.1002/qj.2438.
- , P. M. Gabriel, Z. Qu, and S. Kato, 2021: Representativity of Cloud-Profiling Radar Observations for Data Assimilation in Numerical Weather Prediction. *Q. J. R. Meteorol. Soc.*, **147**, 1801–1822. <https://doi.org/10.1002/qj.3996>.
- 430 —, J. N. S. Cole, Z. Qu, N. Villefranque, and M. W. Shephard, 2023: Radiative Closure Assessment of Retrieved Cloud and Aerosol Properties for the EarthCARE Mission: The ACMB-DF Product. *Atmos. Meas. Tech.*, to be submitted.
- Cole, J. N. S., H. W. Barker, Z. Qu, N. Villefranque, and M. W. Shephard, 2023: Broadband Radiative Quantities for the EarthCARE Mission: The ACM-COM and ACM-RT Products. *Atmos. Meas. Tech.*, to be submitted.
- 435 Donovan, D. P., P. Kollias, and G-J van Zadelhoff, 2023: The Generation of EarthCARE L1 Test Data sets Using Atmospheric Model Data Sets. *Atmos. Meas. Tech.*, to be submitted
- Eisinger, M., T. Wehr, T., Kubota, D., Bernaerts, and K. Wallace, 2023: The EarthCARE production model and auxiliary products. *Atmospheric Measurement Techniques*, to be submitted.
- 440 ESA., 2001: *The Five Candidate Earth Explorer Missions: EarthCARE –Earth Clouds, Aerosols and Radiation Explorer*, ESA SP-1257(1), September 2001. ESA Publications Division: Noordwijk, The Netherlands.
- Illingworth, A. + others, 2015: THE EARTHCARE SATELLITE: The next step forward in global measurements of clouds, aerosols, precipitation and radiation. *Bull. Am. Met. Soc.*, **96**, 1311-1332. DOI:10.1175/BAMS-D-12-00227.1.
- + others, 2018: WIVERN: A New Satellite Concept to Provide Global In-Cloud Winds, Precipitation, and Cloud Properties. *Bull. Am. Met. Soc.*, **99**, 1669–1687. <https://doi.org/10.1175/BAMS-D-16-0047.1>
- 445 Marshak, A., A. Davis, W. Wiscombe, W. Ridgeway, R. Cahalan, 1998: Biases in Shortwave Column Absorption in the Presence of Fractal Clouds. *J. Climate*, **11**, 431-446.
- Platnick, S., Ackerman, S., King, M., et al., 2015: MODIS Atmosphere L2 Cloud Product (06_L2). NASA MODIS Adaptive Processing System, Goddard Space Flight Center, USA: http://dx.doi.org/10.5067/MODIS/MOD06_L2.006.
- 450 Qu, Z., D. P. Donovan, H. W. Barker, Cole, J. N. S., M. W. Shephard, and V. Huijnen, 2023: Numerical Model Generation of Test Frames for Pre-launch Studies of EarthCARE’s Retrieval Algorithms and Data Management System. *Atmos. Meas. Tech.*, to be submitted



- Sun, X. J., H. R. Lia, H. W. Barker, R. W. Zhang, Y. B. Zhou and L. Liu, 2016: Estimation of cloud base heights based on the matching of multiple cloud characteristics. *Q. J. R. Meteorol. Soc.*, **142**, 224-232, DOI:10.1002/qj.2647.
- 455 Tornow, F., H. W. Barker, and C. Domenech, 2015: On the use of Simulated Photon Paths to Co-register TOA radiances in EarthCARE Radiative Closure Experiments. *Q. J. R. Meteorol. Soc.*, **141**, 3239-3251. DOI:10.1002/qj.2606.
- USGS Earth Resources Observation and Science (EROS) Center, 2018: USGS EROS Archive - Land Cover Products - Global Land Cover Characterization (GLCC) Background, <https://www.usgs.gov/centers/eros/science/usgs-eros-archive-land-cover-products-global-land-cover-characterization-0#overview> (last access: April 5, 2022).
- 460 van Zadelhoff, G.-J., H. W., Barker, E., Baudrez, S., Bley, N., Clerbaux, J. N. S., Cole, J., de Kloe, N., Docter, C., Domenech, D. P., Donovan, J.-L. Dufresne, M., Eisinger, J., Fischer, R., García-Marañón, M., Haerig, R. J., Hogan, A., Hünerbein, P., Kollias, R., Koopman, T., Wehr, 2022: EarthCARE level-2 demonstration products from simulated scenes (09.01) [Data set]. Zenodo. <https://doi.org/10.5281/zenodo.7117116>
- 465 Velázquez-Blázquez, A., E. Baudrez, N., Clerbaux, C., Domenech, R. G., Marañón, and N. Madenach, 2023: Towards instantaneous top-of-atmosphere fluxes from EarthCARE: The BMA-FLX product. *Atmospheric Measurement Techniques*, to be submitted.

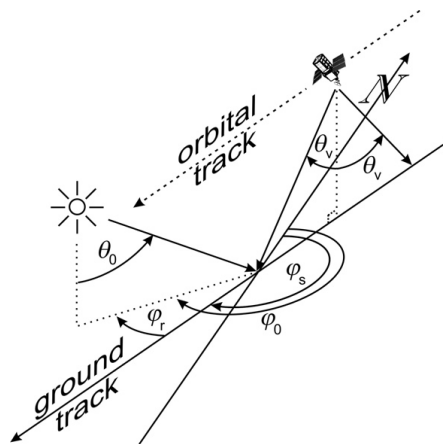

470 **Figure 1:** Schematic showing solar zenith angle θ_0 , solar azimuth angle relative to north φ_0 , satellite-tracking vectors relative to north φ_s , solar azimuth angle relative to satellite-tracking direction φ_r , and the BBR's two off-nadir zenith angles θ_v .

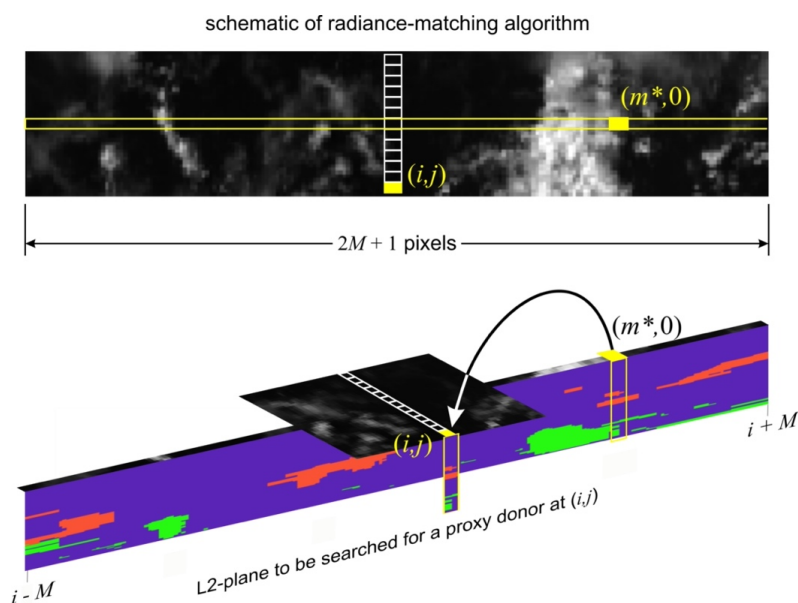


Figure 2: Top panel shows a swath of passive imagery and the location of an off-nadir pixel at (i, j) whose radiances match best with those along nadir at $(m^*, 0)$. Lower panel is a schematic illustrating attribution of the (recipient) column associated with the pixel at (i, j) to the (donor) column of information inferred from EarthCARE's active-passive measurements at $(m^*, 0)$.

475

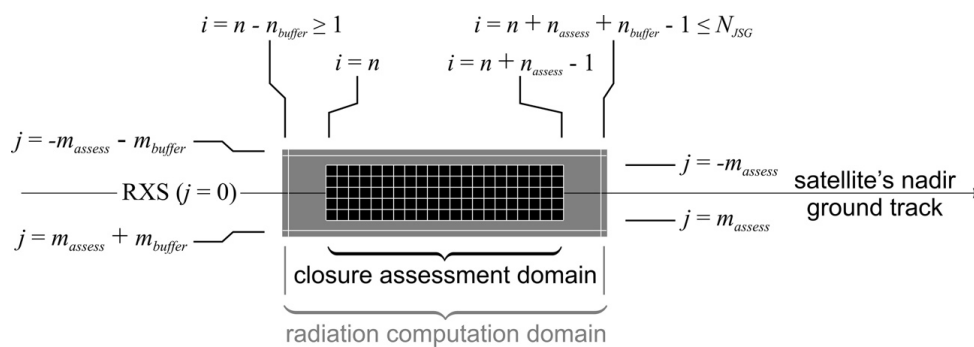


Figure 3: Schematic showing the radiative closure assessment domain $D(i)$ (black) and the radiation computation domain $D^+(i)$; the union of $D(i)$ and the buffer-zone (shaded). See the text for definitions of indices.

480

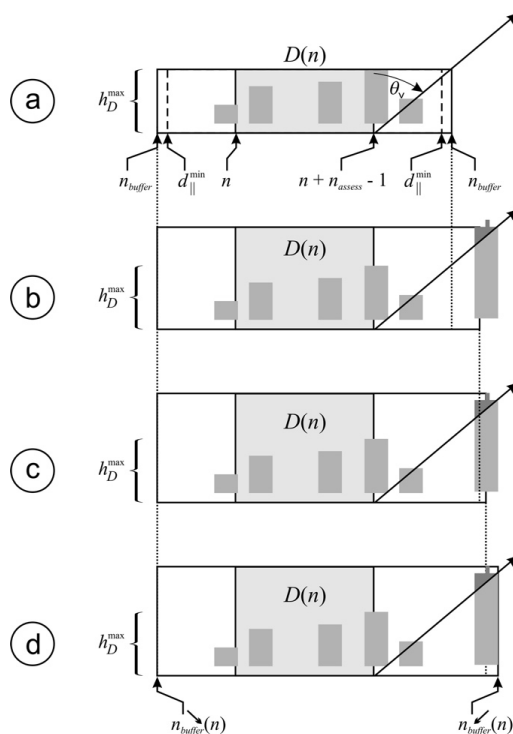


Figure 4: Schematic showing the procedure for finding along-track buffer-zone size; in this case n_{buffer}^{\min} . (a) h_D^{\max} is maximum cloudtop altitude in assessment domain D , and d_{\parallel}^{\min} is the smallest size buffer-zone allowed. (b) As the algorithm searches out in front of D , a cloud is encountered; part of which lies between D and the satellite, and so the buffer-zone increases. (c) Continuing the search, still a higher cloud is encountered between D and the satellite, thus increasing the buffer-zone further. (d) There is still more cloud between D and the satellite so the buffer-zone increases again, this time to its final value of n_{buffer}^{\min} , despite the possibility of cloudtops further out being higher yet still. See text and Appendix B for details.

490



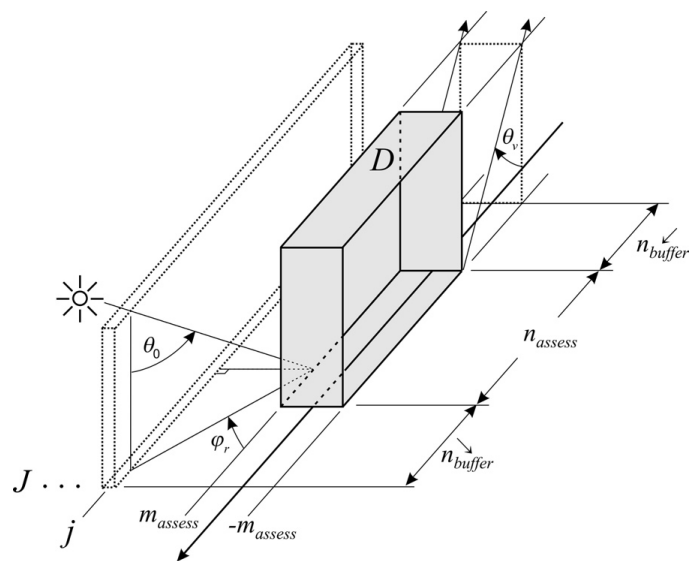


Figure 5: Schematic showing the procedure for finding the size of the cross-track buffer-zone. See text and Appendix B for details.

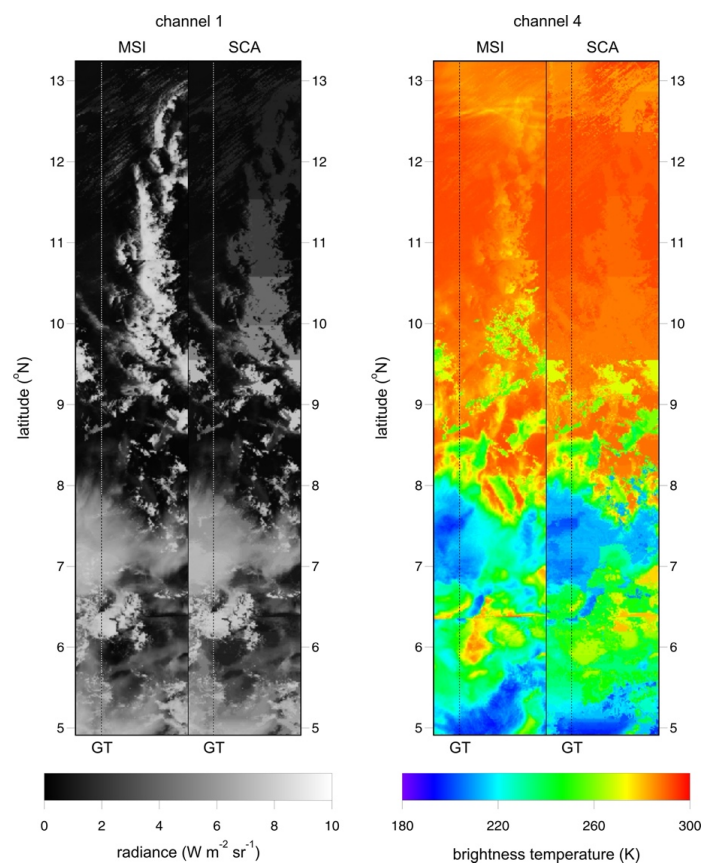

495

Figure 6: Left panel shows MSI and corresponding SCA channel 1 radiances for a segment of the *Hawaii* frame measuring 150 km wide and 900 km long. Right panel is corresponding brightness temperatures from channel 4 radiances. Dashed lines marked GT indicate the ground-track, which coincides with the L2-plane.

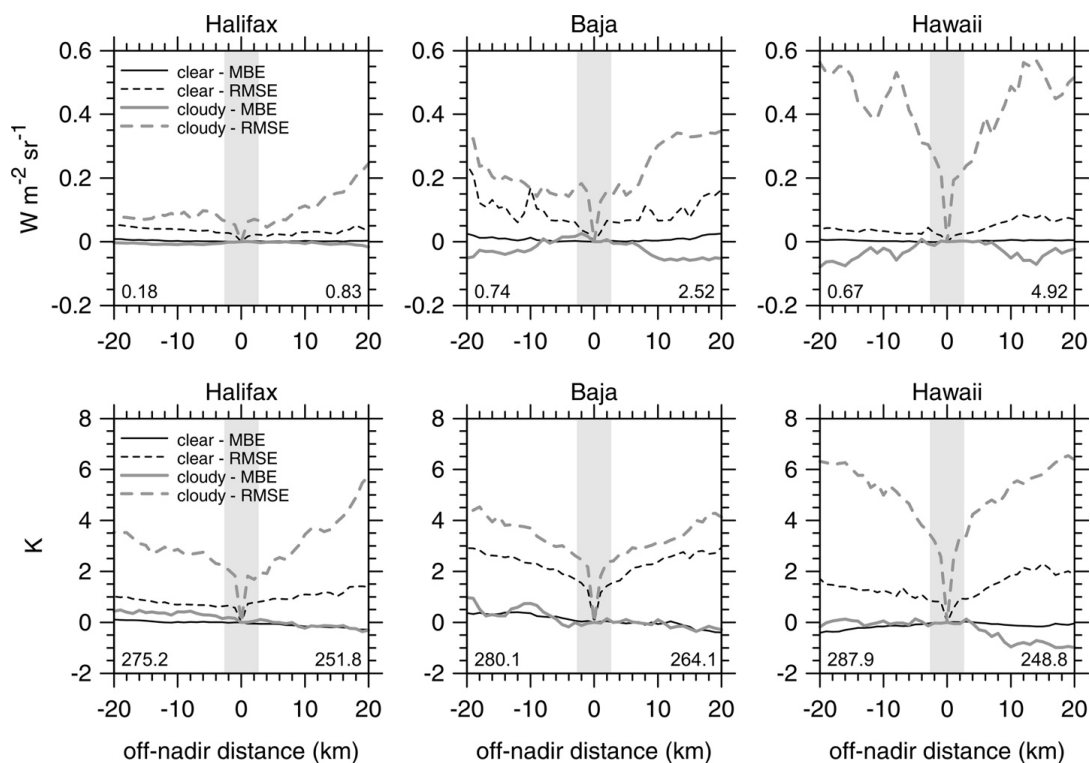

500

Figure 7: Full-frame mean bias errors (MBE) and root mean square errors (RMSE) for SCA reconstructed radiances as functions of distance (-ve values are W) from the ground-track (GT in *Figure 6*). Upper and lower rows are for MSI channel 1 radiances and 4 brightness temperatures. Full-frame mean values are listed on the base of each plot: clear-sky on the left, cloudy-sky on the right. Grey bands indicate EarthCARE's default assessment domains.

505

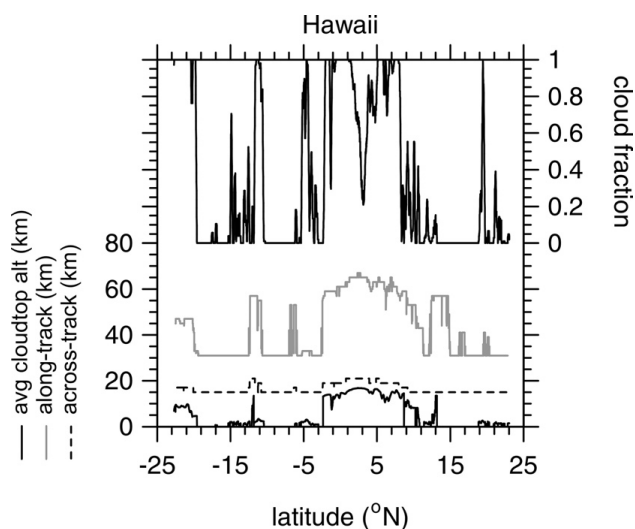


Figure 8: Along-track and across-track length of assessment domain plus buffer-zones as functions of latitude for the *Hawaii* frame. All assessment domains are 5 km across-track by 21 km along-track. Minimum size for all buffer-zones is 5 km. Also shown are corresponding values of mean cloudtop altitude and cloud fraction for 5 x 21 km assessment domains.

510

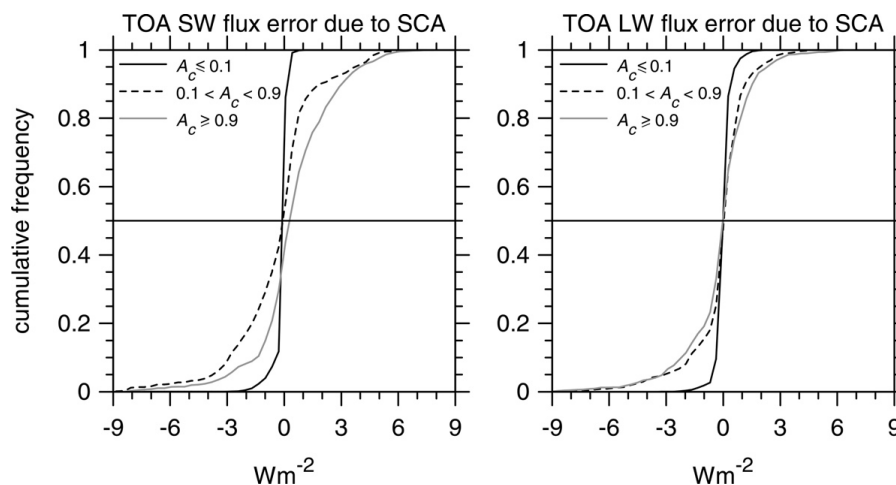


Figure 9: Cumulative frequency distributions of estimated errors in broadband TOA upwelling SW and LW fluxes stemming from the SCA for all 5 x 21 km assessment domains in the *Hawaii* frame. Distributions are partitioned for three ranges of assessment domain total cloud fraction A_c .

515