

# Sensitivity analysis of attenuation in convective rainfall at X-Band frequency using the Mountain Reference Technique

Guy Delrieu, Anil Kumar Khanal, Frédéric Cazenave, and Brice Boudevillain

5

HMCIS Team, Institute for Geosciences and Environmental research (IGE),

UMR 5001 (Université Grenoble Alpes, CNRS, IRD, Grenoble-INP), Grenoble, France

**Abstract.** The RadAlp experiment aims at improving quantitative precipitation estimation (QPE) in the Alps thanks to X-band polarimetric radars and in-situ measurements deployed in the region of Grenoble, France. In this article, we revisit the physics of propagation and attenuation of microwaves in rain. We first derive four attenuation – reflectivity ( $AZ$ ) algorithms constrained or not by path-integrated attenuations (PIA) estimated from the decrease in return of selected mountain targets when it rains compared to their dry-weather levels (the so-called Mountain Reference Technique - MRT). We also consider one simple polarimetric algorithm based on the profile of the total differential phase shift between the radar and the mountain targets. The central idea of the work is to implement these five algorithms all together in the framework of a generalized sensitivity analysis in order to establish useful parameterizations for attenuation correction. The parameter structure and the inherent mathematical ambiguity of the system of equations make it necessary to organize the optimization procedure in a nested way. The core of the procedure consists in (i) exploring with classical sampling techniques the space of the parameters allowed to be variable from one target to the other and from one time-step to the next, (ii) computing a cost function (CF) quantifying the proximity of the simulated profiles and (iii) selecting parameters sets for which a given CF threshold is exceeded. This core is activated for a series of values of parameters supposed to be fixed, e.g. the radar calibration error for a given event. The sensitivity analysis is performed for a set of three convective events using the  $0^\circ$ -elevation PPI measurements of the Météo-France weather radar located on top of the Moucherotte Mount (altitude of 1901 m asl). It allows the estimation of critical parameters for radar QPE using radar data alone. In addition to the radar calibration error, this includes time series of radome attenuation and estimations of the coefficients of the power-law models relating the specific attenuation and the reflectivity ( $A-Z$  relationship) on the one hand and the specific attenuation and the specific differential phase shift ( $A-K_{dp}$  relationship) on the other hand. It is noteworthy that the  $A-Z$  and  $A-K_{dp}$  relationships obtained are consistent with those derived from concomitant drop size distribution measurements at ground level, in particular with a slightly non-linear  $A-K_{dp}$  relationship ( $A = 0.28 K_{dp}^{1.1}$ ). X-Band radome attenuations as high as 15 dB were estimated, leading to the recommendation of avoiding the use of radomes for remote sensing of precipitation at such frequency.

Correspondence to: [guy.delrieu@univ-grenoble-alpes.fr](mailto:guy.delrieu@univ-grenoble-alpes.fr)

## 1. Introduction

Estimation of atmospheric precipitation is important in a high mountain region such as the Alps for the assessment and management of water and snow resources (drinking water, hydro-power production, agriculture and tourism) as well as for prediction of natural hazards associated with intense precipitation and snowpack melting. In complement with in-situ raingauge networks and snowpack monitoring systems, remote sensing using ground-based weather radar systems has a high potential that needs to be exploited but also several limitations that need to be surpassed. A first dilemma is related to the choice of the altitude of the radar setup with a compromise to be found between maximizing the visibility of the radar system(s) at the regional scale and increasing the representativeness of the measurements made in altitude compared to precipitation reaching the ground, especially during cold periods. A second dilemma is the well-known detection / resolution versus attenuation compromise, which is acute for weather radar frequencies. S-Band and C-Band frequencies (around 3 and 5 GHz, respectively) are traditionally preferred in continental-wide weather radar networks (Serafin and Wilson, 2000; Saxion et al. 2011, Saltikoff et al. 2019) for their appropriate precipitation detection capability and their moderate sensitivity to attenuation. In Europe, MeteoSwiss has the longest-standing experience in operating such a C-Band weather radar network in high-mountain regions (Joss and Lee, 1995; Germann et al. 2006; Sideris et al. 2014; Foresti et al. 2018). Implementation of radars operating at the X-Band frequency (~9-10 GHz) has also been proposed in the last decades for research and operational applications at local scales, e.g., for precipitation monitoring in urban areas and/or in mountainous regions (Delrieu et al. 1997; McLaughlin et al. 2009; Scipion et al. 2013; Lengfeld et al. 2014, to name just a few). The renewed interest in the X-Band frequency, known for long to be prone to attenuation (e.g., Hitschfeld and Bordan 1954), is based on the promises of polarimetric techniques (e.g. Bringi and Chandrasekar 2001; Ryzhkov et al. 2005) for attenuation correction (Testud et al. 2000; Matrosov and Clark, 2002; Matrosov et al. 2005; Matrosov et al. 2009; Koffi et al. 2014, Ryzhkov et al. 2014). Météo-France has chosen to complement the coverage of its operational radar network ARAMIS (for Application Radar à la Météorologie Infra-Synoptique) in the Alps by means of X-Band polarimetric radars. A first set of three radars was installed in Southern Alps within the RHyTMME project (Risques Hydrométéorologiques en Territoires de Montagnes et Méditerranéens) in the period 2008-2013 (Westrelin et al. 2012; Yu et al. 2018). An additional radar (MOUC radar, hereinafter) was installed in 2014 on top of the Mount Moucherotte (1901 m) that oversees the valley of Grenoble. The RadAlp experiment (Khanal et al. 2019; Delrieu et al. 2020) is a contribution to research aimed at improving quantitative precipitation estimation (QPE) based on the Météo France MOUC radar, complemented by a suite of sensors installed on the Grenoble valley floor at the Institute for Geosciences and Environmental research (IGE, 210 m asl). This includes the IGE research X-Band polarimetric radar named XPORT, a K-Band Micro Rain Radar (MRR) and in-situ sensors (disdrometers, raingauges).

The present article aims to show that mountain returns can be useful for the parameterisation of QPE algorithms for weather radar systems operating at attenuating frequencies in mountainous regions. It is part of a series of contributions devoted to the Surface Reference Technique proposed for spaceborne radar configuration (Meneghini et al. 1983; Marzoug and Amayenc, 1994; and more recently Meneghini et al. 2020) and its transposition to ground-based radar configurations with the Mountain

65 Reference Technique (Delrieu et al. 1997, Serrar et al. 2000, Delrieu et al. 2020). Figures 1 and 2 illustrate our point. Figure 1 shows a map of dry-weather mountain returns of the MOUC radar. The configuration of the radars operated in the RadAlp experiment is recalled in the insert; note that only the MOUC radar data is used in the current study. The measurements are taken at an elevation angle of  $0^\circ$  which corresponds to the lowest PPI of the volume-scanning strategy of the MOUC radar. The reflectivity data are averaged over a four-hour period; one PPI is performed at the  $0^\circ$ -elevation angle every five minutes.

70 We have selected 22 mountain targets corresponding to compact groups of gates in successive radials (3-6 typically; the radial spacing is  $0.5^\circ$ ) and ranges (5-10 gates; the gate extent is 240 m) presenting a majority of dry-weather reflectivity values greater than 45 dBZ. The paths between the radar and the targets are free of beam blockages and present as few noisy gates (due to side lobes) as possible. In addition to the reflectivity map, the top graphs of Fig. 2 display the co-polar correlation ( $\rho_{hv}$ ) and the total differential phase shift ( $\Psi_{dp}$ ) maps at 15:00 UTC on 21 July 2017 before the convective event that occurred that

75 day between 15:30 and 18:00 UTC. The  $\Psi_{dp}$  map is essentially noisy at that time and the red colour in the  $\rho_{hv}$  map, corresponding to values close to 1, highlights some small rain cells, in particular one in the south of the radar domain close to Target 22 (Grand Veymont Mount). The middle row maps correspond to the occurrence of intense precipitation over the city of Grenoble at 16:05 UTC. A peak of  $40 \text{ mm h}^{-1}$  in ten minutes was recorded at that time by the raingauge located on top of the IGE building. The  $\Psi_{dp}$  map displays marked increasing radial profiles in the North-East (NE) direction. The  $\rho_{hv}$  map

80 allows a good delimitation of the whole rain pattern and clearly shows the dominance of the mountain returns over the rain returns for most of the Belledonne and Taillefer targets. The most striking observation on the reflectivity map is the dramatic decrease of the mountain returns of Targets 1-10 in the NE sector which results with no doubt from the rain cell falling over the city of Grenoble at that time. This is a clear example of what will be termed as “along-path attenuation” hereinafter. On the bottom row of Fig. 2, which corresponds to the measurements made at 17:00 UTC, one can observe a similar strong along-

85 path attenuation in the NE direction in the  $\Psi_{dp}$  map, associated with a second  $40 \text{ mm h}^{-1}$  rainrate peak at the IGE site (see eventually the hyetograph in Delrieu et al. (2020), their Fig. 2). But more impressive is the general decrease of returns from all the mountain targets, associated with a rain cell occurring at the radar site. This is an example of so-called “on-site attenuation”, related to the formation of a water film on the radome, combined with along-path attenuation in the immediate vicinity of the radar site.

90

The article is organised as follows. In the theoretical part (section 2), we find it useful to revisit in some detail the physics of propagation and attenuation of microwaves in rain. We derive (section 2.2) four attenuation – reflectivity (AZ) algorithms constrained or not by path-integrated attenuations (PIA) estimated from the decrease in return of selected mountain targets when it rains, compared to their dry-weather levels. We also consider a simple polarimetric algorithm based on the profile of

95 the total differential phase shift between the radar and the mountain targets (section 2.3). The structure and interdependencies of the parameters are discussed in section 2.4. This leads to the description of the principles of the generalized sensitivity

analysis proposed for studying the physical model at hand (section 3.1). The results obtained are illustrated and discussed item by item in sub-sections 3.2.1-3.2.5. Concluding remarks and future work are presented in section 4.

## 2. Theory

100

### 2.1 Basic definitions and notations

Let us express the radar returned power profile  $P(r)$  [mW] as:

$$P(r) = (C/r^2) Z(r) AF(r) \quad (2.1)$$

105 where  $Z(r)$  [ $\text{mm}^6 \text{m}^{-3}$ ] is the true reflectivity profile,  $AF(r)$  [-] is the attenuation factor at range  $r$  [km] and  $C$  is the radar constant. We suppose the measured reflectivity profile  $Z_m(r)$  to depend both on the attenuation and on a possible radar calibration error denoted  $dC$ :

$$Z_m(r) = P(r) r^2/C = Z(r) AF(r) dC \quad (2.2)$$

In addition to the running range  $r$ , let us consider the range  $r_0$  corresponding to the blind range of the radar system, eventually extended to the range where the reflectivity measurements start to be free of spurious detections due e.g. to side lobes.

110 The attenuation factor  $AF(r)$  is expressed as the product of two terms:

$$AF(r) = AF(r_0) AF(r_0, r) \quad (2.3)$$

where  $AF(r_0)$  is the on-site attenuation factor which, as discussed in the introduction, may result from two main sources: attenuation due to a water film on the radome and along-path attenuation due to precipitation falling between the radar site and range  $r_0$ .

115 As a classical formulation (e.g. Marzoug and Amayenc, 1994), we express the two-way attenuation factor as a function of the specific attenuation profile  $A(r)$  [ $\text{dB km}^{-1}$ ] through the following equation:

$$AF(r) = AF(r_0) \exp(-0.46 \int_{r_0}^r A(s) ds) \quad (2.4)$$

Furthermore, we have to introduce relationships between the radar measurables (specific attenuation and reflectivity) and the variable of interest for QPE, i.e. the rainrate  $R$  [ $\text{mm h}^{-1}$ ], which are assumed to be of power type with the following notations:

$$120 \quad A = a_{AZ} Z^{b_{AZ}} \quad (2.5)$$

$$R = a_{RA} A^{b_{RA}} \quad (2.6)$$

$$R = a_{RZ} Z^{b_{RZ}} \quad (2.7)$$

The order used for the variables in equations 2.5-2.7 is meaningful since the specific attenuation profile is derived from the measured reflectivity profile, while the rainrate profile can be derived in a second step either from the specific attenuation profile or from the corrected reflectivity profile. Due to the well-known lower variability of the R-A relationship compared to the R-Z relationship, (2.6) is preferred to (2.7) for the estimation of the rainrate profiles (Ryzhkov et al. 2014).

Let us now consider another particular range, denoted  $r_m$ , where estimates of the attenuation factor may be available. We use the following notation:

$$AF_m(r_m) = AF(r_m) dAF_m \quad (2.8)$$

where  $AF(r_m)$  is the true attenuation factor at range  $r_m$  and the term  $dAF_m$  represents a multiplicative error term. As illustrated in the introduction, such direct estimates of the attenuation factor can be obtained in mountainous regions using the MRT.

We frequently use hereinafter the notion of path-integrated attenuation (PIA), in units of dB, defined as:

$$PIA(r) = -10 \log_{10}(AF(r)) \quad (2.9)$$

Note that since  $AF(r)$  is comprised between 1 (no attenuation) and 0 (full attenuation), the PIA subsequently takes values in the range of 0 (no attenuation) up to  $+\infty$  (full attenuation). The PIAs at ranges  $r_0$  and  $r_m$  are denoted  $PIA_0$  and  $PIA_m$ , respectively, in the following.

## 2.2 Formulation of the attenuation-reflectivity algorithms

The following mathematical developments are inspired by the works on rain-profiling algorithms in satellite measurement configuration (e.g., Meneghini et al. 1983; Marzoug, Amayenc 1994). The attenuation-reflectivity algorithms (A-Z algorithms) proposed in this section rely on two basic equations. The first one is the analytical solution of (2.4) when the power-law model (2.5) is supposed to represent perfectly the A-Z relationship. By taking the derivative of  $AF^{b_{AZ}}(r_0, r)$  with respect to range  $r$ , one obtains:

$$d(AF^{b_{AZ}}(r_0, r))/dr = AF^{b_{AZ}}(r_0, r)(-0.46 a_{AZ} b_{AZ} Z(r)^{b_{AZ}}) \quad (2.10)$$

Substitution of the true reflectivity by the measured reflectivity through (2.2) and integration between  $r_0$  and  $r$  yields:

$$155 \quad AF^{b_{AZ}}(r_0, r) = 1 - 0.46 a_{AZ} b_{AZ} SZ(r_0, r) / (AF(r_0) dC)^{b_{AZ}}$$

with:

$$SZ(r_0, r) = \int_{r_0}^r Z_m(s)^{b_{AZ}} ds.$$

(2.11)

160

The second equation is obtained by integrating (2.10) up to range  $r_m$  and by introducing the attenuation factor estimate available at this range, yielding:

$$(AF(r_m) / AF(r_0))^{b_{AZ}} + 0.46 a_{AZ} b_{AZ} SZ(r_0, r_m) / (AF(r_0) dC)^{b_{AZ}} = 1$$

(2.12)

165

We develop in Appendix A four formulations of attenuation corrections for a supposedly homogeneous precipitation type, i.e. we assume the  $a_{AZ}$  and  $b_{AZ}$  coefficients to be constant along the propagation path. Each formulation filters out one of the four parameters  $PIA_m$ ,  $dC$ ,  $a_{AZ}$  and  $PIA_0$ , respectively. Note that due to the mathematical expression of the intervening equations there is no possibility to filter out the  $b_{AZ}$  parameter, which will be assumed to be constant, close to a value of 0.8 at X-Band (Ryzhkov et al. 2014), and to present a low sensitivity in the system of equations. The resulting expressions of the reflectivity and specific attenuation corrected profiles are listed hereafter:

170

**AZhb algorithm (independent of  $PIA_m$ ):**

$$175 \quad Z_{AZhb}(r) = Z_m(r) / [(AF(r_0) dC)^{b_{AZ}} - 0.46 a_{AZ} b_{AZ} SZ(r_0, r)]^{1/b_{AZ}}$$

(2.13)

$$A_{AZhb}(r) = a_{AZ} Z_m^{b_{AZ}}(r) / [(AF(r_0) dC)^{b_{AZ}} - 0.46 a_{AZ} b_{AZ} SZ(r_0, r)]$$

(2.14)

This formulation is equivalent to the solution proposed early by Hitschfeld and Bordan (1954), hence the proposed name AZhb. It can be termed as a “forward algorithm” since only the measured reflectivities between range  $r_0$  and the running range  $r$  are used for the correction at range  $r$ . The minus sign between the two terms of the denominator indicates that the denominator is not prevented to tend towards 0 when the SZ cumulative term increases. This solution is subsequently known to be unstable and highly sensitive to calibration error, inadequate values of the A-Z relationship coefficients and on-site attenuation.

180

185 **AZC algorithm (independent of  $dC$ ):**

$$Z_{AZC}(r) = Z_m(r) [AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}}]^{1/b_{AZ}} / \{0.46 a_{AZ} b_{AZ} [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\}^{1/b_{AZ}} \quad (2.15)$$

190  $A_{AZC}(r) = Z_m(r)^{b_{AZ}} [AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}}] / \{0.46 b_{AZ} [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\} \quad (2.16)$

In addition to its independence with respect to dC, it is interesting to note that the specific attenuation profile provided by the AZC algorithm does not depend on the  $a_{AZ}$  parameter. This parameter is however present in the expression of the reflectivity profile.  
195

**AZ $\alpha$  algorithm (independent of  $a_{AZ}$ ):**

$$Z_{AZ\alpha}(r) = Z_m(r) SZ(r_0, r_m)^{1/b_{AZ}} / \{dC [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\}^{1/b_{AZ}} \quad (2.17)$$

200

$$A_{AZ\alpha}(r) = Z_m(r)^{b_{AZ}} [AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}}] / \{0.46 b_{AZ} [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\} \quad (2.18)$$

We note that the specific attenuation profiles provided by the AZC and AZ $\alpha$  algorithms are identical. Moreover, they do not depend on the  $a_{AZ}$  and dC parameters. This is a priori a very interesting property of these algorithms, exploited in particular by Testud et al. (2000) and Ryzhkov et al. (2014). However, the reflectivity profiles provided by the two algorithms are different and, in particular, the reflectivity profile of the AZ $\alpha$  algorithm depends on dC while the reflectivity profile of the AZC algorithm depends on  $a_{AZ}$ .  
205

**AZ0 algorithm (independent of PIA $_0$ ):**

210

$$Z_{AZ0}(r) = Z_m(r) / \{0.46 a_{AZ} b_{AZ} SZ(r, r_m) + (AF(r_m) dC)^{b_{AZ}}\}^{1/b_{AZ}} \quad (2.19)$$

$$A_{AZ0}(r) = a_{AZ} Z_m(r)^{b_{AZ}} / \{0.46 a_{AZ} b_{AZ} SZ(r, r_m) + (AF(r_m) dC)^{b_{AZ}}\} \quad (2.20)$$

215 The AZ0 algorithm has the simplest mathematical expressions among the three algorithms using the PIA constraint. It looks like a “backward algorithm” since the reflectivity and the specific attenuation profiles estimated at the running range  $r$  depend only on the measured reflectivities between ranges  $r$  and  $r_m$ , while the AZC and AZ $\alpha$  algorithms make use of the entire measured reflectivity profile between  $r_0$  and  $r_m$  for the estimations at range  $r$ .

220 The + signs in the denominators of eqs. 2.15-2.20 are indicators of the inherent stability of the three algorithms using the PIA constraint, unlike the AZhb algorithm.

### 2.3 Formulation of a polarimetric algorithm

225 In addition to the AZ algorithms, we consider a PIA profile, denoted  $PIA_{\Phi_{dp}}(r_0, r)$ , derived from the profile of the total differential phase shift on propagation, denoted  $\Phi_{dp}(r_0, r)$  [°]:

$$\Phi_{dp}(r_0, r) = 2 \int_{r_0}^r K_{dp}(s) ds \quad (2.21)$$

230 where  $K_{dp}$  is the specific differential phase shift on propagation [° km<sup>-1</sup>]. Assuming a power-law relationship between the specific attenuation and the specific differential phase shift on propagation, with:

$$A = a_{AK} K_{dp}^{b_{AK}} \quad (2.22)$$

235 We obtain:

$$PIA_{\Phi_{dp}}(r_0, r) = 2 a_{AK} \int_{r_0}^r K_{dp}^{b_{AK}}(s) ds \quad (2.23)$$

240 This polarimetry-derived PIA profile can be compared to the PIA profiles obtained by integrating the AZ specific attenuation profiles given by Eqs 2.14, 2.16, (2.18, identical to 2.16) and 2.20 between  $r_0$  and  $r$ .

### 2.4 Analysis of the parameters of the considered physical model

245 Equations 2.11, 2.12 and 2.23 form a system of equations with seven parameters (or unknowns), namely the coefficients of the A-Z relationship ( $a_{AZ}$ ,  $b_{AZ}$ ), the coefficients of the A –  $K_{dp}$  relationship ( $a_{AK}$ ,  $b_{AK}$ ), the radar calibration error ( $dC$ ), the on-site attenuation ( $PIA_0$ ) and the path-integrated attenuation at range  $r_m$  ( $PIA_m$ ). We focus in this article on the idea of constraining this system of equations with the PIAs derived from the Mountain Reference Technique. The question of the R - A transformation is beyond the scope of the present study.



250 From a physical point of view, the parameters  $dC$ ,  $PIA_0$  and  $PIA_m$  are mutually independent and a priori independent of the coefficients of the  $Z - A - K_{dp}$  power-law models:

- We will assume the radar calibration error to be constant for a given precipitation event, with possible variations from one event to the next.
- Regarding on-site attenuation, Frasier et al. (2013) made a synthesis of previous theoretical and empirical studies, and provided an empirical model based on the comparison of the measurements of two X-Band radar systems in the French Southern Alps, one equipped with a radome and the other one being radomeless. From this article, we take into account a dependence of  $PIA_0$  on the measured reflectivity in the vicinity of the radar site, denoted  $Z_0$ . Based on Figure 5 in Frasier et al. (2013), we have fitted a coarse power-law model for X-band radome attenuation on their experimental data, yielding  $PIA_0^* = 0.0126 Z_0^{1.6}$  with  $PIA_0^*$  in dB and  $Z_0$  in dBZ. Based on their Fig. 6 which shows important variations between the theoretical and empirical results proposed in the literature, we have defined a large range of lower and upper limits for the  $PIA_0$  draws conditioned on  $Z_0$  via the  $PIA_0^*$  model (see Table 1). With  $n = 5$ , the crude model proposed yields upper limits of the  $PIA_0$  sampling range of 4.8, 9.2, 14.6 and 20.8 dB for  $Z_0$  values of 20, 30, 40 and 50 dBZ, respectively. In the following simulations,  $PIA_0$  will be allowed to vary from one target to the next, i.e. in different directions, and from one time step to the next.
- The accuracy of the MRT-derived  $PIA_m$  was studied in Delrieu et al. (1999) by comparing MRT estimates with direct measurements obtained with a receiving antenna set up in the mountain range. They showed that (i) selecting strong mountain returns (typically greater than 45-50 dBZ) allows to mitigate the impact of precipitation falling over the target (negative bias), (ii) that a refined estimation of the so-called dry-weather baseline is required to account for the possible modification of backscattering properties of the mountain surfaces before and after the event and (iii) that the time variability of the dry-weather returns defines the minimum detectable PIA. These elements were accounted for in the present study by selecting strong mountain targets, studying their dry-weather time variability (see also Delrieu et al. 2020) and subsequently defining the range of variation of the  $dAF_m$  multiplicative error (Table 1).

The prefactors and exponents of the  $Z - A - K_{dp}$  power-law models are mutually dependent since they are determined by the shape, density and size distributions of the hydrometeors and their electromagnetic properties, largely driven by their solid versus liquid composition. These coefficients may vary considerably from one precipitation type to another. In addition, even for a given precipitation type, the actual  $Z - A - K_{dp}$  values present an inherent variability with respect to the power-law models, associated with the greater or lesser proximity of the particle size distribution (PSD) moments associated to each particular variable. As a further complexity, when for a given propagation path various types of hydrometeors are successively encountered (e.g. rain, melting precipitation, snow), it would be desirable to apply the appropriate coefficients for the different precipitation types provided one is able to determine them. As a major simplification in the present work, we will be considering a homogeneous precipitation type (convective rainfall). Because of the mathematical form of the equations at hand

and the likely mutual dependence of the exponent and prefactor of each power-law model, we will assume the exponents of the A-Z and the A –  $K_{dp}$  relationships to be constant for all the considered events while the prefactors will be allowed to vary  
285 for each single target and time step.

There has been several studies deriving A-Z and A –  $K_{dp}$  relationships at X-Band using different approaches including model calculations and also the direct use of observational data (e.g., Bringi and Chandrasakar, 2001; Gorgucci and Chadrasakar, 2005, Park et al. 2005, Schneebeli et al. 2012, Matrosov et al. 2014, Yu et al. 2018). Estimations of these coefficients and their  
290 ranges of variation were obtained in our study by processing the drop size distribution (DSD) data collected with a PARSIVEL 2 disdrometer located at the IGE site. The dataset includes 337 rainy days during the period April 2017 – March 2020. The raw DSD measurements have a time resolution of 1 min. They are binned into 32 diameter classes with increasing sizes from 0.125 mm up to 6 mm. Various filters have been applied to discard anomalous data and, in particular to detect non-liquid precipitation, thanks to the falling speed spectra. The volumetric concentration spectra have been computed at a 5-min  
295 resolution. DSD spectra with 5-min rainrate less than  $0.1 \text{ mm h}^{-1}$  were discarded from the analysis. A dataset of about 14600 DSD spectra was thus obtained corresponding to all types of precipitation occurring in liquid phase in the Grenoble valley. As for the scattering model, we used the CANTMAT version 1.2 software programme that was developed at Colorado State University by C. Tang and V.N. Bringi. The CANTMAT software uses the T-Matrix formulation to compute radar observables such as horizontal reflectivity, vertical reflectivity, differential reflectivity, co-polar cross-correlation, specific attenuation,  
300 specific phase shift, etc, as a function of the DSD, the radar frequency, air temperature, oblateness models and canting models for the raindrops as well as the incidence angle of the electromagnetic waves. The results presented herein were computed for the X-band frequency, a temperature of  $10^\circ\text{C}$ , the Beard and Chung (1987) oblateness model, a standard deviation of the canting angle of  $10^\circ$  and an incidence angle of  $0^\circ$  (horizontal scanning, like for the MOUC radar data).

305 Figure 3 illustrates the fittings of the A – Z relationships that can be obtained from a classical logarithm of base 10 transformation of the two variables. One can note that the scatterplot is well conditioned for deriving a power-law model in the sense that it does not present any particular curvature. The least-square regressions of A over Z and of Z over A as well as the least-rectangle regression are displayed to illustrate the impact of the regression technique on the model coefficients. Note that the least-rectangle fit should be preferred since, for these calculations based on DSD data, the two variables can be  
310 considered on an equal footing. The determination coefficient is high and the three regressions performed give subsequently parameter sets close to each other. From the fittings in Fig. 3, we have chosen  $b_{AZ} = 0.8$  as a fixed value for this exponent and  $a_{AZ} = 1.0 \cdot 10^{-4}$  as the central value for the sampling of the prefactor in the following sensitivity analysis. Although the scatter of the points around the power-law model suggests a possible range of variation of [-5, 5 dB] for the DSD-derived values, we have limited this range to [-3, 3 dB] in our simulations on the basis of the much bigger resolution volume of the  
315 radar and the assumption that the prefactor is constant throughout the reflectivity profile (Table 1).

Figure 4 gives the results obtained for the  $A - K_{dp}$  relationship. It can be seen that the scatterplot of the logarithmic of base 10 transformed variables (Fig. 4a) presents a significant curvature. Due to the important weight given to low and medium values in the regressions, the fitted power-law models are clearly unsatisfactory for the highest values, which are of interest in the present study since they correspond to convective precipitation. We have therefore tested two other fitting techniques based on the natural values of the two variables (Fig. 4b). A linear fit with a 0-forced intercept yields  $A_h = 0.32 K_{dp}$  which is consistent with linear relationships proposed in the literature in similar climatological contexts, however with a somewhat higher value of the multiplicative coefficient: e.g., 0.245 in Schneebeli et al. (2012) and 0.276 in Yu et al. (2018). However, we note that this linear fit is not satisfactory with a significant underestimation of the  $A_h$  values for  $K_{dp} > 3 \text{ } ^\circ \text{ km}^{-1}$ . The fitting of a non-linear power-law model (NLPL) proves to be more satisfactory with  $A_h = 0.30 K_{dp}^{1.1}$ . Since the exponents estimated with the log-transformed data are close to 0.9, we have decided to perform several simulations with fixed values of  $b_{AK}$  in the range [0.9 – 1.2] (see Table 1). Regarding the prefactor  $a_{AK}$ , we have considered a central value of 0.3 and a range of variation of [-3, 3dB], that is minimum and maximum values of 0.15 and 0.6, respectively.

Additional tests have been performed, including for instance the influence of the air / hydrometeor temperature, the precipitation type (e.g. stratiform versus convective rainfall), the DSD integration time step, etc. Concerning the last factor, we have compared the results obtained for the 2-min and 5-min time steps and we have found no significant influence on the coefficients of the power-law models, while the  $R^2$  values were significantly downgraded for the 2-min time step (not shown here for the sake of conciseness). As for the precipitation type, we carried out a rough classification of the 337 events into stratiform and convective types, by considering an event as convective if a rainrate threshold of  $10 \text{ mm h}^{-1}$  was exceeded for at least one 5-min time step during the event. As one would expect from the scatterplots in Figs 4 and 5, significant differences appeared between the stratiform and convective  $A - K_{dp}$  relationships whereas the  $A-Z$  relationships were almost identical. This is an argument for keeping the exponent  $b_{AZ}$  constant in our simulation procedure. Regarding the sensitivity on temperature, one possible extension of the present work could be to consider the temperature time series available for each event at the IGE site in the scattering calculations. This would most likely result in an increase in the variability of the  $A-Z$  and  $A - K_{dp}$  relationships. As a classical concern, one may however wonder how the average temperature in the radar resolution volume could be estimated (Ryzhkov et al. 2014). We chose herein to rely on the ability of the simulation procedure to deviate from the central values of the parameters and their ranges of variation defined in Table 1 to be large enough.

### 3. Sensitivity analysis

#### 3.1. Principle

The parameter structure analyzed in sub-section 2.4 led us to organize the sensitivity analysis procedure in a nested way:

For all the considered rain events, we assume the exponents of the A-Z and A –  $K_{dp}$  relationships to be constant. For each event, we assume the radar calibration error to be constant. A simulation is performed for each combination of the  $b_{AZ}$ ,  $b_{AK}$  and dC values listed in Table 1, i.e.  $1 \times 6 \times 13 = 78$  simulations.

355 For each mountain target and each time step, the simulation “core” is implemented as follows:

- 360 • The  $Z_m(r)$  and  $\Phi_{dp}(r)$  profiles between the radar and the mountain target are pre-processed. For each of the successive radials composing the target, this includes determination of gates affected by clutter in the region of the mountain target and along the propagation path. This is done by considering both dry-weather mean values exceeding various thresholds (25 dBZ for significant clutter, 45 dBZ for a gate belonging to the mountain target) and by using the profile of the copolar correlation coefficient ( $\rho_{hv}$ ) (Delrieu et al. 2020). The median  $Z_m(r)$  and  $\Phi_{dp}(r)$  profiles over the series of radials are then computed. The MRT  $PIA_m$  is evaluated as the difference of the  $Z_m$  mean values between the dry-weather baseline and the current time step, the mean being taken over all the gates composing the target. The  $r_0$  value is estimated as the range of the first gate for which four successive values (corresponding to a range extent of 960 m) exceeds a  $\rho_{hv}$  value of 0.95. This last value is set as a threshold between precipitation and clutter / no precipitation (from the statistics presented in Khanal et al. 2019). The  $Z_0$  value is computed as the product of  $1/dC$  (correction for the radar calibration error) and the mean reflectivity of the selected four successive gates if they are located within the first 2 km range; otherwise the  $Z_0$  value is set to 0. The reader is referred to Khanal et al. (2022) for the most recent description of the fairly sophisticated procedure used for the  $\Phi_{dp}(r)$  regularization based on the total differential phase shift profiles  $\Psi_{dp}(r)$  for all the radials associated with a given target. Note that a target is selected at a given time step for the following steps of the simulation if  $PIA_m > 1$  dB and if a good quality index of the  $\Phi_{dp}(r)$  regularization is obtained (Khanal et al. 2022).
- 375 • The Latin Hypercubes Sampling technique (<https://www.rdocumentation.org/packages/pse/versions/0.4.7/topics/LHS>) is then used to generate N parameter sets (with  $N = 1000$  in the following) filling uniformly the parameter space composed of four parameters: the prefactors  $a_{AZ}$  and  $a_{AK}$ , the on-site attenuation factor  $AF(r_0)$  and the multiplicative error  $dAF_m$  (eq. 2.8) on the MRT attenuation factor. The central values and intervals of variation of these four parameters are listed in Table 1. It is noteworthy that the random draws are made on the dB-transformed ranges of parameters so that there are as many values below and above the central value, e.g. as many values between 0.15 and 0.3 on the one hand and between 0.3 and 0.6 on the other hand for the  $a_{AK}$  parameter.
- 380 • After discarding unphysical parameter sets (e.g. those for which  $PIA_0 > PIA_m$ ), the five algorithms are implemented for all the remaining sets. A cost function (CF) is evaluated in order to measure the convergence / proximity of the

simulated profiles for each parameter set. Several formulations of the cost function were tested and we propose the following one hereinafter, which was found to be appropriate:

$$\begin{aligned}
385 \quad \text{CF} = & \text{Mean}(R^2(\text{PIA}_{\text{AZhb}}(r_0, r), \text{PIA}_{\text{AZC}}(r_0, r)), \\
& R^2(\text{PIA}_{\text{AZhb}}(r_0, r), \text{PIA}_{\text{AZ0}}(r_0, r)), \\
& R^2(\text{PIA}_{\text{AZhb}}(r_0, r), \text{PIA}_{\Phi_{\text{dp}}}(r_0, r)), \\
& R^2(\text{PIA}_{\text{AZC}}(r_0, r), \text{PIA}_{\text{AZ0}}(r_0, r)), \\
& R^2(\text{PIA}_{\text{AZC}}(r_0, r), \text{PIA}_{\Phi_{\text{dp}}}(r_0, r)), \\
390 \quad & R^2(\text{PIA}_{\text{AZ0}}(r_0, r), \text{PIA}_{\Phi_{\text{dp}}}(r_0, r)))
\end{aligned} \tag{3.1}$$

where Mean stands for “the mean value of” and  $R^2$  is the determination coefficient between the two profiles indicated between brackets. The profiles considered in this expression of the cost function are the PIA profiles between ranges  $r_0$  and  $r$ . Since the specific attenuation profiles are identical for the AZC and AZ $\alpha$  formulations (eqs. 2.16 and 2.18), only the PIA profile of the first is considered in eq. 3.1. Due to the inherent instability of the AZhb algorithm, we consider the first three  $R^2$  terms in the computation of the CF value only if  $\text{PIA}_m < 10$  dB. Indeed, this 10 dB value proved to be about the maximum PIA this algorithm is able to deal with, even with an almost perfect parameterization (Delrieu et al. 1999b). The last three terms of the CF are measuring the proximity of the three PIA-constrained algorithms. In the following, we have selected  $\text{CF}_{\text{th}} = 0.8$  as the “satisfaction threshold”, i.e. the CF value to be exceeded to consider a given parameter set as “optimal”.

The acronym OPS will be used for “optimal parameter set” hereinafter. The number of optimal parameter sets (NOPS) can be computed for a given target and time step and summed up for all the targets and time steps of an event and for a series of events to yield a measure of the overall quality of a simulation for given fixed parameters ( $b_{\text{AZ}}, b_{\text{AK}}, dC$ ) and randomly drawn parameters ( $a_{\text{AZ}}, a_{\text{AK}}, \text{AF}(r_0), d\text{AF}_m$ ) for each single target / time step using the LHS technique. We recognise that the choice of the cost function (eq. 3.1) and the satisfaction threshold  $\text{CF}_{\text{th}}$  are essentially subjective. This choice relies on the experience gained in the implementation of the simulation framework. Three elements can be mentioned on this subject: (i) accounting for the AZhb algorithm in the CF for low to moderate PIAs less than 10 dB proved to be a good option owing to the strong sensitivity of this algorithm on the calibration error; (ii) adding the polarimetric algorithm and the corresponding  $R^2$  terms in the CF allowed to dramatically reduce the mathematical ambiguity (i.e. the fact that several combination of parameters, including non-physical values, may lead to the convergence of the solutions of the different algorithms) of the physical model at hand, (iii) several satisfaction thresholds were tested with low sensitivity on the results in terms of the quantiles of the statistical distributions of the estimated parameters.

## 3.2. Results

### 3.2.1 Illustration for a given target and time step

420 Figure 5 gives an example of result of the core procedure for target 13 (T13) on 21 July 2017 16:05 UTC. For this case with a MRT PIA of 25.9 dB at a range of about 20 km, we get  $\Phi_{dp}(r_0, r_m) = 71.5^\circ$  and  $Z_0 = 9.5$  dBZ. The optimal set of fixed parameters for the considered event is  $dC^* = 0.5$  dB,  $b_{AZ} = 0.8$  and  $b_{AK}^* = 1.1$  (see next sub-sections). Since for the best OPS, all the profiles overlap perfectly, the results presented in Fig.3 correspond actually to a near-optimal set so that one can see some differences between the solutions of the different algorithms. The set of LHS parameters for this specific target / time

425 step is  $PIA_0^* = 0.46$  dB,  $a_{AZ}^* = 1.01 \cdot 10^{-4}$ ,  $a_{AK}^* = 0.34$  and  $dAF_m^* = 0.99$ . The CF value is 0.925, while the one obtained with the best OPS is 0.981. Note that 55 parameter sets overpassed the CF threshold value of 0.8 for this example, i.e. NOPS = 55 for this target and time steps. For this good (though not the best) OPS, the reflectivity profiles (Fig. 5a) call for the following comments. We have here a clear example of the inherent instability of the AZhb algorithm, which “blows up” at a range of about 7 km for this parameterization. One should remember that this algorithm is not accounted for in the CF computation for

430 such high PIAs, as explained when commenting eq. 3.1. The three other AZ algorithms give rather similar results. As a general behaviour (and in particular whatever the value of the on-site attenuation), we note that the optimal parameterizations lead to the convergence of the AZC and AZ0 algorithms near the radar and to the convergence of the AZ $\alpha$  and AZ0 algorithms at the other end of the profile. Fig 5b gives the solutions obtained in terms of specific attenuation profiles. The AZhb profile is not drawn in this figure. As shown in sub-section 2.2, the AZ $\alpha$  and AZC solutions are identical (represented in red) and slightly

435 different at long range from the AZ0 solution. The comparison of the corrected and uncorrected profiles clearly shows in this example the dramatic impact of attenuation as regard to both the underestimation of the first precipitation cell and the non-detection of the second one. Fig. 5c displays the raw and processed  $\Phi_{dp}$  profiles. For such a strong attenuation case, one can see that the raw profile has little noise and no significant “bumps” that could sign a differential phase shift on backscattering ( $\delta_{hv}$ ) contamination (Trömel et al., 2013). Finally, Fig. 5d allows comparison of the PIA profiles derived from the AZC-AZ $\alpha$

440 algorithms (identical solutions), the AZ0 algorithm and from the  $\Phi_{dp}$  profile. Although there are some differences, the overall consistency between the three profiles is good.

### 3.2.2 Time series of optimal parameter values

445 Figure 6 presents the time series of quantiles of the distributions of the input variables and the estimated optimal parameters obtained for the best simulation of the 21 July 2017 convective event. The sampling strategy making use of  $Z_0$  (see Table 1) is considered for  $PIA_0$ . We will come back in sub-section 3.2.5 on the relationship between  $PIA_0$  (Fig. 6c) and  $Z_0$  (Fig. 6a).

The medians of  $PIA_m$  and  $\Phi_{dp}(r_0, r_m)$  (Fig. 6b) give an indication on the evolution of the storm which was intense between 15:30 and 17:00 UTC with medians of about 20 dB and  $60^\circ$ , respectively. The interquartile ranges of these two variables are quite large, as a result of both the variation of the radar-target distances (from 15 up to 40 km) and the precipitation variability as a function of the azimuth, illustrated in Figs 1 and 2. The time evolution of the storm intensity is also visible on the NOPS time series (Fig. 6f) with multiplicative factors in the range of 5 to 10 between the period 16:00-17:00 and the period 17:00-18:00 UTC. Although for a given target, there is an increasing trend of NOPS when  $PIA_m$  increases (not shown for the sake of conciseness), this is also related to the higher number of targets “reached” (i.e. targets with  $PIA_m$  values greater than 1 dB) between 16:00 and 17:00 UTC. The time series of the prefactors  $a_{AK}$  (Fig. 6d) and  $a_{AZ}$  (Fig. 6e) have a similar behaviour with rather stable median values, that are close to the central values of the sampling intervals derived from the analysis of the DSD data (sub-section 2.4, Table 1). This is reassuring as to the relevance for radar data processing of these DSD-derived relationships deduced from in-situ microphysical measurements and scattering models. We note however that the interquartile ranges are quite large, especially those of the  $a_{AZ}$  parameter. This is an indication that the mathematical ambiguity (Haddad et al., 1995) of the system of equations at hand remains important. It is noteworthy to mention that the ambiguity of the AZ algorithms alone is much larger (e.g. with larger interquartile ranges for the  $a_{AZ}$  parameter). Introducing the polarimetric algorithm and the associated constraints on the coefficients of the  $A - K_{dp}$  relationship allowed to reduce it dramatically (not shown for the sake of conciseness).

Figure 7 presents additional results for the 21 July 2017 event with the evolution of the medians at the event time scale of estimated  $PIA_0$  (Fig. 7a), prefactor of the A-Z relationship (Fig. 7b) and prefactor of the  $A - K_{dp}$  relationship (Fig. 7c) as a function of the calibration error, for two values of the  $b_{AK}$  exponent (1.0 and 1.1). For convenience, the variable  $dZ = -dC$  is used in Fig. 7 to represent the dBZ value to be added to the measured reflectivities for correcting the calibration error. We note that the calibration error has a significant impact on the median and interquartile range of  $PIA_0$ , with, logically, stronger on-site attenuations for negative  $dZ$  values. The prefactors, expressed in dB relative to the central values in Fig. 7, show a slighter and opposite trend to increase as  $dZ$  increases. We also note the marked influence of the  $b_{AK}$  exponent on the two prefactors with an offset of about 0.9 and 0.65 dB on the medians of  $a_{AZ}$  and  $a_{AK}$ , respectively, for  $dZ = 0$ .

### 3.2.3 Estimating the radar calibration error

In order to increase the robustness of the results, the simulation procedure was performed for three convective events that occurred successively during summer 2017. Table 2 presents some characteristic features of these events. For all of them the melting layer (ML) altitude, determined with the  $25^\circ$ -elevation XPORT radar data by using the procedure developed in Khanal et al. 2019, was situated well above the altitude of the Moucherotte Mount radar, hence, there is no ML contamination of the considered radar data. The first two events were rather intense and similar in terms of total rain amount and maximum rainrate

at the IGE site, as well as in terms of the  $PIA_m$  statistics based on the 22 mountain targets. The third one was a bit less intense. To our knowledge, there was no occurrence of hail reported in the area of interest for these three events.

We propose to consider the total NOPS obtained for a given simulation and for a given event as a quality criterion to judge the relevance of a set of fixed parameters ( $dC$ ,  $b_{AZ}$ ,  $b_{AK}$ ). Figure 8 shows the NOPS evolution for the three events separately and all together as a function of the fixed values of  $dC$ , the other fixed parameters being  $b_{AZ} = 0.8$  and  $b_{AK} = 1.1$  in this figure. We note that the various curves are rather flat near their optimum values. The overall sensitivity to the calibration error is clear however in the considered  $[-2, 2 \text{ dB}]$  range, e.g. with a ratio of the maximum to the minimum NOPS values of 1.4 for the all-events curve. Although the global results tend to indicate an almost perfect calibration of the measured reflectivities (optimal  $dZ$  value -  $dZ^*$  in the following - of  $0.25 \text{ dBZ}$ ), one can note that the  $dZ^*$  values vary from one event to the next with  $-0.5 \text{ dBZ}$  for the 21 July 2017 event,  $1.0 \text{ dBZ}$  for the 8 August 2018 event and  $0.5 \text{ dBZ}$  for the 31 August 2017 event. We find it difficult to know whether such variations in the electronic calibration of the radar from one event to the next are physically realistic. By eliminating the data from time steps with significant on-site attenuation, we checked that on-site attenuation could not be held responsible for these  $dZ^*$  variations.

495

### 3.2.4 Linearity of the $A - K_{dp}$ relationship

Similarly, Fig. 9 shows the evolution of the NOPS criterion computed for the three events all together as a function of the  $dZ$  and  $b_{AK}$  (Table 1) values. We note a slight superiority of the simulations with  $b_{AK}$  in the range  $[1.05-1.15]$  compared to the one with  $b_{AK} = 1.0$  in terms of the NOPS maximum value. This observation is also valid for each of the three events separately (not shown for clarity in plotting). The simulation with  $b_{AK} = 0.9$  is clearly below the other ones. For  $b_{AK} = 1.1$  and for the optimal  $dZ$  value of each event, the log-transformed distribution of  $a_{AK}$  computed over the three events is nearly symmetrical with an average value of  $0.28$  and an interquartile range of about  $[-1, 1 \text{ dB}]$ . Hence, we obtain in this study quite a remarkable agreement between the radar and DSD-derived  $A - K_{dp}$  relationships, with  $A = 0.28 K_{dp}^{1.1}$  and  $A = 0.30 K_{dp}^{1.1}$ , respectively. Similarly, the optimal  $A - Z$  relationship derived from the simulation exercise is very close to the one obtained by the DSD measurements (Fig. 3) with  $A = 1.07 \cdot 10^{-4} Z^{0.80}$ .

505

### 3.2.5 Radome attenuation

Coming back to Figure 6, we remind that the sampling strategy making use of  $Z_0$  was considered for the random drawing of  $PIA_0$  values in the simulation. One has to remark that such close-range reflectivity measurements are actually affected by radome attenuation. This may explain why estimated  $PIA_0$  values are higher for time step 17:00 UTC than for time steps



between 15:30 and 15:55 while  $Z_0$  values are about 10 dBZ higher in the latter period. The relevance of the  $Z_0$  variable for detection and quantification of on-site attenuation remains limited for a radar equipped with a radome.

515

Figure 10 gives two examples of the core procedure implementation in the case of severe on-site attenuation that occurred on 21 July 2017 at 17:00 UTC (Fig. 2 bottom graphs). The constraint on the maximum value for the  $PIA_0$  sampling as a function of  $Z_0$  was relaxed in these calculations with a maximum  $PIA_0$  limit set to 30 dB whatever  $Z_0$ . The mountain returns from Target 04 (T04) allow to quantify both on-site attenuation and along-path attenuation due to precipitation falling over the city of Grenoble (NE sector) at that time (left-hand side example). At this range of about 40 km, we get  $PIA_m = 47.9$  dB and  $\Phi_{dp}(r_0, r_m) = 129.9^\circ$ . The mountain returns from Target 19 (T19) located in the South-East sector (right-hand side) seem to be essentially affected by the precipitation conditions at the radar site. At this range of about 27 km, we get  $PIA_m = 11.9$  dB and  $\Phi_{dp}(r_0, r_m) = 12.2^\circ$ . This yields  $PIA_m/\Phi_{dp}(r_0, r_m)$  ratios of 0.37 and 0.97 dB degree<sup>-1</sup> for the two targets, respectively. These values are clearly (especially the second one) well above the range of expected values for the slope of a supposedly linear  $A - K_{dp}$  relationship. In addition to the generalized decrease of the mountain returns visible in Fig. 2, this is an indication of a large on-site attenuation effect. The dC-corrected  $Z_0$  values computed in the directions of the two targets are significantly different with 38.9 and 28.6 dBZ, respectively. One can observe the very good convergence of all the AZ algorithms in both cases. In particular for T19, all the AZ reflectivity profiles, including the AZhb one, are perfectly matched. The agreement is also very good between the PIA profiles of the AZ algorithms and the one of the polarimetric algorithm, except for a very slight stall of  $PIA_{\Phi_{dp}}(r)$  at a range of about 30 km for T04, likely due to disturbances associated with side-lobe effects (visible on the  $\rho_{hv}$  PPI on top of Fig. 10).

For the two OPS considered in Fig. 10, one gets  $PIA_0$  values of 10.1 and 10.8 dB. By considering the  $PIA_0$  statistical distribution calculated over the optimal parameter sets of all the targets for the considered time step, one obtains a symmetrical distribution with a slightly higher mean value of 12.6 dB and a rather large interquartile range of 4.5 dB. The mean value increases somehow (13.5 dB) and the interquartile range decreases to 3.2 dB if the  $PIA_0$  distribution is computed for targets 9-22 only, i.e. for targets with reduced along-path attenuation. It is worth noting that such statistics are not improved (e.g., interquartile range reduced) if one considers a more stringent satisfaction criterion (e.g.  $CF_{th} = 0.9$  instead of  $CF_{th} = 0.8$ ).

#### 540 4. Discussion and future work

In this article, we have started to implement a simulation framework to study the interactions between X-band microwaves and hydrometeors in a mountainous context. Emphasis was placed on the attenuation problem, which is known to be severe for the frequency under consideration and essentially impossible to correct unless estimates of total attenuation are available at a distance from the radar. The RadAlp experiment allows us to obtain direct PIA estimates from the Mountain Reference

545

Technique in some specific directions and indirect estimates from the processing of the profiles of total differential phase shift available for each radial. Although the polarimetric technique is a priori much more convenient to apply and has interesting characteristics (independence on radar calibration, on-site attenuation and partial beam blockages), it suffers from several limitations, including (i) the fact that the  $\Psi_{dp}$  profile is noisy for light precipitation, (ii) possible contaminations by the differential phase shift on backscatter  $\delta_{hv}$  (iii) possible impact of non-uniform beam filling and (iii) the need to specify the relationship between the specific attenuation and the specific differential phase shift which depends on hydrometeor types, temperature, and so on. In a similar way to the satellite configuration (e.g. the possibility to use the Surface Reference Technique in addition to the dual-frequency measurements at Ka and Ku Bands for processing the radar data of the GPM core platform ; Meneghini et al. 2020), we have proposed to take advantage of all the MRT and polarimetric measurements available to perform a generalized sensitivity analysis of the physical model of interest. In the simple case of convective precipitation (i.e. without “contamination” of radar data by snow or melting precipitation), we have obtained interesting results regarding estimation of radar calibration error, radome attenuation and the A – Z and A –  $K_{dp}$  relationships. We note that for the estimated optimal radar calibration error, the A-Z and A- $K_{dp}$  relationships derived from radar data are consistent with those derived from concomitant drop size distribution measurements at ground level, in particular with a slightly non-linear A- $K_{dp}$  relationship ( $A = 0.28 K_{dp}^{1.1}$ ). This is reassuring regarding the relevance of the use of microphysical data and scattering models for the parameterization of radar data processing. We have deliberately left aside the question of the specific attenuation - rainrate conversion in this article. An interesting validation exercise to be performed consists in using the DSD-derived A – R relationship for the conversion of the estimated specific attenuation profiles. The resulting radar rainrate estimates will be compared with the raingauge measurements available. Another outcome of the study is the quantification of X-Band radome attenuation. Values as high as 15 dB were estimated, leading to the recommendation of avoiding the use of radomes for remote sensing of precipitation at such frequency. As an alternative, it would be desirable to develop specific sensors to detect / quantify the presence of water on the radome wall (Mancini et al. 2017). As a next step, we plan to extend the procedure to stratiform events with MOUC radar measurements made at times within or above the melting layer. The multi-angle, multi-frequency, polarimetric measurements of the valley-based radars will be critical in this respect for the characterization of the ML from below (Khanal et al. 2019, 2022), the parameterization of Z-A- $K_{dp}$ -R relationships for different hydrometeor types and the mitigation of the mathematical ambiguity of the physical model of interest.

## Appendix A: Formulation of the attenuation-reflectivity algorithms

### A.1 AZhb algorithm (independent of $PIA_m$ )

575

This formulation is based on (2.11) only. In other words, it does not make use of  $PIA_m$ . By combining (2.11), (2.2) and (2.3), one obtains a corrected reflectivity profile through the following equation:

$$Z_{AZhb}(r) = Z_m(r) / [(AF(r_0) dC)^{b_{AZ}} - 0.46 a_{AZ} b_{AZ} SZ(r_0, r)]^{1/b_{AZ}} \quad (A.1)$$

580

The specific attenuation profile follows from the use of the A-Z power-law model (2.5):

$$A_{AZhb}(r) = a_{AZ} Z_m^{b_{AZ}}(r) / [(AF(r_0) dC)^{b_{AZ}} - 0.46 a_{AZ} b_{AZ} SZ(r_0, r)] \quad (A.2)$$

### 585 **A.2 AZC algorithm (independent of dC)**

The attenuation constraint (2.12) is used to express dC as:

$$dC = [0.46 a_{AZ} b_{AZ} SZ(r_0, r_m) / (AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}})]^{1/b_{AZ}} \quad (A.3)$$

590

which is introduced in (2.11) to yield:

$$AF_{AZC}^{b_{AZ}}(r_0, r) = [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)] / AF(r_0)^{b_{AZ}} SZ(r_0, r_m) \quad (A.4)$$

595 The corrected reflectivity profile is then derived from (2.2), (2.3), (A.3) and (A.4) to read as:

$$Z_{AZC}(r) = Z_m(r) [AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}}]^{1/b_{AZ}} / \{0.46 a_{AZ} b_{AZ} [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\}^{1/b_{AZ}} \quad (A.5)$$

600 Note that in the previous derivations, the expression of dC given by (A.3) is used two times, first in the expression of  $AF_{AZC}^{b_{AZ}}(r_0, r)$  from (2.11) and then in the substitution of dC in (2.2).

The specific attenuation profile follows from the use of the A-Z relationship (2.5):

$$605 \quad A_{AZC}(r) = Z_m(r)^{b_{AZ}} [AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}}] / \{0.46 b_{AZ} [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\} \quad (A.6)$$

### **A.3 AZ $\alpha$ algorithm (independent of $a_{AZ}$ )**

610 The attenuation constraint (2.12) is used to express  $a_{AZ}$  as:

$$a_{AZ} = [dC^{b_{AZ}} (AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}})] / [0.46 b_{AZ} SZ(r_0, r_m)] \quad (A.7)$$

which can be introduced in (2.11) to yield:

615

$$AF_{AZ\alpha}^{b_{AZ}}(r_0, r) = [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)] / AF(r_0)^{b_{AZ}} SZ(r_0, r_m) \quad (A.8)$$

Equation A.8 is actually identical to the  $AF_{AZC}^{b_{AZ}}(r_0, r)$  expression (A.4). From (A.8), (2.2) and (2.3), the resulting corrected reflectivity profile can be expressed as:

620

$$Z_{AZ\alpha}(r) = Z_m(r) SZ(r_0, r_m)^{1/b_{AZ}} / \{dC [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\}^{1/b_{AZ}} \quad (A.9)$$

One can note that  $Z_{AZ\alpha}(r)$  is different from  $Z_{AZC}(r)$  (A.5) and that it depends on  $dC$ .

625 Next, it can be verified by using (A.9), (2.5) and (A.7) (a second time, for the necessary substitution of  $a_{AZ}$ ) that the  $AZ\alpha$  specific attenuation profile is identical to the  $AZC$  specific attenuation profile given by (A.6) with:

$$A_{AZ\alpha}(r) = Z_m(r)^{b_{AZ}} [AF(r_0)^{b_{AZ}} - AF(r_m)^{b_{AZ}}] / \{0.46 b_{AZ} [AF(r_0)^{b_{AZ}} SZ(r, r_m) + AF(r_m)^{b_{AZ}} SZ(r_0, r)]\} \quad (A.10)$$

630

#### **A.4 AZ0 algorithm (independent of $PIA_0$ )**

The attenuation constraint (2.12) is used to express  $AF(r_0)^{b_{AZ}}$  as:

$$635 \quad AF(r_0)^{b_{AZ}} = [0.46 a_{AZ} b_{AZ} SZ(r_0, r_m) + (AF(r_m) dC)^{b_{AZ}}] / dC^{b_{AZ}} \quad (A.11)$$

which can be introduced in (2.11) to yield:

640

$$AF_{AZ0}^{b_{AZ}}(r_0, r) = \{0.46 a_{AZ} b_{AZ} SZ(r, r_m) + AF(r_m)^{b_{AZ}} dC^{b_{AZ}}\} / \{0.46 a_{AZ} b_{AZ} SZ(r_0, r_m) + (AF(r_m) dC)^{b_{AZ}}\} \quad (A.12)$$

The resulting corrected reflectivity profile is:

$$Z_{AZ0}(r) = Z_m(r) / \{ 0.46 a_{AZ} b_{AZ} SZ(r, r_m) + (AF(r_m) dC)^{b_{AZ}} \}^{1/b_{AZ}} \quad (A.13)$$

645

And the specific attenuation profile:

$$A_{AZ0}(r) = a_{AZ} Z_m(r)^{b_{AZ}} / \{ 0.46 a_{AZ} b_{AZ} SZ(r, r_m) + (AF(r_m) dC)^{b_{AZ}} \} \quad (A.14)$$

650

### **Code and data availability**

There will be no problem to make available the codes / data developed / used in this study, preferably through demands of collaboration to the authors.

### **655 Conflict of interest**

The authors declare that they have no conflict of interest.

### **Author contribution**

GD is the main contributor for this article (concept, theoretical developments, calculations, article writing, corresponding author). AKK (PhD student) and BB (assistant professor) are scientists contributing actively to the RadAlp experiment. They performed the internal review of the article. FC is a research engineer who built and keeps improving the XPORT radar, a key instrument deployed in the RadAlp experiment. BB is also the HMCIS team leader and as such does a lot of work for all the team members.

### **665 Acknowledgements**

We thank the three anonymous reviewers for their valuable comments, which helped us improving the article. We are grateful to P.N. Gatlin (NASA Marshall Space Flight Center, Huntsville, AL) for providing the CANTMAT version 1.2 software developed at Colorado State University by C. Tang and V.N. Bringi, who we also thank. The RadAlp experiment is co-funded by the Labex osug@2020 of the Observatoire des Sciences de l'Univers de Grenoble, the Service Central Hydrométéorologique et d'Appui à la Prévision des Inondations (SCHAPI) and Electricité de France / Division Technique Générale (EDF/DTG).

## References

- 675 Beard, K.V., and Chuang, C.: A new model for the equilibrium shape of raindrops, *J. Atmos. Sci.*, 44, 1509-1524. [https://doi.org/10.1175/1520-0469\(1987\)044<1509:ANMFTE>2.0.CO;2](https://doi.org/10.1175/1520-0469(1987)044<1509:ANMFTE>2.0.CO;2), 1987.
- Bringi, V.N., and Chandrasekar, V.: *Polarimetric Doppler weather radar, principles and applications*. Cambridge University Press, 636 pp, 2001.
- 680 Delrieu, G., Caoudal, S., Creutin, J.D.: Feasibility of using mountain return for the correction of ground-based X-band weather radar data. *J. Atmos. Oceanic Technol.*, 14(3), 368-385 DOI: 10.1175/1520-0426(1997)014<0368:FOUMRF>2.0.CO;2, 1997.
- 685 Delrieu, G., Serrar, S., Guardo, E., and Creutin, J.D.: Rain Measurement in Hilly Terrain with X-Band Weather Radar Systems: Accuracy of Path-Integrated Attenuation Estimates Derived from Mountain Returns. *J. Atmos. Oceanic Technol.*, 16, 405–416, [https://doi.org/10.1175/1520-0426\(1999\)016<0405:RMIHTW>2.0.CO;2](https://doi.org/10.1175/1520-0426(1999)016<0405:RMIHTW>2.0.CO;2), 1999.
- 690 Delrieu, G., Huc, L., and Creutin, J.D.: Attenuation in rain for X- and C-band weather radar systems: Sensitivity with respect to the drop size distribution. *J. Appl. Meteor.* 38(1): 57-68. [https://doi.org/10.1175/1520-0450\(1999\)038<0057:AIRFXA>2.0.CO;2](https://doi.org/10.1175/1520-0450(1999)038<0057:AIRFXA>2.0.CO;2), 1999b.
- Delrieu, G., Khanal, A.K., Yu, N., Cazenave, F., Boudevillain, B., and Gaussiat, N.: Preliminary investigation of the relationship between differential phase shift and path-integrated attenuation at the X band frequency in an Alpine environment. *Atmos. Meas. Tech.*, 13, 3731–3749, <https://doi.org/10.5194/amt-13-3731-2020>, 2020
- 695 Foresti, L., Sideris, I.V., Panziera, L., Nerini, D., and Germann, U.: A 10-year radar-based analysis of orographic precipitation growth and decay patterns over the Swiss Alpine region. *Q. J. R. Meteorol. Soc.*, 144(176), 2277-2301, DOI: 10.1002/qj.3364, 2018.
- 700 Frasier, S.J., Kabeche, F., Figueras i Ventura, J., Al-Sakka, H., Tabary, P., Beck, J. and Bousquet, O.: In-place estimation of wet radome attenuation at X band. *J. Atmos. Oceanic Technol.*, 30, 917–928, <https://doi.org/10.1002/qj.3366>, 2013.
- Germann, U., Galli, G., Boscacci, M., and Bolliger, M.: Radar precipitation measurement in a mountainous region. *Q. J. Royal Meteorol. Soc.*, 132(618), 1669-1692; DOI: 10.1256/qj.05.190, 2006.
- 705 Gorgucci, E., and Chandrasekar V.: Evaluation of attenuation correction methodology for dual-polarization radars: Application to X-band systems. *J. Atmos. Oceanic Technol.*, 22, 1195–1206, doi:10.1175/JTECH1763.1, 2005.
- 710 Haddad, Z.S., Im, E., and Durden, S.L.: Intrinsic ambiguities in the retrieval of rain rates from radar returns at attenuating wavelengths. *J. Appl. Meteor. Climatol.*, 1995, vol. 34, no 12, p. 2667-2679.
- Joss, J. and Lee, R.: The Application of Radar-Gauge Comparisons to Operational Precipitation Profile Corrections. *J. Appl. Meteor.*, 34, 2612–2630, [http://dx.doi.org/10.1175/1520-0450\(1995\)034<2612:TAORCT>2.0.CO;2](http://dx.doi.org/10.1175/1520-0450(1995)034<2612:TAORCT>2.0.CO;2), 1995.
- 715 Khanal, A. K., Delrieu, G., Cazenave, F., and Boudevillain, B.: Radar remote sensing of precipitation in high mountains: detection and characterization of Melting Layer in French Alps, *Atmosphere*, 10, 784; doi:10.3390/atmos10120784, 2019.
- 720 Khanal, A. K., Delrieu, G., Cazenave, F., and Boudevillain, B.: Investigation of the relationship between path-integrated attenuation (PIA) and differential phase shift ( $\Phi_{dp}$ ) in the melting layer of precipitation at X-band frequency. In preparation for submission to *Atmospheric Measurement Techniques*, June 2022.

- Koffi, A.K, Gosset, M., Zahiri, E.-P., Ochou, A.D., Kacou, M., Cazenave, F., and Assamoi, P.: Evaluation of X-band polarimetric radar estimation of rainfall and rain drop size distribution parameters in West Africa. *Atmospheric Research*, 143, 438-461. DOI:10.1016/j.atmosres.2014.03.009, 2014.
- 725 Lengfeld, K., Clemens, M., Münster, H., and Ament, F.: Performance of high-resolution X-band weather radar networks – the PATTERN example, *Atmos. Meas. Tech.*, 7, 4151–4166, <https://doi.org/10.5194/amt-7-4151-2014>, 2014
- Mancini, A., J. L. Salazar, R. M. Lebrón, and Cheong B. L.: A novel instrument for real-time measurement of attenuation of weather radar radome including its outer surface. Part II: the concept. *J. Atmos. Oceanic Technol.*, 35, 953–973, 730 <https://doi.org/10.1175/JTECH-D-17-0083.1>, 2018.
- Marzoug, M., and Amayenc, P.: A class of single and dual-frequency algorithms for rain-rate profiling from a spaceborne radar: Part 1- Principle and tests from numerical simulations. *J. Atmos. Oceanic Technol.*, 11, 1480-1506. [http://dx.doi.org/10.1175/1520-0426\(1994\)011%3C1480:ACOSAD%3E2.0.CO;2](http://dx.doi.org/10.1175/1520-0426(1994)011%3C1480:ACOSAD%3E2.0.CO;2), 1994.
- 735 Matrosov, S. Y., and Clark, K.A.: X-Band Polarimetric Radar Measurements of Rainfall. *J. Appl. Meteor.* 41(9): 941-952. [http://dx.doi.org/10.1175/1520-0450\(2002\)041%3C0941:XBPRMO%3E2.0.CO;2](http://dx.doi.org/10.1175/1520-0450(2002)041%3C0941:XBPRMO%3E2.0.CO;2), 2002.
- Matrosov, S.Y., Kingsmill, D.E., Martner, B.E., and Ralph, F.M.: The Utility of X-Band Polarimetric Radar for Quantitative 740 Estimates of Rainfall Parameters. *J. Hydrometeor.*, 6, 248–262, <https://doi.org/10.1175/JHM424.1>, 2005.
- Matrosov, S.Y., Campbell, C., Kingsmill, D.E., and Sukovich, E.: Assessing Snowfall Rates from X-Band Radar Reflectivity Measurements. *J. Atmos. Oceanic Technol.*, 26, 2324–2339, DOI: 10.1175/2009JTECHA1238.1, 2009.
- 745 Matrosov, S.Y., Kennedy, P.C., Cifelli, R.: Experimentally Based Estimates of Relations between X-Band Radar Signal Attenuation Characteristics and Differential Phase in Rain. *J. Atmos. Oceanic Technol.*, 31, 2442-2450, <https://doi.org/10.1175/JTECH-D-13-00231.1>, 2014.
- Meneghini, R., J. Eckermann, and Atlas, D.: Determination of rain rate from a space borne radar using measurements of total 750 attenuation. *IEEE Transactions in Geosciences and Remote Sensing*, GE-21, 34-43, 1983.
- Meneghini, R., H. Kim, L. Liao, Kwiatkowski J., and Iguchi T.: Path attenuation estimates for the GPM Dual-frequency Precipitation Radar (DPR). *J. Meteor. Soc. Japan*, 99, 181–200, doi:10.2151/jmsj.2021-010, 2020.
- 755 McLaughlin, D., Pepyne, D., Chandrasekar, V., Philips, B., Kurose, J., Zink, M., Droegemeier, K., Cruz-Pol, S., Junyent, F., Brotzge, J., Westbrook, D., Bharadwaj, N., Wang, Y., Lyons, E., Hondl, K., Liu, Y., Knapp, E., Xue, M., Hopf, A., Kloesel, K., DeFonzo, A., Kollias, P., Brewster, K., Contreras, R., Dolan, B., Djaferis, T., Insanic, E., Frasier, S., and Carr, F., 2009: Short-Wavelength Technology and the Potential For Distributed Networks of Small Radar Systems. *Bulletin of the American Meteorological Society*, 90, 1797–1818, <https://doi.org/10.1175/2009BAMS2507.1>, 2009.
- 760 Park, S.-G., Maki M., Iwanami K. , Bringi V. N. , and Chandrasekar V. , 2005: Correction of radar reflectivity and differential reflectivity for rain attenuation at X band. Part II: Evaluation and application. *J. Atmos. Oceanic Technol.*, 22, 1633–1655, doi:10.1175/JTECH1804.1.
- 765 Ryzhkov, A.V., Giangrande, S.E., and Schuur, T.J.: Rainfall estimation with a polarimetric prototype of WSR-88D. *J. Appl. Meteor.*, Vol. 44, Issue 4, p502-515. DOI: 10.1175/JAM2213.1, 2005.
- Ryzhkov, A. V., Diederich, M., Zhang Pengfei, and Simmer, C.: Potential utilization of specific attenuation for rainfall 770 estimation, mitigation of partial beam blockage and radar networking. *J. Atmos. Oceanic Technol.*, Vol. 31, p599-619. DOI: 10.1175/JTECH-D-15-00038.1, 2014.

- Saltikoff, E., G. Haase, L. Delobbe, N. Gaussiat, M. Martet, D. Idziorek, H. Leijnse, P. Novák, M. Lukach, and K. Stephan, 2019. OPERA the Radar Project. *Atmosphere*, 10, 320; doi:10.3390/atmos10060320.
- 775 Saxion, D. S., and Coauthors, 2011: New science for the WSR-88D: Validating the dual polarization upgrade. 27th International Conference on Interactive Information Systems Processing for Meteorology, Oceanography, and Hydrology, Jan 22-27, 2011, Seattle, WA, USA.
- Schneebeili, M., and Berne, A.: An Extended Kalman Filter Framework for Polarimetric X-Band Weather Radar Data Processing. *J. Atmos. Oceanic Technol.*, 29, 711–730, <https://doi.org/10.1175/JTECH-D-10-05053.1>, 2012.
- 780
- Scipion, D. E., R. Mott, M. Lehning, M. Schneebeili, and A. Berne: Seasonal small-scale spatial variability in alpine snowfall and snow accumulation, *Water Resour. Res.*, 49, 1446–1457, doi:10.1002/wrcr.20135, 2013.
- 785 Serafin, R. J., and J. W. Wilson: Operational weather radar in the United States: Progress and opportunity. *Bull. Amer. Meteor. Soc.*, 81, 501–518, 2000.
- Serrar, S., Delrieu, G., Creutin, J.D., Uijlenhoet, and R.: Mountain Reference Technique: Use of mountain returns to calibrate weather radars operating at attenuating wavelengths. *J. Geophys. Res. – Atmospheres*, 105(D2): 2281-2290. DOI :10.1029/1999JD901025, 2000.
- 790
- Sideris, I. V., Gabella, M., Erdin, R., and Germann, U.: Real-time radar–raingauge merging using spatio-temporal co-kriging with external drift in the alpine terrain of Switzerland. *Q. J. R. Meteorol. Soc.*, 140, 1097 – 1111, DOI:10.1002/qj.2188S, 2014.
- 795
- Testud, J, Le Bouar, E., Obligis, E. and Ali-Mehenni, M.: The Rain Profiling Algorithm Applied to Polarimetric Weather Radar. *J. Atmos. Oceanic Technol.*, 17: 332-356. [http://dx.doi.org/10.1175/1520-0426\(2000\)017%3C0332:TRPAAT%3E2.0.CO;2](http://dx.doi.org/10.1175/1520-0426(2000)017%3C0332:TRPAAT%3E2.0.CO;2), 2000.
- 800 Trömel, S., Kumjian, M.R., Ryzhkov, A.V., Simmer, C., and Diederich, M.: Backscatter differential phase – estimation and variability. *J. Appl. Meteor. Climatol.*, 52, 2529-2548, doi: 10.1175/JAMC-D-13-0124.1, 2013.
- Westrelin, S., Meriaux, P., Tabary, P., and Aubert Y.: Hydrometeorological risks in Mediterranean mountainous areas - RHYTMME Project: Risk Management based on a Radar Network. ERAD 2012 7<sup>th</sup> European Conference on Radar in Meteorology and Hydrology, June 2012, Toulouse, France. 6 p., hal-01511157, 2012.
- 805
- Yu, N., Gaussiat, N., and Tabary, P.: Polarimetric X-band weather radars for quantitative precipitation estimation in mountainous regions. *Q. J. Royal Meteorol. Soc.*, 144(717), DOI:10.1002/qj.3366, 2018.

810



**Table 1:** Values and ranges of variation of the attenuation model parameters in the sensitivity analysis

<b>Parameters fixed for a given simulation</b>			
Parameter	Value(s)		
$b_{AZ}$	0.80		
$b_{AK}$	0.9, 1.0, 1.05, 1.10, 1.15, 1.20		
dC	-2, -1.25, -1, -0.75, -0.5, -0.25, 0, 0.25, 0.5, 0.75, 1, 1.25, 2		
<b>Parameters taken into account in the Latin Hypercubes Sampling for a given simulation</b>			
Parameter	Central value	Range of multiplicative coefficient of the central value (in dB)	Lower and upper limit
$a_{AZ}$	$1.0 \cdot 10^{-4}$	[-3, 3 dB]	$[0.5 \cdot 10^{-4}, 2.0 \cdot 10^{-4}]$
$a_{AK}$	0.3	[-3, 3 dB]	[0.15, 0.6]
$dAF_m$	1.0	[-1, 1 dB]	[0.79, 1.26]
$AF(r_0)$	$PIA_0^* = 0.0126 Z_0^{1.6}$ $PIA_0^* \text{ [dB]}; Z_0 \text{ [dBZ]}$ $AF^*(r_0) = 10^{-PIA_0^*/10}$		Lower limits: $PIA_0^L = 0; A(r_0)^L = 1$ Upper limits: $PIA_0^U = n PIA_0^*$ $A(r_0)^U = 10^{-PIA_0^U/10}$ with $n = 5$


815

**Table 2.** Some characteristics of the three convective events considered in this study. The melting layer (ML) detection was performed with the 25°-elevation angle measurements of the XPORT radar using the algorithm described in Khanal et al. (2019). The total rain amount and the maximum rainrate are recorded at the raingauge available at the IGE site at the bottom of the Grenoble valley. The PIA<sub>m</sub> statistics are derived from the MRT by considering all the 22 mountain targets and the 0° elevation data of the Moucherotte Mount radar.


Date	Beginning (UTC)	End (UTC)	Minimum altitude of the ML bottom (m asl)	Total rain amount (mm)	Maximum rainrate in 10 min (mm h <sup>-1</sup> )	Maximum PIA <sub>m</sub> value (dB)	Number of profiles with PIA <sub>m</sub> greater than a given value
21 July 2017	15:30	19:00	3000	35.2	42.0	59.8	11 (> 40 dB)
8 August 2017	8:30	14:00	3700	27.9	48.0	63.4	20 (> 40 dB)
31 August 2017	7:00	11:30	3200	19.9	15.5	17.5	8 (> 15 dB)

825


830

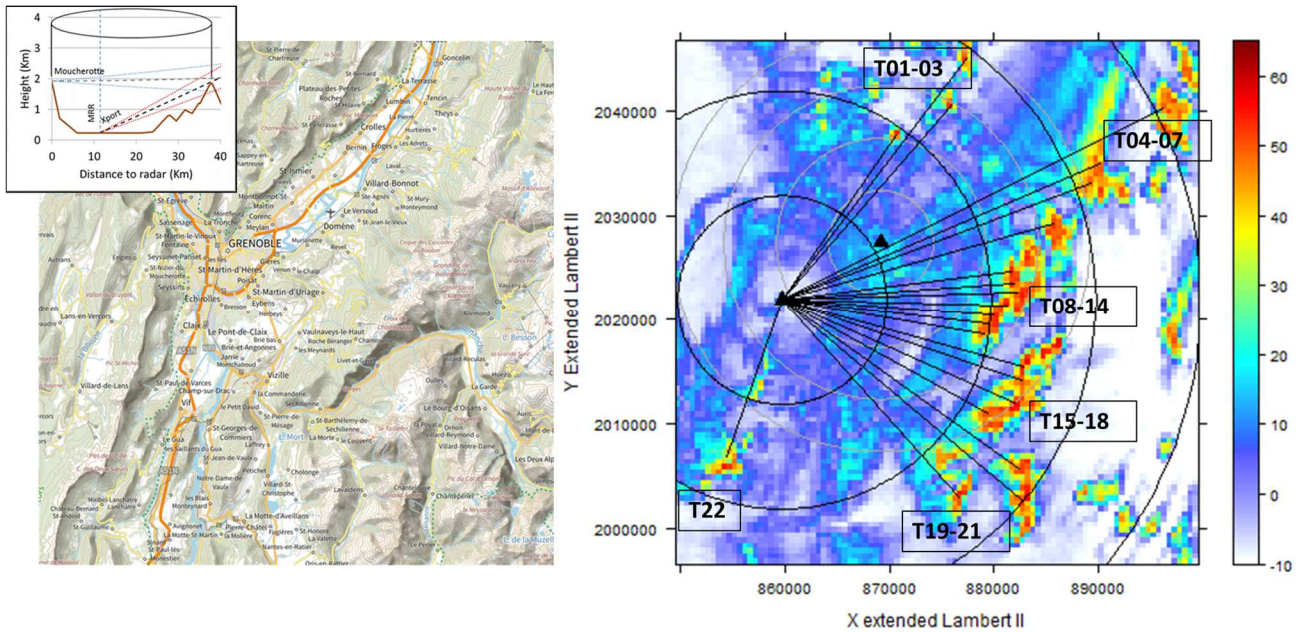


**Figure 1:** Left - 50x50 km<sup>2</sup> map of the region of Grenoble, France (from Geoportail, Institut Géographique National); Right – Dry-weather reflectivity map of the X-Band weather radar located on top of the Moucherotte Mount (1901 m asl) in the Vercors massif. The radar is marked with a black triangle and circular range markers spaced by 10 km. The Cartesian map has a resolution of 500 m. The measurements were taken at an elevation angle of 0° during dry-weather conditions before the 21 July 2017 event. The radial lines indicate the azimuths and ranges of the 22 mountain targets used for the MRT implementation. Targets 1-3 are located in the Chartreuse Massif, targets 4-14 in the Belledonne Massif, targets 15-21 in the Taillefer Massif and Target 22 in the Vercors Massif. In the background, the second black triangle indicates the IGE site at the bottom of the valley (210 m asl). The grey circles with 5 km spacing indicate the coverage of the XPORT X-Band polarimetric radar whose measurements were used in the present study only for the detection of the melting layer.

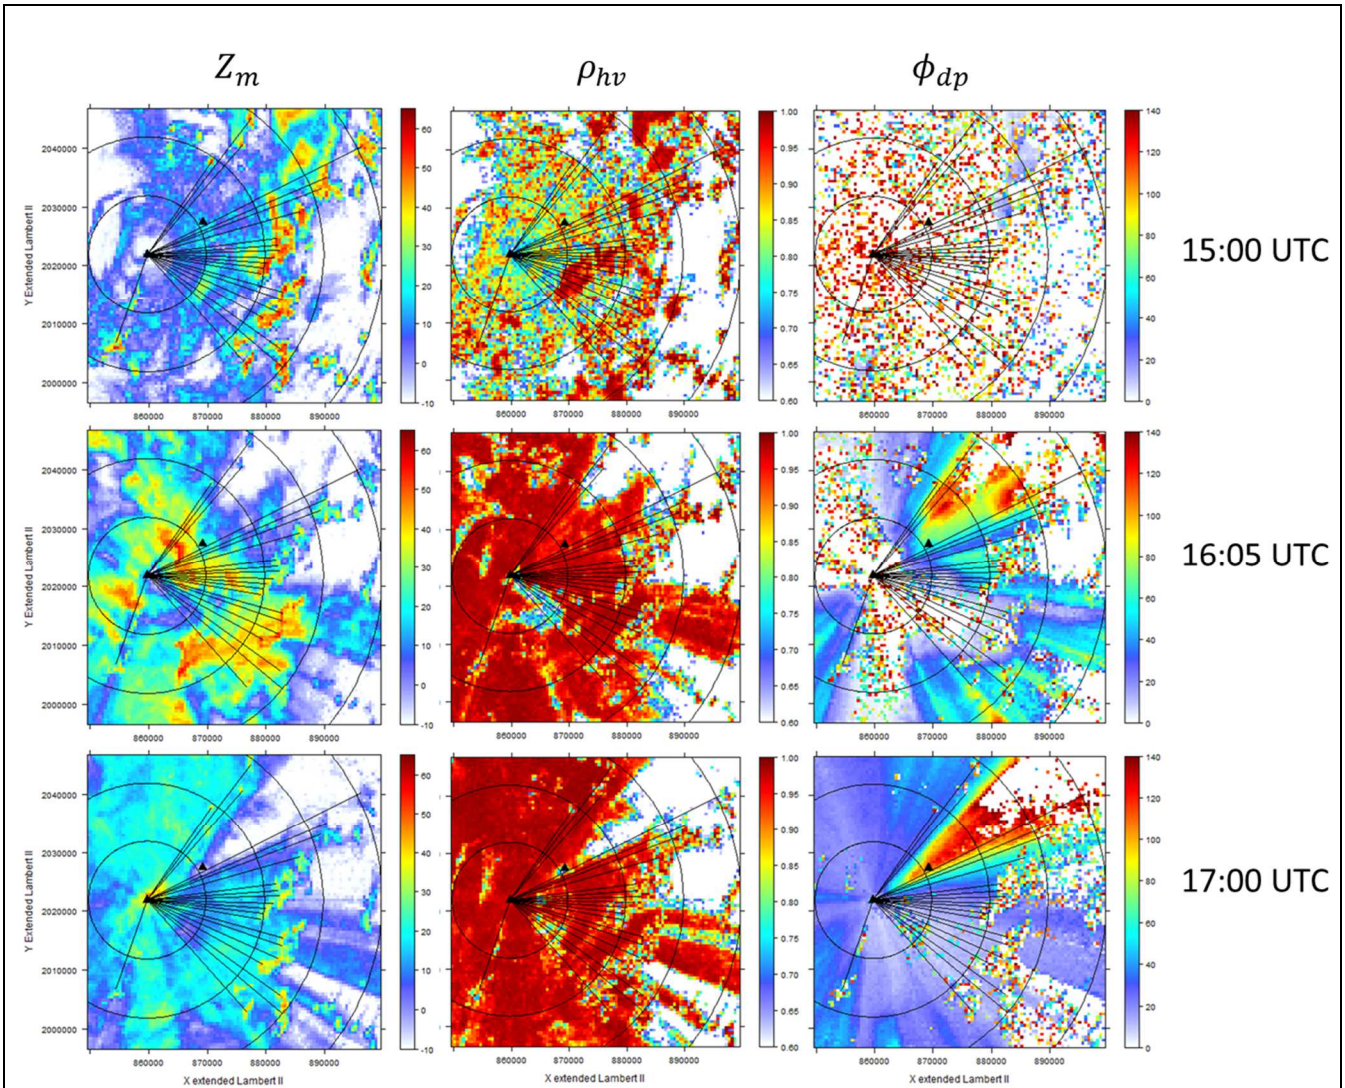


**Figure 2:** Examples of  $0^\circ$ -elevation PPIs of measured reflectivity (left), co-polar correlation coefficient (middle) and total differential phase shift (right) taken before (top) and at two moments with intense precipitation (middle and bottom) during the 21 July 2017 convective event. As in Fig. 1, the circular range markers of the Mouchette Mount radar are spaced by 10 km.

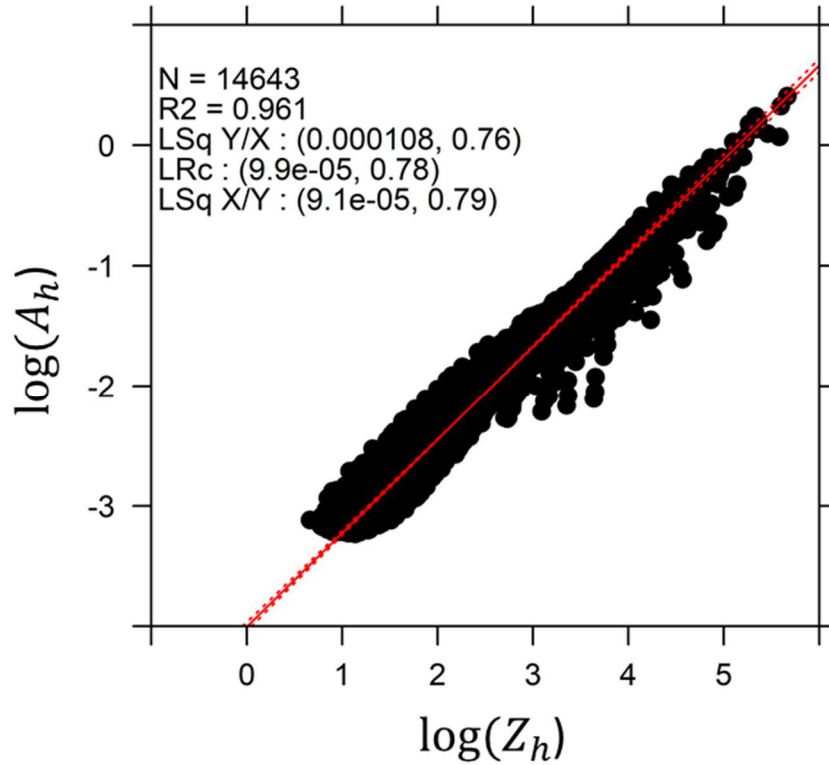


**Figure 3:** Results of the fitting of DSD-derived power-law models for the horizontal specific attenuation  $A_h$  [ $\text{dB km}^{-1}$ ] as a function of the horizontal reflectivity  $Z_h$  [ $\text{mm}^6 \text{m}^{-3}$ ] using a classical logarithmic of base 10 transformation of the two variables. Are given in the insert the number of points  $N$ , the square of the correlation coefficient ( $R^2$ ) of the logarithmic regression, the prefactors and exponents of the resulting least-square regressions of the variable in ordinate versus the variable in abscissa (Lsq Y/X) and vice versa (Lsq X/Y) as well as the least-rectangle regression (LRc) which considers the two variables on an equal footing.

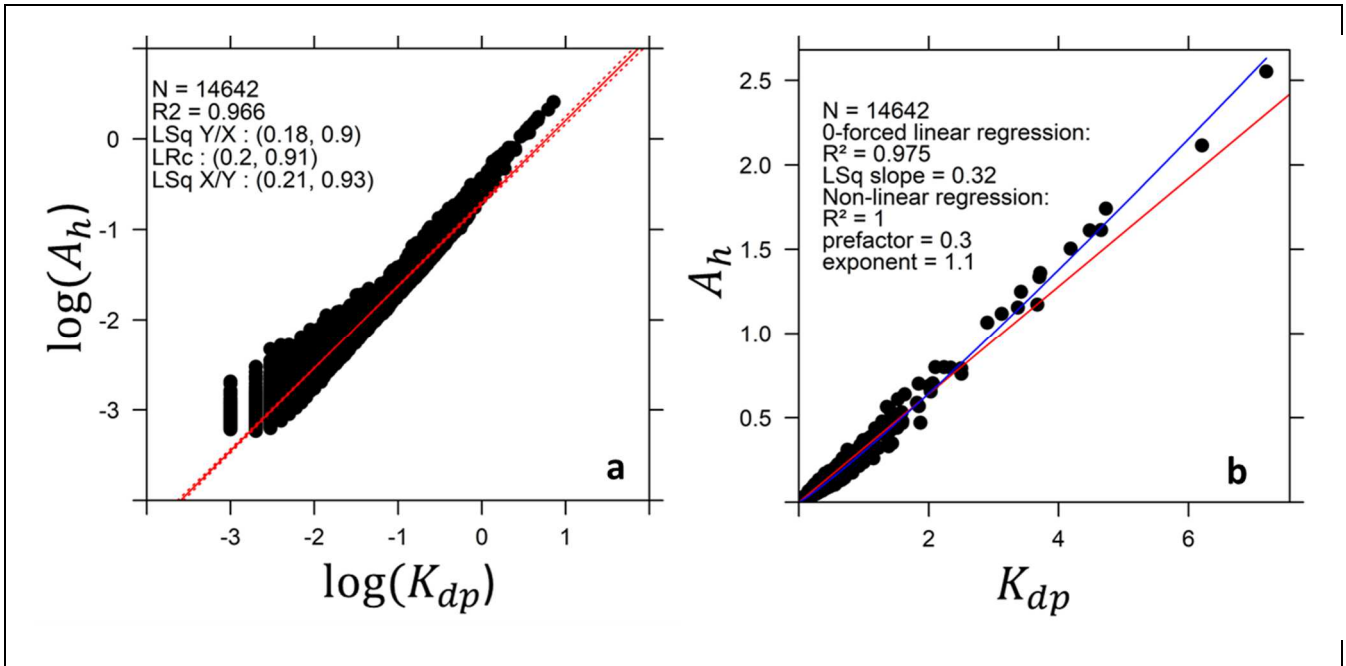

**Figure 4:** Fitting of DSD-derived power-law models for the horizontal specific attenuation  $A_h$  [ $\text{dB km}^{-1}$ ] as a function of the specific differential phase shift on propagation  $K_{dp}$  [ $^{\circ} \text{km}^{-1}$ ] (a) using a classical logarithmic of base 10 transformation of the two variables (same comments as in Fig. 3 for this graph) and (b) using natural values of the two variables. The red line in (b) is the 0-forced linear regression with a slope equal to 0.32 and the blue curve is the non-linear fit of a power-law model with a prefactor of 0.30 and an exponent of 1.1.

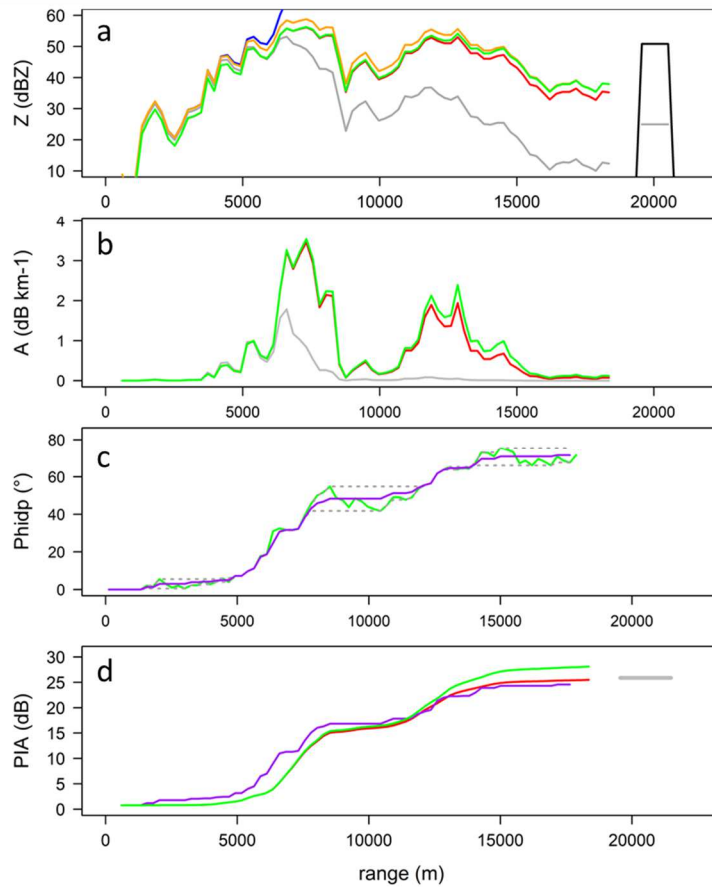


**Figure 5:** Implementation of the five algorithms (blue: AZhb; red: AZC; orange: AZ $\alpha$ ; green: AZ0; purple: PIA $_{\phi_{dp}}$ ) for mountain target T13 during the 21 July 2017 convective event at 16:00 UTC using a near-optimal parameter set (see text for details). The results are displayed in terms of profiles of (a) reflectivity, (b) specific attenuation, (c) differential phase shift on propagation and (d) path-integrated attenuation. The grey profile in (a) is the measured reflectivity profile; the black and grey horizontal lines at range 20 km represent the mean dry-weather baseline and current reflectivities, respectively, of the mountain target. The resulting measured PIA value of 25.2 dB is reported in grey in (d). The grey profile in (b) is derived from the measured reflectivity profile by using eq. 2.5. The purple line in (c) is the raw total differential phase shift profile and the grey dotted curves are the envelope curves used in the regularization procedure (Delrieu et al. 2020, Khanal et al. 2022).

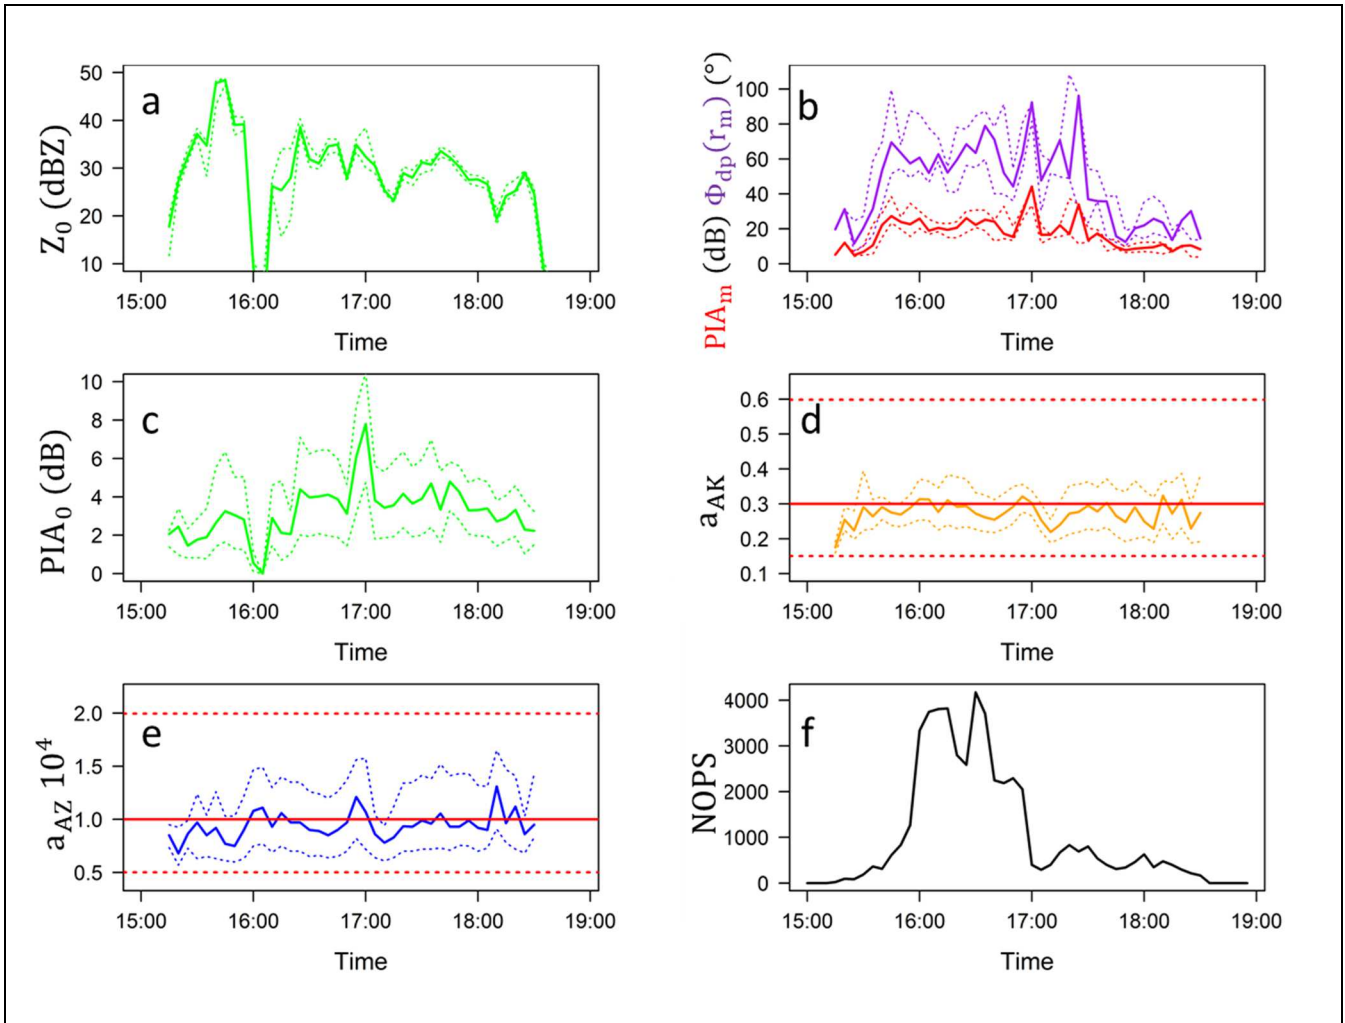


**Figure 6:** Time series of the input variables and optimal parameters for the best simulation obtained for the 21 July 2017 convective event. The optimal set of fixed parameters for this event is  $dC = 0.5$  dB,  $b_{AZ} = 0.80$  and  $b_{AK} = 1.1$ . For each of the three considered input variables (a)  $Z_0$ , (b)  $PIA_m$  (red) and  $\Phi_{dp}(r_0, r_m)$  (purple), are displayed the median (continuous line) and the 25 and 75% quantiles (dotted lines) of their distributions over the 22 mountain targets. A similar representation is proposed for the LHS optimal parameters (c)  $PIA_0$ , (d)  $a_{AK}$  and (e)  $a_{AZ}$ , except that the distributions are established over all optimal parameters of all targets. In (d) and (e), the dotted horizontal lines materialize the lower and upper limits consider in the LHS of the considered parameter. The time series of the number of optimal parameter sets (NOPS) cumulated over all the 22 targets is displayed in (f).




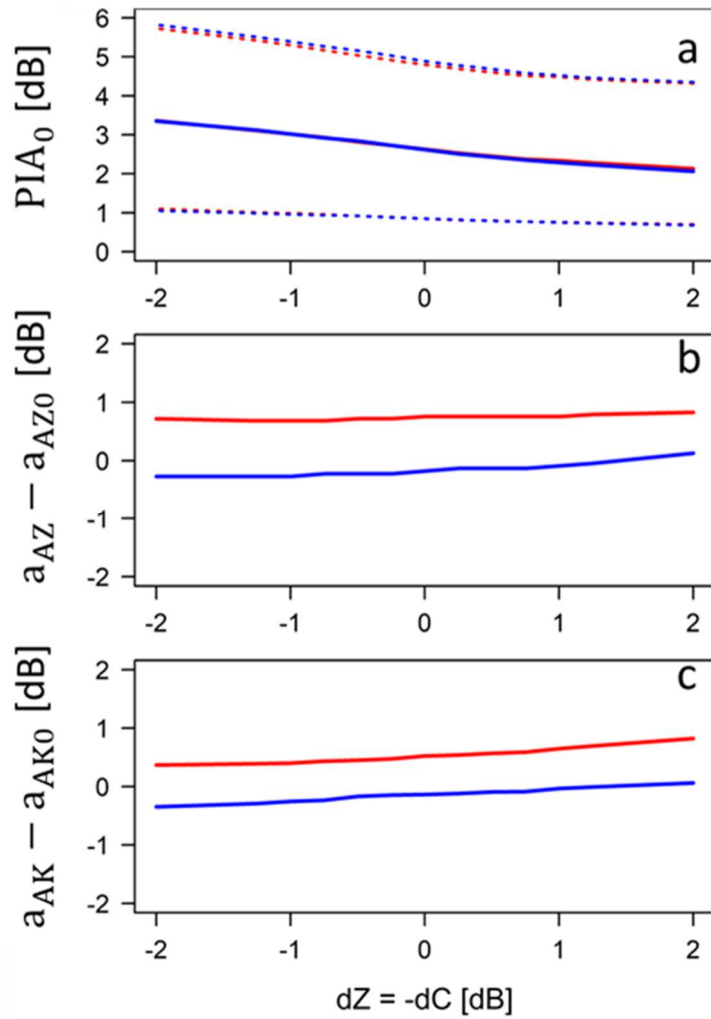


**Figure 7:** Evolution of the medians of the distributions of on-site attenuation (a), prefactor of the A-Z relationship (b) and prefactor of the A –  $K_{dp}$  relationship (c) estimated for the 21 July 2017 event as a function of the calibration error. The variable  $dZ$ , equal to  $-dC$ , is used to represent the dBZ value to be added to the measured reflectivities for correcting the calibration error. The prefactors, expressed in dB, are calculated with respect to the central values of their intervals of variation:  $a_{AZ0} = 10 \log(1.0 \cdot 10^{-4})$  and  $a_{AK0} = 10 \log(0.3)$  (Table 1). Like in Fig. 4b, the red curves correspond to  $b_{AK} = 1$  and the blue curves to  $b_{AK} = 1.1$ . The dotted red and blue curves in the top graphs represent the 25 and 75% quantiles of the distributions of  $PIA_0$ .

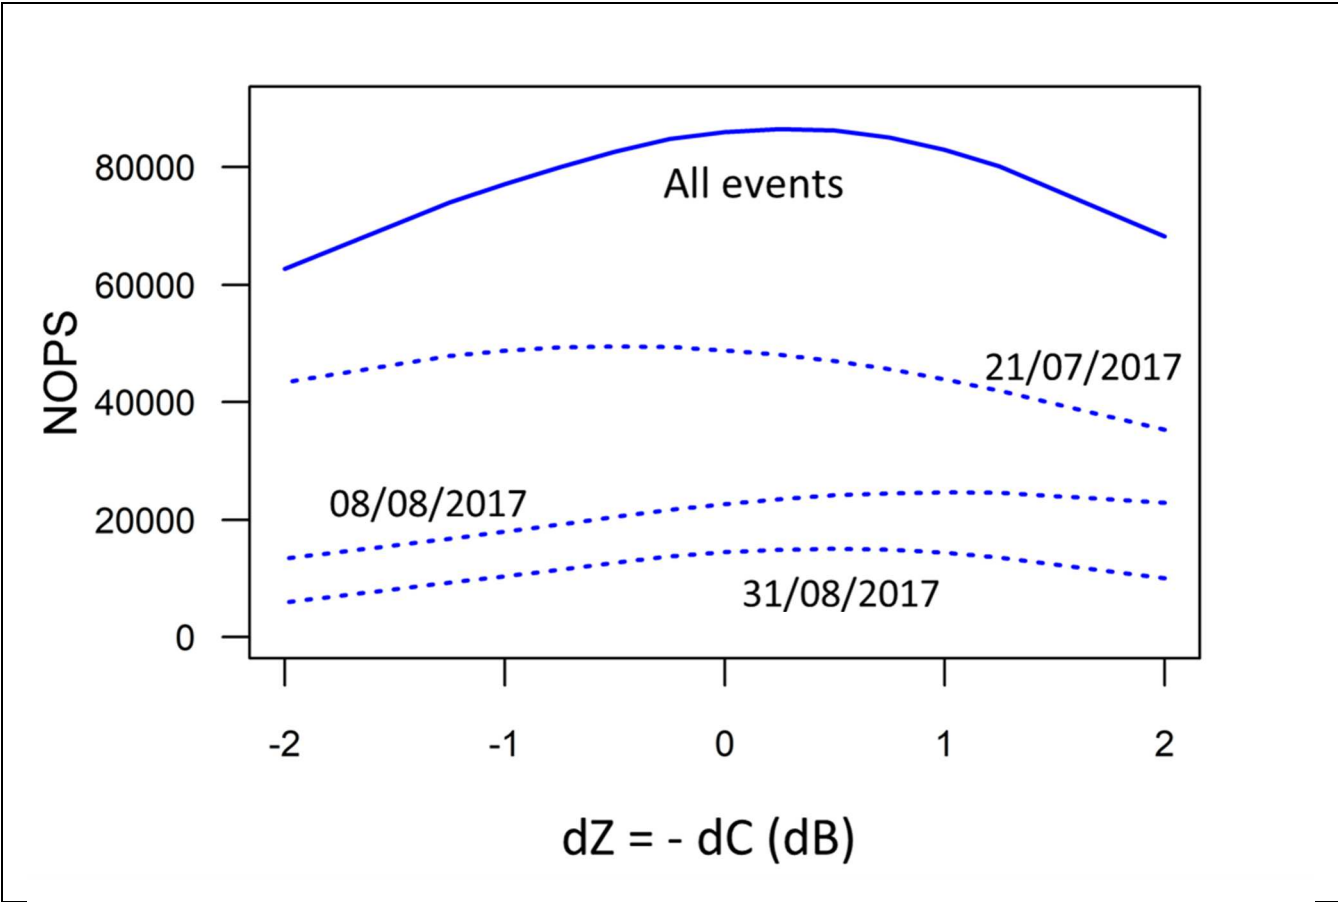

**Figure 8:** Evolution of the total number of optimal parameter sets (NOPS) as a function of the radar calibration error for three convective events separately (dotted blue curves) and all together (solid blue curve). The other fixed parameters for these simulations are  $b_{AZ} = 0.8$  and  $b_{AK} = 1.1$ .

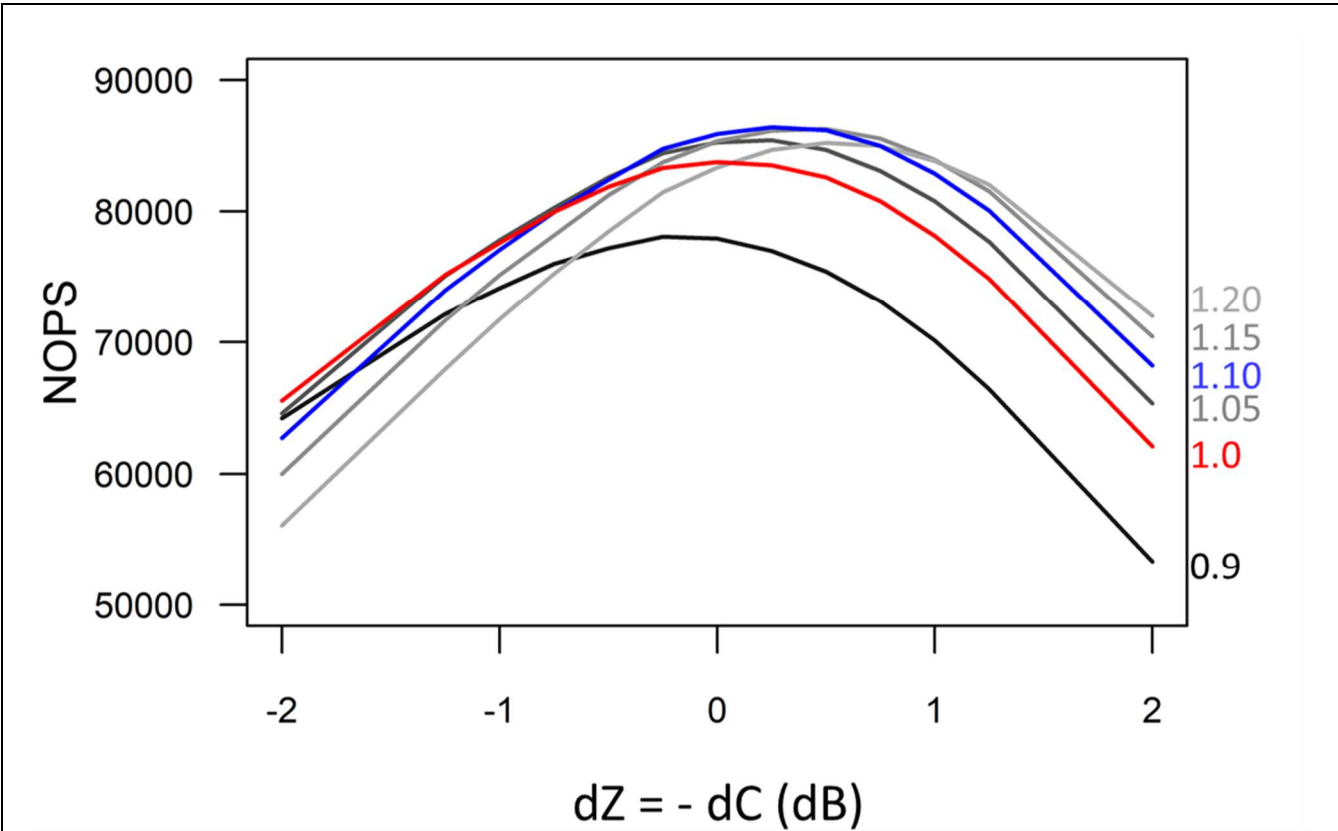

**Figure 9:** Evolution of the total number of optimal parameter sets (NOPS) computed for the three convective events all together as a function of  $dZ$  for various values of the exponent of the  $A - K_{dp}$  relationship listed on the right-hand side of the figure. Like in Figs. 4b and 7, the red curve corresponds to  $b_{AK} = 1.0$  and the blue curve to  $b_{AK} = 1.1$ .

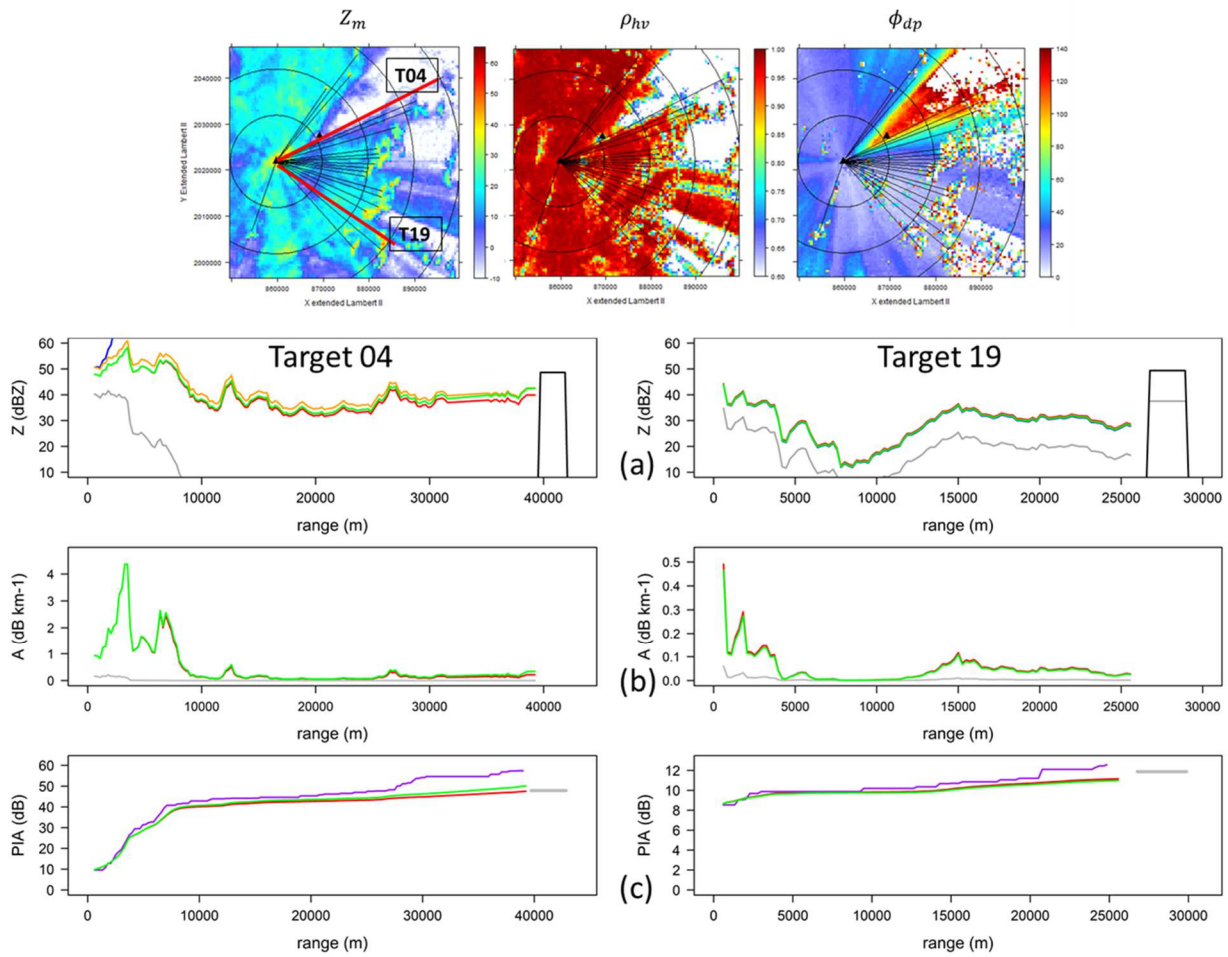

**Figure 10:** Implementation of the five algorithms with sets of optimal parameters (blue: AZhb; red: AZC; orange: AZ $\alpha$ ; green: AZO; purple: PIA $_{\phi_{dp}}$ ) on 21 July 2017 at 17:00 UTC for mountain target T04 with both along-path and on-site attenuation (left), as well as for mountain target T19 with on-site attenuation mainly (right). The results are displayed in terms of profiles of (a) reflectivity, (b) specific attenuation, (c) path-integrated attenuation. In the upper images are also displayed the PPIs of the measured reflectivity (with the indication of the position of the two targets in red), the co-polar correlation coefficient and the raw total differential phase shift.