

1 Particle Inertia Effects on Radar Doppler Spectra Simulation

2 Zeen Zhu¹, Pavlos Kollias^{1,2} and Fan Yang¹

3 ¹Environmental and Climate Sciences Dept, Brookhaven National Laboratory, Upton, NY, USA

4 ² Division of Atmospheric Sciences, Stony Brook University, Stony Brook, NY, USA

5 *Correspondence to: Zeen Zhu (zzhu1@bnl.gov)*

6

7 **Abstract.** Radar Doppler spectra observations provide a wealth of information about cloud and
8 precipitation microphysics and dynamics. The interpretation of these measurements depends on
9 our ability to simulate these observations accurately forward. The effect of small-scale turbulence
10 on the radar Doppler spectra shape has been traditionally treated by implementing the convolution
11 process on the [hydrometeor](#) reflectivity spectrum and environment turbulence. This approach
12 assumes that all the particles in the radar sampling volume respond the same to turbulent scale
13 velocity fluctuations and neglects the particle inertial effect. Here, we investigate the [inertia effects](#)
14 of [liquid phase particles](#) on the forward modelled radar Doppler spectra. A physics-based
15 simulation is developed to demonstrate that big droplets, with large inertia, are unable to follow
16 the rapid change of velocity field in a turbulent environment. These findings are incorporated to a
17 new radar Doppler spectra simulator. Comparison between the traditional and the newly
18 formulated radar Doppler spectra simulators indicates that the conventional simulator leads to an
19 unrealistic broadening of the spectrum, especially in strong turbulence environment. This study
20 provides clear evidence to illustrate the droplets inertial effect on radar Doppler spectrum and
21 develops a physics-based simulator framework to accurately emulate the Doppler spectrum for a
22 given Droplet Size Distribution in turbulence field. The proposed simulator has various potential
23 applications [for](#) the cloud/precipitation studies and provides a valuable tool to decode the cloud
24 microphysical and dynamical properties from Doppler radar observation.

25

26

27

28

29

30

31

32 1 Introduction

33 The radar Doppler spectrum represents the frequency (velocity) distribution of the
34 backscattered radar signal at a particular range. For a vertically pointing radar, the Doppler
35 spectrum provides the distribution of the backscattered signal over a range of Doppler velocities,
36 whose value depends on the dynamical (i.e., vertical air motion) and cloud microphysical (i.e.,
37 hydrometeors concentration and sizes) properties within the radar sampling volume. A variety of
38 research applications that utilize the full radar Doppler spectrum have been developed. For
39 instance, Doppler spectrum can be used to simulate rain Droplet Size Distribution (DSD) (Atlas et
40 al., 1973), remove clutters and identify hydrometeor signals (Williams et al., 2018; Luke et al.,
41 2008; Moisseev and Chandrasekar, 2009), identify drizzle development stage (Zhu et al.,
42 2022; Acquistapace et al., 2019), retrieve vertical air motion (Kollias et al., 2002; Williams,
43 2012; Zhu et al., 2021), characterize the melting-layer properties (Li and Moisseev, 2020; Mróz et
44 al., 2021), and to improve the representation of cloud microphysical process in model (Kollias et
45 al., 2011b). Combined with the depolarization capability, Doppler spectrum can also be used for
46 cloud-phase classifications and to investigate ice-cloud microphysical process (Luke et al.,
47 2010; Luke et al., 2021; Kalesse et al., 2016; Oue et al., 2018). The list of widely application of the
48 Doppler spectrum in the cloud-precipitation research mentioned above is by no means exhaustive.

49 Despite the extensive applications, an unambiguous interpretation of radar Doppler
50 spectrum still remains a challenging task in the cloud radar community. One important reason is a
51 lack of fully understanding of the entanglement between the hydrometeor microphysics and
52 environment dynamics as well as their manifestation on the Doppler spectrum morphology
53 (Kollias et al., 2002). More specifically, the Doppler spectrum width is mainly contributed by the
54 spread of the still-air hydrometeor terminal velocity, the horizontal and vertical wind shear within
55 the radar observation volume and the environment turbulence; while the Doppler frequency shift
56 is a combined measure of the air motion and the particles falling velocity (Doviak, 2006). A
57 successful separation of the microphysical and dynamical contributions to Doppler spectrum is
58 essential to reduce retrieval uncertainties and to better characterize the cloud-precipitation
59 properties (Zhu et al., 2021).

60 Doppler spectrum simulators have been invaluable for the interpretation of the radar
61 Doppler spectrum shape (Capsoni et al., 2001; Oue et al., 2020; Kollias et al., 2011a; Maahn et al.,
62 2015). Traditionally, the impact of turbulence on the shape of the radar Doppler spectrum is

63 represented by the convolution of the still air (no air motion) hydrometeor reflectivity spectrum
64 with a Gaussian distribution (Gossard and Strauch, 1989). The width of the Gaussian distribution
65 is parameterized as a function of the radar parameters and the turbulence intensity often
66 represented in terms of eddy dissipation rate (Borque et al., 2016). This approach is only valid
67 under the assumption that the droplet inertia effect is negligible and droplets with different sizes
68 can follow exactly the environment wind field. In reality, however, big droplets with large inertia
69 cannot follow the rapid change of wind velocity field unlike small droplets perform (Yanovsky,
70 1996;Lhermitte, 2002). Not accounting for the particle inertia effect can lead to a misinterpretation
71 of the Doppler spectrum and cause large uncertainties for retrieval products (Nijhuis et al., 2016).

72 Several physics-based frameworks have been proposed to simulate the droplet motions in
73 turbulence field (Khvorostyanov and Curry, 2005;Lhermitte, 2002). Here, the approach proposed
74 by Lhermitte (2002) is used to illustrate the droplets inertial effect and to investigate this effect on
75 the radar Doppler spectrum. In detail, we aim to answer the following questions: 1) How does
76 inertia affect the response of a droplet in a fluctuating turbulent wind field? 2) Is this effect
77 significant on the simulated and observed radar Doppler spectrum? and 3) How can we account
78 for the droplet inertia in radar Doppler spectrum simulators? Building on these investigations, a
79 new approach to generate radar Doppler spectrum is described.

80 The structure of this paper is organized as follows: section 2 describes the physical
81 modeling framework used to simulate the liquid droplet motion and to illustrate the droplets inertia
82 effect in a turbulent environment; section 3 proposes the physics-based Doppler spectrum
83 simulator and compares the emulated spectra to the ones generated from the traditional method;
84 in section 4 one observed Doppler spectrum is used as an illustrative example to compare the
85 Doppler spectrum generated from the two simulators; section 5 concludes the major results of this
86 study and followed by a discussion.

87

88

89

90

91

92

93

94

95 **2 Droplets inertial effect in a turbulent environment**

96 In this section, a physics-based simulation framework used to illustrate the droplets inertia
97 effect in a turbulent environment is presented. First, we will introduce the equations used to
98 describe the velocity of droplets moving in the air. Then a generated turbulent wind field is applied
99 to the simulation framework to illustrate the droplet inertial effect and the potential implication on
100 the generated Doppler spectrum.

101

102 **2.1 Motion of droplets in the air**

103 The fundamental dynamical framework of describing the droplets motion in the air is
104 adapted from Lhermitte (2002), p.81. Assuming a liquid droplet with diameter of D , the motion
105 of the droplet in the air can be described as:

106

$$F - mg = m \frac{dV_D}{dt} \tag{1}$$

107

108 where m is the droplet mass, V_D is the droplet velocity, F is the drag force exerted by wind
109 expressed as:

$$F = \frac{C_d S (V_w - V_D)^2 \rho_a}{2} \cdot \text{sgn}(V_w - V_D) \tag{2}$$

111 Where C_d is the wind drag coefficient, ρ_a is air density, S is the droplet cross section normal to
112 wind direction. V_w is wind velocity and $(V_w - V_D)$ indicates droplet velocity with respect to air.
113 In a turbulent environment, V_w could be either positive or negative, thus the exerted wind can either
114 accelerate or decelerate the droplet velocity. To this end, the sign function $\text{sgn}(V_w - V_D)$ is
115 included to account for the wind drag force direction.

116 For spherical droplets, S can be calculated as:

$$S = \frac{\pi D^2}{4} \tag{3}$$

117

118

119 and droplet mass (m) is calculated as:

$$m = \frac{1}{6}\pi\rho_l D^3 \quad (4)$$

where ρ_l is liquid water density.

The only unknown factor is the drag coefficient C_d , which should be derived from experiment. Numerous studies have been conducted to measure the sphere terminal velocity in fluid and estimate C_d as a function of Reynolds number (Re) (Schlichting and Kestin, 1961; Lapple and Shepherd, 1940; Haider and Levenspiel, 1989). However, the derived $C_d - Re$ relationships in the previous studies are applied for rigid spherical particles. For the rain droplets with large diameter, the droplet is distorted and the exerted drag coefficient for a given Re deviates from the rigid sphere. To this end, the drag term of the rain droplet is obtained from the measurement of the terminal velocity of liquid droplets. Here, we adapt the experiment data from Gunn and Kinzer (1949), in which study C_d and Re are estimated for liquid droplets with diameter ranging from 100 μm to 5.8 mm. The experiment-derived C_d and Re are shown in Figure 1, we further fit the data with a fifth-degree polynomial (red line) to estimate C_d for a given Re :


$$\log C_d = 1.4277 - 0.8598 \times \log Re + 0.0699 \times (\log Re)^2 - 0.0023 \times (\log Re)^3 - 0.0003 \times (\log Re)^4 + 0.0013 \times (\log Re)^5 \quad (5)$$

Where the Reynolds number Re is represented as:

$$Re = \frac{|V_w - V_D| D \rho_a}{\mu} \quad (6)$$

where μ is the air dynamic viscosity. The values used for ρ_a , ρ_l , and μ are 1.22 kg m^{-3} , 1000 kg m^{-3} , $1.81 \times 10^{-5} \text{ kg m}^{-1} \text{ s}^{-1}$, corresponding to atmospheric environment of 15°C and 1000 hPa .

Combining (1)-(6), a set of ordinary differential equation is constructed, the droplet velocity (V_D) for a given droplet with diameter D as a function of time can be resolved numerically for a given wind field (V_w).

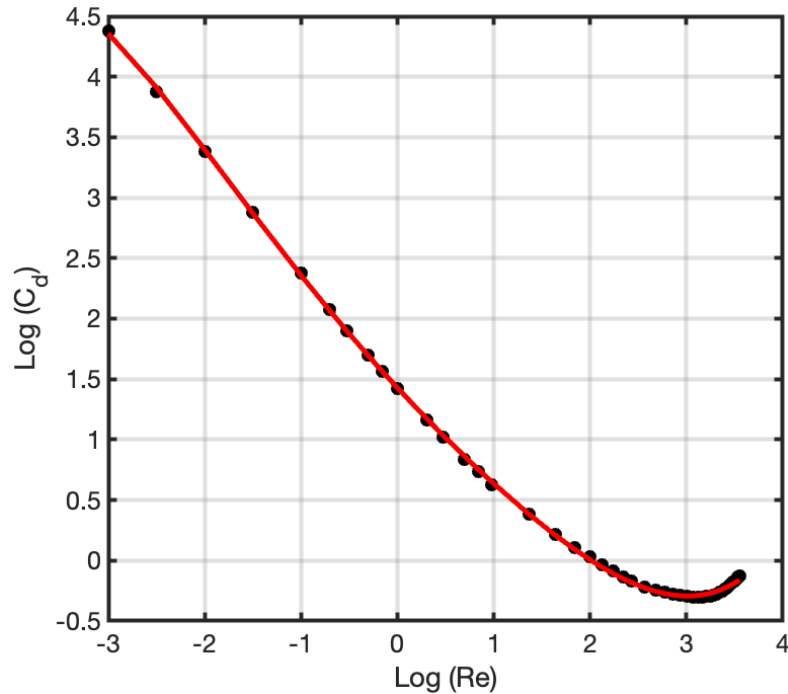


149

150 Figure 1: The black dots represent the experiment-derived C_d and Re adapted from Gunn and
 151 Kinzer (1949). The red line is a fifth-degree polynomial fitting function.

152

153 **2.2 Illustration of droplet inertial effect**

154 We first illustrate the inertial effect by calculating droplets motion using a constant wind
 155 velocity. For simplicity, here we assume all the droplets are moving horizontally, thus the gravity
 156 (mg) is neglected in Eq.1. Seven droplets with diameters of $10\ \mu m$, $50\ \mu m$, $100\ \mu m$, $500\ \mu m$, 1
 157 mm , $2\ mm$, $5\ mm$ are selected to cover the size range of cloud droplet, drizzle and raindrops.
 158 Initial velocity of all the droplets is $0\ ms^{-1}$, a constant wind velocity with $10\ ms^{-1}$ is exerted upon
 159 the droplets when $t > 0\ s$. Due to the wind drag force, droplets start to move but with different
 160 accelerations depending on droplet inertia: droplets with small inertia are accelerated more quickly
 161 than larger ones. This effect is clearly illustrated in Figure 2: droplet with diameter of $10\ \mu m$
 162 quickly reach to the wind velocity within only $0.002s$, while droplets with $1\ mm$ and $5\ mm$ need
 163 5 and $50s$ to adjust their motion to the exerted wind velocity. The different response time of
 164 droplets with different sizes to the exerted wind velocity suggests that small droplets are more
 165 capable to follow the velocity variation than their large counterparts.

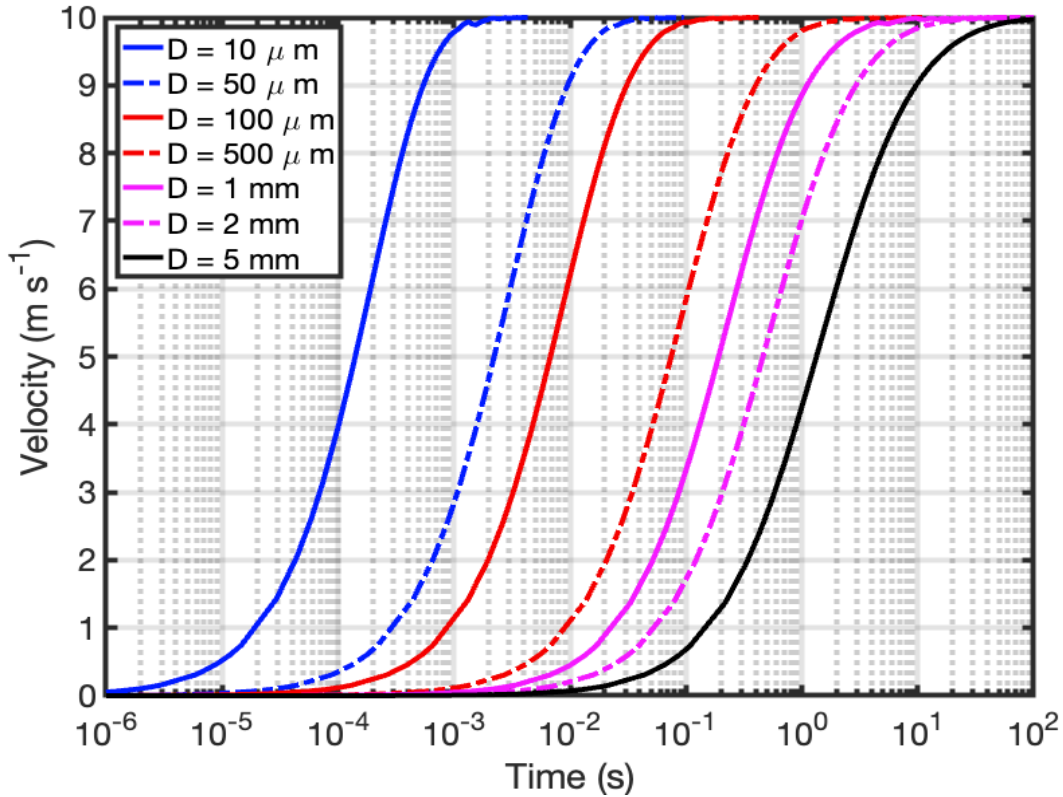

166

167 Figure 2. Velocity of droplets with diameter of $10 \mu\text{m}$ (blue solid line), $50 \mu\text{m}$ (blue dash-dot line),
 168 $100 \mu\text{m}$ (red line), $500 \mu\text{m}$ (red dash-dot line), 1 mm (magenta solid line), 2 mm (magenta dash-
 169 dot line) and 5 mm (black solid line) as function of time after exerted by a constant wind with 10
 170 ms^{-1} -velocity.

171

172 In real atmosphere, air velocity is not constant but fluctuates with time as a representative
 173 of turbulent nature. In this study we adapt the approach proposed by Deodatis (1996) by using the
 174 Spectral Representation Method (SRM) to generate the turbulent wind field based on a predefined
 175 Von Karman energy spectrum. The SRM is widely used in the wind engineering community due
 176 to its high accuracy, simplicity and computational efficiency. (Shinozuka and Deodatis, 1991; Zhao
 177 et al., 2021). Here, the 1-D turbulence wind is generated with 2 Hz sampling frequency, 1000s
 178 duration and with standard deviation of 0.3 ms^{-1} , the codes being applied to generate the wind can
 179 be accessed from Cheynet (2020). The selection of 0.3 ms^{-1} standard deviation is based on a
 180 quantitatively estimation of cloud radar observation under a typical cloudy environment.
 181 Specifically, for the convective cloud system with eddy dissipation rate (ε) of $5 \times 10^{-3} \text{ m}^2 \text{ s}^{-3}$
 (Mages et al., 2022), the turbulence-contributed Doppler spectrum width (σ_t) from a vertical

pointing radar with 30m range resolution(ΔR) and 0.3° beamwidth (θ) at 1km height is estimated to be 0.27 ms^{-1} based on the equation from Borque et al. (2016):

$$\varepsilon \approx \frac{\sigma_t^3}{\sigma_z (1.35\alpha)^{3/2}} \left(\frac{11}{15} + \frac{4}{15} z^2 \frac{\sigma_x^2}{\sigma_z^2} \right)^{-3/2} \quad (7)$$

Where α is the Kolmogorov constant with 0.5, $\sigma_z = 0.35 * \Delta R$, $\sigma_x = \frac{\theta}{4\sqrt{\ln 2}}$, θ is the one-way half-power width with unit of radian. z is height above surface.

The spectrum and time series of the generated air velocity are shown in Figure 3: the turbulence spectrum (Figure 3a) characterizes typical inertial subrange of the turbulence scale with a standard deviation of 0.3 ms^{-1} (Figure 3b).

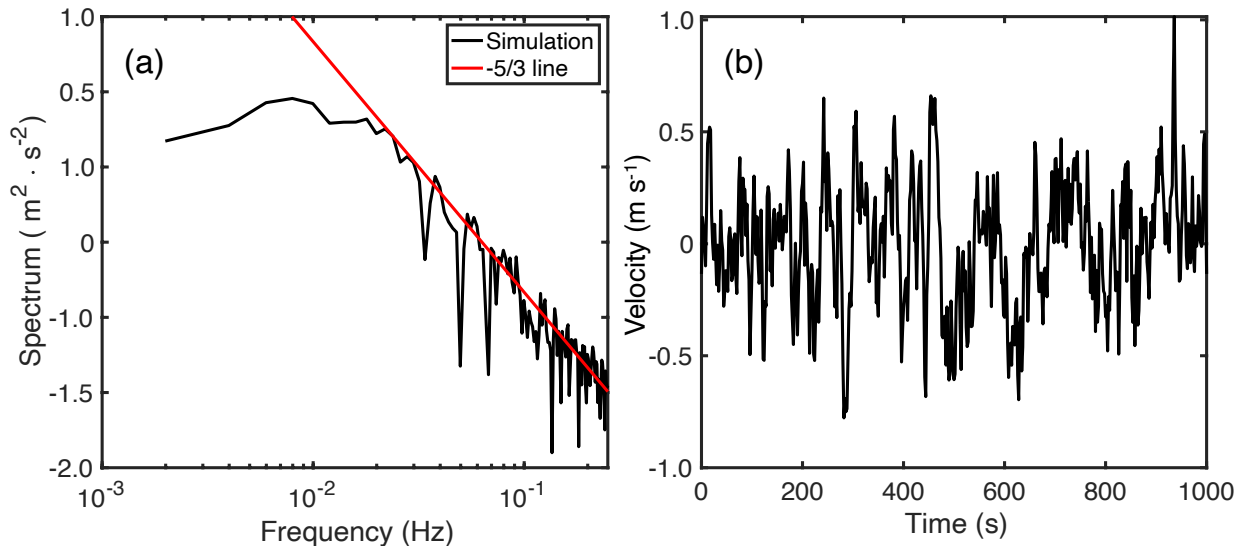



Figure 3. (a) Spectrum of the simulated turbulence (black line), red line represents the -5/3 slope. (b): Time series of vertical velocity for the simulated turbulence.

The generated air velocity is assigned to V_w in Eq. (2) to simulate the motion of droplets with initial velocity set as 0 ms^{-1} . Figure 4a shows the time-depended velocity of droplets with selected diameter of 0.5 mm, 1 mm, 2 mm, 3 mm. Droplets with different sizes response differently with the change of wind velocity, and there are two notable characteristics due to the inertial effect (highlighted in the black oval in Fig. 4a). First, large droplets need longer time to adjust to the wind velocity, thus there is a distinct time-lag when the peak velocity is reached for different particles. Second, in addition to the time-lag, the peak velocity reached by the large

202 droplets is smaller than the small droplets. Here, we use correlation coefficient between the actual
 203 wind velocity and the droplet velocity to quantify the inertial effect. A correlation coefficient of 1
 204 represents droplets can follow exactly the wind velocity and a correlation coefficient less than 1
 205 indicates a time-lag effect between the wind and droplet velocity due to droplet inertia. Figure 4b
 206 shows that the correlation coefficient is close to 1 when the droplets are smaller than 500 μm but it
 207 decreases dramatically as droplet size increases. The correlation coefficient reaches to 0 when
 208 diameter reaches to 2000 μm . In addition, for droplets with diameters smaller than 300 μm the
 209 standard deviation of the actual droplet velocity is 0.29 ms^{-1} (blue curve, Figure 4b), which is close
 210 to standard deviation of the background wind field (0.3 ms^{-1}). As droplet size increases, the
 211 velocity variation decreases due to droplet inertial effect.

212 The simulation results shown in Figure 4 suggest that droplets with diameter smaller than
 213 300 μm are less affected by inertia and can quickly adjust their velocity to the imposing wind field,
 214 and thus, small cloud droplets can be treated as perfect air tracers (Kollias et al., 2001). On the
 215 other hand, large droplets ($D > 0.5 \text{ mm}$) exhibit a time lag in their response to the air motion and
 216 an amplitude reduction (inertia-based filtering). As the observed Doppler velocity is a combined
 217 measure of the droplet velocity and the ambient air motion, this droplet inertial effect is expected
 218 to have a considerable effect on the generated radar Doppler spectrum. In the following section,
 219 we will illustrate how the radar Doppler spectrum is affected by droplet inertia and how to account
 220 for this effect using a new radar Doppler spectrum simulator.

221

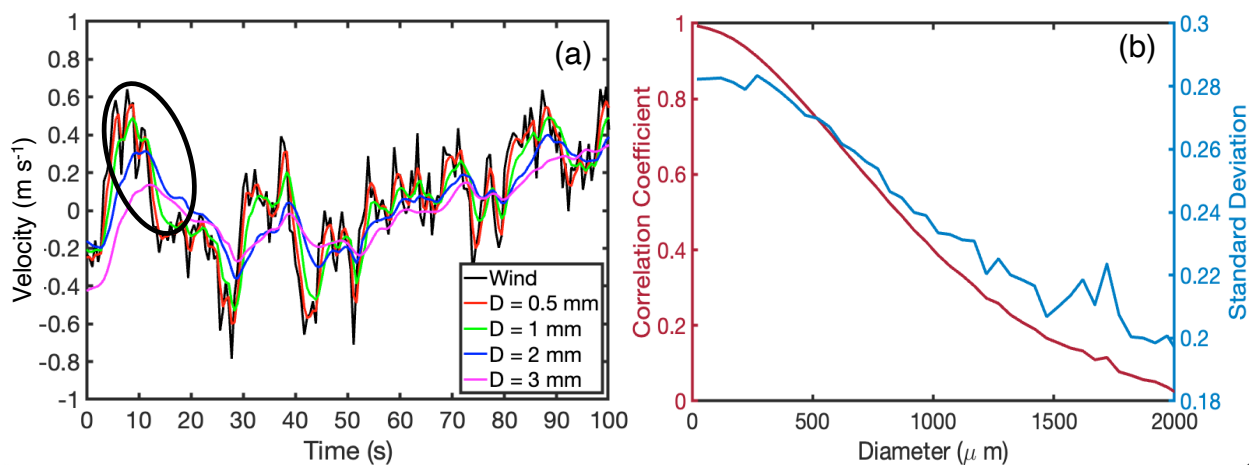

222

223 Figure 4. (a) Generated wind velocity filed (black line) and the simulated velocity for particles
 224 with diameter of 0.5mm (red line), 1mm (green line), 2mm (blue line) and 3mm (magenta line).

225 The black oval indicates the period showing droplet inertia effect. (b) Left axis: correlation
 226 coefficient between wind [field](#) and droplet velocity for different droplets size; right axis: standard
 227 deviation of the droplets velocity with different droplets size. Only droplets with size from 0 μm
 228 to 2000 μm are shown for the sake of clarity.

230 **3 Radar Doppler spectrum Simulator**

231 Two methodologies for simulating the radar Doppler spectrum for a given DSD and
 232 turbulence conditions are used here. The first approach is the traditional one. All droplets,
 233 independent of their sizes, are assumed to have no inertial effects and thus act like perfect tracers.
 234 In this case, the [radar Doppler spectrum in a turbulent environment](#) is represented through the
 235 convolution of a Gaussian distribution and the [radar Doppler spectrum in still air which is only](#)
 236 [determined by the hydrometeor DSD](#) (Gossard, 1981; Kollias et al., 2011, Zhu et al., 2021). A
 237 brief overview of the traditional method is described in section [3.1](#).

239 **3.1 Traditional Doppler spectrum simulator**

240 For a given DSD described by a number concentration $N(D)$ per unit of volume in m^{-4} , the
 241 radar reflectivity $d\eta(D)$ (m^2/m^3) from particles with diameter between D to $D + dD$ can be
 242 expressed as [\(Lhermitte, 2002, p. 228\)](#):

$$243 \text{-----} d\eta(D) = N(D)\sigma_b(D)dD \quad (8)$$

244 where $\sigma_b(D)$ is the backscatter cross section (m^2) of a particle with diameter D in m . Mie scattering
 245 theory is used to estimate $\sigma_b(D)$. In this formulation, the radar power spectrum distribution is
 246 provided in terms of particle size. Profiling radar do not observe the radar backscatter-energy
 247 power spectrum $d\eta(D)$ but the radar Doppler [spectrum](#) density $S_q(V_t)$ where V_t is the [droplet still-](#)
 248 [air terminal velocity](#). The conversion from droplet size to V_t requires a $V_t(D)$ relationship.
 249 Here, the [function](#) proposed by [\(Lhermitte, 2002, p.120\)](#) is used to [estimate](#) V_t as a function of
 250 [droplet](#) diameter (D):

$$251 V_t(D) = 920 \times (1 - \exp(-6.8 \times D^2 - 4.88 \times D)) \quad (9)$$

252 where the unit of D and V_t is in cm and cms^{-1} respectively. Subsequently, the radar Doppler
 253 spectral density $S_q(V_t)$ in units of $m^2m^{-3} (ms^{-1})$ is given by:

254
$$S_q(V_t) = \frac{d\eta}{dV_t} = \frac{d\eta}{dD} \frac{dD}{dV_t} = N(D)\sigma_b(D) \frac{dD}{dV_t} \quad (10)$$

255 where $\frac{dD}{dV_t}$ is estimated from Eq. 9.

256 The $S_q(V_t)$ is the “still-air” radar Doppler spectrum where the only velocity contribution
 257 is the droplet still-air terminal velocity. In the real atmosphere, the observed velocities from the
 258 radar include the turbulent motions with scales larger or smaller than that of the radar sampling
 259 volume (Kollias et al., 2001; Borque et al., 2016). One parameter that is typically used to describe
 260 turbulence intensity is the eddy dissipation rate (EDR in m^2s^{-3}). The EDR value can be converted
 261 to a radar Doppler spectrum broadening term σ_t in ms^{-1} (Borque et al., 2016). It is important to
 262 note that the σ_t value strongly depend on the radar sampling characteristics (Kollias et al., 2005).
 263 For the same EDR value, σ_t is lower for radar systems with short time dwell, narrow beamwidth
 264 and short pulse length (Borque et al., 2016). The σ_t is typically used to introduce the effect of
 265 turbulence on the radar Doppler spectrum. Under the assumption of isotropic turbulence, the
 266 distribution of the turbulent motions within the radar sampling volume can be approximated using
 267 a Gaussian function

268
$$G(v) = \frac{1}{\sigma_t \sqrt{2\pi}} \times \exp\left(-\frac{1}{2} \left(\frac{v}{\sigma_t}\right)^2\right) \quad (11)$$

269 And its impact on radar Doppler spectrum is formulated by the convolution between $S_q(V_t)$ and
 270 $G(v)$ (Gossard and Strauch, 1989) as:

271
$$S(v) = (S_q * G)(v) = \int_{-\infty}^{\infty} S_q(u)G(v - u)du \quad (12)$$

272 **3.2 Physics-simulation based Doppler spectrum simulator**

273 In this approach, instead of using a Gaussian distribution to parameterize turbulence field
 274 and applying the convolution process to represent the interaction between DSD and environmental
 275 turbulence, the radar Doppler spectrum is generated using a large number of simulated droplet
 276 velocities during a given simulation period. Specifically, for droplet with diameter of D moving in
 277 a turbulent flow, the droplet velocity at each specific time can be numerically resolved as $V(D, t)$
 278 based on the ordinary differential equations described in section 2.1.

279 The radar Doppler spectrum density at each time step $S_t(v)$ can be directly estimated as:

$$S_t(v) = \frac{\sum N(D_{V_{i-1} \sim V_i}) \sigma_b(D_{V_{i-1} \sim V_i})}{V_i - V_{i-1}} \quad (13)$$

Where $D_{V_{i-1} \sim V_i}$ represents the diameter of the particle with velocity within the predetermined Doppler velocity interval $[V_{i-1}, V_i]$ at each timestep. $N(D_{V_{i-1} \sim V_i})$ and $\sigma_b(D_{V_{i-1} \sim V_i})$ indicate the number concentration and the backscatter power corresponding to each diameter. The predetermined Doppler velocity V_i is depended on the radar configuration of Nyquist velocity ($V_{nyquist}$) and the number of the Fast Fourier Transform points ($NFFT$):

$$V_i = -V_{nyquist} + \frac{2V_{nyquist}}{NFFT} \times i; i = [1, 2, 3, \dots, NFFT] \quad (14)$$

The final Doppler spectrum can be obtained by averaging $S_t(v)$ during the simulated period:

$$S(v) = \frac{1}{N_t} \sum_{t=1}^{t=N_t} S_t(v) \quad (15)$$

where N_t is the total simulation timesteps:

$$N_t = T \times f \quad (16)$$

Where T and f is the simulated time and the sampling frequency of the generated turbulence wind field.

It is noted that the emulated radar Doppler spectrum is depended on the generated turbulence flow, which is contolled by three parameters: time duration (T), sampling frequency (f) and standard deviation (σ). σ quantify the turbulence intensity while T and f determine the total emulated time steps. Here we use the typical cloud radar configurations to guide the chosen of T and f . Specifically, T is set as 2s and f is set as 20 Hz to accommodate the cloud radar operated at Atmospheric radiation measurement (ARM) program with appromiately 40 spectra being averaged in 2s (Kollias et al., 2005).

300

3.3 Doppler spectra comparison from two simulators

Both simulators described above are applied to emulate the Doppler spectrum observed by a 94-GHz (W-band) profiling cloud radar for a given DSD and for a set of different turbulence environments. The Nyquist velocity is set as ± 12 ms⁻¹ and a 512-point Fast Fourier Transform (FFT) is used to generate the radar Doppler spectrum. The Marshall-Palmer exponential DSD (Marshall and Palmer, 1948) with $N(D) = N_0 e^{-\Lambda D}$ is used to represent the DSD in the radar sampling volume. The values of the intercept parameter N_0 and the slope factor Λ are chosen to be


307

308 0.08 cm^{-4} and 15 cm^{-1} . Droplet diameter ranges 10 to $4000 \mu\text{m}$ with bin size as $1 \mu\text{m}$. The
309 selection of W-band radar and the use of a rain DSD is because it is well known that the W-band
310 radar Doppler spectrum in rain has distinct features which allow to pinpoint the Doppler spectrum
311 morphology. Specifically, due to the Non-Rayleigh scattering, the backscattered power for rain
312 droplets with specific radius is identified as local minimal value, this characteristics is manifested
313 as the “Mie notches” in the observed Doppler spectrum (Kollias et al., 2002;Kollias et al., 2007).
314 Turbulence field is generated with 20 Hz frequency (f), 100s duration (T) and standard deviation
315 (σ) of 0.05 ms^{-1} , 0.25 ms^{-1} , 0.35 ms^{-1} and 0.45 ms^{-1} , respectively. The reason of applying different
316 turbulence settings is to better illustrate the droplet inertia effect under different turbulence
317 environment. It is expected that with increasing turbulence intensity the droplet inertia effect will
318 be manifested in larger differences between the generated radar Doppler spectrum from two
319 methods.

320 When solving the ordinary differential equations described in Section 2.1, the initial droplet
321 velocity is set as 0 ms^{-1} , thus at the beginning of the simulation the droplet gravity force is greater
322 than the wind drag force, the droplet will accelerate until their terminal fall velocity is reached,
323 after which the droplets fluctuate around the terminal fall velocity with variations induced by the
324 exerted wind. The radar Doppler spectrum should be estimated after the steady state is reached.
325 Here, we split the 100s simulated period to two parts: the first 40s is the “speed-up” time which
326 allows the droplets of different size adjust to their steady state, the remaining 60s is used for
327 Doppler spectrum emulation. Specifically, each Doppler spectrum is estimated within a 2s interval
328 as illustrated in Section 3.2, then the generated 30 Doppler spectra in the 60s are further averaged
329 to produce the final Doppler spectrum. This final average step is used to smooth the Doppler
330 spectrum generated in a short period (2s) during which the averaged exerted wind may have a non-
331 zero value.

332 The emulated Doppler spectrum from two methods with four turbulence settings are shown
333 in Figure 5. In a turbulent environment with σ_t of 0.05 ms^{-1} (Figure 5a), the two simulated spectra
334 (red and blue line in Figure 5a) and the Doppler spectrum without turbulence broadening (black
335 line) are almost overlapping with each other, indicating that the radar Doppler spectrum shape is
336 dominated by the DSD shape and the droplets still-air terminal fall velocity in weak turbulence
337 conditions. For σ_t equal to 0.25 ms^{-1} , the broadening of the right edge of the radar Doppler
338 spectrum from the physics-based simulation (PBS) approach (red line in Figure 5b) is less than that

339 produced with the convolution approach (blue line in Figure 5b). As σ_t increases to 0.35 ms^{-1} , a
 340 large differences between the right edges of the spectra from the two simulators can be clearly
 341 identified. When σ_t reaches to 0.45 ms^{-1} , the right edge velocity difference between two spectra is
 342 larger than 1 ms^{-1} . Overall, the right edge from the PBS-generated Doppler spectrum is more steep
 343 than that from the convolution-based approach, illustrating that large droplets can not follow the
 344 rapidly changed turbulent field due to the inertia effect. Another notable finding is the left part of
 345 Doppler spectra (velocity smaller than 4 ms^{-1}) from two simulators almost overlap with each other
 346 in different turbulence scenarios, as this part of the spectrum is mostly contributed by small
 347 droplets with negligible inertial effect, thus the corresponding Doppler spectrum can be adequately
 348 represented by the convolution process.

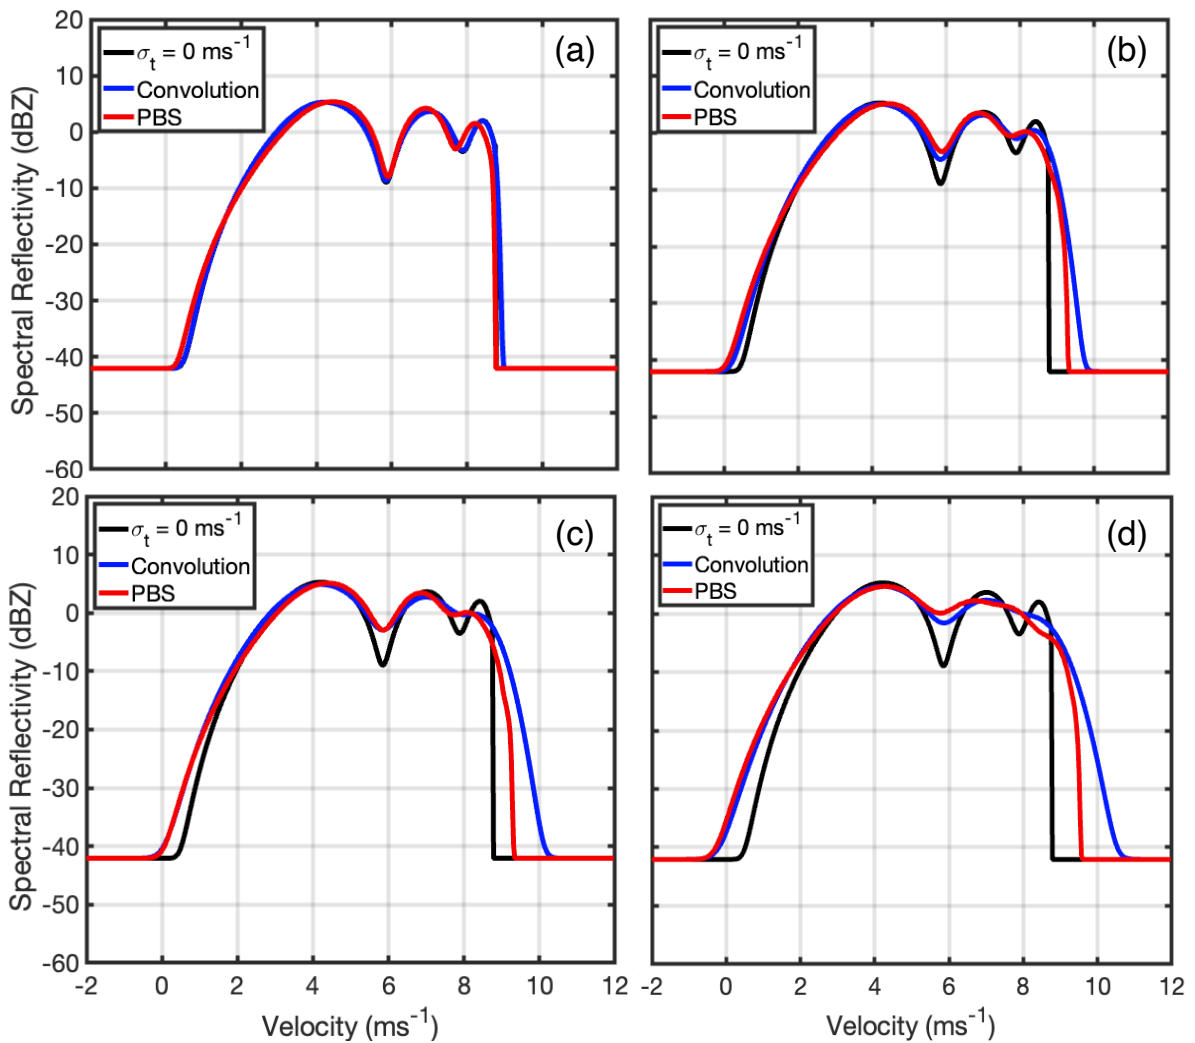

349

350 Figure 5. Doppler spectrum generated by the convolution-based (blue line) and physics-based
351 simulation (PBS) (red line) approach for turbulence standard deviation with (a) 0.05 ms⁻¹, (b) 0.25
352 ms⁻¹, (c) 0.35 ms⁻¹, (d) 0.45 ms⁻¹. The black line represents generated Doppler spectrum with $\sigma_t =$
353 0 ms⁻¹. Positive velocity indicates downward motion.

354
355 Comparing the three generated Doppler spectra in Figure 5, we can clearly identify the
356 effect of droplet inertia on Doppler spectrum morphology under different turbulence environments.
357 In general, both two simulators indicate a wider Doppler spectrum under a large turbulence
358 condition, but with different broadening magnitudes. The convolution-based approach generates a
359 wider spectra in a more turbulent environment. This overestimation of the turbulence broadening
360 effect indicates that the convolution process used in the conventional simulator is unable to
361 accurately represent the interaction between DSD and turbulence field. On the other hand, for the
362 small droplets, the inertial effect is negligible and the generated Doppler spectra from two
363 approaches are consistent with each other. It is therefore concluded that the convolution process
364 can simulate the Doppler spectrum for the light drizzle precipitation which mostly occurs in marine
365 boundary layer clouds but it is inadequate to emulate Doppler spectrum for the heavy precipitation
366 in deep convection, especially in the presence of strong turbulence environment.

367 368 4 An illustrative example of Doppler spectrum comparison between observation and 369 simulation

370 In this section, we will present an illustrative example by using one observed Doppler
371 spectrum to evaluate the performance of the simulators. The observed Doppler spectrum is
372 obtained from the W-band ARM Cloud Radar (WACR) at the ARM Southern Great Plain (SGP)
373 observatory during a heavy precipitation period on May 9, 2007. For the WACR, the maximum
374 unambiguous velocity is 7.8ms⁻¹, which is smaller than the still-air terminal velocity of droplets
375 with diameter larger than 3mm and lead to velocity folding. Here velocity de-aliasing process is
376 performed to reconstruct the Doppler spectrum with velocity from 0 ms⁻¹ to 11 ms⁻¹. The observed
377 Doppler spectrum is further calibrated from the displacement caused by vertical air motion by
378 pinpointing the location of first Mie notch of the Doppler spectrum to 5.83ms⁻¹.(Kollias et al.,
379 2002). To simulate the Doppler spectrum, the hydrometeor DSD and the turbulence broadening
380 term (σ_t) are needed. Here, the raindrops DSD is observed from the impact disdrometer which can

381 measure droplet diameter from 0.3mm to 5.4 mm with 20 bins (Wang et al., 2021). The temporal
 382 resolution of the WACR and the disdrometer is 4.28s, 1min respectively. To make the observation
 383 from two instruments comparable, the WACR-observed Doppler spectra are averaged over 1min
 384 to coincide with the disdrometer observational period. For this example, we use the disdrometer-
 385 measured DSD from 05:44 to 05:45 UTC to simulate the radar Doppler spectrum and compare it
 386 with the one observed of WACR in the same period.

387 The observed DSD is shown in Figure 6a, and the corresponding WACR-observed Doppler
 388 spectrum is shown as the black line in Figure 6b. Based on the observed DSD, the radar Doppler
 389 spectrum for the droplets falling in still air is generated (not shown), from which the DSD-
 390 contributed Doppler spectrum width (σ_D) is estimated as 1.34 ms⁻¹. Since the wind shear
 391 broadening contribution (σ_S) to radar Doppler spectrum is generally smaller than σ_D and the
 392 turbulence broadening (σ_t) (Borque et al., 2016), here we neglect the σ_S contribution and estimate
 393 σ_t as:

$$394 \quad \sigma_t^2 = \sigma_o^2 - \sigma_D^2$$

395 Where σ_o is the observed Doppler spectrum width, which is 1.46 ms⁻¹ in this example, and
 396 σ_t is estimated as 0.58 ms⁻¹. To estimate the accuracy of σ_t , we further assume the observed DSD
 397 is the only source of the uncertainty. Considering that the accuracy of the droplets size
 398 measurement of the disdrometer is approximately $\pm 5\%$ (Wang et al., 2021), the uncertainty of σ_D
 399 and σ_t is estimated as 0.15 ms⁻¹.


400 With the observed DSD and the estimated σ_t , the radar Doppler spectrum can be simulated.
 401 It is noted that large rain droplets falling in the air are nonspherical, thus backscattered power from
 402 an oblate droplet may be different from the one from rigid liquid sphere. To this end, for the Mie
 403 scattering calculation, axis ratio ($\frac{a}{b}$) of the droplet with diameter larger than 2mm is considered
 404 as a function of diameter (D) with unit of mm (Pruppacher and Beard, 1970):

$$405 \quad \frac{a}{b} = 1.03 - 0.062D$$

406 The simulated Doppler spectrum from the convolution and the PBS method are shown in
 407 Figure 6(b). It is noticeable that the Doppler spectrum from the PBS approach (red line) is more
 408 noisy than that from the convolution approach (blue line). This is due to the insufficient bin
 409 categories of the particle measured from disdrometer, it is expected that with increasing the number
 410 of measured particle size, the generated Doppler spectrum become more smooth. Nevertheless, it

411 is still recognizable that the both the morphology and the magnitude of the PBS-based spectrum
412 right edge is more consistent with observation compared with the one generated from the
413 convolution approach. Both of the two simulators represent the first peak of the Doppler spectrum
414 from 3 ms⁻¹ to 6 ms⁻¹ very well, while neither of them generate a consistent second peak
415 morphology compared with observation. The left edge of the Doppler spectrum from the
416 convolution-based approach is broader than the observation, while the PBS is unable to represent
417 the Doppler spectrum smaller than 1ms⁻¹ due to the abscent of the droplets with diameter smaller
418 than 0.3 mm observed from disdrometer.

419 The purpose of this Doppler spectrum comparison is not for a robust validation but used as
420 an illustrative example to show the morphology of the simulated Doppler spectrum based on real
421 observations and to discuss the required measurements would be used for robust Doppler spectrum
422 simulator validation. To a certain degree, a more consistency Doppler spectrum morphology is
423 identified between the observation and from the PBS simulator, especially for the right edge of the
424 spectrum. However, great cautions should be taken for further interpretation as both of the
425 simulators cannot represent the left part of the Doppler spectrum and the second notches very well.
426 This discrepancy is mainly because the observed DSD by disdrometer may not an adequate
427 representation of the hydrometeors that contribute the Doppler spectrum observed by WACR.
428 Specifically, there are three critical challenging issues should be overcome before a solid and
429 convincing Doppler spectrum simulator evaluation effort being performed: 1) the disdrometer is
430 located at the surface, while the lowest measurement height of WACR is 460m. When the rain
431 droplets fall, droplets may collide, breakup, and being advected from adjacent regions by the
432 horizontal wind; Thus a large uncertainty is expected by using the surface-observed DSD to
433 represent the hydrometeor distribution at 450m above; 2) the observed DSD from the disdrometer
434 only measure droplets with 20 size categories, which is insufficient for the physics-based
435 simulation to generate a smooth and complete Doppler spectrum; 3) the uncertainty of the
436 estimated σ_t is challenging to be well constrained due to the large uncertainty of the observed DSD
437 mentioned above. A comprehensive and solid validation of the Doppler spectrum simulator require
438 simultaneous and well- aligned DSD and Doppler spectrum measurement; large number of the
439 measured droplet size categories and carefully estimation of the environment turbulence
440 broadening factors.

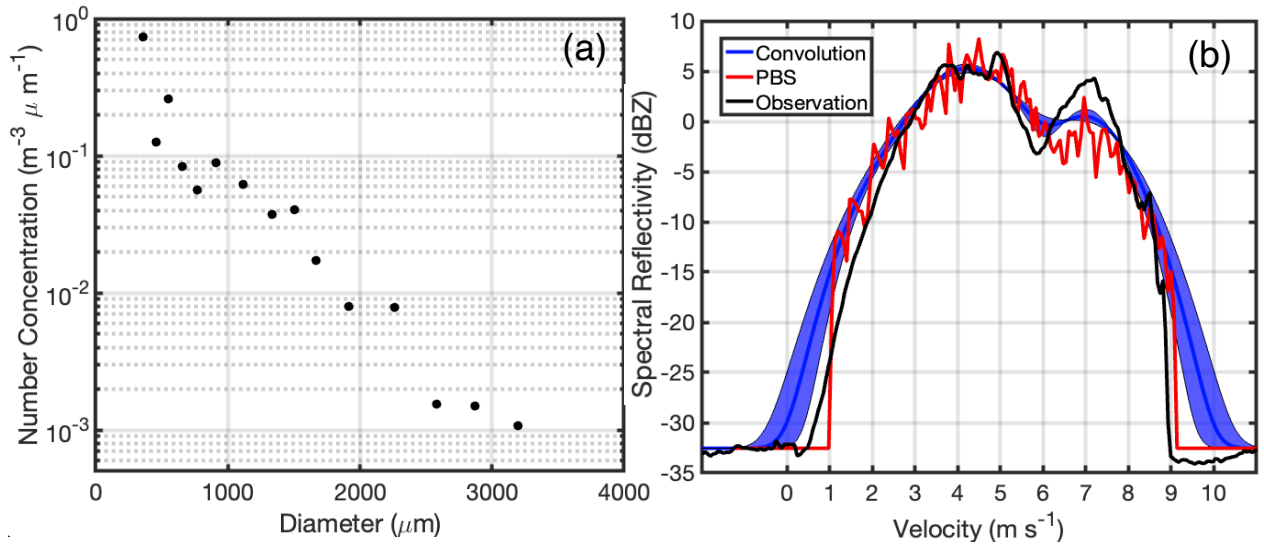

442 Figure 6. (a) Black dots represent the observed raindrop number concentration from disdrometer
 443 at 05:44 (UTC) on May 9, 2007 on SGP site. (b) Doppler spectra simulated from the PBS (red)
 444 and convolution (blue) method and the observed spectrum from WACR (black line). Positive
 445 velocity indicates downward motion.

446

447 5 Conclusions

448 The radar Doppler spectrum offer unprecedented capabilities for studying cloud and
 449 precipitation microphysics. Recent advancements in radar technology and signal processing have
 450 enable the continuous recording of high-quality radar Doppler spectra observations from a wide
 451 range of profiling radar systems (Kollias et al., 2005;Kollias et al., 2016). Until now, the simulation
 452 of the radar Doppler spectra was based on well-established techniques (Gossard, 1988;Kollias et
 453 al., 2011a). However, inertial effect of large droplets are typically neglected in the design of current
 454 simulators. Here, the impact of the liquid droplet's inertia on the shape of the radar Doppler
 455 spectrum was investigated. A physics-based simulation framework is developed to simulated the
 456 droplets velocity in a given turbulence environment. It demonstrates that big droplets with large
 457 inertia will take longer time to adapt to the change of velocity field, indicating large droplets are
 458 incapable of following the turbulence wind as small droplets do.

459

460 Building on the simulation framework, a new approach is proposed to emulate Doppler
 461 spectrum by resolving the velocity of each droplet during the entire time domain. The simulated
 462 W-band radar Doppler spectrum is compared with the one generated from the traditional method

463 for a typical DSD with four different turbulence environments. The comparison indicates that the
464 traditional Doppler simulator without considering the inertial effect generates an artificially
465 broader Doppler spectrum. This inertia effect becomes more noticeable as turbulence intensity
466 increases. This finding suggests that special caution should be taken when applying convolution-
467 based approaches to represent DSD-turbulence interaction in heavy precipitation. In the case of
468 light precipitation mostly happening in marine boundary layer cloud, the droplet inertia effect on
469 Doppler spectrum is negligible and the traditional simulator generates consistent results with the
470 proposed simulator. This proposed Doppler spectrum simulator have a wide potential applications
471 in the cloud radar community. For instance, neglecting droplet inertia effect on radar Doppler
472 spectrum increases the retrieval uncertainty of the eddy dissipation rate (Nijhuis et al., 2016). This
473 simulator can correct inertial effect on Doppler spectrum and improve the retrieval accuracy. The
474 forward Doppler spectra simulator can also be utilized to connect radar observation and modeling
475 output to evaluate the model performance (Oue et al., 2020; Mech et al., 2020; Silber et al., 2022).

477 One WACR-observed Doppler spectrum collected from the ARM SGP observatory is
478 compared with the simulated Doppler spectrum as an illustrative example to validate the fidelity
479 of the simulator from the convolution and the PBS-based approach. The presented case shows that
480 the proposed PBS generate a more similar morphology of the right edge of the Doppler spectrum
481 compared with the traditional simulator. However, both of two simulator fail to reconstruct the left
482 edge and the second notch of the Doppler spectrum. These inconsistencies are due the fact that the
483 surface-based DSD from disdrometer is inadequate to represent the hydrometeor observed by
484 cloud radar at a high level. A careful and solid validation of the radar Doppler spectrum simulator
485 would require co-aligned observations of DSD and Doppler spectrum and well-constrained
486 turbulent broadening estimations. Nevertheless, the proposed Doppler spectrum simulator, with
487 the ability to simulate individual droplet motion as well as their manifestation on Doppler spectrum,
488 provide an valuable tool to improve the understanding of Doppler radar observation from a
489 fundamental physics perspective. We expect this proposed Doppler spectrum simulation
490 framework can stimulate more studies to better interpret the Doppler radar observation and to
491 decode the microphysics and dynamics information concealed in radar Doppler spectrum.

493 **Competing interests.**

494 **P. K.** is the associate editor of AMT and the peer-review process was handled by an independent
495 editor. The authors have no other competing interests to declare.

496

497 **Code/Data availability**

498 Ground-based data were obtained from the Atmospheric radiation measurement (ARM) user
499 facility, a U.S. Department of Energy (DOE) Office of Science user facility managed by the Office
500 of Biological and Environment Research.

501 W-Band (95 GHz) ARM Cloud Radar (WACRSPECCMASKCOPOL). 2007-05-09 to 2007-05-
502 10, Southern Great Plains (SGP) Central Facility, Lamont, OK (C1). Compiled by K. Johnson, D.
503 Nelson and A. Matthews. ARM Data Center. Data set accessed 2022-07-
504 05 at <http://dx.doi.org/10.5439/1025318>.

505 Impact Disdrometer (DISDROMETER). 2007-05-09 to 2007-05-10, Southern Great Plains
506 (SGP) Central Facility, Lamont, OK (C1). Compiled by D. Wang. ARM Data Center. Data set
507 accessed 2022-07-05 at <http://dx.doi.org/10.5439/1025181>.

508

509

510 **Author contributions**

511 Zeen Zhu implemented the method, performed the analysis, produced the figures, and wrote the
512 initial draft of the manuscript. Pavlos Kollias supervised and provided advice and guidance on all
513 aspects of the analysis and contributed to the writing of the manuscript. Fan Yang advised on
514 results interpretation and manuscript editing. All authors read the manuscript draft and contributed
515 comments.

516

517 **Financial support**

518 Zeen Zhu's contribution is supported by Brookhaven National Laboratory via the Laboratory
519 Directed Research and Development Grant LDRD 22-054. Pavlos Kollias and Fan Yang are
520 supported by the US Department of Energy (DOE) under contract DE-SC0012704.

521

522

523

524 **Reference**

- 525 Acquistapace, C., Löhnert, U., Maahn, M., and Kollias, P.: A New Criterion to Improve
526 Operational Drizzle Detection with Ground-Based Remote Sensing, *Journal of Atmospheric and*
527 *Oceanic Technology*, 36, 781-801, 2019.
- 528 Atlas, D., Srivastava, R., and Sekhon, R. S.: Doppler radar characteristics of precipitation at
529 vertical incidence, *Reviews of Geophysics*, 11, 1-35, 1973.
- 530 Borque, P., Luke, E., and Kollias, P.: On the unified estimation of turbulence eddy dissipation
531 rate using Doppler cloud radars and lidars, *Journal of Geophysical Research: Atmospheres*, 121,
532 5972-5989, 2016.
- 533 Capsoni, C., D'Amico, M., and Nebuloni, R.: A multiparameter polarimetric radar simulator,
534 *Journal of Atmospheric and Oceanic Technology*, 18, 1799-1809, 2001.
- 535 Cheynet, E.: Wind field simulation (text-based input), Zenodo, Tech. Rep., 2020, doi:
536 10.5281/ZENODO.3774136, 2020.
- 537 Deodatis, G.: Simulation of ergodic multivariate stochastic processes, *Journal of engineering*
538 *mechanics*, 122, 778-787, 1996.
- 539 Doviak: Doppler radar and weather observations, Courier Corporation, 2006.
- 540 Gossard, E. E.: Measuring drop-size distributions in clouds with a clear-air-sensing Doppler
541 radar, *Journal of Atmospheric and Oceanic Technology*, 5, 640-649, 1988.
- 542 Gossard, E. E., and Strauch, R. G.: Further guide for the retrieval of droplets distributions in
543 water clouds with a ground-based clear-air-sensing Doppler radar, *NASA STI/Recon Technical*
544 *Report N, 90, 11911, 1989.*
- 545 Gunn, R., and Kinzer, G. D.: The terminal velocity of fall for water droplets in stagnant air,
546 *Journal of Atmospheric Sciences*, 6, 243-248, 1949.
- 547 Haider, A., and Levenspiel, O.: Drag coefficient and terminal velocity of spherical and
548 nonspherical particles, *Powder technology*, 58, 63-70, 1989.
- 549 Kalesse, H., Szyrmer, W., Kneifel, S., Kollias, P., and Luke, E.: Fingerprints of a riming event on
550 cloud radar Doppler spectra: observations and modeling, *Atmospheric Chemistry and Physics*
551 (Online), 16, 2016.
- 552 Khvorostyanov, V. I., and Curry, J. A.: Fall velocities of hydrometeors in the atmosphere:
553 Refinements to a continuous analytical power law, *Journal of the atmospheric sciences*, 62,
554 4343-4357, 2005.
- 555 Kollias, Albrecht, B. A., Lhermitte, R., and Savtchenko, A.: Radar observations of updrafts,
556 downdrafts, and turbulence in fair-weather cumuli, *Journal of the atmospheric sciences*, 58,
557 1750-1766, 2001.
- 558 Kollias, Clothiaux, E. E., Albrecht, B. A., Miller, M. A., Moran, K. P., and Johnson, K. L.: The
559 atmospheric radiation measurement program cloud profiling radars: An evaluation of signal
560 processing and sampling strategies, *Journal of Atmospheric and Oceanic Technology*, 22, 930-
561 948, 10.1175/jtech1749.1, 2005.
- 562 Kollias, Clothiaux, E., Miller, M., Albrecht, B., Stephens, G., and Ackerman, T.: Millimeter-
563 wavelength radars: New frontier in atmospheric cloud and precipitation research, *Bulletin of*
564 *the American Meteorological Society*, 88, 1608-1624, 2007.

565 Kollias, Remillard, J., Luke, E., and Szyrmer, W.: Cloud radar Doppler spectra in drizzling
566 stratiform clouds: 1. Forward modeling and remote sensing applications, *Journal of Geophysical*
567 *Research-Atmospheres*, 116, 10.1029/2010jd015237, 2011a.

568 Kollias, Szyrmer, W., Remillard, J., and Luke, E.: Cloud radar Doppler spectra in drizzling
569 stratiform clouds: 2. Observations and microphysical modeling of drizzle evolution, *Journal of*
570 *Geophysical Research-Atmospheres*, 116, 10.1029/2010jd015238, 2011b.

571 Kollias, P., Albrecht, B. A., and Marks, F.: Why Mie? Accurate observations of vertical air
572 velocities and raindrops using a cloud radar, *Bulletin of the American Meteorological Society*,
573 83, 1471-1483, 10.1175/bams-83-10-1471, 2002.

574 Kollias, P., Clothiaux, E. E., Ackerman, T. P., Albrecht, B. A., Widener, K. B., Moran, K. P., Luke, E.
575 P., Johnson, K. L., Bharadwaj, N., and Mead, J. B.: Development and applications of ARM
576 millimeter-wavelength cloud radars, *Meteorological Monographs*, 57, 17.11-17.19, 2016.

577 Lapple, C., and Shepherd, C.: Calculation of particle trajectories, *Industrial & Engineering*
578 *Chemistry*, 32, 605-617, 1940.

579 Lhermitte, R. M.: Centimeter & millimeter wavelength radars in meteorology, Lhermitte
580 Publications, 2002.

581 Li, H., and Moisseev, D.: Two layers of melting ice particles within a single radar bright band:
582 Interpretation and implications, *Geophysical Research Letters*, 47, e2020GL087499, 2020.

583 Luke, E. P., Kollias, P., Johnson, K. L., and Clothiaux, E. E.: A technique for the automatic
584 detection of insect clutter in cloud radar returns, *Journal of Atmospheric and Oceanic*
585 *Technology*, 25, 1498-1513, 10.1175/2007jtecha953.1, 2008.

586 Luke, E. P., Kollias, P., and Shupe, M. D.: Detection of supercooled liquid in mixed-phase clouds
587 using radar Doppler spectra, *Journal of Geophysical Research-Atmospheres*, 115,
588 10.1029/2009jd012884, 2010.

589 Luke, E. P., Yang, F., Kollias, P., Vogelmann, A. M., and Maahn, M.: New insights into ice
590 multiplication using remote-sensing observations of slightly supercooled mixed-phase clouds in
591 the Arctic, *Proceedings of the National Academy of Sciences*, 118, e2021387118, 2021.

592 Maahn, M., Loehnert, U., Kollias, P., Jackson, R. C., and McFarquhar, G. M.: Developing and
593 Evaluating Ice Cloud Parameterizations for Forward Modeling of Radar Moments Using in situ
594 Aircraft Observations, *Journal of Atmospheric and Oceanic Technology*, 32, 880-903,
595 10.1175/jtech-d-14-00112.1, 2015.

596 Mages, Z., Kollias, P., Zhu, Z., and Luke, E. P.: Surface-based observations of cold-air outbreak
597 clouds during the COMBLE field campaign, *Atmospheric Chemistry and Physics Discussions*, 1-
598 39, 2022.

599 Marshall, J. S., and Palmer, W. M. K.: The distribution of raindrops with size, *Journal of*
600 *meteorology*, 5, 165-166, 1948.

601 Mech, M., Maahn, M., Kneifel, S., Ori, D., Orlandi, E., Kollias, P., Schemann, V., and Crewell, S.:
602 PAMTRA 1.0: the Passive and Active Microwave radiative TRANSfer tool for simulating
603 radiometer and radar measurements of the cloudy atmosphere, *Geoscientific Model*
604 *Development*, 13, 4229-4251, 2020.

605 Moisseev, D. N., and Chandrasekar, V.: Polarimetric spectral filter for adaptive clutter and noise
606 suppression, *Journal of Atmospheric and Oceanic Technology*, 26, 215-228, 2009.

607 Mróz, K., Battaglia, A., Kneifel, S., von Terzi, L., Karrer, M., and Ori, D.: Linking rain into ice
608 microphysics across the melting layer in stratiform rain: a closure study, *Atmospheric*
609 *Measurement Techniques*, 14, 511-529, 2021.

610 Nijhuis, A. C. O., Yanovsky, F. J., Krasnov, O., Unal, C. M., Russchenberg, H. W., and Yarovoy, A.:
611 Assessment of the rain drop inertia effect for radar-based turbulence intensity retrievals,
612 *International Journal of Microwave and Wireless Technologies*, 8, 835, 2016.

613 Oue, M., Kollias, P., Ryzhkov, A., and Luke, E. P.: Toward exploring the synergy between cloud
614 radar polarimetry and Doppler spectral analysis in deep cold precipitating systems in the Arctic,
615 *Journal of Geophysical Research: Atmospheres*, 123, 2797-2815, 2018.

616 Oue, M., Tatarevic, A., Kollias, P., Wang, D., Yu, K., and Vogelmann, A.: The Cloud-resolving
617 model Radar SIMulator (CR-SIM) Version 3.3: description and applications of a virtual
618 observatory, *Geoscientific Model Development (Print)*, 13, 2020.

619 Pruppacher, H. R., and Beard, K.: A wind tunnel investigation of the internal circulation and
620 shape of water drops falling at terminal velocity in air, *Quarterly Journal of the Royal*
621 *Meteorological Society*, 96, 247-256, 1970.

622 Schlichting, H., and Kestin, J.: *Boundary layer theory*, Springer, 1961.

623 Shinozuka, M., and Deodatis, G.: Simulation of stochastic processes by spectral representation,
624 1991.

625 Silber, I., Jackson, R. C., Fridlind, A. M., Ackerman, A. S., Collis, S., Verlinde, J., and Ding, J.: The
626 Earth Model Column Collaboratory (EMC 2) v1. 1: an open-source ground-based lidar and radar
627 instrument simulator and subcolumn generator for large-scale models, *Geoscientific Model*
628 *Development*, 15, 901-927, 2022.

629 Wang, D., Bartholomew, M. J., Giangrande, S. E., and Hardin, J. C.: Analysis of Three Types of
630 Collocated Disdrometer Measurements at the ARM Southern Great Plains Observatory, Oak
631 Ridge National Lab.(ORNL), Oak Ridge, TN (United States). *Atmospheric ...*, 2021.

632 Williams: Vertical air motion retrieved from dual-frequency profiler observations, *Journal of*
633 *Atmospheric and Oceanic Technology*, 29, 1471-1480, 2012.

634 Williams, C. R., Maahn, M., Hardin, J. C., and de Boer, G.: Clutter mitigation, multiple peaks, and
635 high-order spectral moments in 35 GHz vertically pointing radar velocity spectra, *Atmospheric*
636 *Measurement Techniques*, 11, 4963-4980, 10.5194/amt-11-4963-2018, 2018.

637 Yanovsky, F.: Simulation study of 10 GHz radar backscattering from clouds, and solution of the
638 inverse problem of atmospheric turbulence measurements, *IEE Conference Publication*, 1996,
639 188-193,

640 Zhao, N., Huang, G., Kareem, A., Li, Y., and Peng, L.: Simulation of ergodic multivariate
641 stochastic processes: An enhanced spectral representation method, *Mechanical Systems and*
642 *Signal Processing*, 161, 107949, 2021.

643 Zhu, Z., Kollias, P., Yang, F., and Luke, E.: On the estimation of in-cloud vertical air motion using
644 radar Doppler spectra, *Geophysical Research Letters*, 48, e2020GL090682, 2021.

645 Zhu, Z., Kollias, P., Luke, E., and Yang, F.: New insights on the prevalence of drizzle in marine
646 stratocumulus clouds based on a machine learning algorithm applied to radar Doppler spectra,
647 *Atmospheric Chemistry and Physics*, 22, 7405-7416, 2022.

648

649

