



Assessment of current methane emissions quantification techniques for natural gas midstream applications

Yunsong Liu^{1,2}, Jean-Daniel Paris^{1,2}, Gregoire Broquet¹, Violeta Bescós Roy³, Tania Meixus Fernandez³, Rasmus Andersen⁴, Andrés Russu Berlanga⁵, Emil Christensen⁴, Yann Courtois⁶, Sebastian Dominok⁷, Corentin Dussenne⁶, Travis Eckert⁸, Andrew Finlayson⁹, Aurora Fernández de la Fuente⁵, Catlin Gunn¹⁰, Ram Hashmonay¹¹, Juliano Grigoletto Hayashi¹⁰, Jonathan Helmore⁹, Soeren Honsel¹², Fabrizio Innocenti⁹, Matti Irjala¹³, Torgrim Log^{14,15}, Cristina Lopez⁶, Francisco Cortés Martínez⁵, Jonathan Martinez¹⁶, Adrien Massardier¹⁷, Helle Gottschalk Nygaard⁴, Paula Agregan Reboredo⁵, Elodie Rousset⁶, Axel Scherello¹², Matthias Ulbricht⁷, Damien Weidmann^{10,18}, Oliver Williams¹⁰, Nigel Yarrow⁹, Murès Zarea¹⁹, Robert Ziegler²⁰, Jean Sciare², Mihalis Vrekoussis^{2,21}, Philippe Bousquet¹

¹Laboratoire des Sciences du Climat et de l'Environnement (LSCE/IPSL), CEA-CNRS-UVSQ, Université Paris-Saclay, Gif-sur-Yvette, 91191, France

²Climate and Atmosphere Research Center (CARE-C), the Cyprus Institute, Nicosia, 2113, Cyprus

³Enagás, S.A. Paseo de los Olmos, Madrid, 19 28005, Spain

15 ⁴Dansk Gasteknisk Center a/s Dr. Neergaards Vej 5B 2970 Hørsholm

⁵SENSIA Solutions, Av. Gregorio Peces Barba, 1, Leganés, Madrid, 28919, Spain

⁶GRTgaz RICE, 1-3, rue du Commandant d'Estienne d'Orves, Villeneuve-la-Garenne, 92390, France

⁷ADLARES GmbH, Oderstraße 65, Teltow, 14513, Germany

⁸SeekOps, 1205 Sheldon Cove, TX 78753, Austin

20 ⁹National Physical Laboratory, Hampton Road, Teddington, Middlesex, TW11 0LW, UK

¹⁰MIRICO, Unit 6 Zephyr Building, Eighth St, Didcot OX11 0RL, UK

¹¹OPGAL, HaNapah St 11, Karmiel, Israel

¹²Open Grid Europe GmbH, Gladbecker Straße 404. Essen, 45326, Germany

¹³Aeromon Oy, Esterinportti 1, Helsinki, 00240, Finland

25 ¹⁴GASSCO, Bygnesvegen 75, Kopervik, 4250, Norway

¹⁵Department of Safety, Chemistry and Biomedical Laboratory Sciences, Western Norway University of Applied Sciences, Hagesund, 5528, Norway

¹⁶Bureau Veritas Emissions Services, ZA LENFANT, 405 rue Emilien Gautier CS60401, AIX EN PROVENCE CEDEX, 13591, France

30 ¹⁷Bureau Veritas Exploitation, ZA LENFANT, 405 rue Emilien Gautier CS60401, AIX EN PROVENCE CEDEX, 13591, France

¹⁸STFC Rutherford Appleton Laboratory, Space Science and Technology Department, Didcot, Oxfordshire, OX110QX, UK

¹⁹ENGIE Research & Innovation, 1 Place Samuel de Champlain, Courbevoie, 92400, France

²⁰JRC Energy Institute, P.O.Box2, Petten, 1755ZG, Netherlands

35 ²¹University of Bremen, Institute of Environmental Physics and Remote Sensing (IUP) & Center of Marine Environmental Sciences (MARUM), Bremen, D-28359, Germany

Correspondence to: Yunsong Liu (yunsongliu@yeah.net)

Abstract. Methane emissions from natural gas systems are increasingly scrutinized and accurate reporting requires site- and source-level measurement-based quantification. We evaluate the performance of ten available, state-of-the-art CH₄ emission
40 quantification approaches against a blind controlled release experiment at an inerted natural gas compressor station in 2021. The experiment consisted of 17 blind, 2-hour releases at single or multiple simultaneous exhaust points. The controlled



releases covered a range of methane flow rates from 0.01 kg h⁻¹ to 50 kg h⁻¹. Measurement platforms included aircraft, drones, trucks, van, and ground-based stations, as well as handheld systems. Herewith, we compare their respective strengths, weaknesses, and potential complementarity depending on the emission rates and atmospheric conditions. Most systems were able to quantify the releases within an order of magnitude. The level of errors from the different systems was not significantly influenced by release rates larger than 0.1 kg h⁻¹, with much poorer results for the 0.01 kg h⁻¹ release. It was found that handheld OGI cameras underestimated the emissions. In contrast, the ‘site-level’ systems, relying on atmospheric dispersion, tended to overestimate the emission rates. We assess the dependence of the emission quantification performance against key parameters such as wind speed, deployment constraints and measurement duration. At the low windspeeds encountered (below 2 m s⁻¹), the experiments did not reveal a significant dependence on wind speed. The ability to quantify individual sources was degraded during multiple-source releases. Compliance with the Oil and Gas Methane Partnership (OGMP2.0) highest level of reporting may require a combination of the specific advantages of each measurement technique and will depend on reconciliation approaches. Self-reported uncertainties were either not available, or based on standard deviation in a series of independent realizations or fixed value from expert judgement or theoretical considerations. For most systems, site-level overall relative errors estimated in this study are higher than self-reported uncertainties.

1 Introduction

Methane, a key constituent of natural gas, is a powerful short-lived (11.8 years) greenhouse gas and has about 29.8 times the global warming potential of CO₂ on a 100-year horizon (IPCC, 2021). Natural gas consumption has increased by 2.2% over the last decade to reach 4307.5 billion standard m³, with the existing reserves reaching 188.1 trillion m³ in 2021 (BP 2022). Global demand for natural gas is projected to grow to approximately 4500 billion m³ in 2030 and 5100 billion m³ in 2050 (IEA, 2021). Although the combustion of natural gas releases significantly less CO₂ per unit of energy produced than other fossil fuels, methane emissions due to procedures leading to venting, to unintentional leaks and incomplete combustion associated with the supply chain may erode the climatic advantage of natural gas as a transition energy compared to liquid fuels if not addressed (Balcombe et al., 2017; Cooper et al., 2021; Zimmerle et al., 2020). Improving CH₄ emission detection and reporting across the natural gas value chain is thus critical to understanding and mitigating the emission sources to enable a large-scale transition to natural gas.

Intensive research has recently focused on quantifying CH₄ emissions from different sectors of the natural gas supply chain (Bell et al., 2017; Crow et al., 2019; Duren et al., 2019; Roscioli et al., 2015; Defratyka et al., 2021; Balcombe et al., 2022). To continuously improve reporting through better quantification of emissions in natural gas value chain, different measurement systems have been developed and applied in the field during the past decade (Allen et al., 2013; Ars et al., 2017; Johnson et al., 2021; Morales et al., 2021; Sherwin et al., 2021; Bell et al., 2020). In many cases, in natural gas production areas CH₄ emissions derived from atmospheric measurements were larger than the values reported in inventories at the basin scale (Harriss et al., 2015; Alvarez et al., 2018; Rutherford et al., 2021; Foulds et al., 2022), although



underestimation might not be systematic in poorly constrained production regions such as the Western Russian Arctic or
75 Arabian Gulf gas fields (Petäjä et al., 2020; Paris et al., 2021). Inventory under-reporting has been attributed to a variety of
potential reasons: reporting based on assumptions of past years' activity while activity increases; lack of accounting for all
sources in emission inventories; lack of accounting for specific and time-limited venting operations; aging equipment and
aging plants; challenging spatial or temporal aggregation of activities or missing specific super-emitters.

Facing this challenge of reconciling inventories with measurements and in order to monitor progress in emission reduction
80 policies, the Oil and Gas Methane Partnership (OGMP2.0; <https://www.ogmpartnership.com>), as a voluntary initiative,
encourages the use of site-level measurement to reconcile source- and site-level emission estimates. This approach is
relevant to bridge the gap between industry practice of source-level (bottom-up) approach, and site-scale measurements
(Allen et al., 2014; Olczak et al., 2022). However, measuring site scale emissions relies on a range of measurement systems,
which have highly variable performance at this scale.

85 Controlled release experiments and intercomparison studies have been used to improve and evaluate the performance of
methane emission measurement systems (e.g., Albertson et al., 2016; Feitz et al., 2018; Ravikumar et al., 2019; Edie et al.,
2020; Defratyka et al., 2021b; Kumar et al., 2021; Morales et al., 2022). Ravikumar et al. (2019) reported the evaluation of
the results from 10 vehicles, drones, and plane-based mobile CH₄ leak detection and quantification technologies through
90 single-blind controlled release tests. They found that 6 of the 10 technologies could correctly detect over 90% of the test
scenarios and correctly assign a leak to a specific equipment in at least 50% of test scenarios. Bell et al. (2020) assessed 12
CH₄ emission measurement technologies. They found that localization by handheld and mobile technologies is more
accurate than continuous monitoring systems. However, Kumar et al. (2022) reported 20%-30% precision for the estimate of
controlled CH₄ release rates when relying on either mobile or fixed station networks. Their localization of the releases was
better when relying on fixed stations. With the rapid development of current technology, Sherwin et al. (2021) have shown
95 that an airplane-based hyperspectral imaging CH₄ emission detection system can detect and quantify over 50% of total
emissions from super-emitters those fewer than 20% of sources contribute more than 60% of total emissions (Duren et al.,
2019). Moreover, the airborne CH₄ measurement technology reported by Johnson et al. (2021) can detect, locate and
quantify individual sources at or below the magnitudes of recently regulated venting limits with ± 31%-68% quantification
uncertainties.

100 These studies propose conclusions that strongly depend on the specific experimental set-up, mobile of fixed platforms,
sensors, sampling strategies and applied models. With the regular improvement of instruments and techniques, new inter-
comparisons based on controlled releases and involving a wide range of techniques are needed periodically. Our study aims
at providing an update on the current capabilities in a scenario that replicates real conditions and at fulfilling this requirement,
focusing on mature technologies available in Europe.

105 In the present study, we investigate the performance of various available techniques to quantify emissions in a blind-
controlled release experiment. The experiment was held at a mothballed (N₂ inerted) compressor station of a defunct
underground gas storage facility, providing a realistic environment for such measurements. It was organized by the European



Gas Research Group (GERG, <https://www.gerg.eu/>) in 2021. The range of emissions and the configuration of exhaust points aimed to reproduce highly realistic situations occurring in the midstream natural gas industry, including transmission
110 pipelines, compressors stations and storage facilities that connect upstream production to downstream distribution and end users (GIE and MARCOGAZ, 2019). The experiment included 17 blind, controlled 2-hour releases with single or multiple emission sources. The controlled releases covered a wide range of situations, such as different flow rates (from 0.01 kg h⁻¹ to 50 kg h⁻¹), release heights (ranging from 1 m to 28 m), and gas outlet shapes. In addition, the actual compressor station piping maze and equipment surrounding the release points provided the challenging air flow environment encountered in a
115 site in operation.

Twelve different promising measurement systems were selected to participate in this one-week campaign by GERG. The aim was to compare and evaluate these measurement systems (including mobile, ground-based, and handheld measurement platforms) to quantify CH₄ emissions at the industrial site level and analyze their respective strengths, weaknesses, and potential complementarity depending on the emission and atmospheric conditions. The study focuses on quantifying
120 emissions from single or multiple emission points. The detection and identification of those leaks are a prerequisite to this quantification but they are not evaluated in the present study as release points were known by the measurement systems' operators.

2 Methodology

2.1 Site description

125 A mothballed compressor station was selected as the test site. The compressor station, located in Spain, has various compression equipment for injecting and treating gas extracted from a nearby underground gas storage (Fig. 1). It is not in operation and is completely inerted with nitrogen. There are no significant natural or anthropogenic sources of methane identified in the area. The site is surrounded by flat roads from the outside and inside, making it suitable for vehicle-based mobile measurements.

130 Five selected gas outlet points, hereafter called nodes, were embedded in the site infrastructure. The nodes were split into two areas: Area A included Node 1, and Area B includes Nodes 2-5 (Fig. 1). Node 1 was located at the top of the vent stack of the site at the height of 28 m. In this case, the chosen exit type was open-ended to simulate the emission conditions in vent stacks. Node 2 was 9 m above ground level with an open-ended exit. Node 3 was 4 m high with openings in a ring-shaped small pipe. Node 4 was a linear tube three meters long with holes along it at 1.5 m height. Node 5 was an open outlet at 1.5
135 m height, dedicated exclusively to the tests with the lowest emission rates.



Figure 1: Aerial view of the Enagas site in Spain and node location (white circles). The controlled release facility is indicated by a white disk marked “CRF”.

2.2 Controlled release facility

140 The controlled release facility (CRF) is a portable flow control system purposefully designed and configured by the National Physical Laboratory (NPL) to create ‘real-world’ gaseous emission scenarios. A detailed description can be found in Gardiner et al. (2017). The system (Fig. 2) enables the operator to replicate a variety of gaseous emissions at comparable scales in a range of industrial settings to validate emissions monitoring methodologies under field conditions. The facility is computer-controlled and monitored, allowing for the execution of pre-written operational programs and the analysis of flow

145 data post-test. Communication to the instrument is made via a low-voltage umbilical cable, allowing the operator to control the system from a distance of up to 50 m from the gas blending equipment. The so-called ‘MidiCRF’ system was used when the flow was below 1.2 kg h^{-1} (Node 5). Its principle derives from a simplified version of the CRF. The uncertainties of the CRF and MidiCRF are dominated by the calibration uncertainty. Calibration was performed on site, prior to tests commencing, with the same source gas as used in the tests. The systems were calibrated by NPL using volumetric piston

150 based calibrators (Mesa Labs) with measurement traceability to national standards.

NPL provided operational training to Enagas staff, who then operated the CRF for the execution of the tests.

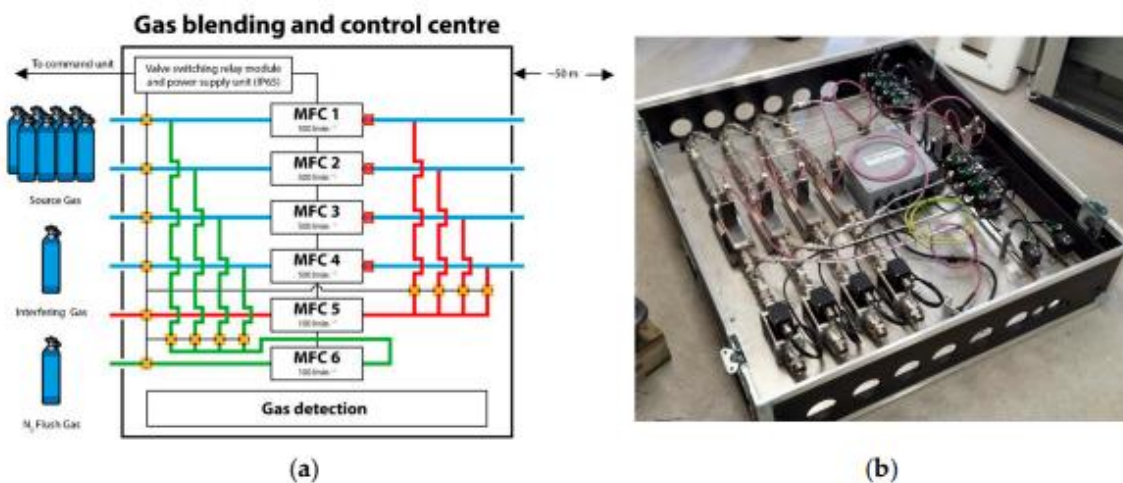


Figure 2: (a) the Controlled Release Facility schematic and (b) photograph of the flow control system (Gardiner et al., 2017).

2.3 Test scenarios and organization of the experiment

155 The 17 releases were performed from October 4 to October 8, 2021. They covered a range of situations combining different total flow rates (0.01 kg h^{-1} - 50 kg h^{-1}), across single or multiple nodes. This approach aimed at simulating a variety of fugitive and venting emissions in natural gas midstream sites.

The releases involved single or multiple nodes with a constant emission rate over 2 hours. The releases were “blind”, i.e., the release rates were not known by the participants. The series of release rates were established in advance and ordered randomly within the range of 0.01 kg h^{-1} to 50 kg h^{-1} (Table 2). Two releases took place in Area A only, 14 in Area B only, and one in both Areas A and B. The participants knew the areas of emission (A and/or B) but not the exact emitting node(s) in the case of Area B. Participants also knew the range of possible emission rates and the timing of the releases. Participants did not know each other’s results until after all participants blindly uploaded their results to an ‘upload only’ server, three weeks after the end of the campaign week.

165 The lowest release rates (below 0.5 kg h^{-1}) were dedicated to evaluating the quantification limit, defined here as the lower limit below which a technique does not provide relevant emission estimates.

Due to the linearity of the CH₄ atmospheric dispersion, we hypothesize that across the releases, and a threshold will emerge between a “low concentration regime” (where measured concentrations are commensurate with instrumental accuracies) or a “high concentration regime” (where instrumental accuracies of methane measurements become negligible against methodological approaches or ancillary measurements). This distinction aims to be generic and may not describe the behavior of a particular instrument or method. However, in a low-concentration regime, the relative uncertainties in emission rate estimates are expected to decrease with increasing release rates. The quantification limit should thus correspond to the emission threshold above which the measurement uncertainties are sufficiently low so that the uncertainty in the emission estimate does not depend on the release rates. We used a relatively uniform sampling of the emission rates to infer it.



175 Within each 2 h release, the series of measurements by the different participants were sequenced to minimize the impact of a specific quantification system on others. For example, drones flew sequentially to avoid any collision risk. The helicopter flew over the site only at the very end of the releases to avoid disturbing plume dispersion for other groups. The drones generate turbulences that can influence the structures of the plume measured by other platforms (in particular by Lidar 2), which can perturb the corresponding emission computation. An initial organizational briefing ensured the alignment of all

180 technology providers and a smooth succession of releases and measurements. During the campaign week, permanent coordination by radio was applied between site coordinators and all involved groups. Experiment details and sequencing technologies were shared with all participants through a paperboard on the site. The different quantification systems relied on different measurement durations to provide release estimates due to this organization but also because they followed different operating protocols.

185 A sonic anemometer (Vaisala WXT530) attached to a mast was located between Areas A and B at 5 m height to perform wind measurements during the campaign.

The Drone 2 group performed daily background measurements prior to any release (using drone-based optical CH₄ measurements). Morning daily concentrations remained within 2.2-2.5 ppm (reported range). These background measurements suggested that there was no large local CH₄ source near the site. Therefore, it is unlikely that any significant

190 CH₄ enhancement from outside the site may have influenced the release experiment.

Table 1: Test scenarios with detail of emission rates per node (unit in kg h⁻¹). The reported uncertainties are based on 2 standard deviations, providing a confidence interval of 95%.

Test	Total emission rate	Node1	Node2	Node3	Node4	Node5
1	2.6 ±1.8			2.6 ±1.8		
2	5.7 ±0.7	5.7 ±0.7				
3	1.2 ±0.01					1.2 ±0.01
4	22.7 ±2.2		9.7 ±0.5	3.1 ±1.8	10.0 ±1.2	
5	5.7 ±1.3		2.0 ±0.5		3.6 ±1.2	
6	22.4 ±2.2		9.8 ±0.5	2.7 ±1.8	10.0 ±1.2	
7	18.9 ±0.7	18.9 ±0.7				
8	46.4 ±2.3	11.0 ±0.7	15.2 ±0.5	9.0 ±1.8	11.1 ±1.2	
9	0.1 ±0.0001					0.1 ±0.0001
10	5.1 ±1.2				5.1 ±1.2	
11	8.1 ±1.2				8.1 ±1.2	
12	32.5 ±2.2		16.7 ±0.5	5.9 ±1.8	9.9 ±1.2	
13	0.5 ±0.01					0.5 ±0.01
14	7.03 ±1.31		2.5 ±0.5		4.5 ±1.2	
15	0.01 ±0.0001					0.01 ±0.0001
16	3.8 ±1.2				3.8 ±1.2	
17	14.6 ±2.2		2.3 ±0.5	9.8 ±1.8	2.5 ±1.2	



2.4 Participants and measurement systems

195 Twelve quantification systems were selected based on an internal review by the GERG consortium (GERG, 2021,
“Technology Benchmark for site-level methane emissions quantification”-Phase I-GERG,
[https://www.gerg.eu/projects/methane-emissions/gerg-technology-benchmark-for-site-level-methane-emissions-
quantification-phase-ii-a/](https://www.gerg.eu/projects/methane-emissions/gerg-technology-benchmark-for-site-level-methane-emissions-quantification-phase-ii-a/)). The ability to detect leaks was not part of the criteria as the present study focuses on
quantification. Besides the performance of each measurement system, the criteria included high Technology Readiness Level
200 (TRL), demonstrated ability to perform such measurements on-site, and the possibility for the service to be performed
commercially by an independent operator. Table 2 summarizes the main characteristics of these systems. These
quantification systems combine measurement platforms, instruments, and post-processing algorithms to derive emission
rates. The systems are based on handheld, vehicle, drone, and airborne mobile platforms and ground-based fixed
measurements. The measurement devices include optical gas imaging cameras, DIAL lidar, off-axis integrated cavity output
205 spectroscopy, and tunable diode laser spectrometry, as well as an early prototype direct quantification device, a Venturi
effect High Flow Sampling system, designated subsequently by Hi-Flow.

Each system implemented its own quantification methodologies and associated developed quantification software to derive
CH₄ emission rates. These approaches include inverse dispersion modeling, mass balance, tracer ratio and other proprietary
data algorithms. The reporting of the emission rates was done according to a specific template.

210 The self-reporting of uncertainties, however, was not mandatory and no specific reporting format was required. Six of the
systems provided their diagnostics of uncertainties in the estimates (hereafter all uncertainties are provided in terms of 1-
sigma values). Lidar 2 reported expanded uncertainty providing a 95% level of confidence.

A company operating two systems, one drone based and another one car-based, withdrew from the experiment and did not
report their data. They reported that their measurement protocol was to be optimized.

215 In addition to these relatively mature technologies, a direct quantification equipment for fugitives was able included in the
tests. The equipment is a hand-held device that used a venture tube supplied by a compressed air cylinder (Hi-Flow). This
equipment is a prototype with a low TRL, and it was included in the test to assess its performance for fugitives’
quantification.

220

225



Table 2: A summary of the systems participating in the campaign.

Name	Platform	Sensor	Quantification algorithm	Assessment type
Drone 1	Matrice 300 RTK from DJI	Tunable Diode Laser Spectrometry	Reverse dispersion modeling, considering the location of the plume, sensor measurements and local weather data	Site-level
Lidar 1	Helicopter MD-900	LiDAR DIAL	Direct estimation by multiplying the integrated gas concentration, the respective wind speed and the sine of the angle between the fence line and wind direction	Site-level
Tracer	Van	Off-axis integrated cavity output spectroscopy	Calculated as the integrated signal of CH ₄ concentration relative to the integrated signal of tracer gas concentration	Site-level
Lidar 2	Truck	Differential absorption lidar (DIAL)	Determined by combining the concentration map with wind speed and direction	Site-level
Drone 2	DJI M300 UAS	An in-situ tunable diode laser absorption spectrometer	Proprietary data algorithms based on an engineering control volume model	Site-level
Fixed 1	Ground	Laser dispersion spectroscopy operating in the midIR region	The algorithm combines gas concentration data of each retroreflector with meteorological data	Source-level
Fixed 2	Unmanned cameras	Two OGI cameras: an uncooled LWIR detector and a cooled MWIR detector	Depends on three variables: thermal contrast between the plume and the background; column density; absorption peak of the target gas	Source-level
Hi-Flow	Handheld	A venturi tube driven by a compressed air cylinder	Determined by the gas concentration and the suction flow rate of the venturi	Source-level
OGI 1	Handheld camera	Optical gas imaging (OGI) camera	Quantification software	Source-level
OGI 2	Handheld camera	OGI camera	Quantification software	Source-level



3 Data collection and analysis

The primary purpose of the experiments was to assess the ability to infer the total methane emission rate during each release. Therefore, the reporting focused on providing a total emission estimate for each release. During multiple-node releases, we also considered detailed reported estimates for individual nodes when available from the participants. The ability to provide estimates per individual source during a multiple release was considered a desirable feature of site-level quantification techniques.

As a normalized performance indicator, the absolute value of the relative error (called hereafter “absolute error”, $|(E_{\text{estimate}} - E_{\text{real}})/E_{\text{real}}|$) was computed for each release and each provider. E_{estimate} is the estimate provided by a given participant, and E_{real} is the actual emission rate). The distributions of absolute error are analyzed per release (considering each provider as a single realization) or per provider (considering each release as a different realization).

Table 3 gives an overview of the number of results provided by each participant. It indicates, for each experiment, whether a given participant provided the estimate for the total emission rate, partial emission rate estimates where one or several nodes may be missing, or an estimate that is not valid. Overall, there is no single release that was reported by all participants, and no system reported all releases; the number of total emission estimates was between 5 and 9 for a given release, and between 5 and 16 for a given system. The Hi-Flow prototype was not authorized to work on Nodes 1 and 2, as those nodes were considered risky (difficult to access) for the operator. The limited amount of data reported directly constrained our ability to identify robust statistical relationships between the errors in the release rate estimates and potential drivers of the quantification such as the meteorological conditions or the type of CH_4 releases.

All participants followed their own process to provide quality control and validate their estimates. Some participants excluded data points considered poor and provided reduced coverage of the releases prioritizing lower uncertainty, while others provided extensive coverage. Each data provider relied on its own judgment and procedures to balance the quantity and quality of the estimates. This balance is essential to consider when evaluating the respective merits of each system as a high overall precision may be a trade-off with a high “coverage” of the release rates. It should be noted that in real-life operations, less stringent time constraints may apply and more time may be available on site compared to the 2h per release of the present study. Each provider reported specific limitations and challenges explaining the coverage of the releases after the campaign.

255

260



Table 3: Overview of valid emission estimates for each release, including the 0.01 and 0.1 kg h⁻¹ releases. The letter indicates the availability of estimation. T: total emissions were captured; P: partial emission rate, one or several nodes may be missing from the total; 0: no estimate or value considered invalid by the provider. In the case of Lidar 2, some results were considered poor due to the influence of drones during the campaign.

Release ID	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Nb full	% Full
Drone 1	0	T	T	T	T	0	T	T	T	T	T	0	T	0	T	T	0	12	71%
Lidar 1	T	T	0	T	T	0	T	T	T	T	T	T	T	T	T	T	T	15	88%
Tracer	T	0	T	T	T	T	T	T	T	T	T	0	T	T	0	T	T	14	82%
Hi-Flow	0	0	T	P	P	P	0	0	T	0	0	0	T	P	T	T	0	5	29%
Fixed 1	T	0	T	T	T	T	0	P	T	T	T	T	T	T	T	T	T	14	82%
Lidar 2	0	T	0	0	T	T	T	P	0	0	0	0	T	T	0	0	T	7	41%
OGI 1	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	P	16	94%
Drone 2	T	T	T	T	P	T	T	T	T	T	T	T	T	T	T	T	T	16	94%
Fixed 2	T	T	0	P	P	T	T	P	0	T	T	T	0	P	0	T	T	9	53%
OGI 2	T	T	T	P	T	P	T	P	T	T	T	T	T	T	T	T	T	14	82%
Nb full estimates	7	7	7	6	8	6	8	5	8	8	8	6	9	7	7	9	7		

265 4 Results and discussion

4.1 Qualitative assessment of the total emission estimates per participant

In line with quantifying total site emissions, Figure 3 compares the total emission estimates provided by each participant with actual total emission rates per release. It displays linear regressions between the estimated and actual emission rates (without weighting the estimates based on the diagnostics of uncertainties).

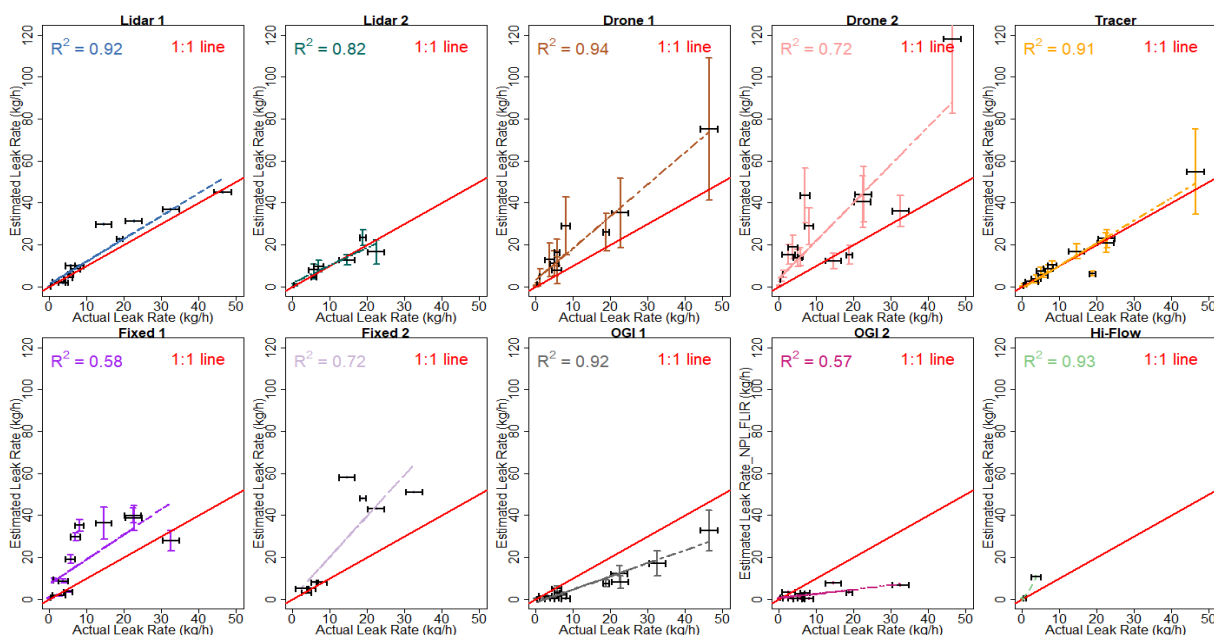





Figure 3: Scatter plot of estimated and actual rates for the releases for each participant. Linear regression (dashed line) including the 1:1 line (red) shown for reference. The horizontal uncertainty bars are the 1-sigma uncertainties of the controlled release facility. The vertical error bars are uncertainties provided by the participant.

Regarding biases on estimates, Lidar 1 slightly overestimated the emission rates, especially in the middle range of release rates. There was no significant bias in the release estimates from Lidar 2, limited to 22.4 kg h⁻¹. Drone 1 and Drone 2 tended to overestimate emission rates. All estimates but one from Tracer bore errors that fit in the 1-sigma uncertainty specified for this system. Fixed 1 tended to overestimate the emission rates from 5 kg h⁻¹ to 30 kg h⁻¹. For Fixed 2, the performance was better for lower emissions (below 10 kg h⁻¹) and tended to overestimate the emission rates above 10 kg h⁻¹. By contrast, OGI 1 and OGI 2 tended to underestimate the emission rates, likely influenced by cases where the distance to node could not be within the recommended range. There was no obvious bias for Hi-Flow, but it provided only estimates for three single-node release in the lower rate range: 0.5-3.8 kg h⁻¹.

In summary, the quantification systems of Lidar 1, drones and both fixed sensors generally overestimated the emission rates (with regression slopes ranging from 1.08 for Lidar 1 to 1.96 for Fixed 2), and the systems of handheld OGI generally underestimated them. However, two site-level systems did not follow this trend. The estimates from Tracer and Lidar 2 were close to the actual rates. In the present study, the number of results provided by Lidar 2 is small to assess any biases since the release they could not measure the appropriate nodes were excluded from the analysis.

4.2 Total release emission estimates: quantitative synthesis

Figure 4 provides the distribution of absolute error for the series of estimates from each participant, excluding the results for the two smallest releases of 0.01 kg h⁻¹ and 0.1 kg h⁻¹, whose specific goal was to assess the quantification limits.

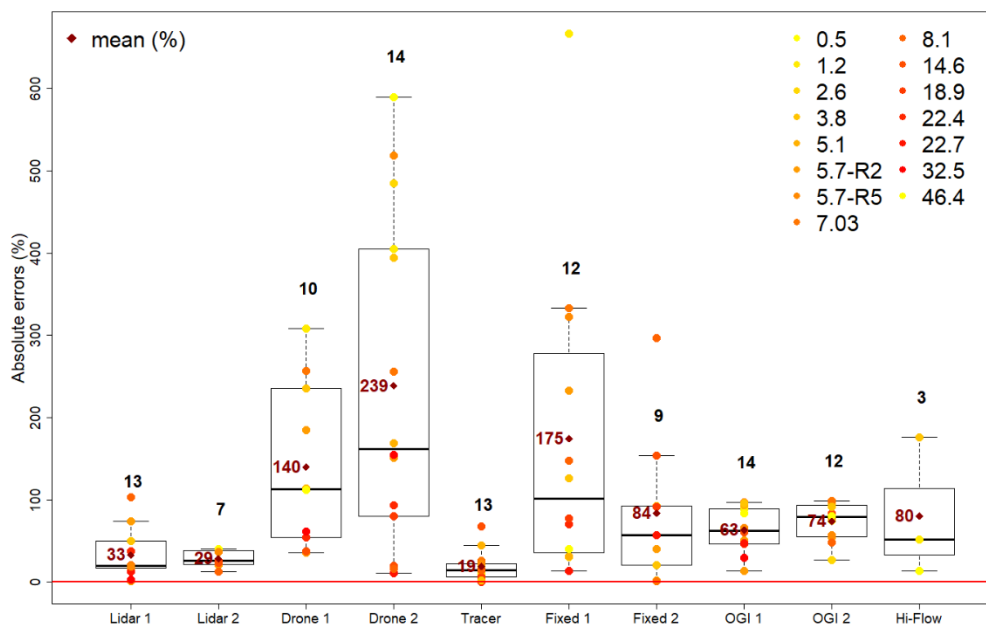



295 **Figure 4: Absolute errors for each system, in percent. The color scale corresponds to the actual rates of the different releases, given in the top right corner (kg h^{-1}). Whisker plots indicate the median, interquartile range, min, and max (excluding outliers) of the distributions. The average values are also indicated (dark red dot, %). The number of points accounted for in the statistical distribution is indicated on top of each whisker plot. The quantification technologies are ordered from site-level (Lidar 1, Lidar 2, Drone 1, Drone 2 and Tracer) on the left to source-level systems (Fixed 1, Fixed 2, OGI1 and Hi-Flow) on the right.**

The absolute errors range from 0% to 600%, even when excluding the releases below 0.5 kg h^{-1} . There is a large spread of typical errors in the results from one participant to the other, with average absolute errors per participant ranging from 19% (for Tracer) to 239% (for Drone 2). Among the site-level quantification systems, Lidars and Tracer provide estimates with absolute errors typically below 50%, while estimates from both drones generally bear average absolute errors in excess of 300 100% errors. Fixed sensors provide intermediate performance, with an average absolute error of 84% to 175%. Low wind speeds (below 2 m s^{-1}) combined with short time window (20 min) to collect data may have challenged the modeling of the dispersion for the processing of drone measurements and secondary, possibly turbulence caused by the drones, which could explain the drones' high errors during the experiment. The different source-level quantification systems provide relatively consistent performance with lower 63% to 80% average absolute errors and absolute errors for any release that generally lie 305 below 100%. Hi-Flow not commercially available, which relies on a particular sampling principle, provides good performance among the source-level measurements but only on three complete release estimates due to deployment limitations, while OGI 1 and OGI 2 provide 14 and 12 estimates, respectively. Figure S1 shows how often the estimates from a system fall within a multiplicative range of the actual values, either between half and twice the actual value or within a tenth and ten times the actual value. Notably, it highlights that some systems provide results with occasional discrepancies of 310 more than one order of magnitude (OGI). The table excludes the releases of 0.01 kg h^{-1} and 0.1 kg h^{-1} . The only system that limits 100% of its total release estimates within a factor of 2 (range 0.5-2) uncertainty band has the second-lowest coverage rate (Lidar 2). Conversely, OGI 1 and Drone 2 are within the factor 2 range only for 36% of the releases. Given its relevance for reconciliation, i.e., ensuring that there is no missing emission, we chose the total emissions from Table 3 to establish these statistics.

315 4.3 Parameters influencing total release estimates

4.3.1 Role of measurement duration


Measurement duration is one of the factors that influence deployment, with the mobilization and demobilization time. These durations were established by the technology suppliers, and are supposed to optimize results. The influence of measurement duration is expected to be the result of two competing effects: 1) integrating more data leads to a decrease in measurement error and 2) wind (and hence plume position) variation over time may 'blur' the data. Here we find that the errors are not 320 correlated with the time used by the different participants to make measurements. Both fixed sensors (Fixed 1 and Fixed 2) integrate measurements over two hours, while helicopter-based Lidar 1 relies on nearly instantaneous images of the concentration field, with total survey duration measured in seconds, not even minutes. Tracer records on average 2.5 min per



measurement leg. To ensure an appropriate uncertainty, 20 measurements were conducted per release (in total 45 min
 325 measurements). Drones had 20 minutes to cover the measurement. Suggestion to elaborate on this aspect, see comment.
 While the tests analyzed here didn't perform sensitivity analysis of measurement duration for each technology, future
 experiments could support the investigation of how the performance of some techniques relying on integration over
 measurement durations that can vary would improve with increasing duration. At the site level, for some techniques,
 increasing time coverage can also improve the ability to cover all nodes. For others, this can lead to an overestimation if not
 330 considered in the estimation process.

4.3.2 Dependence of error on emission rate

Figure 5 shows the relation of absolute errors with the total emission rate for all 17 releases. The estimates of the 0.01 kg h⁻¹
 bear errors systematically larger than 100% (100% for Lidar 1) for all participants' systems and often reach more than 500%
 (3300% for Fixed 1). Therefore, 0.01 kg h⁻¹ could not be quantified with any of these systems. The wind conditions during
 335 this smallest release did not appear to be more challenging than during the other releases (wind speed was 2.6 m s⁻¹; see
 Section 4.3.3). Therefore, the low magnitude of this release challenged all types of systems. This finding shows that this leak
 rate is below the quantification limit for most techniques. Besides this case, and even considering the 0.1 kg h⁻¹ release, the
 range of errors does not appear to decrease with increasing release rates, consistent with expectations in a high-concentration
 regime. Thus, the quantification limit for most systems (Tracer, Drone 1, Drone 2, Fixed 1, OGI 1, OGI 2, and Hi-Flow)
 340 appears to lie between 0.01 kg h⁻¹ and 0.1 kg h⁻¹.

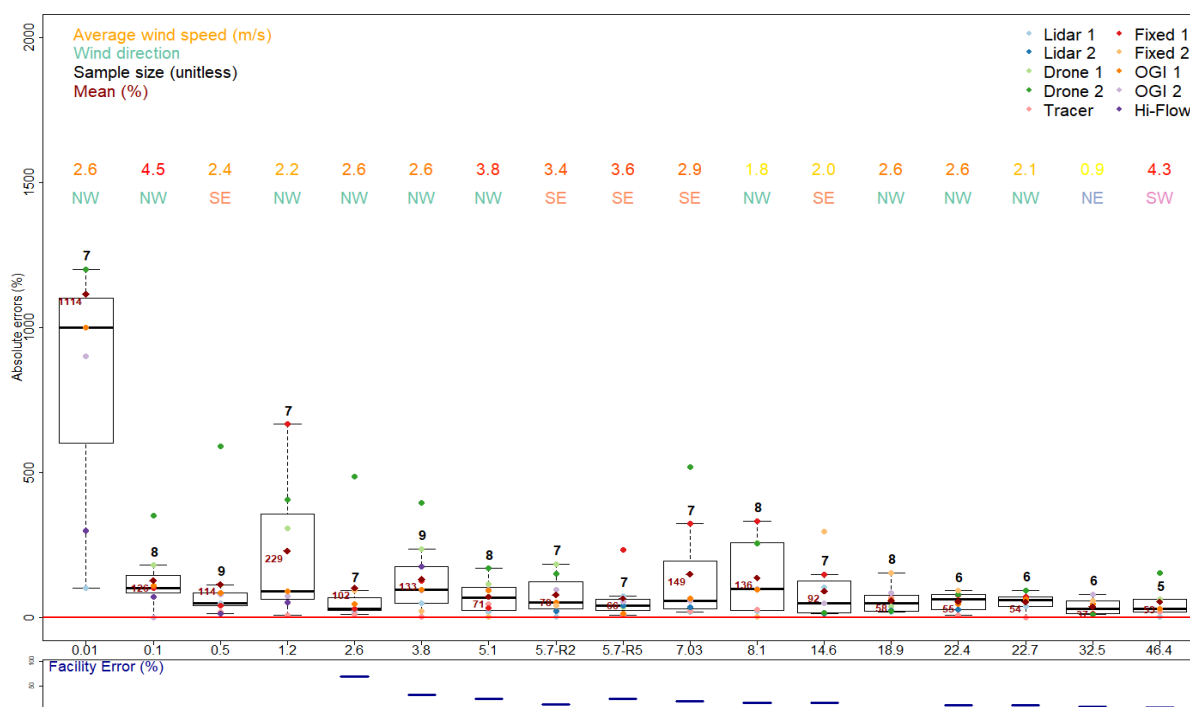



345 **Figure 5: Aggregated absolute errors as a function of total release rate. Dot colors correspond to individual participants (top right legend). Whisker plots indicate the median, interquartile range, min, and max (excluding outliers) for each release. The average values are also indicated. Average wind speed and direction per release are provided in the upper part of the top panel. The lower panel shows the uncertainty in the CRF rate for each release.**

4.3.3 Role of wind

The amplitude of the signal and the accuracy of the modeling frameworks are expected to depend strongly on the wind and turbulence conditions, primarily on the wind speed. Low wind speed (below 2 m s^{-1}) can be challenging for those participants relying on atmospheric dispersion models for the quantification of the emission rates (Wilson et al., 1976). The
350 wind direction likely plays a role since the positioning of the sensors is constrained by logistical issues, due to the potential overlapping or divergence of plumes from different nodes and since some directions drive the plume against or close to obstacles impacting the atmospheric flows. Low wind speed values (below 2 m s^{-1}) and specific wind direction sectors prevented some participants from providing valid estimates during specific releases. However, considering the valid
355 estimates, the results do not reveal any clear relationship between the wind speed or direction and the errors. Among the releases for which the errors were significantly larger than for the others is that of 1.2 kg h^{-1} from Node 5 only and that of 8.1 kg h^{-1} from Node 4 only, both at 1.5 m height in a congested area. In these cases, the average wind speeds were relatively small, and the wind was blowing from the NW. Only two other releases above 0.1 kg h^{-1} were performed from Node 4 and
360 Node 5, with NW and stronger winds and lower scatter. Better performance were reported for other releases, which were conducted under weaker and/or NW wind. A more thorough examination of individual releases with a high spread in performance is required. Overall, it should be investigated further that improving wind measurement protocols and upwind/downwind congestion characterization may lead to enhanced accuracy for the leak rate estimates.

4.3.4 Sensitivity to the different types of nodes

In this section, we investigate the influence of specific nodes (with a specific shape, configuration and/or location; see Section 2.1) on the relative errors. Mean absolute errors for single node releases from Node 1, Node 3, Node 4 and Node 5
365 are 68%, 102%, 113% and 172%, respectively (Table 4). There was no single release from Node 2 only. Node 5 bears larger absolute errors than other nodes. This might be explained by the dedication of Node 5 to the lowest rates and its proximity to the ground. This position may induce a dispersion that is more complicated to capture.

Some nodes may raise specific issues during multiple node releases e.g., because they are away from the others and thus require extensive sampling (which is notably the case for Node 1). This ability to perform extensive measurements can be
370 considered a good discriminant of site-level techniques. However, we have only seven multiple-node releases, which systematically include Nodes 2 and 4 and exclude Node 5. This limits our ability to get robust conclusions regarding the impact of specific nodes during multiple node releases.



375 **Table 4: Distributions of the mean absolute errors (%) across the available, total release estimates from the different measurement systems for each release.**

Nodes	Emission rate (kg h ⁻¹)	Release ID	Mean absolute errors (participants)
1	5.7	2	78 (7)
1	18.9	7	58 (8)
3	2.6	1	102 (7)
4	3.8	16	133 (9)
4	5.1	10	71 (8)
4	8.1	11	136 (8)
5	0.5	13	114 (9)
5	1.2	3	229 (7)
2&4	5.7	5	66 (7)
2&4	7.03	14	148 (7)
2&3&4	14.6	17	92 (7)
2&3&4	22.4	6	55 (6)
2&3&4	22.7	4	54 (6)
2&3&4	32.5	12	37 (6)
1&2&3&4	46.7	8	53 (5)


Node 1 (the vent stack) is away from the other nodes and raises specific challenges for some systems. In particular, Tracer, Fixed 1, and Hi-Flow could not measure Node 1 due to accessibility issues. Its height exceeded the maximum distance of the operating range for OGI 2. Statistics for single-node releases (Table 4) showed that the results for releases from Node 1 are better than for other single-node releases. Table 5 details the results per measurement system for the releases with emissions from Node 1 only. For those releases, Lidar 1 and Lidar 2 provide estimates with less than 25% absolute errors, and other systems can yield more than 50% absolute errors.

Figure 6 is similar to Fig. 4 but it excludes all the releases that include Node 1 (i.e., excluding releases #2, #7 and #8), and shows that the best performing technologies are Tracer, followed by Lidar 2 (limited coverage) and Lidar 1. Removing these three releases increases the mean errors of most techniques. These results indicate that emissions from Node 1 are easier to quantify than other nodes, likely due the lack of obstacles to air flow. This is put in balance of the challenge represented by measuring at this height for source-level.



Table 5: Absolute errors (%) for releases from Node 1 (the vent stack).

Release ID	R2 (5.7 kg h ⁻¹)	R7 (18.9 kg h ⁻¹)
Lidar 1	2	20
Lidar 2	21	23
Drone 1	185	37
Drone 2	151	20
Fixed 2	40	154
OGI 1	51	61
OGI 2	95	84
Tracer	N/A	68
Mean (%)	95	65

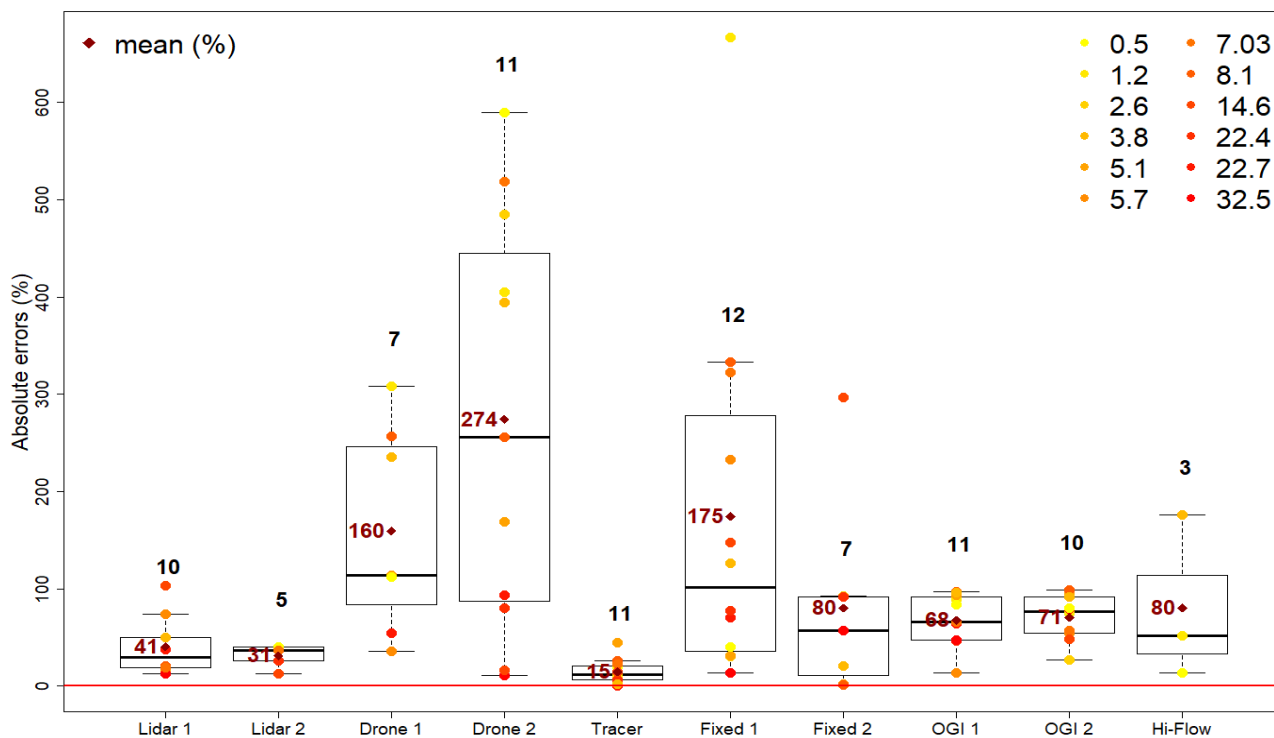

395

Figure 6: Same as Figure 4 but excluding vent stack emissions.



4.3.5 Are site-level performance better during single-node releases?

Ignoring the releases of 0.01 kg h^{-1} and 0.1 kg h^{-1} , we have eight single-node releases and seven multiple-node releases, as shown in Table 1. In general, most measurement systems' total estimates of multiple-node releases are better than their estimates of single-node releases (6 out of 9 systems, by 70% on average, as shown in Table 6). This result is unexpected since, in principle, it is more challenging to sample and properly analyze information on multiple more or less overlapping plumes arising from more or less distant sources rather than to sample and analyze a single plume from a single source. It is unclear whether this result is statistically robust or if the number of data points is too limited to raise a robust conclusion on this topic. The result is reassuring, as the purpose of site-level systems is to check whether any emission source may have been missed through the source-level measurements. For some specific techniques (Lidars and Fixed 2), the opposite is true: single-node estimates are more accurate than their total estimates for multiple-node releases.

Table 6: Distributions of the mean absolute errors (%) of each measurement system of single-node releases, multiple-node releases, and all releases according to the estimates provided by each participant.

Release Type	Single node (%)	Number	Multiple nodes (%)	Number	ALL (%)
Lidar 1	26	7	42	6	33
Lidar 2	28	3	29	4	29
Drone 1	178	7	51	3	140
Drone 2	309	8	146	6	239
Tracer	26	7	11	6	19
Fixed 1	205	6	144	6	175
Fixed 2	52	6	149	2	84
OGI 1	77	8	45	6	63
OGI 2	81	8	60	4	74
Hi-Flow	80	3	NA	NA	80
Mean (%)	106	N/A	75	NA	94

4.4 From site level to source level: Node-level performance

This section aims at assessing the potential for mapping and attributing the site-level emissions to different sources (in complement to quantifying the total emissions) in an industrial site, focusing on individual nodes. Such single-node estimates were optionally provided during multiple-node releases by some of the measurement systems, which have the capability to distinguish the signal from the different nodes. In principle, this is a defining feature of source-level systems. However, most site-level techniques had this ability as well. The accessibility of nodes and their location nearby other leaks have conditioned the provision of valid data by participants.



Figure 7 compares the collective performance of all techniques at the single node level during single- and multiple-node releases for all the measurement systems. Multiple-node releases were available for all nodes, excluding Node 5. Single-node releases were unavailable from Node 2. The quantification systems perform better on average when no other node emits. Node 3 is quantified with a 51% mean error when emitting alone, against 127% when part of a multiple node release. Similarly, for Node 4, the mean error during the single-node releases is 100%, increasing to 124% during multiple-node releases. This effect is less obvious for Node 1 (comparing 67% and 71% errors). The generally better performance in quantifying individual nodes when no other node emits is likely linked to the influence of the signal from other emissions in quantifying the individual node. Source-level techniques perform equally well for individual nodes during single- and multiple-node releases. This highlights that good performance in site-level emission quantification does not necessarily imply good performance in individual source-level quantification and that requirements for leak quantification need to be carefully specified prior to selecting a particular technique.

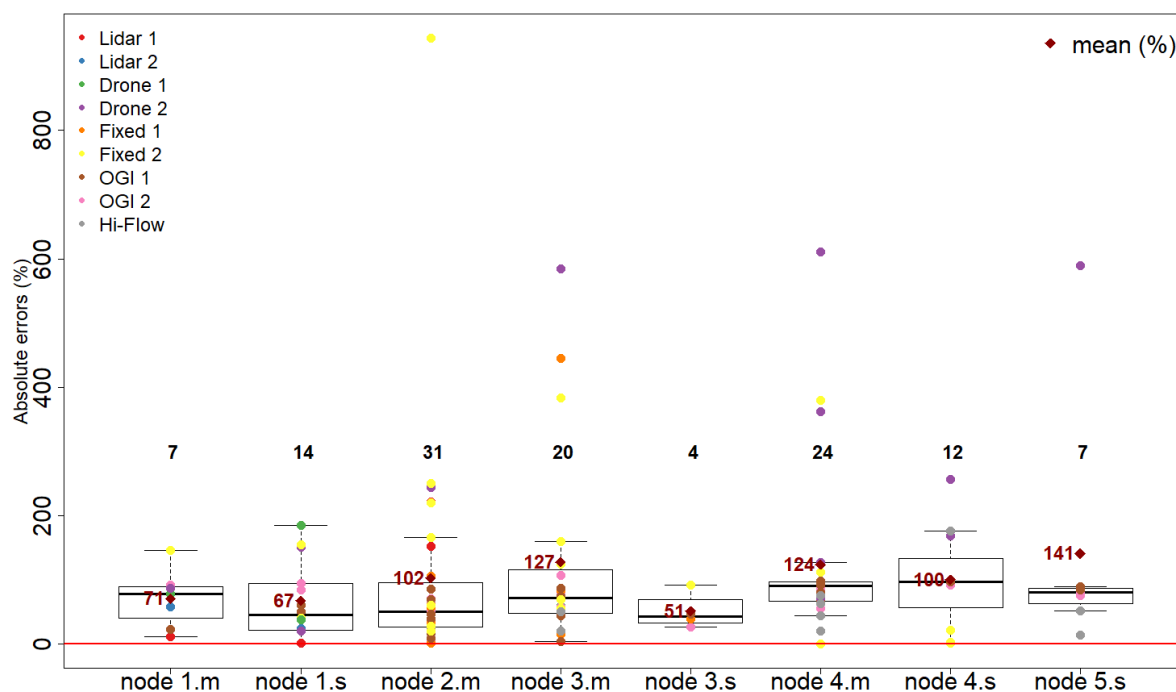


Figure 7: Comparison of absolute errors for single node releases (“.s”) and multiple node releases (“.m”). Excluding the releases of 0.1 kg h⁻¹ or less. Each point is a participant’s node-level estimate.

Focusing now only on single-node estimates during multiple-node releases, absolute errors on individual Nodes 1-4 are 71%, 102%, 127% and 124% respectively. These significantly higher uncertainties for Nodes 2-4 are linked to the fact that they are located in Area B, embedded in a large structure and with a close location of nodes. It could also mean that Node 1 was not accessible to less accurate techniques, creating an artificial favorable bias for Node 1. This directly impacts Nodes 2-4



uncertainties, with the possibility to combine with a possible overlap in plume dispersion if wind runs parallel to the
435 alignment of these nodes.

Differences in node-level errors during multiple-node releases across Nodes 2-4 are not statistically significant. There is,
therefore, no obvious detectable influence of the node shape on the performance in the context of multiple-node releases.

The ability of distinguishing individual nodes, even with a slightly degraded performance, is a desirable feature for site-level
methods to facilitate reconciliation and verification that all sources are accounted for by source-level methods. This may be a
440 criterion for trade-off between accuracy and ability to resolve individual sources for a given facility.

Each measurement system had its specific performance for specific combinations of nodes. Fixed 2 showed relatively larger
absolute errors for Area A, and Drone 2 showed relatively larger absolute errors for Area B. OGI measurement systems
showed relatively stable and smaller absolute errors than other systems during multiple node releases. In the case of Hi-Flow,
its ability to characterize correctly leaks from only certain nodes is aligned with its specifications.

445 Unsurprisingly, source-level systems are not systematically able to capture all emissions during multiple-node releases due
to constraints such as the node configuration, wind speed and wind direction. High altitude sources like Node 1 may be out
of reach for source-level quantification systems. Therefore, for a given need, the operating parameters range has to be
accounted for when choosing a system for a specific type of source. Overall, this justifies OGMP 2.0's recommendation to
perform reconciliation between two different quantification methods, e.g., a source-level and a site-level one, to ensure a
450 detailed and robust assessment of emissions.

5 Lessons learned and implications

We assessed performance of currently available quantification systems for midstream emissions based on 17 blind controlled
release experiments. The controlled releases covered a wide range of situations, such as different flow rates (from 0.01 kg h⁻¹
455 to 50 kg h⁻¹), release heights (ranging from 1 m to 28 m), and different types of gas outlet shapes (e.g., open-ended, ring-
shaped and linear). The analysis attempts to identify environmental and configuration factors limiting performance.
Although the measurements were conducted under partially controlled conditions, low wind speed and unavoidable
interferences between measurement systems have been identified as factors that affect measurement uncertainty.

Table 7 summarizes the findings of the present study. Most systems could report within an order of magnitude of the
controlled release rate. Lidar 1 and Tracer have demonstrated average absolute errors below 50% on more than two-thirds of
460 releases. The absolute errors of Lidar 2 and Tracer denote comparable uncertainties (Table 7). Drones specified relative
higher uncertainties compared with other measurement systems. Self-reported uncertainties were not available for some
systems. Available self-reported uncertainties determined as the standard deviation of a series of independent realization
based on a theoretical calculation or a fixed value. Besides, for most providers, site-level measurement systems mean errors
are higher than the self-reported uncertainties by technology providers.



465 Overall, the best performers are associated with deployment constraints. Lidar 1 requires the deployment of a helicopter. Although the present study did not investigate detection capability, Lidar 1 onboard helicopter lends itself to be integrated with routine pipeline patrolling. The mobile ground measurements (e.g., Tracer and Lidar 2) had difficulties accessing areas downwind of source emissions based on meteorological and road conditions. Tracer performs well if the acetylene release is well-located next to pre-identified leak areas and roads are available downwind. Lidar 2 had challenges positioning the truck-based platform under certain wind conditions and could cover only 41% of releases. Lidar 2's sensitivity to wind conditions may be a less stringent limitation in real life than in this experiment. Here the time constraints of the experiment were fixed in advance and known to the participants. However, in real life, an operational application may allow for more relaxed time constraints and the ability to wait for favorable wind conditions, but not always. Lidar 2's small coverage of tests may imply implementation issues to perform measurements that cover a whole site, as they need to find appropriate truck location depending on the location of the emissions and the wind direction, further research is needed on this. Ground-based measurements such as Fixed 1, Fixed 2, and OGI have limited detection distances. However, today no single technique that may be considered as a practical working standard for quantification.

Table 7: A summary of findings from the present study.

Systems	Absolute errors (%)	Supplier specified uncertainty (%)	% of release where true emission rate is inside the uncertainty range	0.5-2x (%)	0.1-10x(%)	Release coverage (%)
Lidar 1	33	N/A	N/A	92	100	88
Lidar 2	29	17	100	100	100	41
Drone 1	140	55	20	40	100	71
Drone 2	239	29	20	36	100	94
Tracer	19	20-30	92	92	100	82
Fixed 1	175	13	25	50	100	82
Fixed 2	84	N/A	N/A	78	100	53
OGI 1	63	36	14	36	79	94
OGI 2	74	N/A	N/A	25	69	82
Hi-Flow	80	12	0	33	100	29

The limited number of releases (17) implemented did not let significant influence emerge from wind speed and node shape. Nodes clustered in Area B and its structure induced challenging conditions for single-node measurements during multiple-node releases, yet representative of mid-stream facilities. More controlled release experiments are needed to acquire more statistics, and test the dependence on a wider range of environmental parameters, especially wind conditions. Sensor precision may play a role in small release rates but was not demonstrated influence the releases above 0.1 kg h⁻¹ significantly. The fact shown in the present study that 0.01 kg h⁻¹ could not be quantified with any of these systems. There is an apparent random character, mostly technique-dependent, not elucidated in the frame of the present study, but that could likely be



clarified with more data and comparing atmospheric turbulence and building configurations, and controlled gas temperature/injection speed and direction.

Additionally, the present study demonstrated that Tracer and Lidar 1 could be independently used for quantifying CH₄ emissions. However, their errors should be considered when performing reconciliation. Lidars and Tracer show better estimates (below 50%) of the total emissions among site-level measurement systems, and OGIs (ranging from 63% for OGI 1 to 74% for OGI 2) show stable and better estimates of the individual nodes during multiple-node releases compared with other source-level measurement systems. Therefore, Lidars/Tracer applied with OGIs together have the potential to obtain not only accurate estimates of total emissions but also accurate estimates from each node. Further work is needed to determine how these systems can be applied together to reconcile source-level and site-level quantification.

490 Only Lidar 1 appears to combine the advantage of site-level techniques and source-level precision, albeit at the cost and footprint of deploying a helicopter. Reliable site-level measurements are in principle useful to: a) identify all leak sources and b) provide a check for source-level inventories. Source-level measurements allow to rank fugitive emission sources, and to plan accordingly LDAR campaigns.

In the present study, the site was positioned in an environment selected for its isolation from other methane sources. In a real-life context with nearby sources (e.g., industrial complex and proximity to agriculture), our assessment of node-level performance in single vs. multiple-node releases (Section 4.4) suggests that most measurement systems would see their performance degraded to some extent, depending on the proximity to external sources. With the influence of nearby external sources, the distinction between low-concentration and high-concentration regimes might not hold. The sensor precision would then be expected to play a role in the ability to discern specific plumes of interest from other nearby sources.

500 The ambitious OGMP 2.0 Level 5 reporting requires the complementary site-level measurements such as the ones scrutinized in our study. Level 5 is the highest grade and elaborates on top of level 4, a source-level estimate of asset emission based on measurements. The site selected for our study is considered an archetypal site of the natural gas midstream industry that would be using this reporting. Our study selected state-of-the-art systems currently available in Europe and able to perform measurements such as those required by OGMP 2.0 for the reconciliation process, for Level 5 reporting. In real-life applications, whether or not these measurement systems can fulfill the requirements of this reporting depends not only on individual technology performance, but also on the frequency of deployment and reconciliation methodology. However, we have shown that the definition of ‘site-level’ as considered in Level 5 reporting still represents a challenge for measurement systems. Indeed site-level’s ability to distinguish individual sources is a bonus, as is source-level’s ability to quantify at area level. Careful consideration of the integration of detection along with quantification would be valuable, including standalone detection and quantification capability or using complementary detection sensors. This outcome should be taken into account when defining how reconciliation is to be performed. Level 5 requires reconciliation with the source-level estimate, which should be investigated in future research. Finally, we expect a continuous improvement of the accuracy of site-level estimates which may require such intercomparison to be repeated in the future.

515



520 *Data availability.* The data is not made publicly available in a repository, but can be requested from the corresponding author.

Author Contributions. YL performed data comparison and synthesis and wrote the manuscript. JDP, GB VBR and TMF designed the study. JDP and GB contributed to data analysis, synthesis and writing of the manuscript. MV, PB and JS contributed to advising, reviewing, and editing the manuscript. OW, JGH, CG, CD, CL, ER, YC, AF, JH, FI, NY, RA, HGN, 525 and EC contributed to instrument preparation, fieldwork and data analysis. DW and RH contributed to field supervision and technical guidance. MI contributed to data acquisition. AM contributed to operating the drone. JM contributed to preparation and field supervision. TE, SD contributed to data processing and data analysis. MU contributed to coordination and supervision. AS and SH contributed to data processing and data analysis as well as supervision of this study. FCM, ARB, PAR, AFF contributed to preparation, field work, supervision and data analysis. VBR, TMF and MZ contributed to 530 coordination, supervision and experiment design. RZ provided valuable feedback as a member of the Advisory Board.

Competing Interests. The authors declare that they have no conflict of interest

Acknowledgements. We would like to thank Nick Shepherd, Fritjof Biowski, Stefanie Ulbricht, Alberto Wahnnon and Alfredo Badolato for their on-site operations and supervision for making the one-week experiment move smoothly; thank Luke Holehouse and Amy Paerson for the data analysis and data visualization. Additionally, we would like to thank pilots Andrew 535 Lake and Juergen Zimmer for performing the drone and helicopter flights on-site.

Financial support. This research was supported by GERG members and the project Eastern Mediterranean Middle East-Climate & Atmosphere Research Center (EMME-CARE) which has received the funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No. 856612 and the Cyprus Government.

References

540 Albertson, John. D., Harvey, T., Foderaro, G., Zhu, P., Zhou, X., Ferrari, S., Amin, M. S., Modrak, M., Brantley, H., and Thoma, E. D.: A Mobile Sensing Approach for Regional Surveillance of Fugitive Methane Emissions in Oil and Gas Production, *Environ. Sci. Technol.*, 50, 2487–2497, <https://doi.org/10.1021/acs.est.5b05059>, 2016.



- Allen, D. T.: Methane emissions from natural gas production and use: reconciling bottom-up and top-down measurements, *Current Opinion in Chemical Engineering*, 5, 78–83, <https://doi.org/10.1016/j.coche.2014.05.004>, 2014.
- 545 Allen, D. T., Torres, V. M., Thomas, J., Sullivan, D. W., Harrison, M., Hendler, A., Herndon, S. C., Kolb, C. E., Fraser, M. P., Hill, A. D., Lamb, B. K., Miskimins, J., Sawyer, R. F., and Seinfeld, J. H.: Measurements of methane emissions at natural gas production sites in the United States, *Proceedings of the National Academy of Sciences*, 110, 17768–17773, <https://doi.org/10.1073/pnas.1304880110>, 2013.
- Alvarez, R. A., Zavala-Araiza, D., Lyon, D. R., Allen, D. T., Barkley, Z. R., Brandt, A. R., Davis, K. J., Herndon, S. C.,
550 Jacob, D. J., Karion, A., Kort, E. A., Lamb, B. K., Lauvaux, T., Maasackers, J. D., Marchese, A. J., Omara, M., Pacala, S. W., Peischl, J., Robinson, A. L., Shepson, P. B., Sweeney, C., Townsend-Small, A., Wofsy, S. C., and Hamburg, S. P.: Assessment of methane emissions from the U.S. oil and gas supply chain, *Science*, eaar7204, <https://doi.org/10.1126/science.aar7204>, 2018.
- Ars, S., Broquet, G., Yver Kwok, C., Roustan, Y., Wu, L., Arzoumanian, E., and Bousquet, P.: Statistical atmospheric
555 inversion of local gas emissions by coupling the tracer release technique and local-scale transport modelling: a test case with controlled methane emissions, *Atmos. Meas. Tech.*, 10, 5017–5037, <https://doi.org/10.5194/amt-10-5017-2017>, 2017.
- Balcombe, P., Anderson, K., Speirs, J., Brandon, N., and Hawkes, A.: The Natural Gas Supply Chain: The Importance of Methane and Carbon Dioxide Emissions, *ACS Sustainable Chem. Eng.*, 5, 3–20, <https://doi.org/10.1021/acssuschemeng.6b00144>, 2017.
- 560 Bell, C. S., Vaughn, T. L., Zimmerle, D., Herndon, S. C., Yacovitch, T. I., Heath, G. A., Pétron, G., Edie, R., Field, R. A., Murphy, S. M., Robertson, A. M., and Soltis, J.: Comparison of methane emission estimates from multiple measurement techniques at natural gas production pads, *Elementa: Science of the Anthropocene*, 5, 79, <https://doi.org/10.1525/elementa.266>, 2017.
- Bell, C. S., Vaughn, T., and Zimmerle, D.: Evaluation of next generation emission measurement technologies under
565 repeatable test protocols, *Elementa: Science of the Anthropocene*, 8, 32, <https://doi.org/10.1525/elementa.426>, 2020.
- BP Statistical Review of World Energy 2022, <https://www.bp.com/content/dam/bp/business-sites/en/global/corporate/pdfs/energy-economics/statistics/statistical-review/bp-stats-review-2022-full-report.pdf>, last access 29 September 2022, 2022.
- Cooper, J., Balcombe, P., and Hawkes, A.: The quantification of methane emissions and assessment of emissions data for the
570 largest natural gas supply chains, *Journal of Cleaner Production*, 320, 128856, <https://doi.org/10.1016/j.jclepro.2021.128856>, 2021.
- Crow, D. J. G., Balcombe, P., Brandon, N., and Hawkes, A. D.: Assessing the impact of future greenhouse gas emissions from natural gas production, *Science of The Total Environment*, 668, 1242–1258, <https://doi.org/10.1016/j.scitotenv.2019.03.048>, 2019.



- 575 Defratyka, S. M., Paris, J.-D., Yver-Kwok, C., Loeb, D., France, J., Helmore, J., Yarrow, N., Gros, V., and Bousquet, P.: Ethane measurement by Picarro CRDS G2201-i in laboratory and field conditions: potential and limitations, *Atmos. Meas. Tech.*, 14, 5049–5069, <https://doi.org/10.5194/amt-14-5049-2021>, 2021a.
- Defratyka, S. M., Paris, J.-D., Yver-Kwok, C., Fernandez, J. M., Korben, P., and Bousquet, P.: Mapping Urban Methane Sources in Paris, France, *Environ. Sci. Technol.*, 55, 8583–8591, <https://doi.org/10.1021/acs.est.1c00859>, 2021b.
- 580 Duren, R. M., Thorpe, A. K., Foster, K. T., Rafiq, T., Hopkins, F. M., Yadav, V., Bue, B. D., Thompson, D. R., Conley, S., Colombi, N. K., Frankenberg, C., McCubbin, I. B., Eastwood, M. L., Falk, M., Herner, J. D., Croes, B. E., Green, R. O., and Miller, C. E.: California’s methane super-emitters, *Nature*, 575, 180–184, <https://doi.org/10.1038/s41586-019-1720-3>, 2019.
- Feitz, A., Schroder, I., Phillips, F., Coates, T., Negandhi, K., Day, S., Luhar, A., Bhatia, S., Edwards, G., Hrabar, S., Hernandez, E., Wood, B., Naylor, T., Kennedy, M., Hamilton, M., Hatch, M., Malos, J., Kochanek, M., Reid, P., Wilson, J.,
- 585 Deutscher, N., Zegelin, S., Vincent, R., White, S., Ong, C., George, S., Maas, P., Towner, S., Wokker, N., and Griffith, D.: The Ginninderra CH₄ and CO₂ release experiment: An evaluation of gas detection and quantification techniques, *International Journal of Greenhouse Gas Control*, 70, 202–224, <https://doi.org/10.1016/j.ijggc.2017.11.018>, 2018.
- Edie, R., Robertson, A.M., Field, R.A., Soltis, J., Snare, D.A., Zimmerle, D., Bell, C.S., Vaughn, T.L. and Murphy, S.M.: Constraining the accuracy of flux estimates using OTM 33A. *Atmospheric Measurement Techniques*, 13(1), 341–353.
- 590 <https://doi.org/10.5194/amt-13-341-2020>, 2020.
- Foulds, A., Allen, G., Shaw, J. T., Bateson, P., Barker, P. A., Huang, L., Pitt, J. R., Lee, J. D., Wilde, S. E., Dominutti, P., Purvis, R. M., Lowry, D., France, J. L., Fisher, R. E., Fiehn, A., Pühl, M., Bauguitte, S. J. B., Conley, S. A., Smith, M. L., Lachlan-Cope, T., Pisso, I., and Schwietzke, S.: Quantification and assessment of methane emissions from offshore oil and gas facilities on the Norwegian continental shelf, *Atmos. Chem. Phys.*, 22, 4303–4322, [https://doi.org/10.5194/acp-22-4303-](https://doi.org/10.5194/acp-22-4303-2022)
- 595 2022, 2022.
- Gardiner, T., Helmore, J., Innocenti, F., and Robinson, R.: Field Validation of Remote Sensing Methane Emission Measurements, *Remote Sens.*, 9, 956, <https://doi.org/10.3390/rs9090956>, 2017.
- Gas Infrastructure Europe (GIE) and MARCOGAZ 2019: Potential ways the gas industry can contribute to the reduction of methane emissions, https://ec.europa.eu/info/sites/default/files/gie-marcogaz_-_report_-_reduction_of_methane_emissions.pdf, last access: 13 October 2022.
- 600 Harriss, R., Alvarez, R. A., Lyon, D., Zavala-Araiza, D., Nelson, D., and Hamburg, S. P.: Using Multi-Scale Measurements to Improve Methane Emission Estimates from Oil and Gas Operations in the Barnett Shale Region, Texas, *Environ. Sci. Technol.*, 49, 7524–7526, <https://doi.org/10.1021/acs.est.5b02305>, 2015.
- IEA: International Energy Agency: Global Energy Review, <https://www.iea.org/reports/global-energy-review-2021> (last
- 605 access: 22 September 2022), 2021.
- IPCC, 2018: Global Warming of 1.5°C. An IPCC Special Report on the impacts of global warming of 1.5°C above pre-industrial levels and related global greenhouse gas emission pathways, in the context of strengthening the global response to the threat of climate change, sustainable development, and efforts to eradicate poverty [Masson-Delmotte, V., P. Zhai, H.-O.



- Pörtner, D. Roberts, J. Skea, P.R. Shukla, A. Pirani, W. Moufouma-Okia, C. Péan, R. Pidcock, S. Connors, J.B.R. Matthews,
610 Y. Chen, X. Zhou, M.I. Gomis, E. Lonnoy, T. Maycock, M. Tignor, and T. Waterfield (eds.)), Cambridge University Press,
Cambridge.
- Johnson, M. R., Tyner, D. R., and Szekeres, A. J.: Blinded evaluation of airborne methane source detection using Bridger
Photonics LiDAR, *Remote Sensing of Environment*, 259, 112418, <https://doi.org/10.1016/j.rse.2021.112418>, 2021.
- Kumar, P., Broquet, G., Yver-Kwok, C., Laurent, O., Gichuki, S., Caldow, C., Cropley, F., Lauvaux, T., Ramonet, M.,
615 Berthe, G., Martin, F., Duclaux, O., Juery, C., Bouchet, C., and Ciais, P.: Mobile atmospheric measurements and local-scale
inverse estimation of the location and rates of brief CH₄ and CO₂ releases from point sources, *Atmos. Meas. Tech.*, 14,
5987–6003, <https://doi.org/10.5194/amt-14-5987-2021>, 2021.
- Kumar, P., Broquet, G., Caldow, C., Laurent, O., Gichuki, S., Cropley, F., Yver-Kwok, C., Fontanier, B., Lauvaux, T.,
Ramonet, M., Shah, A., Berthe, G., Martin, F., Duclaux, O., Juery, C., Bouchet, C., Pitt, J., and Ciais, P.: Near-field
620 atmospheric inversions for the localization and quantification of controlled methane releases using stationary and mobile
measurements, *Quarterly Journal of the Royal Meteorological Society*, 148, 1886–1912, <https://doi.org/10.1002/qj.4283>,
2022.
- Morales, R., Ravelid, J., Vinkovic, K., Korbeň, P., Tuzson, B., Emmenegger, L., Chen, H., Schmidt, M., Humbel, S., and
Brunner, D.: A tracer release experiment to investigate uncertainties in drone-based emission quantification for methane
625 point sources, *Gases/In Situ Measurement/Validation and Intercomparisons*, <https://doi.org/10.5194/amt-2021-314>, 2021.
- Morales, R., Ravelid, J., Vinkovic, K., Korbeň, P., Tuzson, B., Emmenegger, L., Chen, H., Schmidt, M., Humbel, S., and
Brunner, D.: Controlled-release experiment to investigate uncertainties in UAV-based emission quantification for methane
point sources, *Atmos. Meas. Tech.*, 15, 2177–2198, <https://doi.org/10.5194/amt-15-2177-2022>, 2022.
- Oil & Gas Methane Partnership 2.0, <https://www.ogmpartnership.com/>, last access: 29 September 2022.
- 630 Olczak, M., Piebalgs, A., Balcombe, P.: Methane regulation in the EU: Stakeholder perspectives on MRV and emissions
reductions, *Environmental Science and Policy*, 137, 314–322, <https://doi.org/10.1016/j.envsci.2022.09.002>, 2022.
- Paris, J.-D., Riandet, A., Bourtsoukidis, E., Delmotte, M., Berchet, A., Williams, J., Ernle, L., Tadic, I., Harder, H., and
Lelieveld, J.: Shipborne measurements of methane and carbon dioxide in the Middle East and Mediterranean areas and the
contribution from oil and gas emissions, *Atmos. Chem. Phys.*, 21, 12443–12462, <https://doi.org/10.5194/acp-21-12443-2021>,
635 2021.
- Petäjä, T., Duplissy, E.-M., Tabakova, K., Schmale, J., Altstädter, B., Ancellet, G., Arshinov, M., Balin, Y., Baltensperger,
U., Bange, J., Beamish, A., Belan, B., Berchet, A., Bossi, R., Cairns, W. R. L., Ebinghaus, R., El Haddad, I., Ferreira-Araujo,
B., Franck, A., Huang, L., Hyvärinen, A., Humbert, A., Kalogridis, A.-C., Konstantinov, P., Lampert, A., MacLeod, M.,
Magand, O., Mahura, A., Marelle, L., Masloboev, V., Moisseev, D., Moschos, V., Neckel, N., Onishi, T., Osterwalder, S.,
640 Ovaska, A., Paasonen, P., Panchenko, M., Pankratov, F., Pernov, J. B., Platis, A., Popovicheva, O., Raut, J.-C., Riandet, A.,
Sachs, T., Salvatori, R., Salzano, R., Schröder, L., Schön, M., Shevchenko, V., Skov, H., Sonke, J. E., Spolaor, A.,
Stathopoulos, V. K., Strahlendorff, M., Thomas, J. L., Vitale, V., Vratolis, S., Barbante, C., Chabrillat, S., Dommergue, A.,



- 645 Eleftheriadis, K., Heilimo, J., Law, K. S., Massling, A., Noe, S. M., Paris, J.-D., Prévôt, A. S. H., Riipinen, I., Wehner, B., Xie, Z., and Lappalainen, H. K.: Overview: Integrative and Comprehensive Understanding on Polar Environments (iCUPE) – concept and initial results, *Atmos. Chem. Phys.*, 20, 8551–8592, <https://doi.org/10.5194/acp-20-8551-2020>, 2020.
- Ravikumar, A. P., Sreedhara, S., Wang, J., Englander, J., Roda-Stuart, D., Bell, C., Zimmerle, D., Lyon, D., Mogstad, I., Ratner, B., and Brandt, A. R.: Single-blind inter-comparison of methane detection technologies – results from the Stanford/EDF Mobile Monitoring Challenge, *Elementa: Science of the Anthropocene*, 7, 37, <https://doi.org/10.1525/elementa.373>, 2019.
- 650 Roscioli, J. R., Yacovitch, T. I., Floerchinger, C., Mitchell, A. L., Tkacik, D. S., Subramanian, R., Martinez, D. M., Vaughn, T. L., Williams, L., Zimmerle, D., Robinson, A. L., Herndon, S. C., and Marchese, A. J.: Measurements of methane emissions from natural gas gathering facilities and processing plants: measurement methods, *Atmos. Meas. Tech.*, 8, 2017–2035, <https://doi.org/10.5194/amt-8-2017-2015>, 2015.
- Rutherford, J. S., Sherwin, E. D., Ravikumar, A. P., Heath, G. A., Englander, J., Cooley, D., Lyon, D., Omara, M., Langfitt, Q., and Brandt, A. R.: Closing the methane gap in US oil and natural gas production emissions inventories, *Nat Commun*, 12, 4715, <https://doi.org/10.1038/s41467-021-25017-4>, 2021.
- Sherwin, E. D., Chen, Y., Ravikumar, A. P., and Brandt, A. R.: Single-blind test of airplane-based hyperspectral methane detection via controlled releases, *Elementa: Science of the Anthropocene*, 9, 00063, <https://doi.org/10.1525/elementa.2021.00063>, 2021.
- 660 Zimmerle, D., Vaughn, T., Luck, B., Lauderdale, T., Keen, K., Harrison, M., Marchese, A., Williams, L., and Allen, D.: Methane Emissions from Gathering Compressor Stations in the U.S., *Environ. Sci. Technol.*, 54, 7552–7561, <https://doi.org/10.1021/acs.est.0c00516>, 2020.