

Compare Results

Old File:

Initial_Submission.pdf

14 pages (2.64 MB)

11/06/2024 13:24:09

versus

New File:

Effect_of_GNSS_clock_rate_on_RO_bending_angles_RV.pdf

20 pages (1011 KB)

19/11/2024 17:34:54

Total Changes

813

Content

- 236 Replacements
- 248 Insertions
- 79 Deletions

Styling and Annotations

- 3 Styling
- 247 Annotations

Go to First Change (page 1)



Observed impact of the GNSS clock data rate on Radio Occultation bending angles for Sentinel-6A and COSMIC-2

Sebastiano Padovan¹, Axel von Engel¹, Saverio Paoletta¹, Yago Andres¹, Chad R. Galley², Riccardo Notarpietro¹, Veronica Rivas Boscan¹, Francisco Sancho¹, Francisco Martin Alemany¹, Nicolas Morew¹, and Christian Marquardt¹

¹European Organisation for the Exploitation of Meteorological Satellites, Darmstadt 64295, Germany

²Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91109, USA

Correspondence: S. Padovan (sebastiano.padovan@external.eumetsat.int)

Abstract.

Radio Occultation (RO) experiments require the tracking of signals from the Global Navigation Satellite System (GNSS) by a Low-Earth-Orbit (LEO) satellite as the signals travel through different layers of the atmosphere. The orbit and clock solutions for the GNSS constellations affect these experiments in two ways: They are needed to obtain a zero-differencing GNSS-based orbit and clock solution for the LEO, and they enter directly the processing of each single RO profile, where the orbit and clock information for the transmitter (GNSS) and receiver (LEO) satellites is required. In this work, we investigate how different GLONASS and GPS orbit and clock solutions affect the statistical properties of RO profiles by comparing our results with forward-modelled bending angle profiles based on data from the European Centre for Medium-Range Weather Forecasts (ECMWF) short-range forecasts. Given that GNSS orbits are relatively smooth, this study focused on the effect of different transmitter clock data rates and we tested the range from 1 to 30 seconds (specifically, the rates of 1, 2, 5, 10 and 30 seconds). The analysis is based on the reprocessing of Sentinel-6A data (four months in 2021, September to December, or about 110k occultations) and of a smaller sample of recent COSMIC-2/FORMOSAT-7 data (August 5th–7th, 2023, or about 9k occultations). We find that at impact heights above about 35 km GLONASS bending angles statistics markedly improve with the use of higher-rate clock information. For GPS, not much is gained by using clock rates higher than 30 s, and the statistics are better for more recent GPS blocks. In the same impact-height range, higher-rate GLONASS clocks also significantly reduce the vertical error correlation. These results are likely the manifestation of the different short-timescale behaviour of the atomic clocks onboard the GPS and GLONASS constellations.

1 Introduction

The calculation of bending angle (BA) profiles based on signals from the Global Navigation Satellite System (GNSS) travelling between a GNSS satellite and a Low-Earth-Orbit (LEO) spacecraft through the Earth's atmosphere requires an accurate knowledge of the position, velocity and clock of the two space vehicles. In the Radio Occultation (RO) processing described in this work, the GNSS positions and clocks are provided as auxiliary data. They are used explicitly in the computation of each

BA (through, e.g., the Doppler equation, Kursinski et al., 1997) and implicitly, given that they are required to obtain the LEO orbit and receiver clock solutions.

25 The GNSS space vehicles have revolution periods in excess of 10 hours and their orbits, which are largely controlled by gravitational dynamics, are relatively smooth and are typically provided at a rate of few minutes. The GNSS clocks are needed to synchronize the receiver clock when performing the LEO Precise Orbit Determination (POD). Due to the random stochastic noises that affect GNSS atomic clocks, a smaller sampling interval is required to obtain accurate interpolations, as needed by the bending-angle-retrieval process. As a reference, the Center for Orbit Determination Europe (CODE) currently provides
30 orbits and clocks with a 5 min and a 30 s sampling rate, respectively, for rapid products (latency of 18 hours, Dach et al., 2023b) and 5 min and both 5 s and 30 s sampling rate for orbits and clocks for final products (latency of two weeks, Dach et al., 2023a). The Jet Propulsion Laboratory (JPL) Global Differential GPS (GDGPS) real-time (RT) GNSS products are available with a 1 min orbit sampling and a 1 s clock sampling. Table 1 provides some information on these and other sets of GNSS products that have been used in this study.

35 RO represents a high-rate application of GNSS products, since a typical radio occultation event has a duration of few minutes at most. At these time intervals, different GNSS constellations and different clock hardware within a given constellation show a range of clock stabilities (e.g., Hauschild et al., 2013; Griggs et al., 2015). The implication is that a proper description of the behavior of a clock (i.e., to have a model of its evolution), will require a product with a rate that depends on the clock properties. In other words, a more unstable clock hardware benefits from the use of a higher-rate clock correction.

40 The analysis of Sentinel-6A (S6A) RO data performed at the European Organisation for the Exploitation of Meteorological Satellites (EUMETSAT) using different GNSS data streams provided the motivation for this study, as described in Sect. 2. The experiment set-up is described in Sect. 3. The bulk of the analysis and the results in Sect. 4 are based on a 4-month-long batch of data from the S6A RO experiment (Sect. 4.1) and are complemented by a smaller batch of COSMIC-2/FORMOSAT-7 data (Sect. 4.2). Discussion and conclusions are presented in Sect. 5 and 6, respectively.

45 2 Motivation

The S6A spacecraft is the latest member of the family of altimetry reference missions (e.g., Donlon et al., 2021). For the first time, such a mission is equipped with an RO instrument, which was built by JPL (see also Paoletta et al., 2024, this issue). The receiver is connected to a POD antenna, which tracks only GPS signals, and to two occultation antennas tracking both GPS and GLONASS signals, located in the velocity and anti-velocity direction. The entire mission is operated by EUMETSAT. For
50 the RO experiment, JPL is responsible for the provision of Near-Real Time (NRT) RO data, while EUMETSAT for Non-Time Critical (NTC) RO products. These two operational streams are based on the same level zero data, received by EUMETSAT from the spacecraft through its ground segment and redistributed to JPL. JPL also hosts one of the analysis centers of the international GNSS service (IGS) and, through an operational agreement, provides the auxiliary GNSS data for both RO data streams. The JPL GPS auxiliary products provided to EUMETSAT for the NTC processing come from JPL final stream, with
55 orbits and clocks at 15m and 30s, respectively. The JPL GLONASS products come from JPL RT stream, but with orbits at 15m

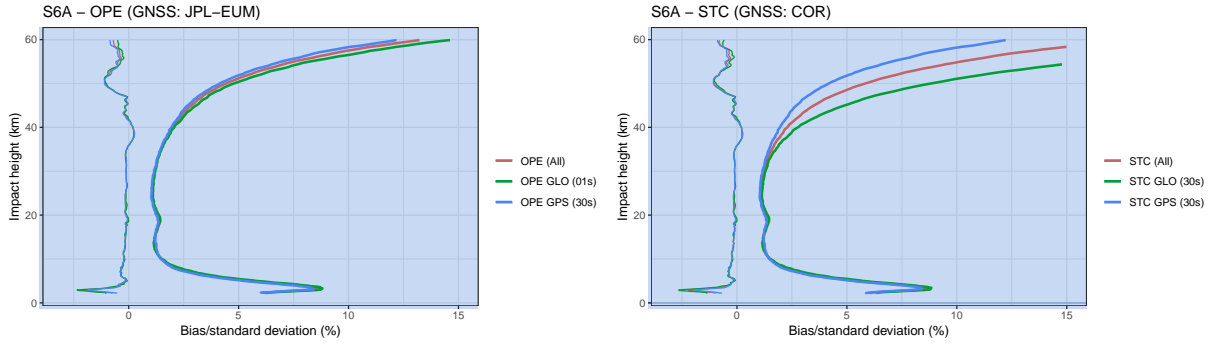


Figure 1. Sentinel-6A robust statistics against ECMWF-based short-range forecasts for two data sets for the period Feb 24th-Mar 31st, 2024, corresponding to about 38k single bending angle profiles for each set. **Left:** Operational data stream (OPE), where the POD is based on Bernese 5.2 (Sect. 3.1) and the GNSS auxiliary data are from JPL, with 30 s and 1 s clock rate for GPS and GLONASS, respectively. **Right:** STC offline data stream, where the POD is based on Bernese 5.4 (Sect. 3.1) and the GNSS auxiliary data are CODE rapid products, with clocks at 30 s for both GPS and GLONASS.

and clocks at 1s (we refer to this set, which mixes RT and final products, as JPL-EUM, see Table 1). The NTC data stream has a formal timeliness of 60 days, but it is kick-started as soon as the GNSS auxiliary data are available. Typically, EUMETSAT receives this data within two weeks from sensing time.

In addition to the operational NTC processor (referred to also as OPE processor), for monitoring purposes at EUMETSAT we deployed an offline Short-Time Critical processor (referred to as STC processor), which uses the CODE rapid products (COR) as GNSS auxiliary data (Dach et al., 2023b), and has a timeliness of about 24 hours. As part of this monitoring activity, for both the offline-STC and the operational-NTC processors, robust statistics are computed for the bias and standard deviation (Maronna et al., 2019) with respect to the forward-modelled bending angle profiles obtained from the temperature, pressure, and humidity profiles extracted from the European Centre for Medium-Range Weather Forecasts (ECMWF) short-range forecasts. The forward modelling is done with the Radio Occultation Processing Package (ROPP, Culverwell et al., 2015). The comparison of the statistics between the STC and OPE data streams provides a first indication of the importance of the GNSS clock data rate for the quality of the derived RO products. In Fig. 1 we plot the bias and the standard deviation for both the OPE and the STC processor, using recent data from the period between February 24th and March 31st, 2024, which corresponds to about 38.5k individual bending angle profiles per processor. For this period, the total number of products obtained with the two processor is slightly different (at about the 3% level), due to the different POD SW and different GNSS auxiliary data used. The bias profiles between the two processors and for the two constellations are self-consistent and hardly distinguishable. For the standard deviation, the situation is different. Both for STC and for NTC the GPS clock products have a 30 s sampling rate. The different data source (COR for the STC and JPL-EUM for the OPE, see Table 1) does not affect the overall standard deviation for GPS. For GLONASS, the STC processor uses the COR 30 s clocks, while the OPE processor is fed with 1 s JPL-EUM clock products. Above about an impact height of 35 km, the GLONASS standard deviation curves (green) are markedly different. Previous work has pointed out the lesser short-term stability of GLONASS clocks with respect

Table 1. Summary of the different sets of GNSS products that have been used for this study.

GNSS products source						
Abbreviation	GPS rate		GLONASS rate		Latency	Description/Notes
	Orbit	Clock	Orbit	Clock		
Center for Orbit Determination Europe (CODE) ¹						
COD	15m/5m	30s	15m/5m	30s	~ 14 days	CODE Finals stream ²
COD 05 s	15m/5m	5s	15m/5m	5s	~ 14 days	CODE Finals stream with high-rate clocks ²
COR	15m/5m	30s	15m/5m	30s	~ 18 hours	CODE Rapid stream ³
Jet Propulsion Laboratory (JPL) Global Differential GPS (GDGPS) ⁴						
JPL RT	1m	1s	1m	1s	~ 1 minute	JPL Real-Time stream ⁵
JPL <i>dd s</i>	15m	<i>dd s</i>	15m	<i>dd s</i>	N/A ⁶	Downsampled JPL RT (e.g., JPL 10s)
JPL-EUM	15m	30s	15m	1s	~ 10 days ⁷	JPL-EUM S6A-RO NTC Operational agreement

¹ The rate of the CODE orbit products has been increased from 15m to 5m after the adoption of the new IGS20 reference frame

(starting on November 27th, 2022); ² For the year YYYY, products are found at <http://ftp.aiub.unibe.ch/CODE/YYYY/>;

³ <http://ftp.aiub.unibe.ch/CODE/>; ⁴ <https://www.gdgps.net/>;

⁵ <https://cddis.nasa.gov/archive/gnss/products/realtime>, https://sideshow.jpl.nasa.gov/pub/JPL_GNSS_Products/RealTime;

⁶ Since these are a downsampled version of the JPL RT stream, no latency can be defined for them;

⁷ These products are not publicly available, but part of an operational agreement between JPL and EUMETSAT.

to GPS ones, at least starting with Block IIF satellites (Griggs et al., 2015; Hauschild et al., 2013). The decreased stability does impact the BA uncertainty, as shown in a preliminary analysis of a small batch of COSMIC-2 data by Yao et al. (2023). Less stable clocks would require a higher rate correction to compensate its noise, and the results of Fig. 1 point into this direction.

80 Given that the work of Hauschild et al. (2013) and Griggs et al. (2015) is several years old, and both the GPS and GLONASS constellations have been evolving in the meantime, we show in Fig. 2 the modified Allan Deviation (e.g., Griggs et al., 2015) for the 1 s JPL RT clock products for December 31st, 2021, a date which is part of the main S6A processing campaign below (Sect. 4.1). At that time in the GPS constellation there were 15, 12 and 5 Block II-R, Block II-F and Block III satellites, respectively. The results for the GPS satellites are similar to those of figure 7 of Griggs et al. (2015), with the addition of the group of Block III satellites, which show a better performance on the short timescales (< 10 s), and are similar to the Block II-F between 10¹ and 10² seconds. The GLONASS constellation was almost completely composed by GLONASS-M satellites, with a single GLONASS-K1, which displays a slightly better performance at the very short timescales.

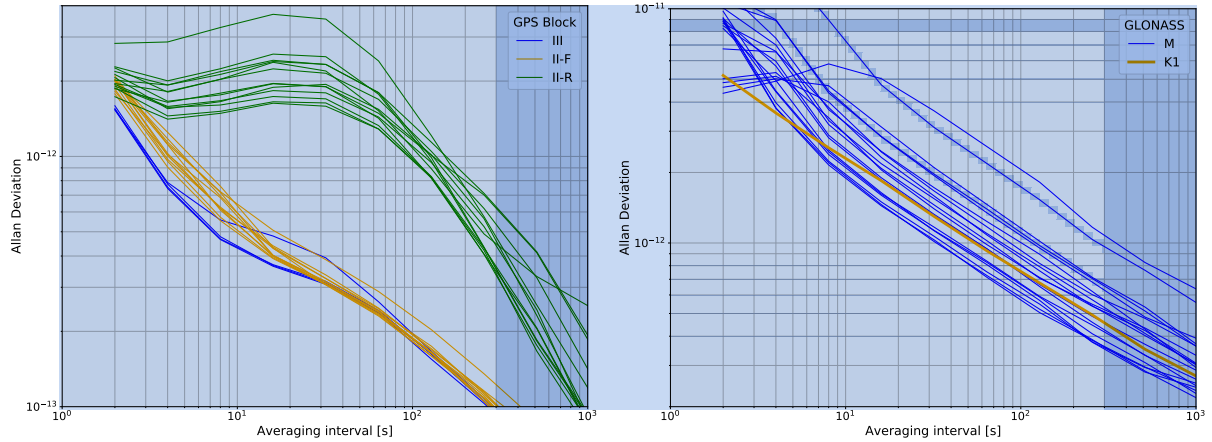


Figure 2. Modified Allan Deviation for the GPS (left) and GLONASS (right) constellations for December 31st, 2021, calculated using JPL RT clock data (Table 1). Please note the different range of the y-axis.

3 Set-up of the experiments

Unless otherwise noted, in what follows all the experiments described are based on the re-processing of radio occultation data from the S6A and COSMIC-2/FORMOSAT-7 missions, from level zero up to BA. These two missions feature the same TriG instrument, a hardware component that builds up on the former BlackJack/IGOR receivers and is a POD and RO receiver able to track signals from multiple GNSS constellations (see Esterhuizen et al., 2009, for additional details), equipped with an ultra-stable oscillator (Tien et al., 2012). The level zero data is decoded using a JPL-provided software compliant with the International Traffic in Arms Regulations (ITAR). The RO processing is performed with the EUMETSAT-developed and -maintained Yet Another Radio Occultation Software (YAROS), and detailed information on the processing approach can be found in Paoletta et al. (2024, this issue). Here, we provide some details on the POD processing setup and on the employed GNSS auxiliary data.

3.1 POD

The LEO orbit and clock solutions are obtained with the latest version of the Bernese GNSS software (version 5.4) using zero-differenced GNSS data (Jäggi et al., 2007; Bock et al., 2011). Bernese 5.4 allows for the modeling of non-gravitational forces on the LEO, namely air-drag and direct and reflected radiation pressure (Mao et al., 2019). To make use of these models, a representation of the shape of the spacecraft and of the material properties of its exterior layers is required. In our simulations we use a macro model for S6A based on Montenbruck et al. (2021), but no shape model is employed for COSMIC-2. Bernese 5.4 has the capability of performing zero-differencing integer ambiguity resolution using the Bias-SINEX products (Villiger et al., 2019; Schaer et al., 2021). However, these products are not part of the operational agreement with JPL and our solutions are based on the float-ambiguity resolution approach. Integer-ambiguity fixing has been shown to be better than the float-

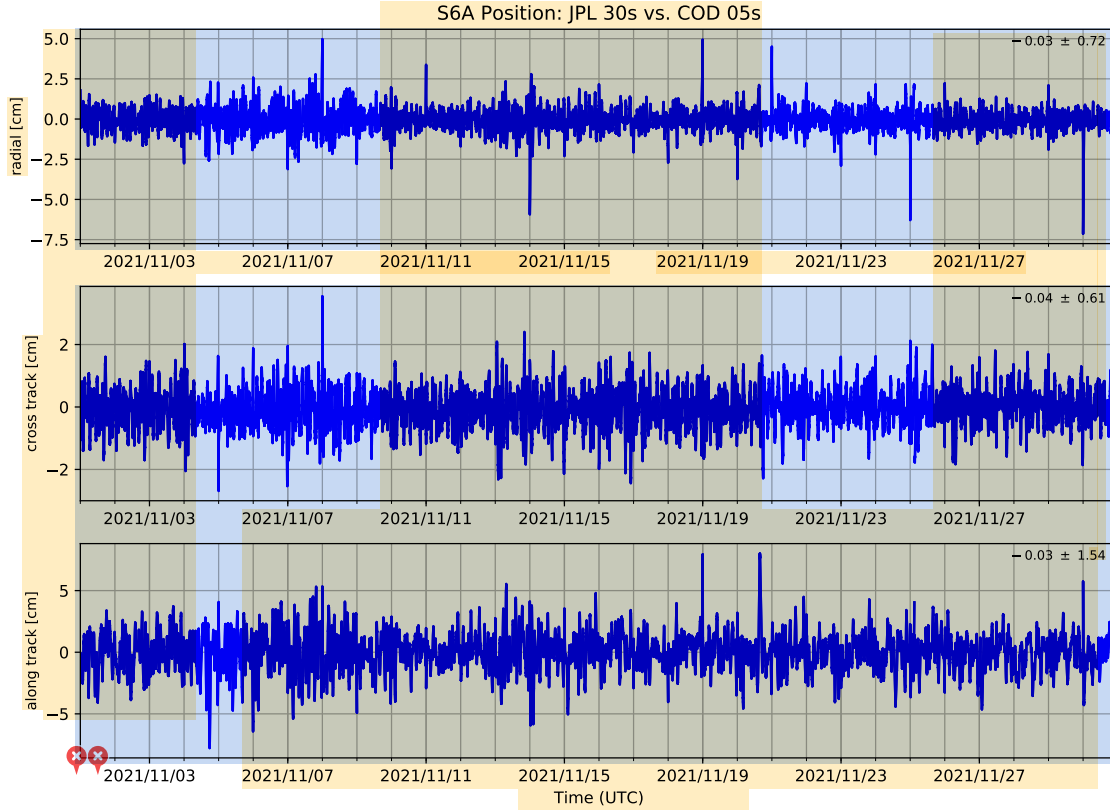


Figure 3. Comparison along the radial (top), cross track (middle) and along track (bottom) directions of two S6A orbit solutions for the month of November 2021. In each panel the mean \pm the root mean square (RMS) is indicated. The two solutions are obtained with the same software (Bernese 5.4) but with two different GNSS GPS auxiliary data products (Table 1): JPL 30 s (15 min orbits and 30 s clocks) and CODE 05 s (5 min orbits and 5 s clocks).

ambiguity approach (e.g., Montenbruck et al., 2018). However, the use of the float ambiguity solution in the BA processor is more than sufficient for generating high-quality RO products (e.g., Kursinski et al., 1997; Montenbruck et al., 2008; Innerkofler et al., 2020). The POD software embedded in the operational processor in 2021 (and thus, used for the generation of the OPE plot in Fig. 1) was Bernese version 5.2, which has neither the non-gravitational force models nor the zero-differencing integer-ambiguity-resolution algorithms available. However, as we argue below in this section, differences in the POD solution (due to e.g., the different models employed by the POD S/W), do not affect the BA statistics.

We assess the quality of a given POD solution in several complementary ways. There is an internal quality assessment within Bernese, where the final so-called reduced-dynamic orbit is compared to the kinematic orbit solution. A kinematic orbit

115 is obtained from the geometrical solution for the position of the LEO at the epochs in which observations are available (e.g., Švehla and Rothacher, 2005). A reduced-dynamic orbit indicates an orbit solution where the dynamical forces originating, e.g., from the extended gravitational field of the Earth, from the Sun, etc. are taken into account. The model cannot realistically take into account all possible forces, hence “reduced”, and some empirical parameters compensate for this (see, e.g., Montenbruck et al., 2005, and references therein.). Bernese handles the data used to generate these two orbits in the same exact way (e.g., 120 same data rejection parameters, same data weighting approach, ect.). As a result, the reduce-dynamics vs kinematic orbit comparison cannot detect any problem originating from, e.g., an error in the attitude modeling or in the definition of the position of the POD antenna, since these kind of errors would affect the two orbits in the same exact way. Thus, we also use a different POD software, the NAvigation Package for Earth Observation Satellites (NAPEOS, Springer et al., 2011), to crosscheck the consistency of the Bernese-based reduced-dynamic solution with the NAPEOS-based solution. As a result of 125 being an altimetry reference mission, in addition to the RO POD antenna (RO-POD), S6A also features another POD antenna (GNSS-POD), which tracks both GPS and Galileo and is connected to a completely independent receiver with its own ultra-stable oscillator (e.g., Donlon et al., 2021). The comparison of the GNSS-POD solution with the RO-POD solution provides a receiver-independent way to crosscheck the solution (of course the clock solution in this case cannot be compared, given that the two receivers have different oscillators). Furthermore, the GNSS-POD-based solution itself is routinely compared with 130 solutions obtained by the members of the Copernicus POD quality working group (CPOD QWG) (Fernández et al., 2024), which EUMETSAT is part of. The above checks allow to perform several complementary S/W-, receiver-, and processing-center-independent cross comparisons to validate our solution.

The focus of this work is to investigate the effect of different GNSS clock data rates on the RO BAs (cf. Fig. 1) and the effect is both direct, since they enter explicitly in the processing of each single RO profile, and indirect through their influence 135 on the POD solution. In Fig. 3 we compare two S6A solutions for the month of November 2021 (which falls within our main test campaign, see Sect. 4.1). One is obtained using JPL RT GPS products, downsampling clocks to 30 seconds and orbits to 15 minutes, the other using CODE final products with clocks at 5 seconds and orbits at 15 minutes (sets JPL 30 s and COD 05 s in Table 1). The RINEX observation files, decoded from level zero data provided by the RO receiver at the rate of 1 s, are downsampled to 30 s when using JPL products and to 10 s when using CODE products. The use of 10 s RINEX data is the 140 customary choice in POD reprocessing campaigns (see the discussion related to the regular service review in Fernández et al., 2024). However, in the POD processing, using a RINEX data rate higher than the clock data rate of the GNSS products would not be beneficial, but would rather increase the noise of the solution (Dach et al., 2015). Thus, for the JPL 30 s, we use RINEX data downsampled to 30 s. It is clear from Fig. 3 that there is a good agreement between the two solutions, with biases below the millimeter level and RMS below 2 centimeters in any given direction. The comparison for the velocity solution (not shown) 145 has both biases and RMS below 0.01 mm/s. These results are well within the standard target specifications of 5 cm and 0.05 mm/s for RO missions (e.g., Innerkofler et al., 2020).

As an additional example of the consistency of the POD results, we plot in Fig. 4 the three-dimensional root mean square (3D RMS) for a set of solutions, which includes the two cases of Fig. 3, based on data recorded by the RO-POD receiver, along with three solutions, based on data recorded by the GNSS-POD receiver, obtained by three members of the CPOD QWG. In

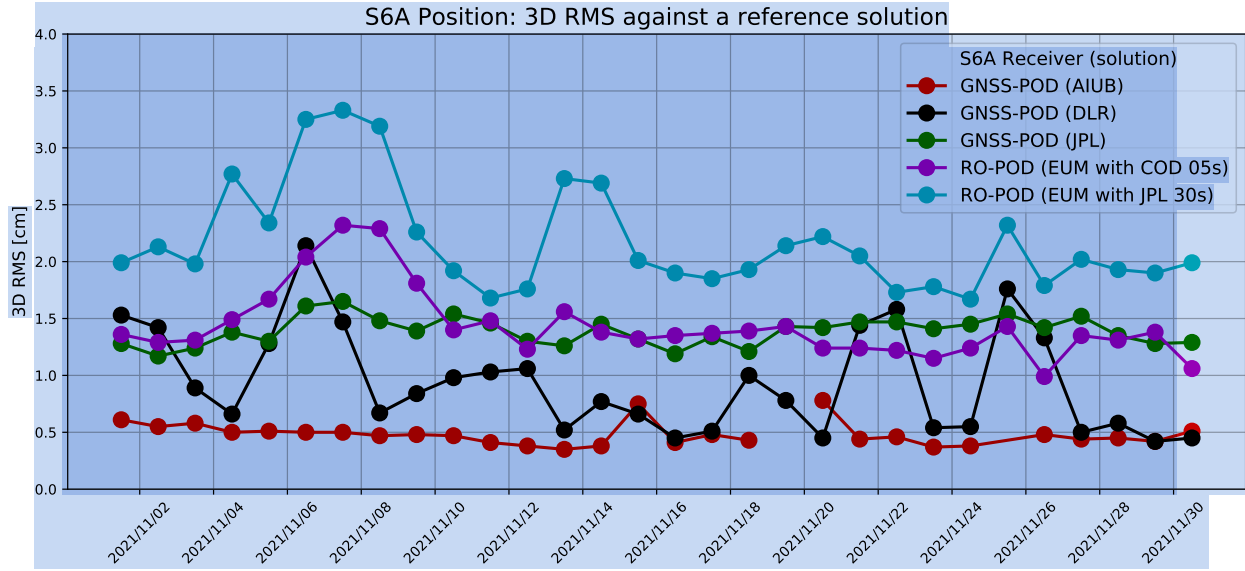


Figure 4. Comparison of different S6A POD solutions in the 3D-RMS space. The reference solution, against which the 3D RMS is computed, is the CPOD QWG combined solution (see main text for details). The pink and cyan solution are the same shown in Fig. 3, and are based on data of the RO-POD receiver, which tracks only GPS. The other three solutions are obtained by processing data of the GNSS-POD receiver, which tracks both GPS and Galileo. AIUB: Astronomical Institute of the University of Bern (their solution for Nov 19th was an outlier and has been removed); DLR: Deutsches Zentrum für Luft- und Raumfahrt; JPL: Jet Propulsion Laboratory.

Fig. 4, we use as reference solution (against which the 3D RMS is computed) the CPOD QWG combined solution, which is a weighted average of the solutions provided by the all the members of the CPOD QWG (see Sec. 3.6.2 in Fernández et al., 2024, for details). Typically, the spread of the different orbits in the 3D-RMS space is well below 3 cm. In Fig. 4 the only exception is the RO-POD solution obtained using JPL 30s GNSS products (Table 1), which is expected given that it is the only set of data based on a Real-Time (and thus, less accurate) GNSS data stream.

3.2 GNSS auxiliary data

For the results presented in the following sections, the GNSS auxiliary data that we employ are JPL RT data (Table 1). The original orbit products are downsampled to 15 min. Different sets of GNSS auxiliary data are created by modifying the clock products. We use a straightforward downsampling (i.e., decimation) of the clocks to create four additional sets of clock products with rates of 2, 5, 10, and 30 seconds (JPL *dds* products, Table 1). Another obvious approach would be to fit the data of the 1 s product to obtain a smoothed version before downsampling it. We verified that for these products outliers are not a concern.

Furthermore, given that the choices that need to be made when fitting (e.g., function to use, degree of the polynomial in a polynomial fit, etc.) may have an effect on the results, we proceeded with the straightforward downsampling.

4 Results

Given the self-consistency of POD solutions obtained by using different GNSS products and approaches (Fig. 3 and 4), the focus of this section is on the effects of using different GNSS clock data rate in the BA data processing. The GNSS transmitter clock bias plays an important role when processing the reconstructed signal phases (i.e., the ones obtained by the level zero decoder) with a zero-differencing algorithm (Beyerle et al., 2005). The main test uses S6A data, and a validation test is performed using COSMIC-2.

For all the experiments presented in this section, the POD solution for the LEO has been obtained using the GPS products of the JPL 30 s data set (see Table 1) with clocks at 30 s and, correspondingly, RINEX data at 30 s (Sect. 3.1). For the RO processing each GNSS auxiliary data set has the same orbits and earth rotation parameters. Five different sets are used, corresponding to differences in the data rate of the clock products as discussed in Sect. 3.2.

4.1 Sentinel 6A

We processed four months of S6A data, from September 1st to December 31st, 2021, which corresponds to around 110k occultation profiles. The results on the bias and standard deviation against ECMWF-data-based forward-modelled profiles are presented per constellation.

For GLONASS, Fig. 5 shows that while the bias is unaffected by the use of different GLONASS clock data rates (in the 1 s–30 s range), the standard deviation markedly improves for impact heights above about 35 km. At 40 km the standard deviation decreases by about 1% going from a 30 second to a 1 second clock product. Using 30 s GLONASS clocks a 5% standard deviation is reached at an impact height of about 45 km, while with a 1 s clock this occurs at about 52 km.

Figure 6 shows that, as it is the case for the GLONASS occultations, the robust bias for the GPS occultations is practically unaffected by the different GPS clock data rates employed. Unlike GLONASS, though, the standard deviation only shows a minor dependence on the GPS clock data rate. However, as visible in the standard deviation at high impact heights between 50 and 60 km (Fig. 6, right panel), there is not a clear trend in the standard deviation with the increasing clock data rate, contrary to the case of GLONASS (Fig. 5). Given that the clock behaviour of the GPS constellation shows a block dependence (Fig. 2), we also plot the bias and standard deviation curves at high impact heights for the different GPS blocks separately (Fig. 7). Overall, for a given clock data rate, the standard deviation improves going from Block-IIR, to Block-IIF and to Block-III. However, for a given Block, the effect of increasing the GPS clock data rate does not affect the standard deviation curve consistently. For the Block-III (Fig. 7, right), going from 30 s to 1 s clocks brings a steady increase in the standard deviation at a given height, with the effect being really minor between 30 and 5 seconds, but becoming noticeable with 2 and 1 second clocks. For the Block-IIF (Fig. 7, middle), all sets are mostly coincident, with a slight degradation of the standard deviation when using the 1 second clock. For the Block-IIR (Fig. 7, left), increasing the clock data rate improves the standard deviation. The improvement

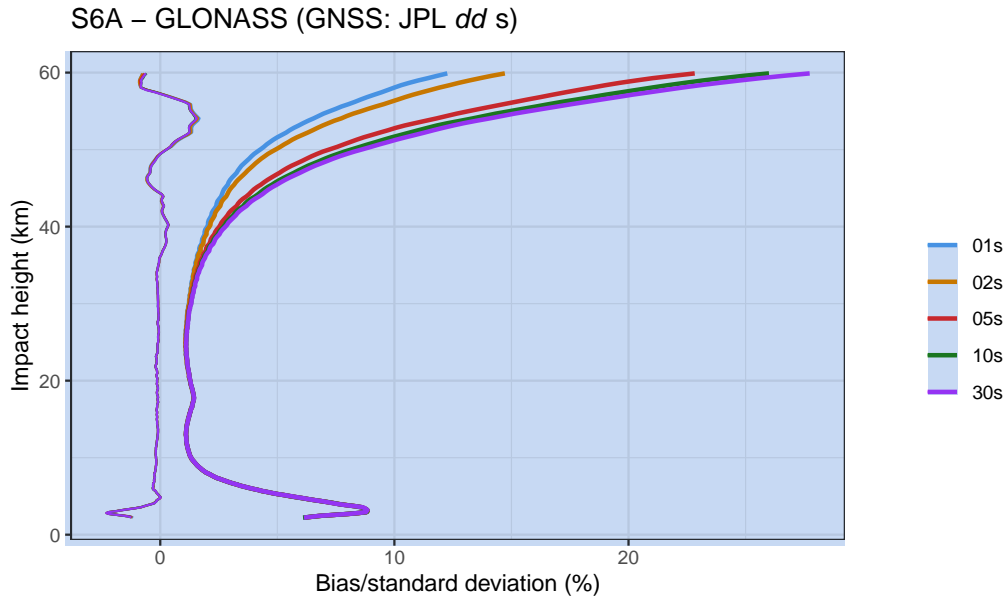


Figure 5. Robust statistics of S6A GLONASS occultations against ECMWF-based short-range forecasts, for the period September to December 2021. Each set corresponds to bending angle profiles processed with different GLONASS clock data rates, as indicated in the legend (see also Table 1). Above an impact height of about 35 km, there is a clear advantage in using high rate GLONASS clocks.

is steady in going from 30 to 5 seconds. The 2 and 5 seconds curves coincides, while going to a rate of 1 second increases the standard deviation.

195 4.2 COSMIC-2

To verify the results observed using S6A data, we used data from COSMIC-2 (e.g., Ho et al., 2020) in a smaller-scale test using three days in 2023 (August 5th–7th), which corresponds to about 9200 occultations. As was the case for S6A, the increase in the clock data rate for GLONASS occultations improves the standard deviation with minor effects on the bias (Fig. 8). For GPS occultations we only present in Fig. 9 results for GPS clocks at 30 seconds, and these results for the standard deviation are consistent with what was found with S6A, where there is an improvement in going from Block-IIR, to Block-IIF, to Block-III (Fig. 9). Results for higher GPS clock rates are consistent with those obtained with S6A. The standard deviation for COSMIC-2 is worse than for S6A due to a POD solution of lesser quality: no macro-model has been used for COSMIC-2, the satellites orbit at a lower altitude (about 550 km versus the 1350 km for S6A) where atmospheric perturbations are larger, and the solar activity increased in 2023 with respect to 2021.

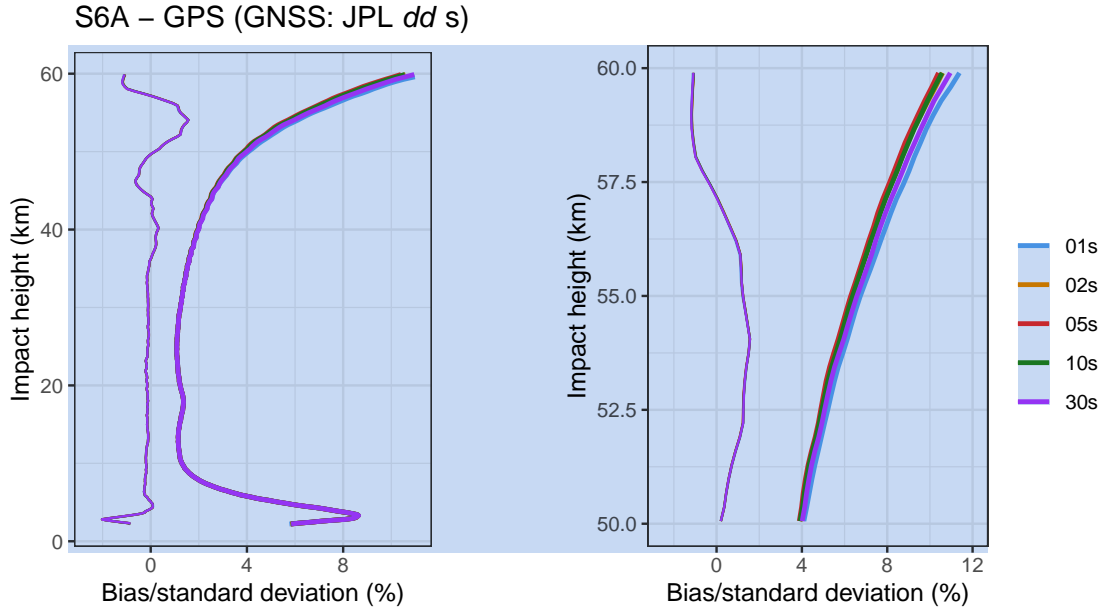


Figure 6. Robust statistics of S6A GPS occultations against ECMWF-based short-range forecasts, for the period September to December 2021. Each set corresponds to bending angle profiles processed with different GPS clock data rates, as indicated in the legend (see also Table 1). Unlike the case of S6A GLONASS occultations (Fig. 5), the standard deviation is largely unaffected by the GPS clock data rate used, as seen in the right panel, which is a zoomed-in view of the 50-60 km impact height range.

205 5 Discussion

The analysis performed in this work points at the importance of using higher-rate GLONASS clock data to obtain the best bending angle statistical performances in term of standard deviation at impact heights in excess of 35 km, with improvements observed up to 1 s, which is the highest rate tested (Fig. 1, 5 and 8). There seems to be no simple dependence of the standard deviation curves for the GPS constellation as a function of the clock data rate (Fig. 7), and the 30 s clock products provide
 210 comparable performance to the GLONASS 1 s products (Fig. 1, 6 and 9). These results confirm expectations based on the analysis of GNSS clock noise at RO-relevant timescales (Hauschild et al., 2013; Griggs et al., 2015).

The above S6A results are based on global statistics of more than one hundred thousand occultations. However, it is informative to also look at single occultations to understand how the GNSS clock sampling rate affects the low-level processing of the measurements. We focus here on the zero-difference phase P_{cr} , which we define as the NCO (Numerically Controlled
 215 Oscillator) phase P_{NCO} corrected for the receiver (τ_{rec}) and transmitter (τ_{tran}) clock bias:

$$P_{\text{cr}} = c \left[\frac{P_{\text{NCO}}}{f} - (\tau_{\text{rec}} - \tau_{\text{tran}}(c\tau)) \right].$$

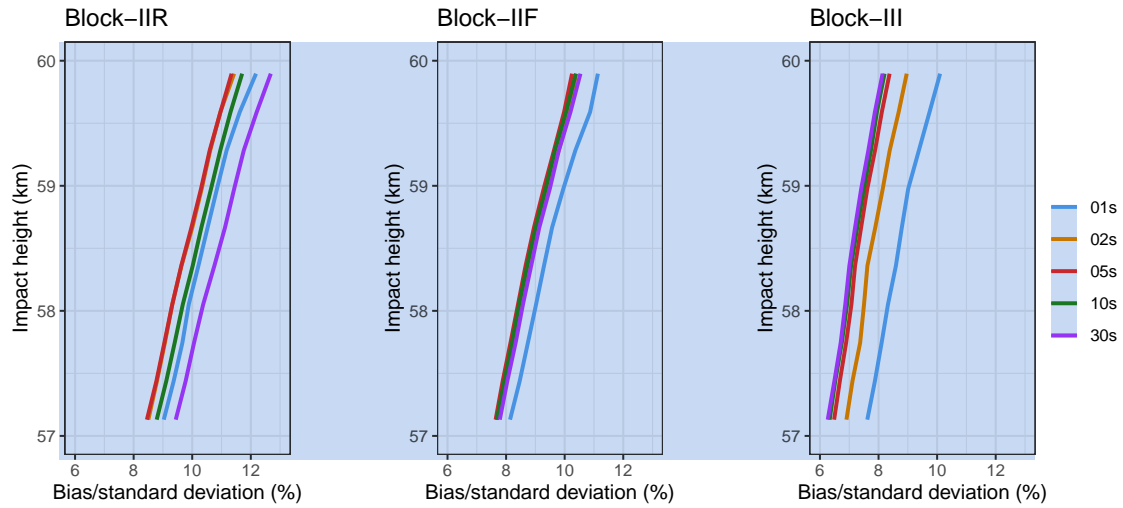


Figure 7. Above-50-km robust standard deviation of S6A GPS occultations against ECMWF-based short-range forecasts (as Fig. 6, right panel), for different GPS clock data rates (legend) and GPS transmitter types. Left: Block-IIR; Middle: Block-IIF; Right: Block-III. From left to right the standard deviation improves at any given clock data rate. However, the effect of increasing the GPS clocks data rate is not the same for each Block (i.e., panel).

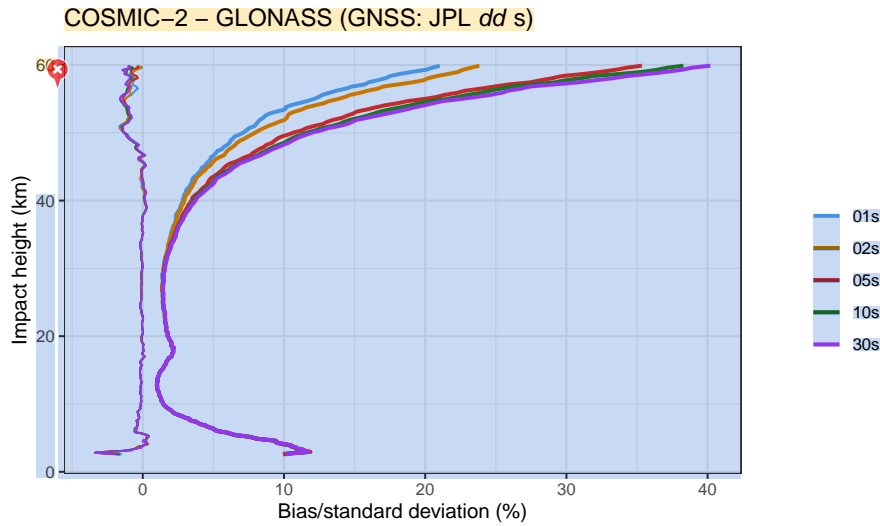


Figure 8. Robust statistics of COSMIC-2 GLONASS occultations against ECMWF-based short-range forecasts, for the period August 5th – 7th, 2023. Each set corresponds to bending angle profiles processed with different GLONASS clock data rates, as indicated in the legend. Above an impact height of about 35 km, there is a clear advantage in using high rate GLONASS clocks, as was the case for S6A (Fig. 5).

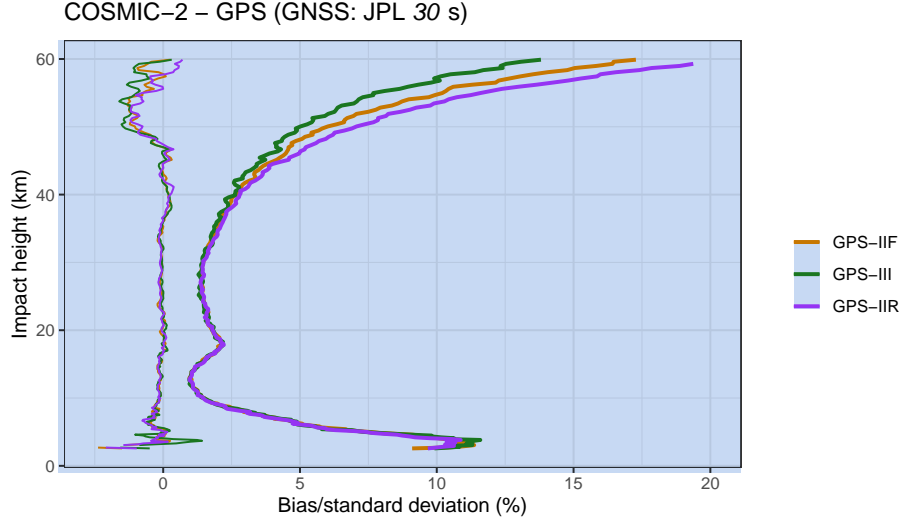


Figure 9. Robust statistics of COSMIC-2 GPS occultations against ECMWF-based short-range forecasts, for the period August 5th–7th, 2023. The curves have been obtained using 30 s GPS clock products. Each set corresponds to a different GPS Block, as indicated in the legend. As was the case for S6A for a given clock data rate (Fig. 7), Block-III is better than Block-IIF, which is in turn better than Block-IIR.

In the equation, f and c are the frequency of the signal and the speed of light, respectively. Given that in our experiments the LEO POD solution is always the same (and thus, τ_{rec} does not change), P_{cr} provides a direct handle on the effect of the transmitter clock bias on the measurements, since the bias does depend on the clock rate cr as indicated with the notation $\tau_{\text{tran}}(\text{cr})$. The quantity $\tau_{\text{tran}}(\text{cr})$ is the value of the transmitter clock bias linearly interpolated to the measurement times.

We calculate the difference of P_{cr} , for cr equal to 2, 5, 10, and 30 seconds, with respect to $P_{01\text{s}}$, which we consider as reference. For the frequency L1, in Fig. 10 we plot the variation of the corrected phase P_{cr} for each constellation and for each hardware. Some things are worth noting in the figure:

1. GLONASS P_{cr} variations (top row) are about a factor of three larger than the GPS P_{cr} variations (bottom row);
2. For GLONASS, increasing the clock rate, significantly reduces the range of these differences;
3. For GPS, the reduction in the variations with increasing clock rate is minor, with the possible exception of the 30 s curve for Block IIR-A.

Similar features characterize the frequency L2 (not shown). Being the bending angle proportional to the time variation of the phase (e.g., Kursinski et al., 1997), it is reasonable to conclude that what we see in these single-occultation-level analysis maps to the trend (or lack thereof) of the standard deviation curves in Fig. 5, 6, 7, 8, and 9. It is also consistent with the better Allan deviation shown by the GPS satellites (Fig. 2).

Finally, we investigated the impact of the different GNSS clock rates on the vertical error correlation. The higher the vertical correlation is, the lower is the information content of a given profile (Bowler, 2020), with implications for the assimilation of

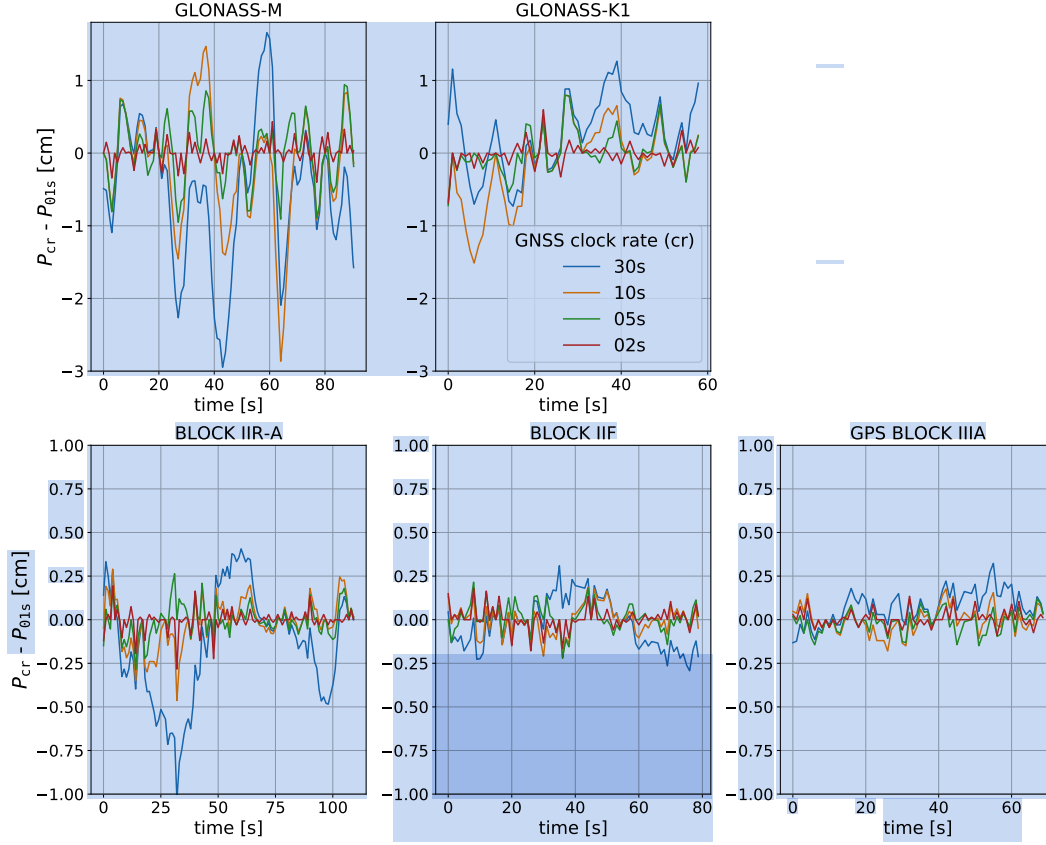


Figure 10. For two GLONASS (top row) and three GPS (bottom row) setting occultations, variation of the L1 phase obtained with different clock rates P_{cr} (legend) with respect to the phase obtained using 1 s clocks, P_{01s} . For GLONASS, the decrease is very evident, especially in the case of the older GLONASS-M occultation. For GPS (note that the vertical axis range is different between the top and the bottom row) the different lines are much more comparable, especially for the more modern blocks.

this data in numerical weather prediction (NWP) models (e.g., Gilpin et al., 2019; Bowler, 2020). The results are shown in

235 Fig. 11. With a behavior that is by now familiar, increasing the clock rate for GLONASS leads to a marked improvement of the vertical error correlation, while for GPS the variation is minimal. Once again, it makes sense that by sampling the noisier GLONASS clocks with a higher rate, leads to a less-correlated set of bending angle profile. Finally, it is interesting to note that while the trend of the standard deviation with clock rate for GPS was not unique across the different blocks (Fig. 6), in the vertical correlation plot the higher the clock rate, the better the vertical correlation, even though the improvement is limited.

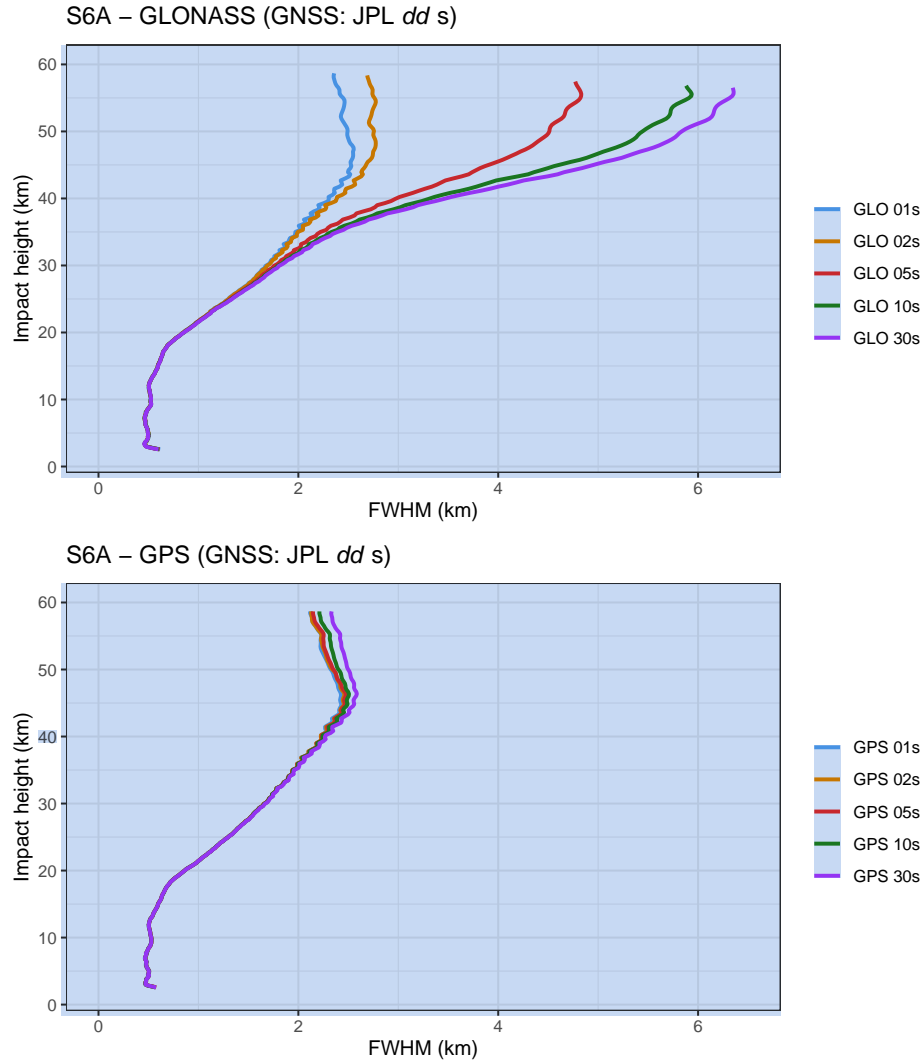


Figure 11. For S6A GLONASS (top) and GPS (bottom) occultations, vertical error correlation, shown here as the full width half maximum (FWHM) evaluated from the spread around the diagonal of the vertical correlation matrix at each level. The dataset used for this figure is the the same S6A dataset used in Fig. 5 and 6.

This work focused on GPS and GLONASS occultations recorded by the S6A and COSMIC-2 RO receivers. In the near future, the RO experiment onboard S6A and the one in the forthcoming follow-up mission, S6B (launch expected from late 2025 onwards), will start collecting on the RO antennas, in addition to GPS and GLONASS, the Galileo signals (EUMETSAT Public Document EUM/LEO-JASCS/DOC/21/1253471). This upgrade will provide a new dataset that can be used to extend the analysis performed here to include the Galileo constellation. In addition, modern RO missions also exploits Galileo and BeiDou signals, as exemplified by the large dataset of the Radio Occultation Modeling Experiment (ROMEX, McHugh et al., 2023; Anthes et al., 2024).

The observed connection of the Allan deviation (i.e., the stability of a given clock hardware) with the standard deviation curves (Fig. 5 and 6), the phase variations in single occultations (Fig. 10) and the vertical error correlation (11) points at the possibility of using the Allan deviation to guide our expectation for future analysis of Galileo and BeiDou datasets. In Fig. 12 (left) we show the modified Allan deviation for the 1s JPL RT clock products for the Galileo constellation on December 31st, 2023. As with GPS (Fig. 2), the older satellites (In-Orbit Validation, IOV) have a higher Allan Deviation than the newer satellites (Full Operational Capability, FOC). The values over the whole interval range shown in the figure are comparable to those of the GPS constellation in Fig. 2. The JPL RT stream only provides GPS, GLONASS, and Galileo products. For BeiDou, we used the CODE data from the Multi-GNSS EXtension (MGEX, Prange et al., 2020), whose clock products have a rate of 30 seconds, and the Allan Deviation can only be computed for averaging intervals of 1 minute or longer (Fig. 12, right). In this limited region the values for the newer BeiDou-3 satellites are below those of GPS and Galileo. The curves in Fig. 2 and 12 are in line with recent estimates of the Allan Deviation of GNSS clock hardware (Jaduszliwer and Camparo, 2021). Based on these results, and under the assumptions that the BeiDou curves extend smoothly at short averaging intervals, we expect that using 30 s Galileo and BeiDou products will provide results similar to those we reported for GPS products in this study.

For RO observations, the best combination of accuracy and small uncertainty is expected in the 5 to 30 km range (Kursinski et al., 1997), the so-called “RO sweet-spot”, and our results (Fig. 1, 5, 6, 8, 9) provide yet another confirmation of this expectation (e.g., Anthes et al., 2022, and references therein). Recently, RO observations have been included as key observations in the assessment of temperature trends in the upper troposphere and lower stratosphere (Masson-Delmotte et al., 2021, Figure TS. 10, pg. 70). Given that GLONASS higher-rate clock data clearly improves the uncertainty and reduces the vertical error correlation, RO processing centers should aim at using this type of products, given their potential impact on both NWP (e.g., Lonitz et al., 2021) and climate studies (e.g., Gleisner et al., 2022).

Competing interests

The contact author has declared that none of the authors has any competing interests.

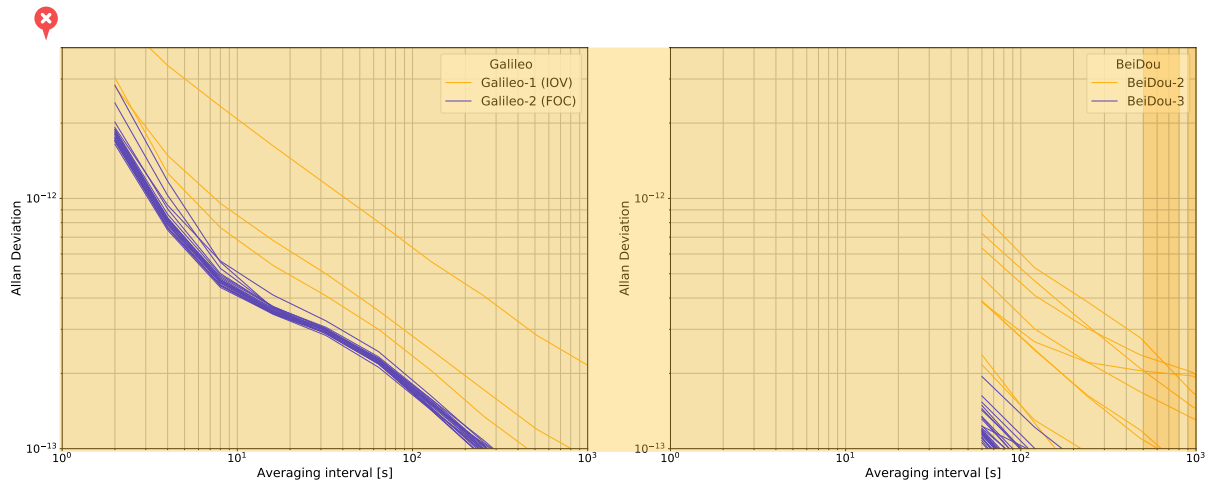


Figure 12. Modified Allan Deviation for December 31st, 2023 for (left) the Galileo constellation, calculated using JPL RT Galileo clock data (available from the websites listed in note 5 of Table 1) and (right) the BeiDou constellation calculated using CODE MGEX data (available at http://ftp.aiub.unibe.ch/CODE_MGEX/CODE/).

270 Acknowledgements

We thank the two anonymous reviewers, whose comments helped improving this paper considerably. The research conducted by C.R.G. was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration (80NM0018D0004).

References

- 275 ^{✖✖✖} Anthes, R., Sjoberg, J., Feng, X., and Syndergaard, S.: Comparison of COSMIC and COSMIC-2 Radio Occultation Refractivity and Bending Angle Uncertainties in August 2006 and 2021, *Atmosphere*, 13, <https://doi.org/10.3390/atmos13050790>, 2022.
- Anthes, R. A., Marquardt, C., Ruston, B., and Shao, H.: Radio Occultation Modeling Experiment, *Bull. Am. Met. Soc.*, 105, E1552 – E1568, <https://doi.org/10.1175/BAMS-D-23-0326.1>, 2024.
- Beyerle, G., Schmidt, T., Michalak, G., Heise, S., Wickert, J., [✖]and Reigber, C.: GPS radio occultation with GRACE: Atmospheric profiling utilizing the zero difference technique, *Geophys. Res. Lett.*, 32, <https://doi.org/10.1029/2005GL023109>, 2005.
- 280 Bock, H., Jäggi, A., Meyer, U., Visser, P., van den IJssel, J., van Helleputte, T., Heinze, M., and Hugentobler, U.: GPS-derived orbits for the GOCE satellite, *J. Geod.*, 85, 807–818, <https://doi.org/10.1007/s00190-011-0484-9>, 2011.
- Bowler, N. E.: An assessment of GNSS radio occultation data produced by Spire, *Quarter. J. R. Met. Soc.*, 146, 3772–3788, <https://doi.org/10.1002/qj.3872>, 2020.
- 285 Culverwell, I. D., Lewis, H. W., Offiler, D., Marquardt, C., and Burrows, C. P.: The Radio Occultation Processing Package, ROPP, *Atm. Meas. Tech.*, 8, 1887–1899, <https://doi.org/10.5194/amt-8-1887-2015>, 2015.
- Dach, R., Lutz, S., Walser, P., and Fridez, P., eds.: Bernese GNSS Software Version 5.2. User Manual, University of Bern, Bern Open Publishing, Bern, <https://doi.org/10.7892/boris.72297>, 2015.
- [✖]Dach, R., Schaer, S., Arnold, D., Brockmann, E., Kalarus, M. S., Prange, L., Stebler, P., and Jäggi, A.: CODE final product series for the
- 290 IGS, <https://doi.org/10.48350/185744>, 2023a.
- Dach, R., Schaer, S., Arnold, D., Brockmann, E., Kalarus, M. S., Prange, L., Stebler, P., and Jäggi, A.: CODE rapid product series for the IGS, <https://doi.org/10.48350/185740>, 2023b.
- Donlon, C. J., Cullen, R., Giulicchi, L., Vuilleumier, P., Francis, C. R., Kuschnerus, M., Simpson, W., Bouridah, A., Caleno, M., Bertoni, R., Ranaño, J., Pourier, E., Hyslop, A., Mulcahy, J., Knockaert, R., Hunter, C., Webb, A., Fornari, M., Vaze, P., Brown, S., Willis, J.,
- 295 Desai, S., Desjonqueres, J.-D., Scharroo, R., Martin-Puig, C., Leuliette, E., Egido, A., Smith, W. H., Bonnefond, P., Le Gac, S., Picot, N., and Tavernier, G.: The Copernicus Sentinel-6 mission: Enhanced continuity of satellite sea level measurements from space, *Remote Sens. Env.*, 258, 112 395, <https://doi.org/10.1016/j.rse.2021.112395>, 2021.
- Esterhuizen, S., Franklin, G., Hurst, K., Mannucci, A., Meehan, T., Webb, F., and Young, L.: TriG - A GNSS Precise Orbit and Radio Occultation Space Receiver, *Institute of Navigation Satellite Division Proceedings of the International Technical Meeting*, pp. 1442–1446,
- 300 22nd International Technical Meeting of the Satellite Division of the Institute-of-Navigation (ION GNSS-09), Savannah, GA, SEP 22-25, 2009, 2009.
- EUMETSAT Public Document EUM/LEO-JASCS/DOC/21/1253471: Sentinel-6 Michael Freilich Product Notice (Radio Occultation NTC), available at https://user.eumetsat.int/s3/eup-strap-media/Sentinel_6_Michael_Freilich_Product_Notice_Radio_Occultation_NTC_v4_a9723227ce.pdf, 2024.
- 305 Fernández, J., Peter, H., Fernández, C., Berzosa, J., Fernández, M., Bao, L., Ángel Muñoz, M., Lara, S., Terradillos, E., Féménias, P., and Nogueira, C.: The Copernicus POD Service, *Adv. Space Res.*, <https://doi.org/10.1016/j.asr.2024.02.056>, 2024.
- Gilpin, S., Anthes, R., and Sokolovskiy, S.: Sensitivity of Forward-Modeled Bending Angles to Vertical Interpolation of Refractivity for Radio Occultation Data Assimilation, *Mont. Weather Rev.*, 147, 269 – 289, <https://doi.org/10.1175/MWR-D-18-0223.1>, 2019.
- Gleisner, H., Ringer, M. A., and Healy, S. B.: Monitoring global climate change using GNSS radio occultation, *Climate and Atmospheric*
- 310 *Science*, 5, 6, <https://doi.org/10.1038/s41612-022-00229-7>, 2022.

- Griggs, E., Kursinski, E. R., and Akos, D.: Short-term GNSS satellite clock stability, *Radio Sci.*, 50, 813–826, <https://doi.org/10.1002/2015RS005667>, 2015.
- Hauschild, A., Montenbruck, O., and Steigenberger, P.: Short-term analysis of GNSS clocks, *GPS Sol.*, 17, 295–307, <https://doi.org/10.1007/s10291-012-0278-4>, 2013.
- 315 Ho, S.-P., Zhou, X., Shao, X., Zhang, B., Adhikari, L., Kireev, S., He, Y., Yoe, J. G., Xia-Serafino, W., and Lynch, E.: Initial Assessment of the COSMIC-2/FORMOSAT-7 Neutral Atmosphere Data Quality in NESDIS/STAR Using In Situ and Satellite Data, *Remote Sens.*, 12, <https://doi.org/10.3390/rs12244099>, 2020.
- Innerkofler, J., Kirchengast, G., Schwärz, M., Pock, C., Jäggi, A., Andres, Y., and Marquardt, C.: Precise Orbit Determination for Climate Applications of GNSS Radio Occultation including Uncertainty Estimation, *Remote Sens.*, 12, <https://doi.org/10.3390/rs12071180>, 2020.
- 320 Jadszliwer, B. and Camparo, J.: Past, present and future of atomic clocks for GNSS, *GPS Sol.*, 25, <https://doi.org/10.1007/s10291-020-01059-x>, 2021.
- Jäggi, A., Hugentobler, U., Bock, H., and Beutler, G.: Precise orbit determination for GRACE using undifferenced or doubly differenced GPS data, *Adv. Sp. Res.*, 39, 1612–1619, <https://doi.org/10.1016/j.asr.2007.03.012>, 2007.
- Kursinski, E. R., Hajj, G. A., Schofield, J. T., Linfield, R. P., and Hardy, K. R.: Observing Earth’s atmosphere with radio occultation measurements using the Global Positioning System, *J. Geophys. Res. Atmospheres*, 102, 23 429–23 465, <https://doi.org/10.1029/97JD01569>, 1997.
- ✖✖ Lonitz, K., Marquardt, C., Bowler, N., and Healy, S.: Final Technical Note of ‘Impact assessment of commercial GNSS-RO data’, <https://doi.org/10.21957/wrh6voyyi>, 2021.
- ✖ Mao, X., Arnold, D., Kalarus, M., Padovan, S., and Jäggi, A.: GNSS-based precise orbit determination for maneuvering LEO satellites, *GPS Sol.*, 27, 147, 2019.
- 330 Maronna, R. A., Douglas Martin, R., Yohai, V. J., and Salibián-Barrera, M.: Robust Statistics: Theory and Methods (with R), Wiley Series in Probability and Statistics, John Wiley & Sons Ltd, Hoboken, NJ, 2nd edn., <https://doi.org/10.1002/9781119214656>, 2019.
- Masson-Delmotte, V., Zhai, P., Pirani, A., Connors, S., Péan, C., Berger, S., Caud, N., Chen, Y., Goldfarb, L., Gomis, M., Huang, M., Leitzell, K., Lonnoy, E., Matthews, J., Maycock, T., Waterfield, T., Yelekçi, O., Yu, R., and Zhou, B., eds.: Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA, <https://doi.org/10.1017/9781009157896>, 2021.
- 335 ✖ McHugh, M., Shao, H., Anthes, R., Ruston, B., Marquardt, C., and ROMEX members: Radio Occultation Modeling Experiment (ROMEX) Framework, White Paper, <https://irowg.org/wpcms/wp-content/uploads/2023/05/ROMEX-Whitepaper-8-3-23.pdf>, accessed on April 25, 2024, 2023.
- 340 Montenbruck, O., van Helleputte, T., Kroes, R., and Gill, E.: Reduced dynamic orbit determination using GPS code and carrier measurements, *Aerosp. Sci. Techn.*, 9, 261–271, <https://doi.org/10.1016/j.ast.2005.01.003>, 2005.
- Montenbruck, O., Andres, Y., Bock, H., van Helleputte, T., van den Ijssel, J., Loiselet, M., Marquardt, C., Silvestrin, P., Visser, P., and Yoon, Y.: Tracking and orbit determination performance of the GRAS instrument on MetOp-A, *GPS Sol.*, 12, 289–299, <https://doi.org/10.1007/s10291-008-0091-2>, 2008.
- 345 Montenbruck, O., Hackel, S., and Jäggi, A.: Precise orbit determination of the Sentinel-3A altimetry satellite using ambiguity-fixed GPS carrier phase observations, *J. Geod.*, 92, 711–726, <https://doi.org/10.1007/S00190-017-1090-2>, 2018.
- Montenbruck, O., Hackel, S., Wermuth, M., and Zangerl, F.: Sentinel-6A precise orbit determination using a combined GPS/Galileo receiver, *J. Geod.*, 95, 109, <https://doi.org/10.1007/s00190-021-01563-z>, 2021.

- Paolella, S., von Engeln, A., Padovan, S., Notarpietro, R., Marquardt, C., Sancho, F., Boscan, V. R., Morew, N., and Alemany, F. M.:
 350 Assessment of Operational Non-Time Critical Sentinel-6A Michael Freilich Radio Occultation Data: Insights into Tropospheric GNSS
 Signal Cutoff Strategies and Processor Improvements, *Atm. Meas. Tech. Discuss.*, 2024.
- Prange, L., Villiger, A., Sidorov, D., Schaer, S., Beutler, G., Dach, R., and Jäggi, A.: Overview of CODE's MGEX solution with the focus
 on Galileo, *Adv. Sp. Res.*, 66, 2786–2798, <https://doi.org/https://doi.org/10.1016/j.asr.2020.04.038>, scientific and Fundamental Aspects of
 GNSS - Part 1, 2020.
- 355 Schaer, S., Villiger, A., Arnold, D., Dach, R., Prange, L., and Jäggi, A.: The CODE ambiguity-fixed clock and phase bias analysis products:
 generation, properties, and performance, *J. Geod.*, 2021, <https://doi.org/10.1007/s00190-021-01521-9>, 2021.
- Springer, T., Dilssner, F., Escobar, D., Flohrer, C., Otten, M., Svehla, D., and Zandbergen, R.: NAPEOS: The ESA/ESOC tool for Space
 Geodesy, in: *EGU General Assembly*, vol. 13, pp. EGU2011–8287, <https://meetingorganizer.copernicus.org/EGU2011/EGU2011-8287.pdf>, 2011.
- 360 Švehla, D. and Rothacher, M.: Kinematic Precise Orbit Determination for Gravity Field Determination, in: *A Window on the Future of
 Geodesy*, edited by Sansò, F., pp. 181–188, Springer Berlin Heidelberg, Berlin, Heidelberg, 2005.
- Tien, J. Y., Okiihiro, B. B., Esterhuizen, S. X., Franklin, G. W., Meehan, T. K., Munson, T. N., Robison, D. E., Turbiner, D., and Young,
 L. E.: Next Generation Scalable Spaceborne GNSS Science Receiver, in: *Proceedings of the 2012 International Technical Meeting of the
 Institute of Navigation*, pp. 882–890, Newport Beach, California, 2012.
- 365 Villiger, A., Schaer, S., Dach, R., Prange, L., Susnik, A., and Jäggi, A.: Determination of GNSS pseudo-absolute code biases and their
 long-term combination, *J. Geod.*, 93, <https://doi.org/10.1007/s00190-019-01262-w>, 2019.
- Yao, J., Weiss, J.-P., and VanHove, T.: Impacts of High Rate GNSS Satellite Clock Estimation on Radio Occultation Bending Angle Re-
 trievals: Preliminary Report, in: *Proceedings of the 2023 International Technical Meeting of The Institute of Navigation*, pp. 995–1001,
 Long Beach, California, <https://doi.org/10.33012/2023.18621>, 2023.