

A modular approach to volatile organic compound samplers for tethered balloon and drone platforms

Meghan Guagenti¹, Darielle Dexheimer², Alexandra Ulinksi³, Paul Walter⁴, James H. Flynn III³, Sascha Usenko¹

5 ¹Department of Environmental Science, Baylor University, Waco, TX, 76798, USA

²Sandia National Laboratories, Albuquerque, NM, 87123, USA

³Department of Earth and Atmospheric Sciences, University of Houston, Houston, TX, 77004, USA

⁴School of Natural Science, St. Edward's University, Austin, TX, 78704, USA

Correspondence to: Sascha Usenko (Sascha_usenko@baylor.edu)

10 **Abstract**

Situated at a land-sea interface, Houston, Texas, is a national hub for the petrochemical industry and has the second fastest-growing metropolitan population in the United States. Addressing air quality in this region is uniquely challenging, due in part to its wide range of meteorological conditions (*e.g.*, convection systems and temperature inversions) and continuum of volatile organic compound (VOC) and aerosol sources (*e.g.*, anthropogenic and biogenic). As a result, Houston was chosen as the location for the Department of Energy's Atmospheric Radiation Measurement (ARM) program-led Tracking Aerosol Convection Experiment (TRACER), which investigated cloud and aerosol interactions in the deep convection over the area. Deployed as a key asset, ARM's tethered balloon system (TBS) was used to investigate questions related to the vertical distributions of aerosols and their formation, including their precursor species volatile organic compounds. Platforms like TBSs and uncrewed aerial vehicles (UAVs) can bridge the vertical gap between ground-based and crewed airplane measurement platforms to focus on near-surface characterization. However, there has been limited effort to modularize and integrate VOC samplers into instrument payloads on both aerial systems. In this study, lightweight and robust VOC samplers were designed and deployed on the TBS and a UAV to collect VOCs in flight. The modular design allowed for scalable adjustments to meet the unique platform requirements and enabled multiple flights per sampling day. Each sampler can autonomously collect VOCs on up to four sorbent tubes for subsequent thermal desorption-gas chromatography-mass spectrometry analysis. The low sampler mass (2.2 kg and 800 g, TBS and UAV, respectively) enables the combination of these VOC samplers with trace gas, aerosol, and meteorological sensors on aerial platforms. These profiles allow us to assess temporal changes in VOC magnitude and composition at multiple locations. Observations from TBS and UAV flights during TRACER are presented and future considerations for sampler design and deployments are discussed.

1 Introduction

30 Volatile organic compounds (VOCs) play a crucial role in tropospheric chemistry and are emitted from diverse
sources, including biogenic and anthropogenic activities. In a city like Houston, Texas, distinguishing between VOC sources
can be difficult when traditionally biogenic compounds are used as part of anthropogenic manufacturing processes on an
industrial scale. For example, while isoprene is typically classified as a biogenic VOC, emissions in areas like the Houston
Ship Channel can reach up to 19 tons per year due to activities such as chemical usage, storage, and transportation (as reported
35 by the Texas Commission on Environmental Quality (TCEQ) and stated in the 30 Texas Administration Code, Section 101.10
for Harris County for the year 2022 (data current as of 05/31/2024). Consequently, isoprene may be regarded as an emission
from volatile chemical products in this region. Variations in emission height (*i.e.*, from stacks or as fugitive emissions) may
also impact the vertical distribution of species and subsequent atmospheric processing. Understanding the nuances of this
processing is a priority for federal and state agencies as VOCs can influence urban atmospheric chemistry by undergoing
40 photooxidation to form secondary organic aerosol (SOA) and ozone (Coggon et al., 2021; Sasidharan et al., 2023).

Atmospheric processing of VOCs can occur rapidly and over relatively short distances, with many compounds
exhibiting high reaction rate coefficients with the daytime and nighttime oxidants, resulting in fast atmospheric lifetimes
(Atkinson and Arey, 2003; Atkinson, 2000). The urban sources of these VOCs can also vary with time, ranging from known
diurnal trends, such as plant-based emissions of isoprene (Park et al., 2011; Bryant et al., 2023), and periods of rush-hour
45 traffic (Shrestha et al., 2022), to pulse event emissions from either biomass burning or industrial activities (Gilman et al., 2015;
Shrestha et al., 2023a; Shrestha et al., 2023b). Moreover, the temporal and spatial (*i.e.* horizontal and vertical) variability of
VOC emissions from both biogenic and anthropogenic sources can influence the urban VOC composition through changes in
various factors, including source related aspects (*i.e.*, type, strength, and proximity to), meteorological conditions, (*i.e.*, time
of day or season), and plume mixing (*i.e.*, transport and mixing of emissions from upwind sources, such as biomass burning).
50 As urban emission sources evolve, the spatial and temporal distributions of VOCs can be altered and affect their atmospheric
processing, thereby influencing the formation of secondary products (*e.g.*, ozone and SOA).

Traditionally, VOC observations have been made from fixed, ground-based locations and have been instrumental in
the long-term monitoring and characterization of surface-level species. Manned aircraft have been employed for spatial and
vertical assessments in lower regions of the troposphere, such as below the atmospheric boundary layer (Müller et al., 2014;
55 Permar et al., 2021; Dreessen et al., 2023). Sampling payloads on aircraft can include a wide range of instrumentation,
including several different types of monitors for aerosols, trace gases, and VOCs. For example, payloads may include surface-
facing lidars, aerosol concentration monitors, and VOC concentration and composition instrumentation that complement
ground-based suites to help characterize the vertical column near the earth's surface (0 – 1500 meters above ground level
(AGL). This section of the atmosphere that contains the biosphere and is a dynamic area subject to abrupt changes in
60 composition due to ground-based emissions as well as meteorological influences (*i.e.*, convection). However, near-surface

measurements, including VOCs, remain largely under-characterized due to several limitations such as financial and logistical challenges and a lack of commercially available VOC samplers for aerial platforms.

Aerial platforms, such as tethered balloon systems (TBS) and uncrewed aerial vehicles (UAV, *i.e.*, drones), have been utilized recently to bridge the gap between surface and manned aircraft atmospheric measurements at low altitudes. The platforms differ in cost, operational logistics, payload capacity, maximum flight ceiling, and in-flight maneuverability. A review of vertical sampling technologies for VOCs highlighted the limitations of available chemically sensitive sensors for aerial platforms and noted the UAV's potential to carry payloads consisting of multiple sensors and provide high spatiotemporally resolved data (Dieu Hien et al., 2019). TBS-based VOC observations date back to Amazonian observations in the 1980s, which were built on and deployed in more urbanized settings periodically throughout the 1990s-2000s. In these studies, researchers used multiple VOC sampling units per flight (Andronache et al., 1994; Davis et al., 1994; Helmig, 1998; Greenberg, 1999; Spirig et al., 2004; Greenberg et al., 2004). However, each unit contained a single sample collection vessel such as a sorbent tube, Teflon bag, or canister. In order to collect multiple samples per flight, several units were distributed along the tether, each controlled by individual timers to construct vertical profiles. Currently, the commercially available options for VOC sampling have been primarily designed for ground-based sampling, including personal monitoring and long-term monitoring applications. These systems were not designed for flight-based measurements or to be integrated into flight platforms with additional sensors by meeting the weight, size, and power limits. Alternatively, whole air samplers have recently been deployed on UAV platforms, enabling up to fifteen samples to be collected per flight (Asher et al., 2021; Leitner et al., 2023). Recent advancements in sorbent tube VOCs samplers have focused on providing low cost, portable samplers (Hurley et al., 2023) and UAV-based VOC samplers with multiple tube sampling capabilities (Chen et al., 2018; Batista et al., 2019; Mckinney et al., 2019; Asher et al., 2021; Li et al., 2021; Leitner et al., 2023; Yang et al., 2023; Zhai et al., 2025). Many of these advancements have been made possible through miniaturization (*e.g.*, size and power requirements) of key components such as computers, pumps, valves, and relays. However, a modular sampling system capable of functioning independently to collect multiple VOC samples per flight on a TBS has not been designed and deployed.

The goals of this work were to 1) design and fabricate a modular sampler capable of programmable VOC collection on tethered balloon flights, 2) integrate the developed sampler into the ARM TBS payload via deployment with meteorological, aerosol, and ozone instrumentation, 3) customize the modular sampler to enable integration into a UAV power system for VOC collection at the Houston Ship Channel. The VOC sampler design was optimized to maximize flight time with other sensors (*i.e.*, trace gas and aerosol monitors) and participate in multiple flights per day. The standalone unit presented here can be programmed to capture up to four VOC samples per flight and be easily expanded using the approach described below, allowing for various vertical profiling sampling approaches (*i.e.*, continuous sampling during ascent/descent or measurements at discreet altitudes). Observations presented herein were collected during the Tracking Aerosol Convection Experiment (TRACER) in Houston, Texas, in the summer of 2022. Sampler design and optimization, including computer programming to control sampling, system ruggedization, and parts and components are described in the following sections.

2 Experimental

95 2.1 Tethered balloon platform

The TBS platform utilized here is owned by the U.S. Department of Energy and was operated by a team of trained professionals out of Sandia National Laboratories in support of TRACER goals (TRACER-Tethersonde, <https://www.arm.gov/research/campaigns/amf2021tracer-ozone> Last access date: 12 May 2024). The operation and logistics have been described in detail elsewhere (Dexheimer, 2024). In brief, TBS flights can reach a maximum altitude of 1.5 km
100 AGL when the weather permits and carry a maximum payload of 33 kg via a tether controlled by a winch system. In support of the project goals, the TBS payload typically consisted of commercial, real-time aerosol and meteorological sensors and select trace gas instrumentation. VOC data from select flights are presented here and can be found through the ARM Data Discovery portal, along with all ARM data used in this study (<https://adc.arm.gov/discovery/#/> Last access date: 12 May 2024). The commercial sensors integrated into the ARM TBS platform included a modified iMet-4-RSB radiosonde to collect
105 temperature, pressure, relative humidity, and GPS altitudes using an external power source (International Met Systems, Inc., MI, USA). In addition, particle size distributions were measured using a Portable Optical Particle Spectrometer (POPS, Handix Scientific LLC, CO, USA; 135 nm – 3615 nm), and ozone concentrations were provided via an electrochemical concentration cell (ECC) ozonesonde (Model 2Z, En-Sci, CO, USA). VOCs were collected on the descent leg of the flights and the TBS loitered at the desired altitude for the twenty-minute sampling period.

110 2.2 UAV platform

The hexacopter UAV (Aurelia X6 Pro, UAV Systems International, NV, USA) used in this study was owned by the University of Houston (UH) and operated by a licensed professional from (UH) in support of the TRACER sub-campaign TRACER-Air Quality 2 (TRACER-AQ2). The UAV had a payload capacity of 6 kg and was flown at a maximum altitude of 120 m AGL. An ECC ozonesonde and iMet-1-RSB were flown in addition to the VOC sampler on select flights (Figure S2).
115 To minimize sampler mass, the frame was constructed using miniature T-Slotted framing and fittings, with walls made from high-flow aluminium perforated sheets. See supplementary material for the housing component's part numbers. VOCs were collected at the maximum altitude (120 m AGL) and at 60 m AGL to explore vertical gradients. Previous studies have investigated the air velocity distribution around UAVs and found the air flushing time below the UAV is much faster (i.e., seconds) than the VOC sampling timescale (i.e., 10 min), therefore the VOC samples may represent an air parcel extending
120 up to ± 5 m surrounding the sampling height (Ventura Diaz and Yoon, 2018; Mckinney et al., 2019). As such, a ± 5 m was applied to the sampling altitudes presented in the text associated with VOC measurements.


2.3 Sampling Campaigns

The platforms were operated in support of overall TRACER goals as part of two different sub-campaigns, TRACER-Tethersonde (<https://www.arm.gov/research/campaigns/amf2021tracer-ozone> Last access date: 07 January 2024) and

125 TRACER-AQ2. The TBS was deployed at the ancillary (*i.e.*, rural) site (29.328, -95.741) ~50 km southwest of downtown
Houston, and the UAV was operated at the San Jacinto Battleground State Historic Site (29° 44' 56" N, 95° 4' 49" W, a site
map is Figure S1) near the Houston shipping channel (*i.e.*, urban influenced). TBS flights were conducted monthly for two-
week periods from June to September 2022 and the UAV was flown periodically during August and September 2022.

2.4 VOC sampler

130 The modularity of the VOC sampler described here enabled deployments on two different aerial platforms. The
internal components described below were used on each platform and the VOC sampler flown on the TBS and a schematic of
the sample flow path, data communication path, and power connections are shown in Figure 1. The TBS sampler housing is a
carbon fiber material that was 3D printed (58.4 x 16.5 x 12.7 cm (L x W x H)) with three user-access ports, including a main
opening along the length of the sampler, and two 15.2 x 15.2 cm openings on the top for access to the power source and the
135 sorbent tubes (Figure S3). The housing also has two fans built into the system to cool the computer and other electronics while
in flight. This adjustment allows for extended operational deployments, even in environments with elevated ambient
temperatures. Sampling tubes were secured during flights using grommets on the unit housing, which also allowed easy access
during tube exchanges. The system was powered using a 21 V DC battery and three voltage regulators to supply sufficient
voltage to the internal components (*i.e.*, pump, valves, and computer). The computer (UDOO Bolt, UDOO, Siena, Italy)
140 controlled the Arduino-operated microcontroller and was programmable to automate sample collection of up to four tubes in
flight. The automation code was written in the open-source software Arduino IDE, and a copy of the code is provided in the
supplementary material. During each flight, an indicator in the Arduino software signalled the completion of the sampling plan
to provide an in-field indication of successful sample collection. The sampler mass of 2.2 kg and 800 g, for the TBS and UAV
versions respectively, were optimized for use on each platform. A table with the internal components and software used in this
145 study is provided in the supplementary material (Table S1). Many of the components within this system are readily available
off-the-shelf, and their modular design allows for convenient upgrades to various versions, catering to the specific requirements
of users. Before each sampling day, a flow calibration was conducted on each sorbent tube to account for potential variability
among the tubes and to ensure the flow remained at 0.1 ± 0.002 lpm, as measured using a flowmeter (Model 5200, TSI Inc,
MN, USA). When adjustments to the sample flow rate were necessary, users modified the pump voltage (Model E242-12,
150 Parker, OH, USA) using the digital voltage regulator.

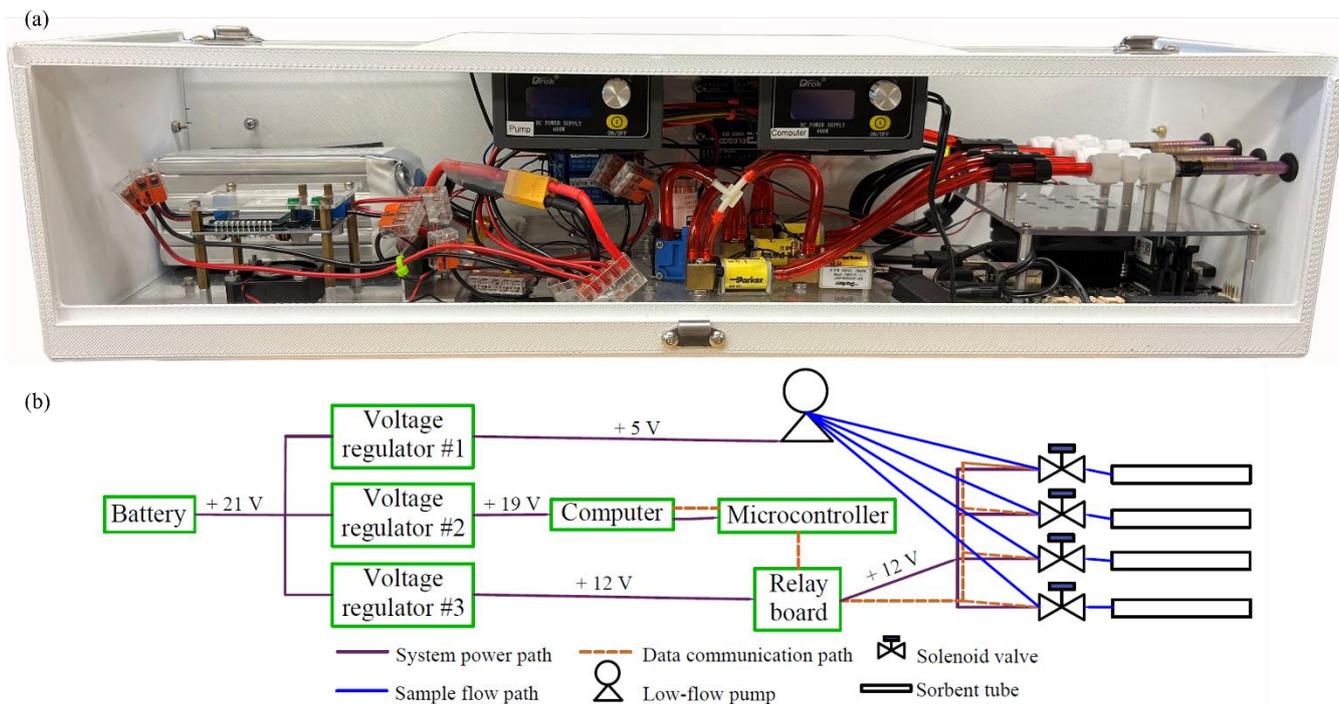

155 Figure 1. A side view of the TBS VOC sampler with the top and side access panels open (a) and a schematic of the modular sampler, including sample flow, electrical, and data communication paths (b). Additional photos of the finalized designs for both the TBS and UAV samplers are in the supplemental material (Fig. S1 and S2).

2.5 VOC sample collection and chemical analysis

160 2.5.1 VOC collection on sorbent tubes

Air samples were collected using dual-bed sorbent tubes packed with Tenax TA and Carboxograph 5TD (Markes International, Bridgend, UK) to capture $C_{4/5}$ – C_{32} organic compounds. After conditioning at 280 °C for 60 min, tubes were capped with brass compression fittings to isolate sorbents from ambient air and placed in clean 50 mL conical centrifuge tubes as a secondary layer of separation. Prior to sampling, sorbent tubes were kept in cold storage at 5 °C for up to two weeks and transferred to double-walled stainless-steel coolers to maintain sample integrity during transport to the sampling location. In the field, the tubes were installed into the sampler and attached to the sampling lines via Teflon compression fittings. During each sampling flight, samples were either collected automatically based on a prewritten code (*i.e.*, TBS operations) or controlled manually by the pilot (*i.e.*, UAV operations) to draw ambient air through a sorbent tube at a flow rate of 0.1 L/min for ten minutes on UAV flights and twenty minutes on TBS flights (total sample volumes of 1 and 2 L, respectively). The configuration of valves within the samplers allowed the operators to sample each tube independently or collect paired samples. After the flights, tubes were recapped and placed in short-term storage before transport back to the lab in double-walled

stainless-steel coolers. The samples were placed in long-term storage at 5 °C for up to two weeks before chemical analysis at the Baylor University Mass Spectrometry Center.

2.5.2 Thermal Desorption-Gas Chromatography-Tandem Mass Spectrometry Analysis

175 VOCs were analyzed using a thermal desorption-gas chromatography-tandem mass spectrometry system (TD-GC-MS/MS, TD-100xr, Markes International, Bridgend, UK paired with a Thermo Scientific TRACE 1310 coupled to a TSQ 8000 Evo, MA, USA). A similar methodology has been employed in previous studies (Ribes et al., 2007; Gallego et al., 2012; Schieweck et al., 2018; Mckinney et al., 2019; Helin et al., 2020). Here, volatile species were desorbed from the tubes at 250 °C for 1 min under a constant flow of helium at 1 mL/min. The desorbed samples were transferred along a 150 °C flow path
180 and were split to either the cold trap for analyte preconcentration at 20 °C prior to GC injection or recollected back onto the sorbent tube for reanalysis. The cold trap was heated at a rate of 40 °C s⁻¹ and the desorbed sample was injected via splitless mode into the GC for chemical separation using a DB-624 column (60 m x 0.32 mm ID x 1.8 µm, J&W Scientific, CA, USA) as the GC was heated from 40 °C to 255 °C (total GC-MS/MS runtime: 36 min).

Selective reaction monitoring (SRM) was used to quantify all target analytes after being ionized via electron impact
185 at 70 eV with an ion source temperature of 250 °C. Argon was used in the collision cell and the retention times and *m/z* ratios used for ion transitions and quantification of each species can be found in Table S3. The samples were also reanalyzed using a full scan (35 *m/z* to 550 *m/z*) mode for untargeted analysis.

To quantify the target analyte concentrations, a seven-point calibration curve was produced across a range of 10 ppb to 12 ppm. A minimum of five points were used to describe each analyte's dynamic linear range and all analytes exhibited R²
190 values greater than 0.99. Neat chemical standards from Sigma Alrich were placed in dichloromethane at concentrations ranging from 150 to 1000 ng/µL (Table S2, Sigma Aldrich, MA, USA). The standard solutions were combined and diluted to make seven calibration solutions. The calibration solutions were spiked onto sorbent tubes under a flow of 0.5 ml/min of N₂ for 5 min (Chen et al., 2018). A digital syringe with a precision of 0.5% was utilized to increase reproducibility when spiking one microliter of calibration solutions (DS80135, Hamilton Company, NV, USA). Quality assurance and quality control were
195 monitored during sample analysis by running a continuing calibration verification (CCV) standard solution at regular intervals (approximately every 4th injection). CCV standard solutions included all analytes at the middle point of the calibration curve. Analytes recoveries beyond ± 40% from CCV analyses required a new calibration curve to be run. All calibration tubes contained the same sorbents and were run using the same chemical analysis methods as field samples. Following chemical analysis, the samples underwent a blank correction to account for artefacts from passive sampling, travel, storage prior to
200 analysis, and potential laboratory contamination. A 30% error was applied to the VOC measurements to reflect the variability in the sampling (e.g., flowrate accuracy) and analysis methods (e.g., sampling efficiency, sorbent tube desorption, and instrumental response variability). Specifically, the flow meter used to calibrate the sample flow has an error of 2%.

3 Results and Discussion

3.1 Performance test flights

205 Following in-lab design and construction, a prototype of the VOC sampler underwent TBS test flights in the spring
of 2022 at the ARM Southern Great Plains user facility (<https://www.arm.gov/capabilities/observatories/sgp>). Flight plans
were focused on evaluating the performance and functionality of the sorbent tube collection system, including 1) design
features such as sampler housing and internal hardware 2) mid-flight sample automation capabilities 3) accessibility of the
system for routine maintenance and troubleshooting. Prior to test flight launches, the user adjusted the prewritten code to
210 reflect the flight's intended sample collection. The code initiation was synchronized to match the sampling strategies of the
VOC sorbent tube collection with the TBS platform's flight plan. To conserve power and only sample during predetermined
times, the computer did not provide power to the pumps until the TBS was expected to reach the first sampling altitude. Once
at altitude, the pump and associated valves were powered for sample collection on a specific tube, and then turned off while
in transit to the next sampling altitude. During sampling, each sorbent tubes were used once, while the process (i.e., powering
215 the pump and opening and closing a unique combination of valves) was repeated sequentially until all sample were collected.
Note, these sequential samples provide VOCs measurements along a vertical TBS or UAV flight, where VOCs measurement
are offset temporally during the descent leg of the flight. After the final collection period, the pump remained unpowered, and
an output message was displayed to indicate the successful execution of the flight algorithm.

Initial flights of the prototype revealed both successful aspects and limitations of the tested features. While the sampler
220 housing and electrical connections remained intact through multiple flights, the original hardware loosened and allowed the
internal components to jostle inside the housing and compromised sampling capabilities. After replacing the hardware with
socket head bolts, functionality tests of in-flight automation using a microcontroller and Arduino software were successful.
During maintenance to replace the hardware, concerns were identified with the sampler's ease of use. Specifically, it was
difficult to access key internal components due to the lack of access ports. This limitation could also affect the operator's
225 ability to routinely exchange tubes or troubleshoot electrical or hardware issues that arise in-field. Therefore, two panels were
added along the length of the final design to facilitate top-down access for users, particularly above the sorbent tube and the
power source areas. Houston-based test flights also highlighted heat-related electrical failures in the extreme ambient
conditions (e.g., > 38 °C) of the TRACER operations. To prevent the computer and electronics from overheating and powering
down mid-flight, additional ventilation modifications were made to the final design's housing.

230 3.2 TBS and UAV sample collection

The samplers designed herein were successfully used to collect VOCs on the ARM TBS and a UAV during the
TRACER intensive operating period (IOP). Across ten TBS flights at the TRACER ancillary site, nineteen VOC samples were
collected during the August deployment. Morning and afternoon flights were conducted to capture temporal changes in all
measured species and aligned with other TBS TRACER-related experimental designs. For example, seven TBS flights

235 occurred on August 4th, 2022, from ~14:00 UTC to ~22:00 UTC and a combination of VOC, meteorological, aerosol, and
ozone monitors were successfully flown on each flight (Fig. 2). Sequential VOC samples were collected on three of the August
4th flights, including a morning flight (Flight #2, Sample 1), a midday flight (Flight #3, Samples 2 and 3) and a late afternoon
flight (Flight #6, Samples 4, 5, and 6). These flights highlight the capability of this system to successfully collect VOCs on
TBS flights, particularly the midday and afternoon launches that collected multiple samples per flight. Further, a single VOC
240 sampling unit successfully worked in tandem with the other monitors to generate three vertical profiles throughout the day and
captured changes in all measured species, including VOC magnitude and composition (see Section 3.3).

At the San Jacinto Battleground State Historic Site, meteorological parameters, ozone, and four VOC samples were
collected across two UAV flights on September 13th, 2022 (Fig. 3). The UAV sampler design demonstrates the scalability of
the modular VOC sampler, and the flights showcase the utility of pairing the internal power and communication features of
245 the UAV with the lightweight, robust components of the sampler to successfully collect VOCs. In this setup, the UAV control
software initiated VOC collection by activating relays within the UAV system. These relays supply power to the sampling
pump and the valves to control sampling timing and selecting which sorbent tube to sample. Additionally, these flights
highlight the feasibility of sub-hourly VOC collection within the first 125 ± 5 m AGL and were enabled via a short (< 15 min)
exchange time for the tubes and UAV battery replacement. The fast turnaround time between flights provides an opportunity
250 to capture temporal variation in chemical profiles within the dynamic near-surface region that can be quickly influenced by
meteorological factors or emission shifts. For example, the temporal evolution of secondary product production (*e.g.*,
monitoring photochemical ozone production at sunrise) or assessing temporal variability of VOCs at the community level
related to local industrial activities. This increased temporal resolution of measurements would be particularly important to
bolster estimates of local emissions and potential exposures, which are usually calculated using the annual averages reported
255 to state agencies.

One of the key limitations to the commercially available options for sorbent tube VOC sampling in ground and aerial
applications is the lack of sampling control. For instance, an automatic sampler from Markes International (MTS-32) has the
capacity to sample up to 32 sorbent tubes but has limited flexibility to conduct complex sampling. The large mass of the MTS-
32 (> 5 kg) makes it unsuitable for use in aerial sampling packages on UAVs or TBSs. As a ground-based system, the MTS-
260 32 can only be programmed with a fixed sample duration (*e.g.*, 10 min) for all 32 tubes, preventing any adjustments to the
sampling strategy mid-operation. Additionally, the current version cannot be connected to a computer for remote operation.
With the computer and microcontroller utilized in the sampler design discussed here, users can perform more complex
sampling strategies. For example, metadata from secondary sensors (*e.g.*, ozone concentrations) may direct the computer to
sample from one resin tube containing specific resins over another. Furthermore, the previous generation of aerial VOC
265 samplers lacked manual control of sampler functions from the tablet-based UAV control software. In this study, the real-time
communication between the UAV and the software enabled researchers to adapt the sampling plan in response to real-time
indicators such as observations made by the ground crew and enables future sampling to potentially respond to sensors on
board, as mentioned previously.


Additional considerations were made regarding the sampler housing on both platforms, opting for materials robust enough to accommodate the internal components, adaptable for in-field adjustments, and lightweight to minimize overall sampler weight. Another key consideration was the internal component's functionality across various conditions, including extreme surface temperatures and altitude changes. Therefore, we sourced parts capable of operating within our anticipated temperature and pressure ranges. With the straightforward modification of vents to the housing, the system operated reliably across multiple flights, even under challenging conditions such as high humidity (> 90%) and temperature (range 28 – 38 °C observed on August 4th, Table S4 and Fig. 2a). In addition, considering the TBS system's power consumption during sampling (2.4 A) and battery capacity, we estimate the system could conduct continuous sampling for 2.2 hours before requiring replacement, equating to 13 consecutive VOC samples (10-minute collection time). When onboard the UAV, the sampling system utilized the internal batteries and consumed 1 Ah of power during VOC collection, representing 4% of the capacity (two 21,000 mAh, 22.2 VDC batteries).

As part of the TRACER experimental design, two sampling sites were selected to characterize the broad range of environmental and aerosol regimes within the region (*e.g.*, main site: near UAV flight location and ancillary site: TBS flight location). The main site was chosen to characterize the variation in aerosol properties stemming from urban, industrial, and refinery sources in the Houston area near the Houston Ship Channel. The ancillary site was 50 km southwest of the urban core and represented a background area expected to experience more pristine aerosol conditions. TBSs typically operate in rural areas with extensive unobstructed airspace, which allows TBS flights to reach greater heights than urbanized operations. During TRACER, the ancillary site helped to assess changes in aerosol and VOC background concentrations and composition to better characterize the transport and mixing of background and urban emissions. In addition, the UAV measurements conducted along the heavily industrialized Houston Ship Channel (near the main site) provided vertical profiles of volatile species near known emissions sources. The aerial data can help inform manufacturing emission factors specific to this distinct setting, which is important for the surrounding communities. These areas can experience direct impacts from changes in emissions due to shifts in industrial activities, thus driving environmental inequalities. Future projects could integrate the capabilities of the TBS and UAV platforms to enhance scientific investigations. For example, sampling near an emission source with a UAV and at a downwind receptor location with a TBS would enable the assessment of hotspots of atmospheric processing within the vertical profile as the plume is transported across an airshed. This approach would help assess air mass dynamics, especially during transitional periods throughout the day to track vertical mixing related to spatial and temporal changes during transport.

3.3 Vertical VOC mixing ratios

TBS flights on August 4th flew an instrumentation suite of VOCs, ozone, aerosol size, and meteorological sensors. VOCs were identified in all samples and their composition is shown in Fig. 2b. The total measured VOC mixing ratios were similar on the morning and midday flights (average: 2.4 ± 0.7 and 3.2 ± 1.0 ppbv, respectively), and increased by a factor of two on the evening flight (Flight #6, average: 7.3 ± 2.2 ppbv, Table S5). The select VOC mixing ratios peaked at 10.3 ± 3.1

ppbv on the midafternoon Flight #6 (Sample #4) and decreased in Samples #5 and 6 as the platform neared the surface. Isoprene was the predominant component of the VOC composition during all flights at the background site. On Flight #6 (Sample #4), isoprene peaked at 8.7 ± 2.6 ppbv, following the known daytime trend of increasing mixing ratios coincident with increasing solar radiation. These isoprene mixing ratios are consistent with previous observations of vertical isoprene gradients in the Amazon. For example, aerial mixing ratios ranging from 0.6 – 11 ppbv have been reported on aircraft and balloon studies, reflecting the variability in the vertical column across different locations (Greenberg et al., 2004; Karl et al., 2007; Jardine et al., 2016; Liu et al., 2018; Batista et al., 2019). Monoterpenes, including α -pinene, β -pinene, and limonene, accounted for 10% of the daily VOC composition. The biogenic emissions of these reactive compounds from vegetation depend on the type of vegetation, temperature, sunlight intensity, and responses to changes in their natural environment (*e.g.*, storms or droughts) (Kim, 2001; Guenther et al., 2012; Steiner, 2020). In addition to biogenic sources, these compounds can also be emitted from the usage and manufacturing of volatile chemical products (Gkatzelis et al., 2021a; Gkatzelis et al., 2021b). These consumer-based anthropogenic sources highlight the complexity of isoprene and monoterpene emissions in urban regions, which can influence their subsequent secondary chemistry to form SOA. These processes can ultimately impact regional land-atmosphere interactions, particularly in areas with a combination of natural, managed, and urban landscapes, such as the southeastern United States. Anthropogenic VOCs (*e.g.*, benzene, toluene, ethylbenzene, and the xylene isomers (BTEX)) were identified as well on TBS flights, primarily below 0.3 km AGL, consistent with ground-based automotive sources. The observed BTEX mixing ratios are similar to daytime observations from 2021 TRACER-AQ measurements at the San Jacinto Battleground site, situated approximately 1 km from the UAV operations in this study (Shrestha et al., 2023a). In contrast to the exceptionally high nighttime measurements in 2021, BTEX remained below 1 ppbv during our observations. This suggests the absence of industrial influence at the site location during this sampling period. Throughout the day, ozone concentrations increased gradually, yet remained consistent across different sampling altitudes. The low (≤ 30 ppbv) ozone concentrations were consistent with a background location upwind from primary emission sources. Aerosol observations prior to Flight #6 showed minimal variability with concentrations below 250 cm^{-3} on all flights and primarily consisting of $0.13 - 0.33 \text{ }\mu\text{m}$ aerosols ($> 97\%$ of aerosol size composition). However, the peak aerosol concentration of 1900 cm^{-3} aligns temporally with the largest VOC mixing ratio, which indicates a change in both the gas and particle phase was captured with this payload. It is important to emphasize that the analytes quantified in this study represent only a select subset of the total VOCs present in the atmosphere.

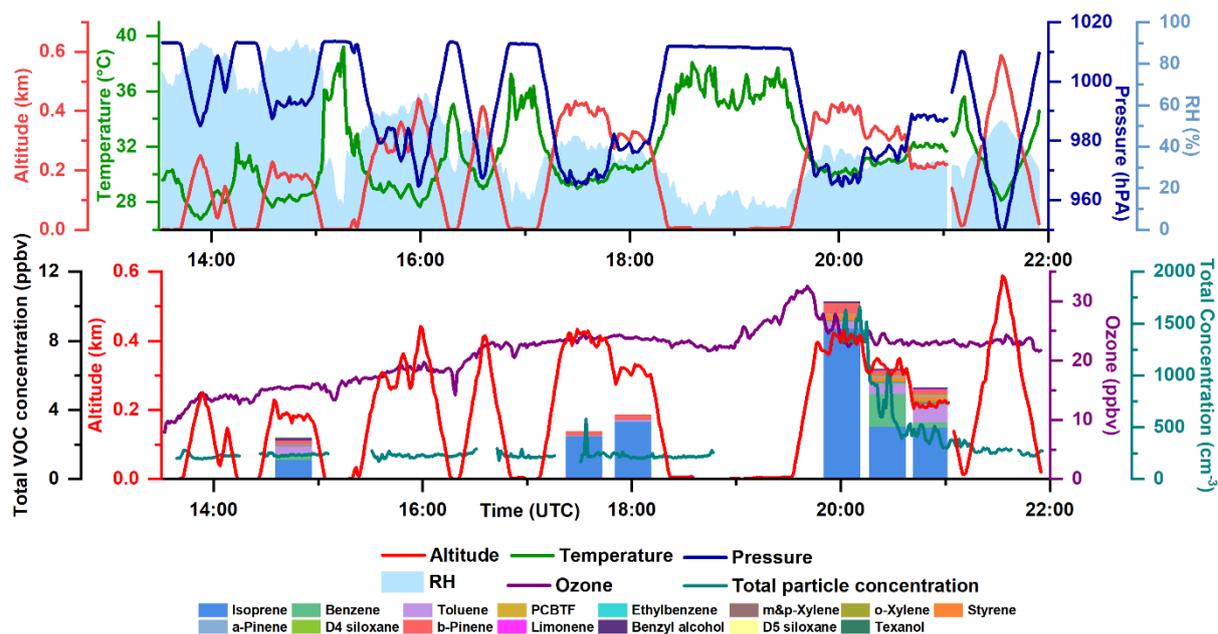


330

Figure 2. Time series of measured parameters from TBS flights on 4 August 2022. (a) TBS flight altitude, ambient temperature, pressure, and relative humidity (RH) observations. (b) VOC flight times (20 min samples, scaled to size) and chemical composition, TBS altitude, ozone measurements, and aerosol measurements on all three flights.

335

UAV measurements near the Houston Ship Channel also captured the temporal variability of VOC mixing ratios and composition (Fig. 3). Peak select VOC mixing ratios was observed on the first flight (5.0 ± 5 m AGL), followed by a decrease to 2.9 ± 0.9 ppbv observed at 60 ± 5 m AGL (Table S6). On the second flight, the select VOC mixing ratios were 0.9 ± 0.3 ppbv at 120 ± 5 m AGL and 3.1 ± 0.9 ppbv at 60 ± 5 m AGL. Benzene, ethylbenzene, and the xylene isomers primarily contributed to the VOC composition ($> 70\%$) on all flights. Isoprene, α -pinene, and limonene were also detected on the first flight, which could be related to either the biogenic sources (*e.g.*, oak and pine trees) within the San Jacinto Battleground State Historic Site or local manufacturing facilities that surround the park. Ozone concentrations ranged from 50 – 70 ppbv within the 1.5 hours of flights, almost two times the concentrations observed at the rural TBS site. Ambient VOC mixing ratios depend on many conditions, including proximity to and strength of emission sources, photochemical processing, meteorological parameters, time of day, and temperature, which can vary on spatial and temporal scales. These field results demonstrated the application of the VOC sampler on the TBS and UAV, more interpretation and analysis are needed to understand the VOC measurements and processes in subsequent manuscripts, including the incorporation of trace gas, aerosol, and meteorological datasets.

345

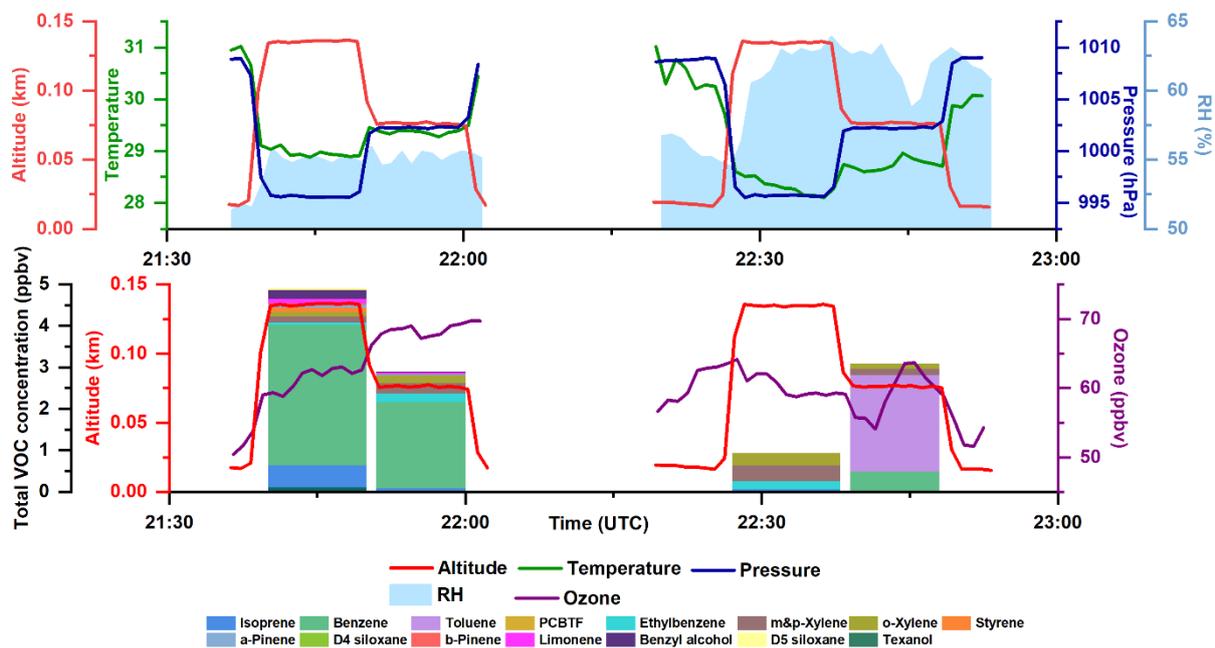

350

Figure 3. Time series of measured parameters from UAV flights on 13 September 2022. (a) UAV flight altitude, ambient temperature, pressure, and relative humidity (RH) observations. (b) VOC flight times (10 min samples, scaled to size) and chemical composition, UAV altitude, and ozone measurements on two flights.

4 Conclusion

355

As aerial platforms continue to be deployed to address a wide range of scientific questions, the modular samplers presented here enable the study of VOC emissions for a variety of sampling strategies. The modular structure of the presented sampler allows the user to adjust the size and capacity for their experimental needs. For example, the sorbent tube quantity could be scaled up to increase the number of samples per flight, with minimal increases to the power draw and sampler mass. A sorbent tube, valve, tubing, and a Teflon compression fitting have a mass of approximately 75 g, representing 3% and 9% of the TBS and UAV sampler mass, respectively. This adjustment would allow users to enhance vertical profiles by collecting samples on the ascent and descent legs or explore temporal variability at a select altitude by loitering and routinely collecting samples. These observations can help fill knowledge gaps in VOC chemistry and secondary product formation aloft, particularly in the dynamic near-surface area that current ground-based and crewed aerial platforms struggle to characterize.

360

Furthermore, these chemically speciated, vertically resolved measurements will help improve the chemical modeling associated with the vertical transport and processing of VOCs.

The aerial operations described here were conducted as part of two independently operated TRACER sub-campaigns. In this study, the automated sampler successfully collected six VOC samples on sorbent tubes during ARM TBS flights in extreme ambient conditions (Table S4). Subsequently, the modular sampler was downsized for UAV flights and collected multiple sorbent tube samples across successive flights. The modular design of the system allowed for a straightforward integration into the UAV's power system, which made the sampler easy to install on the platform. The sample automation within this design reduces the number of necessary units per flight and opens the payload capacity to include sensors such as aerosol (e.g., ARM's POPS, STAC, IcePuck, *etc.*), trace gas, and meteorological measurements. The detailed profiles collected on the TBS are crucial for understanding hotspots of atmospheric processing within the profiles, which may arise from surface-based sources or descend from aloft. These profiles help to characterize factors influencing aerosol size, chemical composition, and ice nucleating properties.

The modular sampler introduced herein has a flexible design with several adjustable components that can be specialized for future sampling designs. For example:

- The internal battery could be scaled down to more widely available batteries (e.g., name brand 20V power tool battery) to further reduce sampler mass on flights, or the power source could be changed to a shore power connection for a long-term, ground-based deployment.
- The computer could be upgraded with a Wi-Fi capability to enable remote communication for a user to control sampling at a long-term ground-based sampling site. The sorbent tube measurements could be a standalone measurement, or they could pair with co-deployed real-time instrumentation to provide enhanced chemical speciation.
- Additional sensors or monitors (e.g., ozone, pressure, GPS, *etc.*) could be added to the system and provide real-time measurements to the computer via Bluetooth communication. These sensors could be integrated into a data-driven sampling strategy that allows for a more targeted VOC analysis in response to in-situ conditions.
- VOC collection could be customized by altering the sorbents within the tubes, incorporating an ozone or particle scrubber before the tube inlet, or extending VOC sampling to different environmental matrices (e.g., soils).
- The modular approach could also be downsized further to serve as a single-tube sampler. The standalone unit would enable constant flow at a rate that is determined by the input voltage. The sampling would also require minimal battery capacity for a 10 min sample and be easily transported between sampling sites in a durable, protective case. For a picture of such a sampler utilizing these components, refer to the supplementary material (Fig. S3).

The robust and user-friendly design can be adapted to extreme climate conditions, sampling methodologies, and platforms and pair with additional sensors to assess VOC chemistry atmospheric processing aloft.

395 **Acknowledgments**

The authors thank the TRACER site operators and TBS operators for their dedication and support. The authors also thank Casey Longbottom for sharing his expertise and 3D printing the TBS sampler housing. They also wish to acknowledge the resources and instrumentation at the Baylor Mass Spectrometry Center.

Financial Support

400 The research was supported in part by the U.S. Department of Energy's Atmospheric Science Research, an Office of Science Biological and Environmental Research program, under DOE/SC-ARM-23-007. Funding for this work was also provided by the Texas Commission on Environmental Quality (TCEQ, Project no. 582-21-22317-015). The contents, findings, opinions, and conclusions are the work of the authors and do not necessarily represent findings, opinions, or conclusions of the TCEQ.

Author Contributions

405 MG and SU conceptualized and developed the presented sampler. SU and JHF were responsible for the study's funding, and supervision. MG was responsible for developing the chemical analysis methods, sample collection and offline analysis, data processing/interpretation, and drafting the manuscript. SU edited the manuscript. PW was responsible for ozonesonde data collection and processing from tethered balloon and UAV flights. DD aided in sampler development and supervised tethered balloon sampling flights. AU piloted the UAV flights and supervised VOC collection. All authors have read and agreed to the
410 published version of the manuscript.

Competing Interest

The contact author has declared that none of the authors has any competing interests.

Data Availability

415 TBS VOC data from select flights are presented here and can be found through the ARM Data Discovery portal, along with all ARM data used in this study (<https://iop.archive.arm.gov/arm-iop/2022/hou/tracer-ozone/usenko-tbsvoc/?ticket=ST-25071-YsBQmA--n2APXsJidpMOvKzmbtQ-prod-cas-fwapp-5cdbdb454-dn9sh> Last access date: 7 January 2025). The UAV VOC data is available upon request from the TCEQ.

420 **References**

- Andronache, C., Chameides, W. L., Rodgers, M. O., Martinez, J., Zimmerman, P., and Greenberg, J.: Vertical distribution of isoprene in the lower boundary layer of the rural and urban southern United States, *Journal of Geophysical Research*, 99, 16989, 10.1029/94jd01027, 1994.
- 425 Asher, E., Hills, A. J., Hornbrook, R. S., Shertz, S., Gabbard, S., Stephens, B. B., Helmig, D., and Apel, E. C.: Unpiloted Aircraft System Instrument for the Rapid Collection of Whole Air Samples and Measurements for Environmental Monitoring and Air Quality Studies, *Environmental Science & Technology*, 55, 5657-5667, 10.1021/acs.est.0c07213, 2021.
- Atkinson, R.: Atmospheric chemistry of VOCs and NO_x, *Atmospheric Environment*, 34, 2063-2101, [https://doi.org/10.1016/S1352-2310\(99\)00460-4](https://doi.org/10.1016/S1352-2310(99)00460-4), 2000.
- 430 Atkinson, R. and Arey, J.: Atmospheric Degradation of Volatile Organic Compounds, *Chemical Reviews*, 103, 4605-4638, 10.1021/cr0206420, 2003.
- Batista, C. E., Ye, J., Ribeiro, I. O., Guimarães, P. C., Medeiros, A. S. S., Barbosa, R. G., Oliveira, R. L., Duvoisin, S., Jardine, K. J., Gu, D., Guenther, A. B., Mckinney, K. A., Martins, L. D., Souza, R. A. F., and Martin, S. T.: Intermediate-scale horizontal isoprene concentrations in the near-canopy forest atmosphere and implications for emission heterogeneity, *Proceedings of the National Academy of Sciences*, 116, 19318-19323, 10.1073/pnas.1904154116, 2019.
- 435 Bryant, D. J., Nelson, B. S., Swift, S. J., Budisulistiorini, S. H., Drysdale, W. S., Vaughan, A. R., Newland, M. J., Hopkins, J. R., Cash, J. M., Langford, B., Nemitz, E., Acton, W. J. F., Hewitt, C. N., Mandal, T., Gurjar, B. R., Shivani, Gadi, R., Lee, J. D., Rickard, A. R., and Hamilton, J. F.: Biogenic and anthropogenic sources of isoprene and monoterpenes and their secondary organic aerosol in Delhi, India, *Atmos. Chem. Phys.*, 23, 61-83, 10.5194/acp-23-61-2023, 2023.
- Chen, J., Scircle, A., Black, O., Cizdziel, J. V., Watson, N., Wevill, D., and Zhou, Y.: On the use of multicopters for sampling and analysis of volatile organic compounds in the air by adsorption/thermal desorption GC-MS, *Air Quality, Atmosphere & Health*, 11, 835-842, 10.1007/s11869-018-0588-y, 2018.
- 440 Coggon, M. M., Gkatzelis, G. I., Mcdonald, B. C., Gilman, J. B., Schwantes, R. H., Abuhassan, N., Aikin, K. C., Arend, M. F., Berkoff, T. A., Brown, S. S., Campos, T. L., Dickerson, R. R., Gronoff, G., Hurley, J. F., Isaacman-Vanwertz, G., Koss, A. R., Li, M., Mckeen, S. A., Moshary, F., Peischl, J., Pospisilova, V., Ren, X., Wilson, A., Wu, Y., Trainer, M., and Warneke, C.: Volatile chemical product emissions enhance ozone and modulate urban chemistry, *Proceedings of the National Academy of Sciences*, 118, e2026653118, 10.1073/pnas.2026653118, 2021.
- Davis, K. J., Lenschow, D. H., and Zimmerman, P. R.: Biogenic nonmethane hydrocarbon emissions estimated from tethered balloon observations, *Journal of Geophysical Research*, 99, 25587, 10.1029/94jd02009, 1994.
- 450 Dexheimer, D., Whitson, G., Cheng, Z., Sammon, J., Gaustad, K., Mei, F., Longbottom, C Tethered Balloon System (TBS) Instrument Handbook. DOE/SC-ARM-TR-206, 10.2172/1415858, 2024.
- Dieu Hien, V. T., Lin, C., Thanh, V. C., Kim Oanh, N. T., Thanh, B. X., Weng, C.-E., Yuan, C.-S., and Rene, E. R.: An overview of the development of vertical sampling technologies for ambient volatile organic compounds (VOCs), *Journal of Environmental Management*, 247, 401-412, <https://doi.org/10.1016/j.jenvman.2019.06.090>, 2019.
- 455 Dreessen, J., Ren, X., Gardner, D., Green, K., Stratton, P., Sullivan, J. T., Delgado, R., Dickerson, R. R., Woodman, M., Berkoff, T., Gronoff, G., and Ring, A.: VOC and trace gas measurements and ozone chemistry over the Chesapeake Bay during OWLETS-2, 2018, *Journal of the Air & Waste Management Association*, 73, 178-199, 10.1080/10962247.2022.2136782, 2023.
- Gallego, E., Roca, F. J., Perales, J. F., Sánchez, G., and Esplugas, P.: Characterization and determination of the odorous charge in the indoor air of a waste treatment facility through the evaluation of volatile organic compounds (VOCs) using TD-GC/MS, *Waste Management*, 32, 2469-2481, <https://doi.org/10.1016/j.wasman.2012.07.010>, 2012.
- 460 Gilman, J. B., Lerner, B. M., Kuster, W. C., Goldan, P. D., Warneke, C., Veres, P. R., Roberts, J. M., De Gouw, J. A., Burling, I. R., and Yokelson, R. J.: Biomass burning emissions and potential air quality impacts of volatile organic compounds and other trace gases from fuels common in the US, *Atmos Chem Phys*, 15, 13915-13938, 10.5194/acp-15-13915-2015, 2015.
- Gkatzelis, G. I., Coggon, M. M., Mcdonald, B. C., Peischl, J., Aikin, K. C., Gilman, J. B., Trainer, M., and Warneke, C.: Identifying Volatile Chemical Product Tracer Compounds in U.S. Cities, *Environmental Science & Technology*, 55, 188-199, 10.1021/acs.est.0c05467, 2021a.
- 465 Gkatzelis, G. I., Coggon, M. M., Mcdonald, B. C., Peischl, J., Gilman, J. B., Aikin, K. C., Robinson, M. A., Canonaco, F., Prevot, A. S. H., Trainer, M., and Warneke, C.: Observations Confirm that Volatile Chemical Products Are a Major Source of

- 470 Petrochemical Emissions in U.S. Cities, *Environmental Science & Technology*, 55, 4332-4343, 10.1021/acs.est.0c05471, 2021b.
- Greenberg, J.: Tethered balloon measurements of biogenic VOCs in the atmospheric boundary layer, *Atmospheric Environment*, 33, 855-867, 10.1016/s1352-2310(98)00302-1, 1999.
- Greenberg, J. P., Guenther, A. B., Pétron, G., Wiedinmyer, C., Vega, O., Gatti, L. V., Tota, J., and Fisch, G.: Biogenic VOC emissions from forested Amazonian landscapes, *Global Change Biology*, 10, 651-662, 10.1111/j.1365-2486.2004.00758.x, 475 2004.
- Guenther, A. B., Jiang, X., Heald, C. L., Sakulyanontvittaya, T., Duhl, T., Emmons, L. K., and Wang, X.: The Model of Emissions of Gases and Aerosols from Nature version 2.1 (MEGAN2.1): an extended and updated framework for modeling biogenic emissions, *Geosci. Model Dev.*, 5, 1471-1492, 10.5194/gmd-5-1471-2012, 2012.
- Helin, A., Hakola, H., and Hellén, H.: Optimisation of a thermal desorption–gas chromatography–mass spectrometry method for the analysis of monoterpenes, sesquiterpenes and diterpenes, *Atmos. Meas. Tech.*, 13, 3543-3560, 10.5194/amt-13-3543-480 2020, 2020.
- Helmig, D., Balsley, B., Davis, K., Kuck, L. R., Jensen, M., Bogner, J., Smith Jr, T., Arrieta, R. V., Rodriguez R., Birks, J. W.: Vertical profiling and determination of landscape fluxes of biogenic nonmethane hydrocarbons within the planetary boundary layer in the Peruvian Amazon, *Journal of Geophysical Research: Atmospheres*, 103, 25519-25532, 485 <https://doi.org/10.1029/98JD01023>, 1998.
- Hurley, J. F., Caceres, A., McGlynn, D. F., Tovillo, M., Pinar, S., Schürch, R., Onufrieva, K., and Isaacman-Vanwertz, G.: Portable, low-cost samplers for distributed sampling of atmospheric gases, 10.5194/egusphere-2023-825, 2023.
- Jardine, K. J., Jardine, A. B., Souza, V. F., Carneiro, V., Ceron, J. V., Gimenez, B. O., Soares, C. P., Durgante, F. M., Higuchi, N., Manzi, A. O., Gonçalves, J. F. C., Garcia, S., Martin, S. T., Zorzanelli, R. F., Piva, L. R., and Chambers, J. Q.: Methanol and isoprene emissions from the fast growing tropical pioneer species *Vismia guianensis* (Aubl.) Pers. (Hypericaceae) in the 490 central Amazon forest, *Atmos. Chem. Phys.*, 16, 6441-6452, 10.5194/acp-16-6441-2016, 2016.
- Karl, T., Guenther, A., Yokelson, R. J., Greenberg, J., Potosnak, M., Blake, D. R., and Artaxo, P.: The tropical forest and fire emissions experiment: Emission, chemistry, and transport of biogenic volatile organic compounds in the lower atmosphere over Amazonia, *Journal of Geophysical Research: Atmospheres*, 112, <https://doi.org/10.1029/2007JD008539>, 2007.
- 495 Kim, J.-C.: Factors controlling natural VOC emissions in a southeastern US pine forest, *Atmospheric Environment*, 35, 3279-3292, [https://doi.org/10.1016/S1352-2310\(00\)00522-7](https://doi.org/10.1016/S1352-2310(00)00522-7), 2001.
- Leitner, S., Feichtinger, W., Mayer, S., Mayer, F., Krompetz, D., Hood-Nowotny, R., and Watzinger, A.: UAV-based sampling systems to analyse greenhouse gases and volatile organic compounds encompassing compound-specific stable isotope analysis, *Atmos Meas Tech*, 16, 513-527, 10.5194/amt-16-513-2023, 2023.
- 500 Li, Y., Liu, B., Ye, J., Jia, T., Khuzestani, R. B., Sun, J. Y., Cheng, X., Zheng, Y., Li, X., Wu, C., Xin, J., Wu, Z., Tomoto, M. A., Mckinney, K. A., Martin, S. T., Li, Y. J., and Chen, Q.: Unmanned Aerial Vehicle Measurements of Volatile Organic Compounds over a Subtropical Forest in China and Implications for Emission Heterogeneity, *Acs Earth Space Chem*, 5, 247-256, 10.1021/acsearthspacechem.0c00271, 2021.
- Liu, Y., Seco, R., Kim, S., Guenther, A. B., Goldstein, A. H., Keutsch, F. N., Springston, S. R., Watson, T. B., Artaxo, P., 505 Souza, R. A. F., McKinney, K. A., and Martin, S. T.: Isoprene photo-oxidation products quantify the effect of pollution on hydroxyl radicals over Amazonia, *Science Advances*, 4, eaar2547, doi:10.1126/sciadv.aar2547, 2018.
- McKinney, K. A., Wang, D., Ye, J., de Fouchier, J. B., Guimarães, P. C., Batista, C. E., Souza, R. A. F., Alves, E. G., Gu, D., Guenther, A. B., and Martin, S. T.: A sampler for atmospheric volatile organic compounds by copter unmanned aerial vehicles, *Atmos. Meas. Tech.*, 12, 3123-3135, 10.5194/amt-12-3123-2019, 2019.
- 510 Müller, M., Mikoviny, T., Feil, S., Haidacher, S., Hanel, G., Hartungen, E., Jordan, A., Märk, L., Mutschlechner, P., Schottkowsky, R., Sulzer, P., Crawford, J. H., and Wisthaler, A.: A compact PTR-ToF-MS instrument for airborne measurements of volatile organic compounds at high spatiotemporal resolution, *Atmos. Meas. Tech.*, 7, 3763-3772, 10.5194/amt-7-3763-2014, 2014.
- Park, C., Schade, G. W., and Boedeker, I.: Characteristics of the flux of isoprene and its oxidation products in an urban area, 515 *Journal of Geophysical Research: Atmospheres*, 116, <https://doi.org/10.1029/2011JD015856>, 2011.
- Permar, W., Wang, Q., Selimovic, V., Wielgasz, C., Yokelson, R. J., Hornbrook, R. S., Hills, A. J., Apel, E. C., Ku, I.-T., Zhou, Y., Sive, B. C., Sullivan, A. P., Collett Jr, J. L., Campos, T. L., Palm, B. B., Peng, Q., Thornton, J. A., Garofalo, L. A., Farmer, D. K., Kreidenweis, S. M., Levin, E. J. T., DeMott, P. J., Flocke, F., Fischer, E. V., and Hu, L.: Emissions of Trace

- Organic Gases From Western U.S. Wildfires Based on WE-CAN Aircraft Measurements, *Journal of Geophysical Research: Atmospheres*, 126, e2020JD033838, <https://doi.org/10.1029/2020JD033838>, 2021.
- 520 Ribes, A., Carrera, G., Gallego, E., Roca, X., Berenguer, M. J., and Guardino, X.: Development and validation of a method for air-quality and nuisance odors monitoring of volatile organic compounds using multi-sorbent adsorption and gas chromatography/mass spectrometry thermal desorption system, *Journal of Chromatography A*, 1140, 44-55, <https://doi.org/10.1016/j.chroma.2006.11.062>, 2007.
- 525 Sasidharan, S., He, Y., Akherati, A., Li, Q., Li, W., Cocker, D., McDonald, B. C., Coggon, M. M., Seltzer, K. M., Pye, H. O. T., Pierce, J. R., and Jathar, S. H.: Secondary Organic Aerosol Formation from Volatile Chemical Product Emissions: Model Parameters and Contributions to Anthropogenic Aerosol, *Environmental Science & Technology*, 57, 11891-11902, 10.1021/acs.est.3c00683, 2023.
- 530 Schieweck, A., Gunschera, J., Varol, D., and Salthammer, T.: Analytical procedure for the determination of very volatile organic compounds (C3–C6) in indoor air, *Analytical and Bioanalytical Chemistry*, 410, 3171-3183, 10.1007/s00216-018-1004-z, 2018.
- Shrestha, S., Yoon, S., Alvarez, S. L., Wang, Y., Flynn, J. H., Usenko, S., and Sheesley, R. J.: Emission Ratios and Diurnal Variability of Volatile Organic Compounds and Influence of Industrial Emissions in Two Texas Cities, *Atmosphere*, 14, 1006, 2023a.
- 535 Shrestha, S., Zhou, S., Mehra, M., Guagenti, M., Yoon, S., Alvarez, S. L., Guo, F., Chao, C. Y., Flynn Iii, J. H., Wang, Y., Griffin, R. J., Usenko, S., and Sheesley, R. J.: Evaluation of aerosol- and gas-phase tracers for identification of transported biomass burning emissions in an industrially influenced location in Texas, USA, *Atmos. Chem. Phys.*, 23, 10845-10867, 10.5194/acp-23-10845-2023, 2023b.
- 540 Shrestha, S., Yoon, S., Erickson, M. H., Guo, F., Mehra, M., Bui, A. A. T., Schulze, B. C., Kotsakis, A., Daube, C., Herndon, S. C., Yacovitch, T. I., Alvarez, S., Flynn, J. H., Griffin, R. J., Cobb, G. P., Usenko, S., and Sheesley, R. J.: Traffic, transport, and vegetation drive VOC concentrations in a major urban area in Texas, *Science of The Total Environment*, 838, 155861, 10.1016/j.scitotenv.2022.155861, 2022.
- Spirig, C., Guenther, A., Greenberg, J. P., Calanca, P., and Tarvainen, V.: Tethered balloon measurements of biogenic volatile organic compounds at a Boreal forest site, *Atmos Chem Phys*, 4, 215-229, 10.5194/acp-4-215-2004, 2004.
- 545 Steiner, A. L.: Role of the Terrestrial Biosphere in Atmospheric Chemistry and Climate, *Accounts of Chemical Research*, 53, 1260-1268, 10.1021/acs.accounts.0c00116, 2020.
- Ventura Diaz, P. and Yoon, S.: High-Fidelity Computational Aerodynamics of Multi-Rotor Unmanned Aerial Vehicles, 10.2514/6.2018-1266, 2018.
- 550 Yang, S., Li, X., Zeng, L., Yu, X., Liu, Y., Lu, S., Huang, X., Zhang, D., Xu, H., Lin, S., Liu, H., Feng, M., Song, D., Tan, Q., Cui, J., Wang, L., Chen, Y., Wang, W., Sun, H., Song, M., Kong, L., Liu, Y., Wei, L., Zhu, X., and Zhang, Y.: Development of multi-channel whole-air sampling equipment onboard an unmanned aerial vehicle for investigating volatile organic compounds' vertical distribution in the planetary boundary layer, *Atmos Meas Tech*, 16, 501-512, 10.5194/amt-16-501-2023, 2023.
- 555 Zhai, H., Zhou, J., Zhao, W., Du, W., Wei, N., Liu, Q., Wang, S., Zhang, J., Cui, W., Zhang, W., Lu, Y., Zhu, Z., and Liu, Y.: Development of a UAV-borne sorbent tube sampler and its application on the vertical profile measurement of volatile organic compounds, *Journal of Environmental Sciences*, 152, 276-286, <https://doi.org/10.1016/j.jes.2024.04.016>, 2025.