

Response to editor's comments on:

On the information content in linear horizontal gradients estimated from space geodesy observations

by Gunnar Elgered, Tong Ning, Peter Forkman, and Rüdiger Haas

6 May 2019

Introduction

The comments are appreciated and well taken. Our responses for each comment follow below, where the editor's comments are in black text and our responses are in red text. Other updates have also been made, mainly language oriented. For example, the first three sections giving background information are now mainly written in the past tense, whereas the results, conclusions, and suggestions for future work are mainly in present and future tense.


I would like to congratulate the authors for the implementation of the corrections and suggestions provided in my previous report and their careful review and revision of the text and figures. I have two concerns related to some new results included in the revised manuscript and a few additional minor comments.

Table 11 shows the mean values of gradient amplitudes from two GPS stations for 3 different cutoff angles (3° , 10° , and 20°). The result is quite striking. The mean amplitude is clearly increasing when the cutoff is increasing, or the other way round, the mean amplitude is decreasing when the cutoff is decreasing. You adopt the 2nd point of view and speculate that the decrease is due to averaging of a larger air-mass, a result that is compared to averaging over longer time periods. I am not convinced by this explanation. I think that changing the cutoff angle has primarily an impact on the correlation between gradients and other parameters and on the accuracy of the estimated parameters. Actually, decreasing the cutoff is expected to improve the accuracy and provide more realistic gradients estimates. I think this is supported by the enhanced agreement with WVR results (the 3° GPS solution agrees better with WVR results). On the other hand, increasing the cutoff to 20° seems rather an unfavourable situation for estimating accurate gradients and it may be that the GPS gradient estimates are actually biased in this case, as well as the WVR gradient maybe? The increased standard deviation of differences and decreased correlation coefficients between GPS and WVR indeed support the idea that GPS and WVR agree less well in that case, i.e. the uncertainty in the GPS gradients is larger as also predicted by the larger formal error. I think that this effect is larger than the effect of sensing different air-masses at lower elevations. At least both points of view should be discussed and if you want to maintain your idea, more evidence should be provided to support it.

We agree, increasing the formal error, and the uncertainty, will imply a larger scatter which in turn will increase the mean amplitude. We think it is quite clear that both these effects will contribute to the observed increase of the mean amplitude with higher elevation cutoff angle in former Table 11 (now Table 10). More work is required in order to determine their relative importance, e.g. a high resolution (100 m ?) numerical weather model to simulate the averaging effect in a turbulent atmosphere, which we do not have access to. Therefore, we stop here and describe both effects and introduce one more suggestion for future work.

My second concern is with your statement that there can be a trend in amplitude without a trend in components (also noted in the previous review). Since the gradient is a vector, if its length increases, the components necessarily increase. This statement should be removed or clarified if I didn't get what you mean.

We think this is matter of definitions. The gradient components (east and north) can be both negative and positive. We include the sign when we calculate the trends for each component, which means that a trend in any of the two components is a kind of tilt of the atmosphere. The variability may increase without any tilt involved, causing the amplitude to have a positive trend, but not the components. This is illustrated by a simulation in the following two graphs:

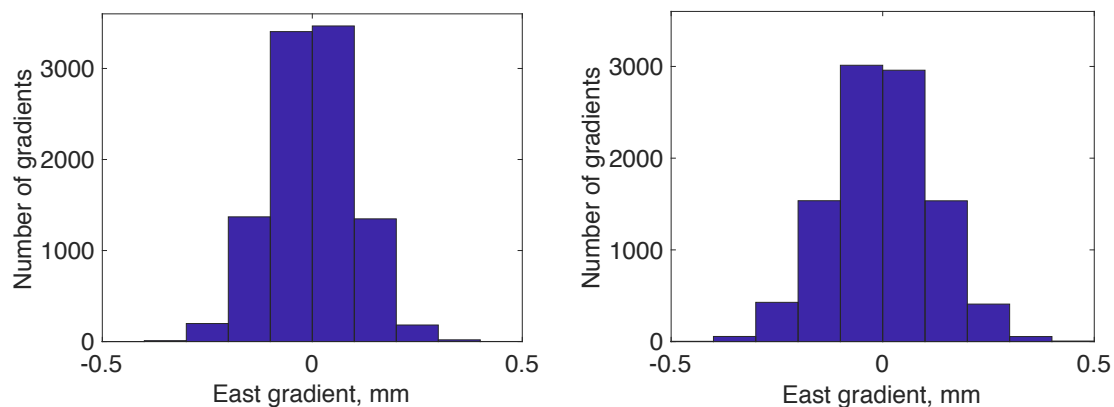

Let us assume that the left and right graphs depict all estimated/observed gradients during year 1 and year 2, respectively. The mean values are both $< 1 \mu\text{m}$, whereas the mean amplitudes are 0.08 mm and 0.10 mm, respectively. We have a trend in the amplitude but not in the east component. (For simplicity this simulation sets the north gradient to always be zero.) Based on this discussion we have rewritten the corresponding text since we think it is important that we define what we have estimated, in spite of the fact that we could only place an upper bound on any gradient trend (discussed further below).

Below are a few additional minor suggestions.

Though you slightly extended the last paragraph describing the organisation of the paper, I think there is still a paragraph missing in the Introduction on the motivation of this work and the rationale of the study scenario. Please add a short paragraph between line 10 and 11.

Done

P2L26-28: Meindl et al. (2004) discussed the global north-south temperature gradient. In your work, regional high and low pressure systems are more important. I suggest to remove the sentence related to work of Meindl et al. (2004), and rewrite this part as follows: "Hydrostatic gradients are usually dominated by pressure gradients and exist mainly over regional scales (e.g. persistent high and low pressure systems) and synoptic scale (e.g. weather systems). For the area of interest in this study we specifically mention the Icelandic low pressure system..."

The text is rewritten. Although we believe that hydrostatic gradients are dominated by gradients in pressure there is no need to make such a general statement. Meindl et al. (2004) used a European and a global network and did not really go into detail about the cause for the stronger north gradients by trying to quantify the influence from temperature and pressure gradients. They wrote: "It is also interesting to note that the north components seem to have a maximum at mid-latitudes and decrease towards the poles and equator."

(Note that the pressure is in the nominator and the temperature is in the denominator in the expression for the refractivity.) Because the work by Meindl et al. (2004) included three of the five stations in our study we think it is appropriate to make a reference to their (early) work.

P3L8: linear in what? Do you mean that the processes cannot be represented by gradients that are a linear function of time?

No, we meant horizontally linear, thinking of the processes mentioned in the previous paragraph. We inserted “horizontally”.

PL21: Add “While total gradients are estimated, they can be interpreted as the sum of hydrostatic and wet components as well. In the following we will subtract the hydrostatic component computed from ECMWF from the total GPS gradient to get the GPS wet gradient.”

Done (assuming that it was referring to page 3 — it made sense).

P12: Are the ECMWF gradients computed from operational analyses or a reanalysis? Note that operational analyses should not be used to analyse long time series because of changes in the model and assimilation system over time.

It is not stated in the paper by Boehm and Schuh (2007). They just write “data of the European Centre for Medium-range Weather Forecasts (ECMWF) model”. We suspect that the gradients are calculated from the operational analysis but since we do not detect any gradient trends from neither the ECMWF gradient time series, nor the GPS wet gradient time series it is not critical.

P13L8-9 (line numbering in the manuscript doesn't match) why is the formal error for the north component larger?

We added the following sentence: “The reason is that we lose many observations of satellites located in the north, see Figure 3.”

Figure 9: add some comments on the year-to-year variability in the results and differences between GPS and ECMWF.

As an introduction to the details below we added the following sentences at the end of the 1st paragraph: “In the top graphs, comparing ECMWF and GPS gradients, we note that the GPS gradients show a larger variability. There are also differences between the east and the north gradients both in the mean over the year and in the seasonal variations.”

P17L11: The sentence suggests that ECMWF gradients are more accurate if used to validate GPS gradients. I suggest to reformulate as “The correlations seen in all cases confirm that a consistent atmospheric signal in terms of gradients is detected by the GPS observations and ECMWF analyses.”

Changed

P17L14: rather than being better modelled by the ECMWF analyses, I think that larger scale features agree better because the representativeness differences between the gridded model fields and GPS point observations are smaller.

We deleted “which is better modelled by the ECMWF data.” The next sentence is sufficient for us to explain what we think is the cause.

P17L25: "...but the relative differences between the sites" it is not clear what relative differences are meant, suggest to be more specific: "GPS gradients are larger by a factor of ~1.5 and this factor is roughly the same for all sites."

Changed

P17 last sentence: "e.g. instrumental" can you be more specific?

The end of the paragraph is rewritten: "... e.g. multipath effects, become important. Variations in the electromagnetic environment that change the impact of the signal multipath at a station may be due to e.g. snow, rain, vegetation, and soil moisture."

P19: I think the section on trend results is not relevant. First, it poses the problem of the homogeneity of the data (both GPS and ECMWF). Second, the values reported in Table 8 are confirmed in the text to be statistically insignificant. Third, the main interest of inspecting trends is said to be for the detection of hardware problems. This is well illustrated in Dousa et al., 2017, but not here. I suggest to remove this section and Table 8 and replace it with one or two summarizing sentences in the Conclusion section.

We did not include Table 8 in the original submission because of the sizes of the uncertainties. The (old) Table 8 is now removed but we need to describe what we did in order to mention it later in the conclusions. (This part of the conclusions is not changed.) Let us compare to some work of our fellow astronomers, i.e. to publish the result from a non-detection. After a search for a specific molecule in a gaseous nebula without a detection, they can place an upper bound on the abundance. In our case we can set an upper bound on any gradient trend for an eleven-year long time series. In this context the reference to Dousa et al. (2017) is relevant, because even if the probability of finding a true gradient trend (larger than its uncertainty) is very small, the exercise itself is motivated. The title of the subsection was modified to "Search for long term trends" which already from the beginning indicate that they are difficult to find.

Table 11: over which period of time are the mean values computed?

Here we note a mistake in the corresponding text. Our first version of the table had separate columns for each year. However, the values were almost identical so we made the table simpler and gave one value for the whole 4-year period. This is now corrected in the text: "... for each year." → "... for the 4-year period 2013–2016."

We also added "15-minute" in the title of the table as an additional clarification.

P23: Section 5.2: discussion of the factors that can cause a difference in GPS and WVR gradient amplitudes should be revised (see above).

It has been revised as described above.

I don't understand point 2) Constraints on the variability should not impact the mean amplitude.

We added to the following text: "A constraint has a similar impact as a low-pass filter. Peaks with a short duration, requiring rapid changes, will be reduced. This is a valid argument for the mean gradient amplitude, but not for the individual east and north components, because their mean values are expected to be very close to zero regardless of the value of the constraint."

At bottom of page “Before studying the correlation...” remove this sentence as GPS and WVR were already compared in the previous section.

Done + we now specifically mention ONSA and ONS1 in the next sentence.

P25L13: As expected => As seen previously from total gradients...

Changed

Figure 12: use the same range for x and y – axis in all plots.

Done

P30: remove the last sentence (it is not demonstrated neither in this paper nor in general that the GPS gradients can help to validate high resolution NWM models). Also P32 remove “both for evaluation of the performance of the model and”.

The last sentence on P30 was removed.

Regarding the sentence on P32 it was intended to be interpreted as suggested future work. Regarding the specific wording “both for evaluation ...”. It is difficult to do both at the same time, we agree. On the other hand model problems could also be identified, and especially if independent WVR gradients agree with the GPS gradients, but that should be obvious, so we adopt the suggested shorter version. In order to be clear that the conclusion section is not only including what we have shown but also what we propose to investigate if it is possibly to show, the title of the section now also states suggestions for future work.

P32. First sentence: the study doesn't really explain the GPS gradients based on meteorological phenomena, but rather presents a statistical analysis and comparison with other data sources. Please correct the sentence.

As a first introductory sentence to the conclusions it works well with: “We have estimated linear horizontal gradients from GPS data from five sites in Sweden.”

“horizontal gradients” => GPS gradients

Changed

Revise the interpretation of impact of cutoff on GPS gradients

Done (as described above)

“simultaneously estimated” => remove “simultaneously”

Done

On the information content in linear horizontal delay gradients estimated from space geodesy observations

Gunnar Elgered¹, Tong Ning², Peter Forkman¹, and Rüdiger Haas¹

¹Department of Space, Earth and Environment, Chalmers University of Technology, Onsala Space Observatory, SE-43992 Onsala, Sweden.

²Lantmäteriet (The Swedish Mapping, Cadastral and Land Registration Authority), SE-80182, Gävle, Sweden

Correspondence: Gunnar Elgered (gunnar.elgered@chalmers.se)

Abstract. We ~~study-estimated~~ have studied linear horizontal gradients in the atmospheric propagation delay above ground-based stations receiving signals from the Global Positioning System (GPS). Gradients ~~are-were~~ estimated from 11 years of observations from five stations in Sweden. Comparing these gradients with the corresponding ones from the European Centre for Medium-Range Weather Forecasts (ECMWF) analyses shows that GPS gradients detect effects over different time scales
5 caused by the hydrostatic and the wet components. The two GPS stations equipped with microwave absorbing material below the antenna in general show higher correlation coefficients with the ECMWF gradients compared to the other three stations. We also estimated gradients using GPS data from two collocated antenna installations at the Onsala Space Observatory. Correlation coefficients for the east and the north wet gradients estimated with a temporal resolution of 15 minutes from GPS data can for specific months reach up to 0.8 when compared to simultaneously estimated wet gradients from microwave radiometry.
10 The best agreement is obtained when an elevation cutoff angle of 3° is applied in the GPS data processing, in spite of the fact that the radiometer does not observe below 20° . Based on the four years of results we note a strong seasonal dependence in the correlation coefficients, from 0.3 during months with smaller gradients to 0.8 during months with larger gradients, typically during the warmer, and more humid, part of the year. Finally, a case study using a 15-day long continuous Very Long Baseline Interferometry (VLBI) campaign was carried out. The comparison of the gradients estimated from VLBI and GPS
15 data indicates that a homogeneous and frequent sampling of the sky is a critical parameter.

1 Introduction

Space geodetic techniques, where the fundamental observable is a radio signal's time of arrival at a station on the surface of the Earth, are affected by variations in the propagation velocity in the atmosphere. Because time measurements avoid problems related to accurate calibration, which are common for systems measuring different types of emissions, it is a common view
20 that Global Navigation Satellite Systems (GNSS) have a long term stability and are well suited for climate monitoring, e.g. in terms of the atmospheric water vapour content. Estimates of the total propagation delay above a GNSS station can be used to determine the integrated amount of water vapour. It is also common practice to estimate two-dimensional horizontal linear gradients for each station in the GNSS data processing, because it improves the reproducibility of estimated geodetic parameters, see e.g. (Bar-Sever et al., 1998).

We ~~study~~ have studied estimated gradients primarily from GPS data from Swedish GNSS stations by comparing these gradients to independent measurements. An important site is the Onsala Space Observatory where a geodetic Very Long Baseline Interferometry (VLBI) telescope and a water vapour radiometer (WVR) are installed and collocated with GNSS receiver stations. The overall goal ~~is~~ was to study the usefulness of GPS-derived gradients in atmospheric and climate research.

5 Previous studies have been carried out using GPS/GNSS data from Onsala. Comparing the gradients derived from VLBI, GPS, and a WVR, Gradinarsky et al. (2000) found that when varying the constraint for the gradient variability from 0.2 to 5.6 mm/ \sqrt{h} the weighted root-mean-square (RMS) difference compared to the WVR gradients varied between 0.8 and 1.0 mm for both the GPS and the VLBI gradients. Using multi-GNSS observations, Li et al. (2015) found a significant increase in the correlation coefficient to about 0.6 when compared to ECMWF gradients, while the one for the GPS only was typically below 0.5. In

10 addition, they found that the RMS difference of the gradient ~~is~~ was reduced to about 25–35 % by multi-GNSS processing.

There are some interesting questions actualised by previous work which we tried to take further. Of specific interest in our study was to investigate if there is any systematic seasonal behaviour in the estimated gradients in Sweden, and if these make sense given the present knowledge about the meteorological conditions. Another issue is that comparisons of estimated GPS gradients with a high temporal resolution are rather sparse, and have to our knowledge so far not covered periods of many

15 years. Here we report on comparisons between GPS and WVR gradients, with a temporal resolution of 15 minutes, over a more or less continuous 4-year period.

In Section 2 we give a short background on the cause of gradients that are sensed by the space geodetic techniques and the model used to estimate them. In Section 3 instruments, techniques, and their data are described. The results are presented in two sections. First, in Section 4, we compare 11 years of total gradients from five Swedish GNSS stations to gradients originating

20 from the European Centre for Medium-Range Weather Forecasts (ECMWF) analyses. Here we study seasonal dependence as well as estimates of long term trends. In Section 5, we use data from two collocated GNSS stations (with different antenna installations) and one WVR to assess the station performances and differences between different GPS processing variants. We also study the seasonal dependence of the estimated wet gradients over a 4-year period. Finally, within this 4-year period a 15-day long VLBI campaign occurred which we use as a case study. In Section 6 we present our conclusions and ~~discuss~~

25 suggest possible future studies of gradients.

2 Cause of horizontal gradients and models

The delay of space geodetic signals propagating through the atmosphere depends of the refractive index. For space geodetic applications it is meaningful to define one hydrostatic and one wet component (Davis et al., 1985). For a horizontally stratified atmosphere it is then common practise to use equivalent zenith values for these components. Additionally we may define a

30 horizontal linear gradient, that can be inferred from ground-based observations (Davis et al., 1993), consisting of one east and one north component, which in turn also can be separated, into one hydrostatic and one wet component.

Hydrostatic gradients are ~~usually dominated by pressure~~ determined by pressure and temperature gradients and exist mainly over ~~global and~~ regional scales (e.g. ~~synoptic scale~~ persistent high and low pressure systems) and synoptic scales (e.g. weather

systems). ~~For example the~~ Using a European and a global GPS network, including three of the GPS stations used in this study, Meindl et al. (2004) have shown that the north gradient has a clear dependence on latitude when averaged over long time scales. ~~This has been shown by Meindl et al. (2004) using GPS data. For~~ For the area of interest in this study we specifically mention the Icelandic low pressure system that typically evolves in the winter and disappears in the summer (Hewson and Longley, 1944). This is a component in the North Atlantic Oscillation and the Arctic Oscillation (Thompson and Wallace, 1998; Sanchez-Franks et al., 2016).

Temperature and especially water vapour can show strong horizontal gradients over small (kilometre) scales and the temporal variability is typically also much higher than that of the hydrostatic gradients, see e.g. Li et al. (2015). Hence, the large local gradients over a station are mainly caused by the variability in water vapour and the wet refractivity. Gradients can be significant during a passage of a weather front, e.g. Kačmařík et al. (2018) report gradient amplitudes of up to 3–4 mm during the passage of an occlusion front over Germany. Nahmani et al. (2019) have studied gradients during the passage of mesoscale convective systems in West Africa and Koulali et al. (2012) have shown correlations between gradients and precipitation and moisture fluxes in Morocco. Other specific weather phenomena that can cause horizontal variability in the partial pressure of water vapour, and hence also the wet refractivity, are sea breeze (Craig et al., 1945; Miller et al., 2003), cloud rolls (Brown, 1970) and convection processes in general.

We note that none of the known processes is expected to be strictly horizontally linear, but the strength in the geometry, the distribution of the observations on the sky, and the GNSS data quality makes it difficult to determine additional atmospheric parameters of higher order.

The atmospheric parameters that are normally estimated when processing space geodesy data are an equivalent zenith wet delay and linear horizontal delay gradients in the east and the north directions. The uncertainties of the estimates depend on the geometry of the observations and the accuracy of the so called mapping functions, used to describe the estimated parameters dependence on the elevation angle, given the specific weather conditions at the site, at the time, see e.g. Boehm et al. (2006) and Kačmařík et al. (2018). The common model used to relate the observed delay along the line-of-sight, $\Delta L(\alpha, \varepsilon)$, and the estimated parameters (IERS Conventions, 2010) is also used in this study, i.e.

$$\Delta L(\alpha, \varepsilon) = m_h(\varepsilon) \Delta L_{hz} + m_w(\varepsilon) \Delta L_{wz} + m_g(\varepsilon) [\Xi_e \sin \alpha + \Xi_n \cos \alpha] \quad (1)$$

where m_h , m_w , and m_g are the mapping functions, depending on the elevation angle ε , for the hydrostatic and the wet delays, and the gradients, respectively; ΔL_{hz} and ΔL_{wz} are the equivalent hydrostatic and wet delays in the zenith direction; α is the azimuth angle, measured clockwise from the north, implying that Ξ_e and Ξ_n are the gradients in the east and in the north directions. While total gradients are estimated, they can be interpreted as the sum of hydrostatic and wet components as well. In the following we will subtract the hydrostatic component computed from ECMWF from the total GPS gradient to get the GPS wet gradient.

In addition to the east and the north gradient components we ~~will also study~~ also studied the gradient amplitude, defined as

$$|\Xi| = \sqrt{\Xi_e^2 + \Xi_n^2} \quad (2)$$

The gradient amplitude is defined for the hydrostatic, the wet, and the total gradients.

3 Instrumentation and data

We ~~compare~~ compared gradients estimated from GPS observations acquired at five sites and six antenna/receiver installations:

- 5 Kiruna (KIR0), Mårtsbo (MAR6), Onsala (ONSA and ONS1), Borås (SPT0), and Visby (VIS0), with respect to VLBI, WVR, and ECMWF estimates. These stations are also part of the EUREF network (Bruyninx et al., 2012). Their geographic locations are shown in Figure 1. In this section we first describe the different datasets. Thereafter, we summarise their use and characterise them in terms of formal errors, advantages, and disadvantages.

3.1 GPS

- 10 We used 11 years of GPS data (2006–2016) from the five Swedish GNSS sites mentioned above. Gradients in the east and the north directions were estimated with a temporal resolution of 5 min. Two GNSS stations are operating continuously at the Onsala Space Observatory, on the west coast of Sweden. The primary station, ONSA, was established already in 1987 and the other station, ONS1, was taken into operation in 2011. The six antenna installations are shown in Figure 2. The antennas of ONSA and ONS1 are located within 100 m from each other and should observe almost identical atmospheric gradients. For the time period 2013–2016 we ~~compare~~ compared gradients from these two stations with simultaneously estimated gradients using
5 data from a WVR.

The analysis of the GPS data ~~follows~~ followed the same lines as described by Ning et al. (2013) and is summarised in Table 1. Specifically we mention that each day ~~is~~ was analysed independently after adding 3 h of data from the previous day and 3 h from the following day, i.e. in total 30 h. The reason ~~is~~ was to avoid discontinuities at midnight in the estimated time series.

- 10 Recent work by Kačmařík et al. (2018) compared estimated gradients with those from a numerical weather model using different gradient mapping functions and elevation cutoff angles. They found the best agreement for an elevation cutoff angle equal to 3°. They also showed that the Bar-Sever et al. (1998) gradient mapping function resulted in 17 % smaller gradient amplitudes compared to the Chen and Herring (1997) mapping function. For the 11-year study presented in the next section we ~~use~~ used a 10° elevation cutoff angle only, whereas we ~~use~~ used several different elevation cutoff angles in the comparison with the WVR data from the Onsala site for a 4-year period.

Based on the five-minute gradients we calculated mean values over 15 min, 6 h, 1 day, and 1 month in order to match the temporal resolution of the comparison data and to study the variability of the wet and the hydrostatic gradients over different time scales.

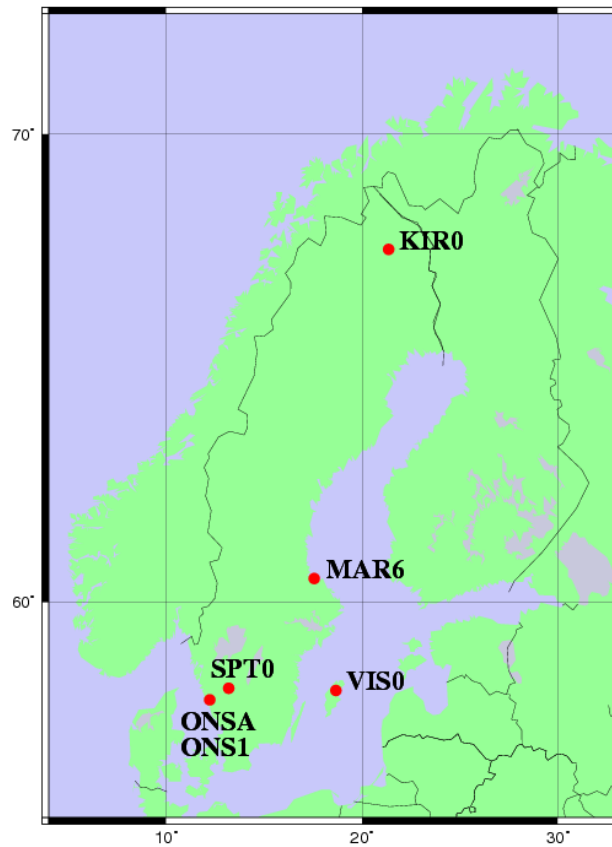


Figure 1. The six GPS stations used in the study. ONSA and ONS1 are collocated together with the VLBI telescope and the WVR at the Onsala Space Observatory.

Examples of the sky coverage of the GPS observations are shown in Figure 3 for the Onsala site. At this latitude there is a significant part of the sky that is never sampled, just north of the zenith direction. It is reasonable to assume that this will have a negative impact on the estimated gradients, and especially in the north direction.



Figure 2. The six antenna installations used to acquire the GPS data. See Figure 1 for their geographical location.

Table 1. Processing of GPS data.

Parameter	Description / Value
Processing software	GIPSY v6.2 (Webb and Zumberge, 1993)
Strategy	Precise Point Positioning (Zumberge et al., 1997) final orbit and clock products were provided by JPL obtained from the legacy GIPSY-OASIS software ^a
Reference frame	IGS08
Mapping functions for ΔL_z	Vienna 1 2006 (VMF1) (Boehm et al., 2006) ^b
Mapping function for Ξ	Bar-Sever et al. (1998)
Elevation cutoff angle	10° ^c
Zenith delay	Estimated every 5 min, constraint 10 mm/ \sqrt{h} (Jarlemark et al., 1998)
Linear horizontal gradient	Estimated every 5 min, constraint 0.3 mm/ \sqrt{h} (Bar-Sever et al., 1998)
Ocean tide model	FES2004 (Lyard et al. , 2006)
Antenna phase centre	igs08_1740.atx (Schmid et al., 2007) ^d
Ambiguity resolution	Yes (Bertiger et al., 2010)
Ionosphere model	2nd order (IGRF) ^e (Matteo and Morton, 2011)

^a For the 11-year dataset, for the 4-year dataset, the products were obtained from a new GipsyX software. We noted that the difference in the products due to the change of software is small (Sibois et al., 2017).

^b For the 11-year dataset, for the 4-year dataset also the weighted ($\sin(\varepsilon)$) VMF1 and the NMF (Niell, 1996) were used.

^c For the 11-year dataset, for the 4-year dataset also 3° and 20° were used.

^d For the 11-year dataset, for the 4-year dataset igs08_1869.atx were used.

^e International Geomagnetic Reference Field

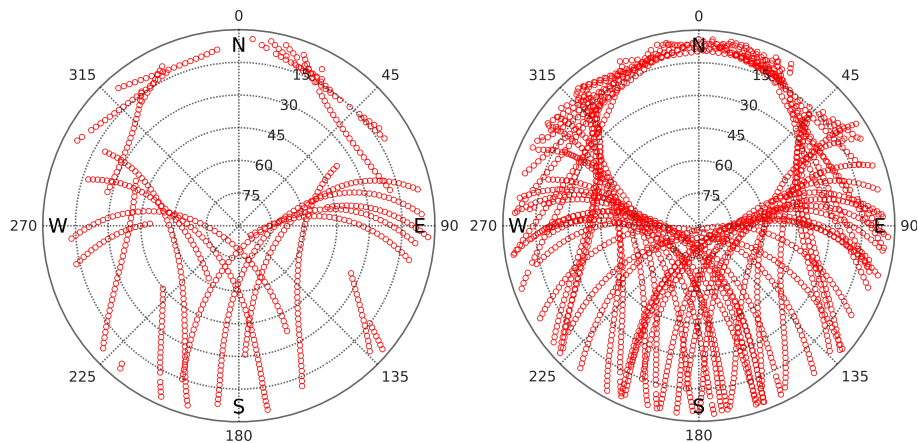


Figure 3. Sky plots of GPS observations at [Onsala](#) from 6 to 12 UT (left) and from 0 to 24 UT (right) on May 12, 2014. This particular day was chosen because ~~results from this day are discussed it is included~~ in [the CONT14 campaign presented in](#) Section 5.3. The sky distribution of observations is very similar, although not identical, for all days.



Figure 4. The water vapour radiometer (WVR) Konrad at the Onsala Space Observatory.

5 3.2 Microwave radiometer

The microwave radiometer, shown in Figure 4, ~~is was~~ designed in order to provide independent estimates of the wet propagation delays for space geodetic applications. It measures the emission from the sky, on and off the water vapour line at 22.2 GHz. Its specifications are summarised in Table 2 and the data processing ~~is was~~ carried out as ~~is was~~ described for another WVR by Elgered and Jarlemark (1998).

10 During the time period 2013–2016 the WVR was observing in a sky mapping mode as is illustrated in Figure 5. A disadvantage of a WVR is that the algorithm for calculation of the wet propagation delay fails for data acquired during rain or when large liquid drops are present in the sensed atmosphere. Typically such conditions imply large positive errors in the wet delay, and the water vapour content (Westwater and Guiraud, 1980). Therefore, data taken during rain, or when the estimated equivalent amount of liquid water in the zenith direction is > 0.7 mm, ~~are were~~ discarded from the gradient analysis. In addition
15 there ~~are were~~ also time periods when the WVR hardware has failed. The amount of analysed data are shown in Figure 6 as the number of individual observations per day. The first long data gap, in 2014–2015, was caused by a broken mechanical waveguide switch and the second long gap, in 2015–2016, was due to broken cables in the so called cable wrap. The cable wrap was redesigned.

In order to avoid ground-noise pickup the WVR ~~provides provided~~ observations of the wet delay in the different directions
20 above 20° . Therefore a simple $\sin(\epsilon)$ mapping function ~~is was~~ used to relate these slant wet delays to the equivalent zenith wet delay ZWD. The WVR gradients ~~are were~~ estimated based on all observations carried out during a period of 15 min using the method of least squares and the Bar-Sever gradient mapping function. We used a four-parameter model, fitting a ~~zenith-wet delay (ZWD)~~ ZWD, a ZWD rate, and an east and a north gradient to the data (Davis et al., 1993). This means that the estimated

Table 2. Specifications for the Konrad WVR.

Parameter	Value
Frequencies	20.6 GHz and 31.6 GHz
Antenna type (one for each channel)	Conical horn with lens
Antenna beam FWHM ^a , E-plane, ch.1 / ch.2	2.9° / 2.0°
Antenna beam FWHM ^a , H-plane, ch.1 / ch.2	3.4° / 2.3°
Reference temperatures (both channels)	313 and 373 K
System noise temperatures, channel 1 / 2	450 / 550 K
RF bandwidth (double sideband)	320 MHz (both channels)
Absolute accuracy (weather dependent due to the quality of tip curves)	1–3 K
Repeatability	0.1 K

^a FWHM = Full Width Half Maximum

gradients are independent of the successive estimates, which is different from the gradients estimated from the space geodetic
5 techniques, where temporal constraints are applied.

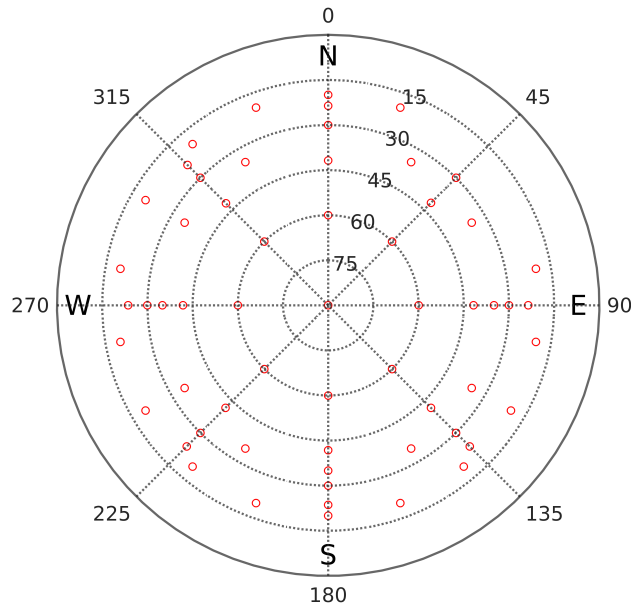


Figure 5. A measurement cycle of the WVR ~~begins~~ begun with two azimuth scans. In order to avoid emission from the ground the lowest elevation angle observed ~~is~~ was 20° . Starting in the north, first turning at an elevation angle of 20° clockwise to the north (excluding the azimuth angles of 40° and 60° due to a nearby radio telescope), and then turning counterclockwise at an elevation angle of 35° . Thereafter four tip curves ~~are~~ were made over the zenith direction (implying four observations in the zenith direction during each cycle): from the north to the south, from the southwest to the northeast, from the east to the west, and from the northwest to the southeast. The cycle ~~is~~ was about 8 min long and ~~is~~ was repeated continuously, implying that almost two complete cycles with a total of $\approx 100 \approx 100$ observations ~~are~~ were used when estimating gradients every 15 min.

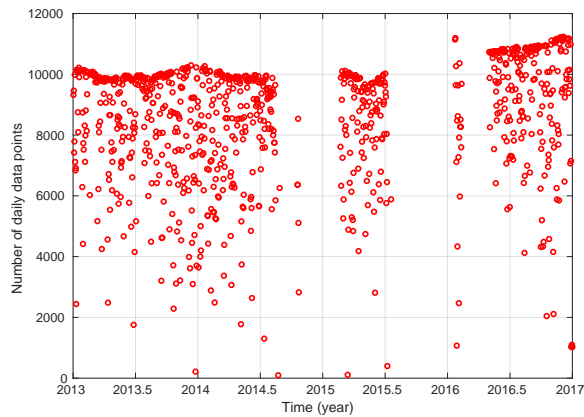


Figure 6. Number of data points per day observed by the WVR. During days without data loss, e.g. due to rain, each estimated gradient ~~is~~ was based on ~~approximately 100~~ ≈ 100 observations in the directions illustrated in Figure 5. Observations close to the sun ~~are~~ were removed from the raw data before the data analysis ~~is~~ was carried out which causes the seasonal variation in the maximum number of observations per day. During the last year the measurement cycle was optimised by reducing some of the time delays inserted between samples but the observational sequence shown in Figure 5 was used during the whole period.

3.3 Very long baseline interferometry data

We have used the VLBI data from the CONT14 campaign coordinated by the International VLBI Service (Nothnagel et al., 2017). The IVS organises continuous (CONT) VLBI campaigns every third year in order to acquire state-of-the-art VLBI data over a time period of two weeks and to demonstrate the highest accuracy of which the current VLBI system is capable.

10 The primary goal of these CONT campaigns is to support research concerning high resolution Earth rotation (Haas et al., 2017) reference frame stability, and daily to sub-daily site motions, but also other aspects. A concise overview of the IVS CONT campaigns is given by MacMillan (2017).

The CONT14 campaign was observed during May 6–20, 2014. The VLBI data were analysed with the calc/solve VLBI data analysis software (Ma et al., 1990). Station positions, ZWD, atmospheric gradients, relative clock parameters w.r.t. a reference
15 station, as well as earth rotation parameters were estimated. The relative clock parameters were estimated as a piecewise linear functions every hour, with a constraint of $5 \cdot 10^{-14}$ s/s between clock rate segments. The ZWD and atmospheric gradients were estimated as piecewise linear functions (i.e. not stochastic processes) with a temporal resolution of 30 min and 6 h, respectively. Constraints for the variability of 15 mm/h for the ZWD rate segments, and 2 mm/day for gradient rates were applied. The NMF (Niell, 1996) mapping functions for ZWD and the Chen and Herring (1997) mapping function for gradients were used in the analysis, together with meteorological information recorded at the VLBI stations. An elevation cutoff angle of 5° was used, and no elevation-dependent weighting.

5 Figure 7 depicts the sampling of the sky for a 6 h period, which is the highest temporal resolution of the gradient estimates from VLBI, as well as all observations scheduled for a 24 h experiment. This schedule was repeated every day with only minor modifications.

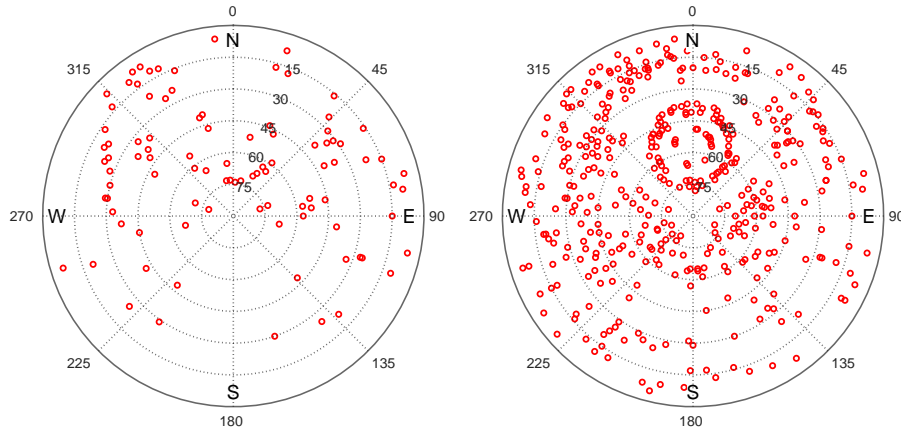


Figure 7. The directions of the VLBI observations for the time period from 6 to 12 UT (left) and from 0 to 24 UT (right), both on May 12, 2014.

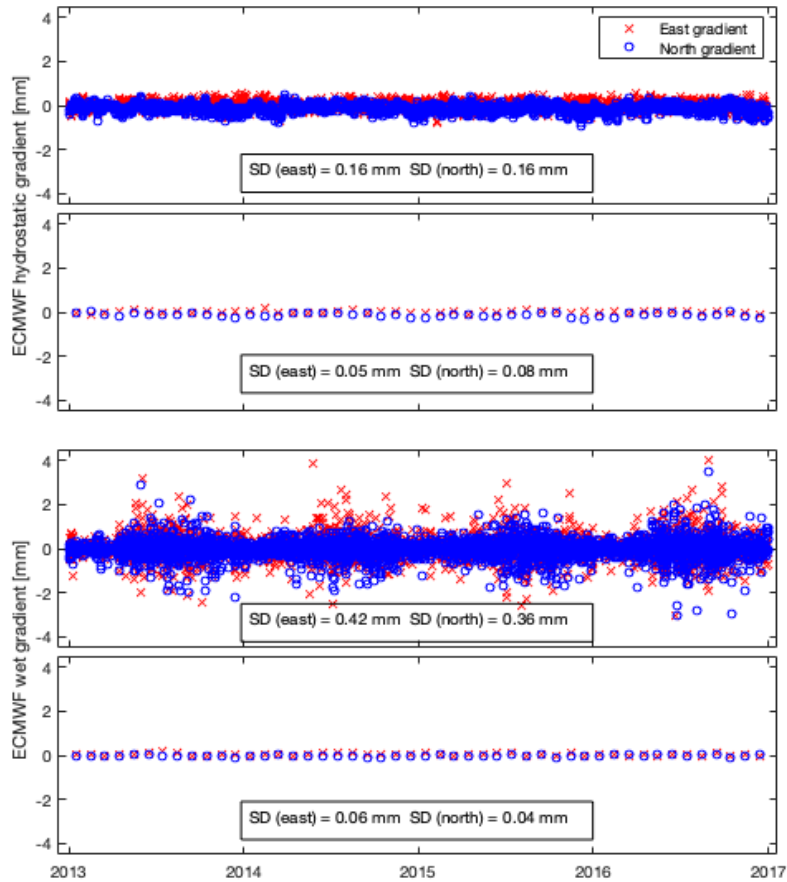


Figure 8. The ECMWF gradients for the ONSA (ONSA) site during the 4-year time period studied in Section ??5. From the top: hydrostatic gradients every 6 h, their monthly averages, wet gradients every 6 h, and their monthly averages.

3.4 ECMWF data

The Technical University of Vienna ~~provides~~provided hydrostatic and wet gradients based on ECMWF data for many space geodetic sites globally. Figure 1 depicts the five sites used here. Details are given by Boehm and Schuh (2007), so we just mention the characteristics that are most relevant for our comparisons. ECMWF ~~provide~~provided profiles of hydrostatic and wet refractivity with a temporal resolution of 6 h, and a spatial resolution of 0.25° (~ 30 km). The profile closest to the site ~~are~~were used together with one profile to the east and one profile to the north to calculate the refractivity gradient profiles. These ~~are~~were thereafter integrated to give the delay gradients. The data ~~are~~were available during certain time periods from the mid of 2005 and ~~are~~were more continuous from 2006. We decided to use the data from 2006 to 2016, resulting in a time series of 11 years.

As an introduction, examples of the ECMWF hydrostatic and wet gradients are illustrated in Figure 8. Worth noting is that the wet gradients dominate for the temporal resolution of 6 h and vary with the season, whereas the wet and the hydrostatic gradients show similar standard deviations (SD) for the monthly averages.

3.5 Summary of datasets

- 10 The results of comparisons between the gradients from these datasets are presented in the next two sections. The usage is defined in Table 3. In Section 4 GPS gradients estimated using the 10° elevation cutoff angle are compared to the ECMWF gradients. The temporal resolution is limited to 6 h in the ECMWF data. On the other hand the time series are 11 years long. The results in Section [??-5](#) focus on comparisons of the wet gradients at the Onsala site. [Here we These](#) have a temporal resolution of 15 minutes when comparing to WVR data and the ECMWF data are only used to subtract the hydrostatic gradients from the total gradients estimated by the GPS and [the](#) VLBI techniques. In Table 4 we summarise the typical formal errors of the remote sensing techniques. Worth noting is the larger formal error for the north GPS gradient, compared to the east gradient, using the elevation cutoff angle of 20° . [The reason is that we lose many observations of satellites located in the north, see Figure 3.](#)
- 5 Other important comments are that WVR gradients are not estimated during rain events and are not based on observations below 20° elevation angles, but have a more homogeneous sky coverage compared to the GPS and the VLBI observations. Gradients from GPS and WVR have a superior temporal resolution, 5 and 15 min, respectively, compared to the 6 h of the VLBI and the ECMWF gradients.

Table 3. Summary of used datasets.

Dataset	Resolution	Time period	ONS1	ONSA	SPT0	VIS0	MAR6	KIR0
GPS ^a	5 min	2006–2016	–	✓	✓	✓	✓	✓
ECMWF ^b	6 h	2006–2016	–	✓	✓	✓	✓	✓
GPS ^c	5 min	2013–2016	✓	✓	–	–	–	–
WVR	15 min	2013–2016	✓	✓	–	–	–	–
VLBI	6 h	6–20 May 2014	✓	✓	–	–	–	–

^a The GPS data were processed with elevation cutoff angles equal to 10° .

^b (Boehm and Schuh, 2007)

^c The GPS data were processed with elevation cutoff angles equal to 3° , 10° , and 20° , different mapping functions, and elevation angle dependent weighting.

Table 4. Formal errors of the remote sensing techniques

Data set	Elev. cutoff angle (°)	Formal error		
		Gradient		ZWD
		East (mm)	North (mm)	(mm)
GPS	3	0.14	0.13	1.7
GPS	10	0.19	0.20	2.3
GPS	20	0.35	0.43	4.0
WVR	20	0.04	0.04	0.2
VLBI	5	0.14	0.13	1.7

4 Comparison of gradients from GPS and ECMWF data for the time period 2006–2016

10 4.1 Seasonal variations of horizontal gradients

We start by investigating the characteristics of the gradients over the year. In Figure 9 we present the monthly mean gradients for the time period 2006–2016 estimated from ECMWF data and GPS data from the Onsala (ONSA) station. In the top graphs, comparing ECMWF and GPS gradients, we note that the GPS gradients show a larger variability. There are also differences between the east and the north gradients both in the mean over the year and in the seasonal variations.

15 We can clearly see negative north gradients in the winter, with a mean value around -0.2 mm, both in the GPS and the ECMWF results. When the ECMWF gradients are separated into the hydrostatic and the wet components this variation appears in the hydrostatic component. We interpret this effect as the influence of the Icelandic low pressure system mentioned in Section 2. The winter feature is clearly seen in the analyses of the mean sea level pressure in the ERA-40 Atlas (https://software.ecmwf.int/static/ERA-40_Atlas/docs/section_B/parameter_mslp.html)

20 The results for the other four stations (KIRO, MAR6, SPT0, and VIS0) show similar systematic features. One exception is KIRO, which is at a higher latitude and has a less humid climate. At KIRO the average monthly wet gradients are much smaller except during the summer months. Furthermore, the influence of the Icelandic low pressure in the winter is not as large as it is at the other four stations. Another exception is seen in the ECMWF wet gradients for ONSA in Figure 9. They are larger in the summer when the wet refractivity is higher. This is also seen at the other stations, but at ONSA there is a tendency of a
5 positive east gradient in the summer. The ONSA GPS station is located a few hundred metres from the coastline, see Figure 1, suggesting that the air on the average is more humid over land compared to over the sea. One possible cause could be the sea breeze that occurs during the summer (Craig et al., 1945; Miller et al., 2003). The issue of wet gradients is studied further using a higher temporal resolution and comparisons with the WVR data in Section 5.2.5.

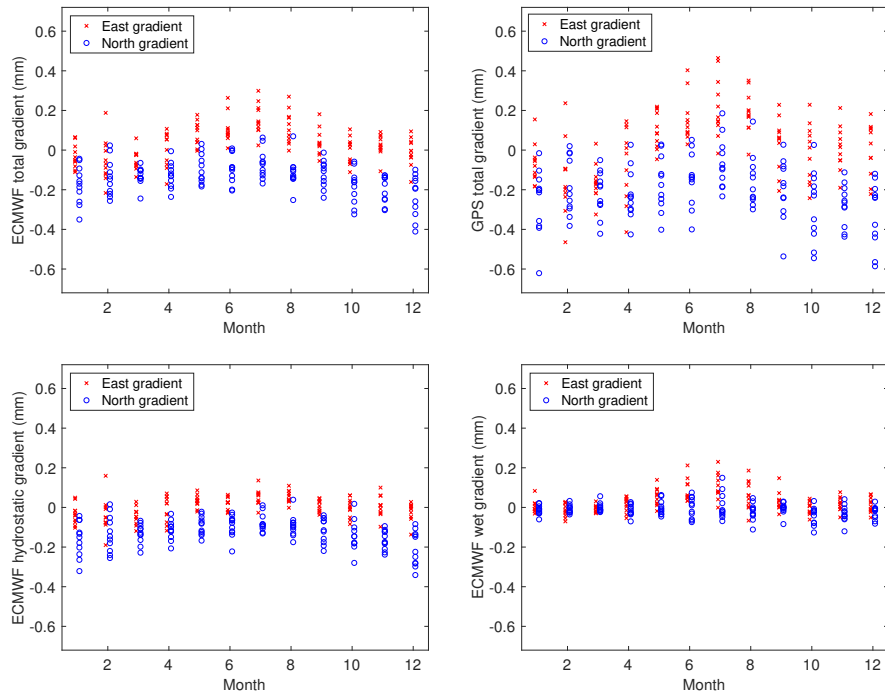


Figure 9. Monthly means of estimated gradients at the Onsala station for the period 2006–2016. The top graphs show the total gradients from ECMWF (left) and GPS (right). The graphs at the bottom show the ECMWF gradients when separated into the hydrostatic (left) and the wet gradient (right).

Table 5. Correlation coefficients for the total east and north gradients estimated from GPS data and compared to ECMWF data.

Station	Six hourly		Daily		Monthly	
	East	North	East	North	East	North
Kiruna (KIR0)	0.55	0.53	0.76	0.75	0.77	0.82
Mårtsbo (MAR6)	0.58	0.51	0.75	0.72	0.83	0.80
Borås (SPT0)	0.58	0.58	0.74	0.74	0.88	0.85
Visby (VIS0)	0.55	0.56	0.71	0.75	0.84	0.81
Onsala (ONSA)	0.60	0.60	0.75	0.78	0.90	0.90

4.2 Comparing GPS and ECMWF gradients over different time scales at the five stations

10 We study the agreement, in terms of correlation coefficients, between the total GPS and ECMWF gradients from 5 GPS stations using data from 2006 to 2016. These are shown in Table 5.

The correlations seen in all cases confirm that ~~an~~ a consistent atmospheric signal in terms of gradients is detected by the GPS observations and ECMWF analyses. We note that the correlation coefficients increase for longer averaging time periods. Our interpretation is that by long term averaging we compare a larger fraction of the gradient that is caused by large scale temperature and pressure gradients, ~~which is better modelled by the ECMWF data~~. Unfortunately, the temporal resolution of 15 6 h in the ECMWF data is not sufficient to resolve neither rapid changes in the pressure related to moving weather systems nor many of the short lived small-scale gradients associated with the variability in the water vapour.

Another result worth noting is that the two stations with the highest correlation coefficients, especially for the monthly averages, are ONSA and SPT0. The 95 % confidence interval is +0.03/−0.04 for the correlation coefficient of 0.90 obtained at 20 station ONSA, based on 131 data points (12 months over 11 years). These two stations are the only ones that are equipped with microwave absorbing material below the antenna and above the metal plate used for the antenna mounting. This could reduce the impact from unwanted multipath effects. The phenomenon calls for further studies.

The mean values and the standard deviations of the gradients, for the three different temporal resolutions, are presented in Tables 6 and 7 from GPS and ECMWF data, respectively. For the 6-hour temporal resolution the GPS gradients estimated at the same time epoch as the ECMWF gradients are included in the calculations. The daily and monthly values are averages using these 6-hour data. Comparing the two tables it is clear that the GPS gradients are ~~always larger, but the relative differences between the sites, and for different averaging periods, are similar~~ larger by a factor of ≈ 1.5 and this factor is roughly the same for all sites. We note that the standard deviations (SD) obtained for the KIR0 station for 6 h and one day are significantly 5 smaller. This is likely a consequence of the lower humidity at the station. For monthly averages, however, all stations have comparable SD, indicating that at this level the hydrostatic gradient and other effects, e.g. ~~instrumental~~ signal multipath effects,

Table 6. Mean values and standard deviations (SD) over the 11 years of estimated total gradients from GPS data for different temporal resolutions.

Station	ZWD ^a		Horizontal gradient							
	Mean	SD	Mean ^b		Six hourly SD		Daily SD		Monthly SD	
			East	North	East	North	East	North	East	North
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
Kiruna (KIRO)	62	36	-0.21	-0.14	0.47	0.47	0.32	0.31	0.13	0.13
Mårtsbo (MAR6)	88	46	-0.23	-0.13	0.55	0.58	0.37	0.36	0.14	0.15
Borås (SPT0)	87	45	-0.24	-0.12	0.56	0.49	0.38	0.38	0.16	0.17
Visby (VIS0)	88	47	-0.07	-0.23	0.60	0.56	0.40	0.37	0.16	0.13
Onsala (ONSA)	92	47	0.01	-0.20	0.59	0.55	0.41	0.38	0.18	0.15

^a The Zenith Wet Delay (ZWD) is included to illustrate the amount of water vapour in the atmosphere above the station and its SD is based on the 6 h gradients.

^b The mean gradient values are based on the 6 h gradients.

Table 7. Mean values and standard deviations (SD) over the 11 years of estimated total gradients from ECMWF data for different temporal resolutions.

Station	Horizontal gradient							
	Mean ^a		Six hourly SD		Daily SD		Monthly SD	
	East	North	East	North	East	North	East	North
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
Kiruna (KIRO)	0.00	-0.14	0.28	0.26	0.20	0.19	0.07	0.07
Mårtsbo (MAR6)	-0.22	-0.13	0.38	0.34	0.25	0.23	0.08	0.09
Borås (SPT0)	-0.00	-0.13	0.39	0.35	0.25	0.24	0.09	0.09
Visby (VIS0)	-0.01	-0.14	0.42	0.37	0.26	0.25	0.08	0.08
Onsala (ONSA)	0.03	-0.14	0.43	0.37	0.27	0.25	0.10	0.09

^a The mean gradient values are based on the 6 h gradients.

become important. [Variations in the electromagnetic environment that change the impact of the signal multipath at a station may be due to e.g. snow, rain, vegetation, and soil moisture.](#)

4.3 Long Search for long term trends

10 We expect that any long-term trends would be very small and therefore also difficult to detect because gradients in general are less than 1 mm and large values typically occur over time scales from minutes to a few hours. Examples of time series with a 6-hour and 15-minute temporal resolutions are seen in Figure 8 and in Subsection 5.3, respectively. An estimated gradient has a direction and from the time series we estimate trends for the east and the north gradients ~~separately. Such trends would correspond to an atmospheric tilt above the station.~~ Combining the east and ~~the~~ north gradients offers the possibility to also search for trends in the amplitude of the gradient at the station. ~~There can be a trend in the amplitude, see Equation (2). A positive trend corresponds to a larger variability and may occur~~ even if there is no trend neither in the east nor in the north components. The amplitude is by definition never negative, ~~see Equation (2).~~ A trend of larger east gradients can be balanced by a similar trend in larger west gradients, resulting in no net trend in the east gradient component, but a trend in the gradient amplitude. ~~Table ?? presents the estimated gradient trends for the east and the north directions and for the amplitudes over the 11 years.~~

20 We estimate ~~and present~~ the total gradient trends from GPS data. Wet gradient trends inferred from GPS can be calculated by subtracting the ECMWF hydrostatic gradients. ~~These All the estimated~~ trends are indeed very small, typically well below 10 $\mu\text{m}/\text{year}$. The highest value is $-19 \mu\text{m}/\text{year}$ for the total gradient in the north direction at the SPT0 station. ~~If this trend originates from the atmosphere it is a local effect, because it is 5 times as large as the total north gradient trend at the nearby ONSA station. However, it is not seen in the ECMWF data which indicates that it is an instrumental effect related to the GPS station.~~

30 ~~A For our 11-year long time series of gradients we obtain a typical formal 1-sigma uncertainty of 3 $\mu\text{m}/\text{year}$ is obtained if we assume that the deviations from the model is white noise, but 40 $\mu\text{m}/\text{year}$ is estimated~~ by taking the short term temporal correlation of the deviations into account using the model presented by Nilsson and Elgered (2008). ~~In addition to that the estimated trends are small relative to their uncertainties we cannot assume perfectly stable hardware at the station. For example, hardware problems giving a large impact on the estimated gradients have been reported by Douša et al. (2017).~~ Given these circumstances it seems unlikely to detect any trends in gradients caused by the atmosphere unless there is a dramatic local effect of the weather conditions at the site. ~~Nevertheless, to study long time series of estimated gradients is motivated by the monitoring of the quality of the data from a GPS station. An example of hardware problems giving a large impact on the estimated gradients have been reported by Douša et al. (2017).~~

5 Gradient trends: 2006–2016. All values are in the unit $\mu\text{m}/\text{year}$.

Station East North Ampl. East North Ampl. East North Ampl. East North Ampl. KIRO 1 –1 0 –1 –0.5 –2 –0.5 –0 –3.5
MAR6 1 –1 1 –0 –3.4 –1 –2.5 –5 –1.4 SPT0 1 –2.2 –4 –1.6 –4 –0.7 –11 –19.8 VIS0 1 –1.2 –1 –1.4 –0 –3.6 –11
–1.3 ONSA 1 –1 1 –1.6 –1 –2.7 –7 –4.1

10 5 Wet gradients at the Onsala site

For the Onsala site we ~~will~~ study total gradients from the two GPS stations and one VLBI station and wet gradients from the WVR for the time period 2013–2016. We ~~will~~ use the hydrostatic gradients from ECMWF to calculate wet gradients from GPS and VLBI total gradients. The designs of the two GPS stations are different, see Figure 2, which motivates to include both of them in the comparisons. Three different studies are made using these data: (1) assessment of the impact of using different
15 processing of the GPS data, primarily varying the elevation cutoff angle, by comparison to the WVR gradients; (2) using the GPS gradients from the processing variant showing the best agreement with the WVR gradients, the seasonal variations in the wet gradient are characterised; and (3) a 15-day long period with VLBI data is used as a case study for comparisons with GPS and WVR wet gradients and the ZWD.

5.1 Test of GPS processing variants relative to WVR data

20 Gradients in the east and the north directions are estimated from the GPS data for five different solutions. We use three different elevation cutoff angles for the VMF1 zenith delay mapping functions. One additional solution is carried out with elevation dependent weighting ($\sin(\varepsilon)$) and in the fifth solution the VMF1 mapping functions are replaced by the NMF. As stated earlier the gradient mapping function presented by Bar-Sever et al. (1998) is used in all cases.

When we use the independent WVR wet gradients together with the total gradients estimated for ONSA and ONS1, the
25 hydrostatic gradients from ECMWF (see Figure 8), linearly interpolated to match the time epochs of the GPS gradients, are subtracted from the estimated total GPS gradients. Thereafter, we form 15 min averages for the east and the north wet gradients from GPS and compare to the corresponding WVR results.

The results for the different GPS solutions are summarised in Tables 8 and 9. Because of the different gradient amplitudes from the WVR and GPS, we present mean values and SD of the differences as well as correlations coefficients. Table 8 shows
30 the results when the total gradients from the stations ONSA and ONS1 are compared to each other. Table 9 shows the results when the wet gradients from ONSA and ONS1 are compared to the WVR gradients. We note that in both tables the best agreement between the gradients estimated is obtained for an elevation cutoff angle equal to 3° . The 95 % confidence interval for correlation coefficients around 0.65 and approximately 80,000 data pairs is ± 0.004 . This confirms the results presented by Kačmařík et al. (2018) using a GNSS station network in central Europe. This result was not expected by us, given that the WVR has an elevation cutoff angle of 20° (in order to avoid ground-noise pickup) the GPS solution using the same cutoff angle would show a better agreement. Our interpretation is that for the temporal resolutions of 5–15 min the low elevation observations are important in order to distinguish the gradient parameters relative to other estimated parameters in the GPS
5 analysis. A higher elevation cutoff angle will remove many observations towards the north, and especially for a cutoff angle of 20° , see Figure 3 and Table 4 with the formal errors.

The solution giving the best agreement, when comparing gradients from ONSA and ONS1 data with each other, is the one with elevation dependent weighting, whereas the comparisons with the WVR, for both ONSA and ONS1, give the best agreement without weighting. The choice of elevation cutoff angle is a compromise between having a good geometry and

Table 8. Assessment of the different GPS solutions comparing total gradients from the two GPS stations ONSA and ONS1.

GPS Solution	Mean		Standard		Correlation	
	Difference ^a		Deviation		Coefficient	
	East (mm)	North (mm)	East (mm)	North (mm)	East (mm)	North (mm)
VMF 3°	-0.01	0.03	0.22	0.25	0.91	0.87
VMF 3° ^b	0.03	0.02	0.15	0.16	0.95	0.92
NMF 3°	-0.01	0.05	0.23	0.26	0.91	0.86
VMF 10°	0.02	0.04	0.25	0.27	0.91	0.88
VMF 20°	0.33	0.36	0.39	0.47	0.82	0.70

^a The mean difference is ONS1-ONSA.

^b Elevation dependent weighting, $\sin(\varepsilon)$

avoiding effects of signal multipath. Our interpretation is that the gradients from ONSA and ONS1 are estimated based on very similar observational directions and have common error sources, such as orbit errors, resulting in correlations around 0.9. In order to increase an already high correlation the observations at the lowest elevation angles are not that important, since multipath effects will be more and more different the closer to the horizon the observations are made. When ONSA and ONS1 gradients are compared to those from the WVR the situation is different, because these gradients are independent and the geometry of the GPS observations becomes more important in order to estimate a more accurate gradient. Although we note that the correlation is here reduced to around 0.6. Since the WVR provides independent gradients, we will in the following focus on the VMF 3° solution without elevation dependent weighting.

Table 9. Assessment of the different GPS solutions for the wet gradients from the two GPS stations ONSA and ONS1 relative to the WVR data.

GPS Solution	Mean		Standard		Correlation	
	Difference ^a		Deviation		Coefficient	
	East (mm)	North (mm)	East (mm)	North (mm)	East (mm)	North (mm)
ONSA						
VMF 3°	0.23	-0.07	0.64	0.57	0.68	0.64
VMF 3° ^b	0.21	-0.06	0.71	0.62	0.58	0.55
NMF 3°	0.22	-0.07	0.64	0.57	0.68	0.64
VMF 10°	0.20	-0.10	0.65	0.59	0.66	0.62
VMF 20°	-0.02	-0.28	0.75	0.73	0.54	0.42
ONS1						
VMF 3°	0.22	-0.04	0.64	0.58	0.68	0.64
VMF 3° ^b	0.24	-0.02	0.71	0.63	0.58	0.55
NMF 3°	0.21	-0.02	0.64	0.58	0.68	0.63
VMF 10°	0.22	-0.04	0.66	0.59	0.66	0.62
VMF 20°	0.36	0.15	0.79	0.73	0.49	0.42

^a The mean difference is the offset referenced to the corresponding WVR time series.

^b Elevation dependent weighting, $\sin(\varepsilon)$

10 5.2 Wet gradients from GPS and WVR

An overview of the data in terms of monthly means of the wet gradient amplitude and the ZWD is presented in Figure 10. The GPS solution with a 3° elevation cutoff angle, no weighting, and the VMF1 mapping functions ~~are is~~ used. When forming monthly means the correlations are obvious, both between GPS and WVR estimates, and between the variability, in terms of the SD, and the gradient amplitudes and the ZWD. Here we also note that the WVR gives much larger gradients. Factors that
15 can cause a difference in gradient amplitude are:

(1) The WVR is sensitive to liquid water in the atmosphere. This is a cause for positive systematic errors in the ZWD as well as occasional overestimates of gradient amplitudes. We investigated this possibility by deleting all WVR observations implying a liquid water content larger than 0.3 mm. The impact was however insignificant. The average gradient amplitude decreased by 0.01 mm. The reason being that large liquid contents are rather infrequent, given that already data acquired during rain (which was assumed to occur when liquid water content was larger than 0.7 mm) have been removed.

(2) The WVR gradients for one 15-minute period do not depend on earlier or later estimates whereas the GPS gradients are estimated using constraints on the variability. A constraint has a similar impact as a low-pass filter. Peaks with a short duration, requiring rapid changes, will be reduced. This is a valid argument for the mean gradient amplitude, but not for the mean values of the individual east and north components, because they are expected to be very close to zero regardless of the value of the constraint.

(3) The fact that the WVR and the GPS gradients are averaged over different air masses ~~also affect~~ introduce effects that will have an impact on the estimated amplitude. The WVR ~~did not cannot~~ observe at elevation angles below 20° , due to the risk of picking up emission from the ground. ~~However, this averaging effect can be seen in the estimated gradient amplitudes using,~~ but for the GPS gradients we have the possibility to study the gradient amplitudes for the different elevation cutoff angles ~~in the GPS solutions~~ presented in Subsection 5.1. Table 10 ~~summarise~~ summarises these results for ONSA and ONS1 for ~~each year~~ the 4-year period 2013–2016. We identify two possible reasons for the increase in gradient amplitude with increasing elevation cutoff angle: (i) the larger volume sensed with a 3° cutoff angle will introduce an averaging effect that will reduce the estimated amplitude, similar to averaging over longer time periods, and (ii) the 20° cutoff angle results in larger formal errors and a larger scatter which implies larger gradient amplitudes.

We conclude that the ~~latter two issues~~ constraints and the sampling of different air masses are the likely ~~explanation~~ explanations for the differences in gradient amplitudes estimated from GPS and WVR data ~~but cannot based on these results determine their relative importance.~~

~~Before studying the correlation between the GPS and the WVR gradients it is appropriate to study how well the gradients from the two GPS stations agree.~~ A correlation plot for the total gradients from ONSA and ONS1 for the VMF1 solution with a 3° elevation cutoff angle is shown in Figure 11. As in the previous section we see a slightly higher correlation for the east gradients, possibly because of the poorer sampling on the sky north of the zenith direction due to the geometry of the GPS satellite constellation at this latitude (see Figure 3).

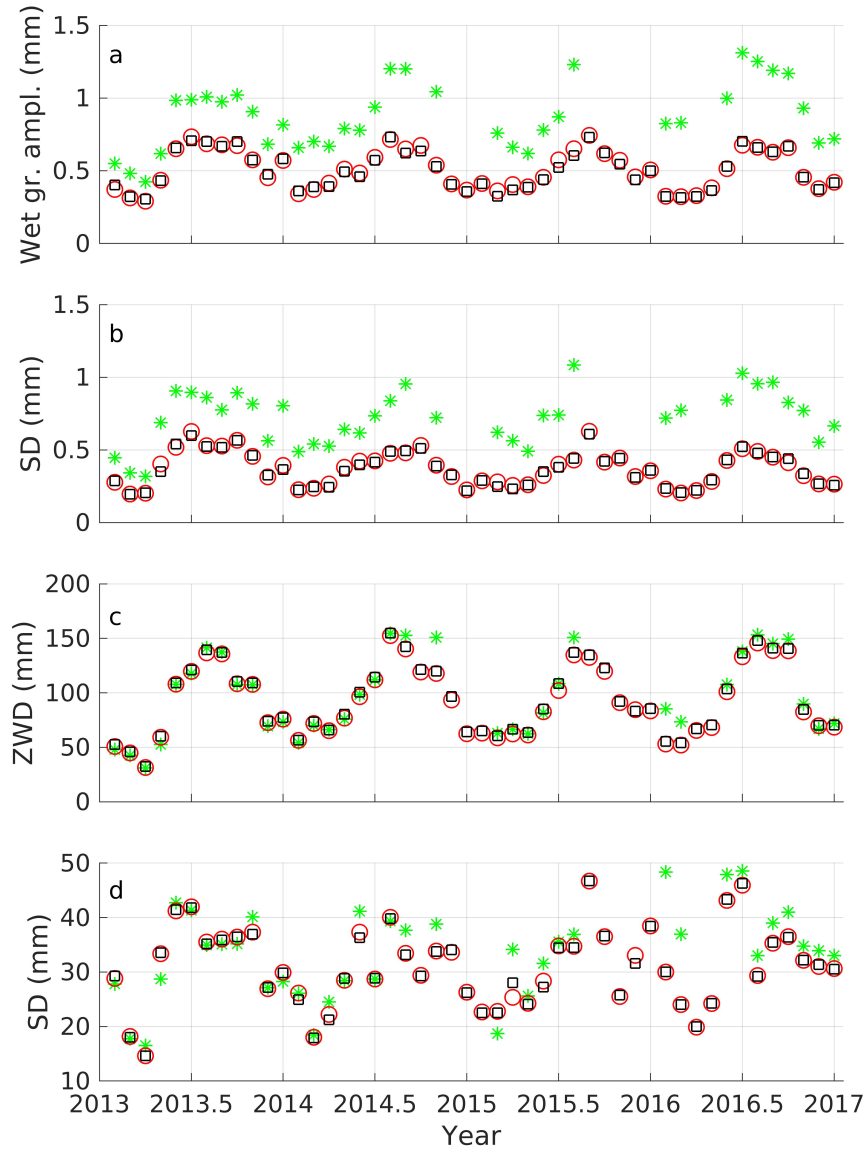


Figure 10. Time series of (a) monthly means of wet gradient amplitudes, $\sqrt{\Xi_{e,wet}^2 + \Xi_{n,wet}^2}$, (b) their SD, (c) monthly means of the ZWD, and (d) the ZWD SD from GPS and WVR. The green stars denote WVR data. The ONSA and ONS1 data are denoted by red circles and black squares, respectively.

Table 10. The impact of the elevation cutoff angle on the estimated 15-minute GPS gradient amplitude

Elev. cutoff angle	Mean value of gradient amplitudes	
	ONSA (mm)	ONS1 (mm)
3°	0.51	0.50
10°	0.58	0.59
20°	0.75	0.70

The two GPS stations share several error sources, such as clock and orbit errors of the observed satellites, and the use of the same mapping functions, meaning that the rather high correlation is overoptimistic due to a common mode suppression of errors.

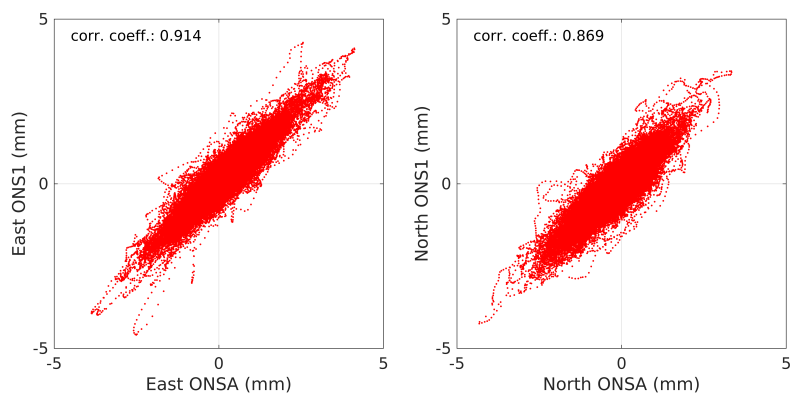


Figure 11. Correlations between estimated total gradients from the GPS stations ONSA and ONS1 using all data with a 5 min resolution from the period 2013–2016.

Correlation plots for the wet gradients from ONSA, ONS1, and the WVR are presented in Figure 12. As expected, seen
5 previously from total gradients the correlations between the estimated gradients from the two GPS stations are significantly higher compared to when the GPS gradients are correlated with the gradients from the WVR. It is also not surprising that the correlation between the wet gradients from ONSA and ONS1 are slightly lower compared to the correlation between the total gradients (Figure 11). When subtracting the hydrostatic gradients, a common signal is removed and the dynamic range is reduced, which affects the correlation coefficients.

10 The reasons for the lower correlation coefficients between the WVR and the GPS gradients are almost identical with the reasons above why the WVR gradient amplitudes are higher: (1) they do not have common sources of errors; (2) the WVR data suffer both from white noise and algorithm errors, especially when liquid water is present; (3) the WVR data for each 15-minute period are independent of the successive periods, whereas there are temporal constraints on the gradients estimated from the GPS data; (4) the sampling on the sky agrees also much better between the two GPS stations, assuming that in general the directions of the observations are towards the same satellites, whereas the WVR observations are evenly spread over the sky and above an elevation angle of 20° .

Concerning the sampling of the atmosphere, the use of a multi-GNSS constellation has been shown to improve the agreement
 5 between GNSS gradients with those estimated from a WVR (Li et al., 2015). In this context it should be noted that with many more GNSS observations the optimum elevation cutoff angle may not be as low as 3° because of an improved sampling of the atmosphere.

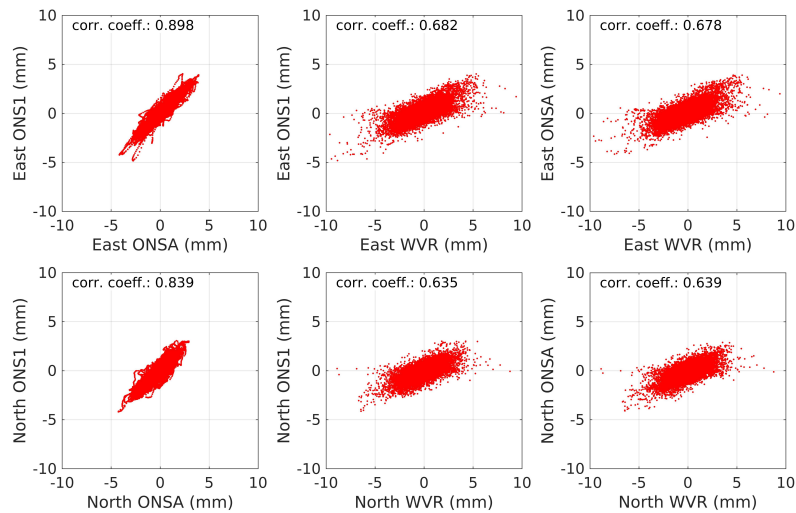


Figure 12. Correlations between estimated wet gradients from the WVR, ONSA and ONS1 using all data from the period 2013–2016. The data in the graphs with ONSA and ONS1 (left) have the original 5 min resolution, whereas the GPS data are averaged over 15 min when compared to the WVR data (middle and right). ~~Note the different scale on the axes in the graphs with WVR data.~~ The correlation coefficients obtained when the east gradients from the WVR were correlated with the original total gradients from GPS were 0.633 for ONSA and 0.637 for ONS1. The corresponding values for the north gradients were 0.575 for WVR-ONSA and 0.571 for WVR-ONS1. This supports our assumption that the ECMWF hydrostatic gradients are reasonably accurate when carrying out a linear interpolation between the 6-hour samples.

We investigated if an average of the wet gradients from both GPS stations, ONSA and ONS1, estimated at the same time epoch, will improve the agreement with the WVR. We see an overall small improvement. For the east gradient the individual

10 correlation coefficients were improved from 0.678 (ONSA) and 0.682 (ONS1) to 0.698. The corresponding values for the north gradient were increased from 0.639 (ONSA) and 0.635 (ONS1) to 0.666. Our interpretation is that by averaging the GPS gradients from ONSA and ONS1 the stochastic noise is reduced.

Correlation plots are shown in Figure 13 for each month of the four years. A clear seasonal dependence is seen, because the variability in the wet refractivity is larger during the warmer time periods, resulting in larger gradients and a larger dynamic
15 range. We note that during October 2014 there were problems with the WVR (see Figure 6). During most of the days there is a significant data loss, likely due to rain, which could be the reason for the low correlation during this month. The other months with low correlations are March 2015 for both the east and the north component, and January and February 2016 for the north component. In all these cases there were no large gradients detected and this has an impact on the correlations. In Figure 8 of Lu et al. (2016) a correlation coefficient of 0.52 was reported for the months March–May, 2014, between GPS and WVR gradients. Here we show that the variability from month to month is large and therefore the choice of the time period for gradient comparison studies is a critical issue.

5 Comparing the results obtained for ONSA with those from ONS1 they are almost identical (in both Figures 12 and 13) meaning that in this case there is no obvious improvement from the absorbing material below the antenna on ONSA. This is different to the previous finding where ONSA and SPT0, with microwave absorbing material, showed a better agreement with ECMWF gradients compared to the KIR0, MAR6, and VIS0 stations. Our assumption is that the lack of a concrete pillar with a metal mounting plate just below the antenna on ONS1, or any other objects affecting the electromagnetic environment at the
10 antenna, eliminates the need for an absorber (see Figure 2).

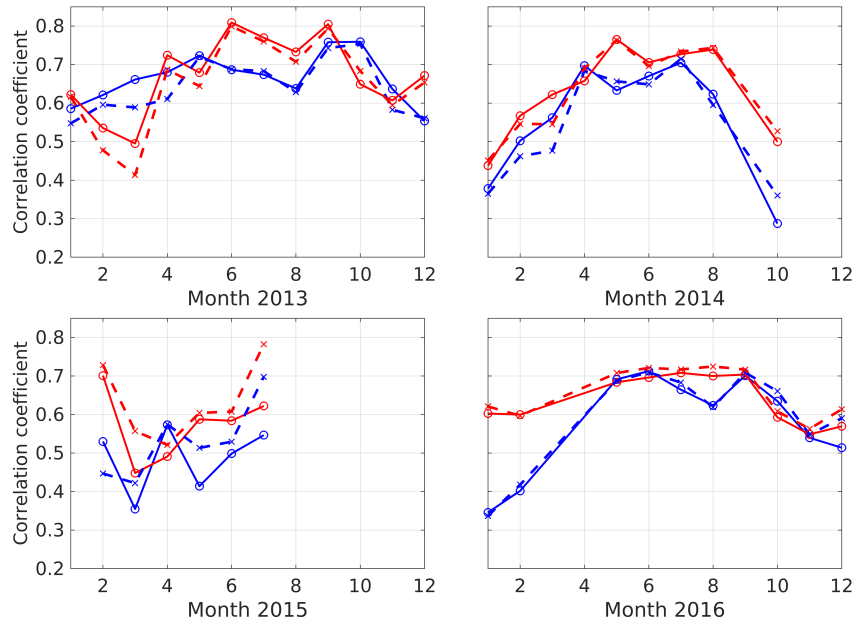


Figure 13. Correlations between estimated wet gradients from the WVR data and the GPS data from ONSA (solid lines) and ONS1 (dotted lines) averaged over 15 min when the hydrostatic gradients ~~have been~~ are removed from the total GPS gradients for each month of the four years. The east gradients are presented with red lines and the north gradients with blue lines.

5.3 GPS, VLBI, and WVR wet gradients during CONT14

The wet gradients from the two space geodetic techniques GPS and VLBI ~~were~~ are compared to each other and to the WVR during the CONT14 campaign. Observations from several earlier CONT campaigns have been analysed in terms of gradients with different results depending on the station and the time of the campaign (Teke et al., 2013). We use this campaign as an
15 example study of the short term variability of the wet gradients. The GPS gradients ~~were~~ are those obtained from the VMF1 solution, unweighted, with a 3° elevation cutoff angle. The ECMWF data, see Figure 14, is only used to subtract the hydrostatic gradients from the total gradients estimated by VLBI and GPS. The time series are shown in Figure 15.

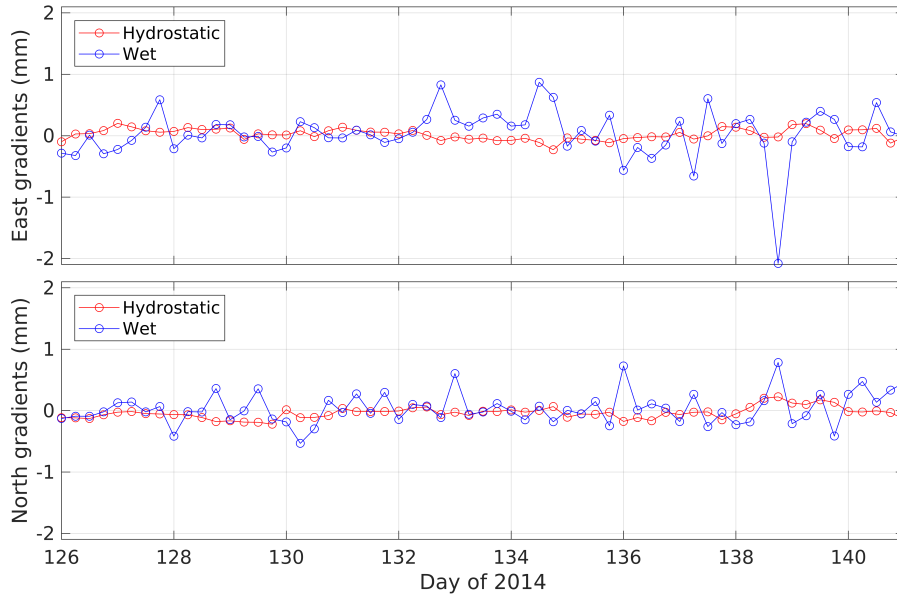


Figure 14. Time series of ECMWF hydrostatic and wet gradients during the CONT14 campaign.

Again we note that the size of the WVR gradients is larger compared to all other instruments. The VLBI gradients correlate with the gradients from the other instruments but their amplitudes are smaller. Given that the sampling of the atmosphere is much more sparse with the VLBI telescope, a short lived gradient in combination with the assumption of linear functions in 6-hour segments, will probably reduce the variability in the estimated amplitude.

Table 11 summarises the correlation coefficients for the east and the north VLBI wet gradients compared to those from the two GPS stations, ONSA and ONS1, and the WVR. Here we have correlated averages using data ± 3 h around the VLBI gradient value every 6 h. In order to be consistent also the interpolated data from continuous VLBI segments are averaged in
5 this way.

We note that the correlation coefficients are lower for the north component for all three comparisons, whereas the SDs are similar. The reason is that the size of the east gradients are larger compared to the north gradients during this 15-day period. Scatter plots (not shown) confirm what is indicated by the SDs, that the quality of the east and north components is similar.

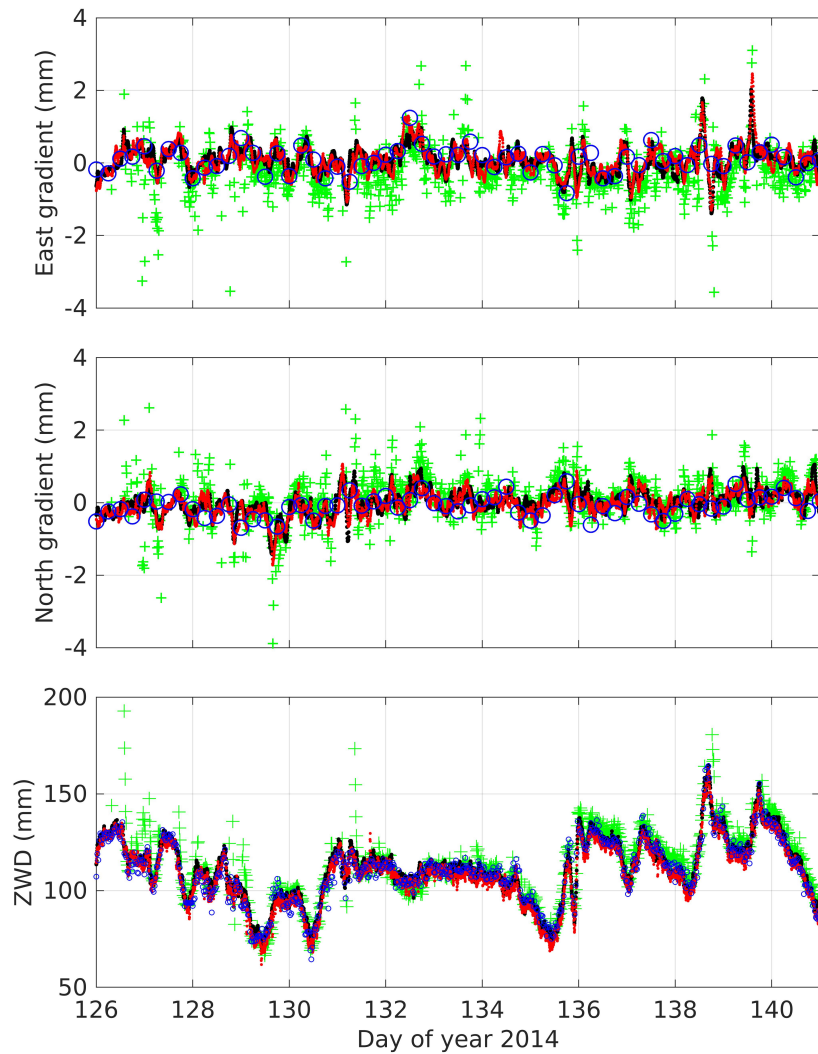


Figure 15. The wet gradients and the ZWD during the VLBI CONT14 campaign 6–20 May (days 126–140). The temporal resolution for the VLBI (blue circles) gradients is 6 h and the ZWD 30 min, 5 min for the GPS gradients for ONSA (red dots) and ONS1 (black dots), and 15 min for the WVR (green plus).

We attribute the lower correlation coefficients obtained between VLBI-GPS and VLBI-WVR using 6 h averages during the
 10 CONT14 campaign compared to GPS-WVR 15 min averages for the month of May 2014 in Figure 13 to the sparse sequential

Table 11. Comparison of estimated wet gradients from VLBI relative to GPS and WVR data.

Reference instrument	Mean difference ^a		Standard deviation		Correlation coefficient	
	East	North	East	North	East	North
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
ONSA	0.01	-0.03	0.22	0.20	0.71	0.57
ONS1	0.03	-0.08	0.22	0.20	0.71	0.56
WVR	0.30	-0.17	0.27	0.27	0.65	0.58

^a The mean difference is VLBI—reference instrument.

sampling of the sky by the VLBI observations. On the other hand, averaging the WVR gradients over ± 3 h reduces some of the noise seen in the 15 min values. The future use of the twin telescopes with faster slewing speeds at the site is likely to improve this situation. During CONT14 there were approximately 360 useful observations at Onsala per day. We expect this to increase by a factor of 6–7 when using the new VLBI Geodetic Observing System (VGOS) (Niell et al., 2018), which means
15 that the use of twin telescopes could result in 200 observations per hour. This in turn makes it possible to improve the temporal resolution of the estimated atmospheric gradients.

Finally, we like to use this 15-day long time series for a discussion on gradient variability. At the end of day 135, see the ZWD plot in Figure 15, more humid air is starting to enter over the site. We note a sudden decrease, followed by a rapid increase. In Figure 16 we zoom in on the gradients and the ZWD during this period. Here we have an example with wet
5 gradients from GPS and WVR gradients when a warm front passage occurs in the evening of day 135. During this passage there is also a smaller drier air mass present causing a decrease followed by an increase in the ZWD. During this dip in ZWD the wind at the ground was from the west increasing from 7 m/s at 18 UT to 11 m/s at 24 UT. During the decrease in ZWD
we see a clear positive east gradient and during the following increase in ZWD the east gradient has a negative peak. Also during the first few hours of day 136 a decrease in the ZWD corresponds to positive values for the east gradient, and the wind continued to come from the west. This is as expected, but there are also variations in the north gradient during this period, consistently detected by the WVR and the GPS data, showing that the wind at the ground was not fully representative for all altitudes. ~~This example illustrates a situation where GPS/GNSS data can be used to evaluate high resolution numerical weather
10 models.~~

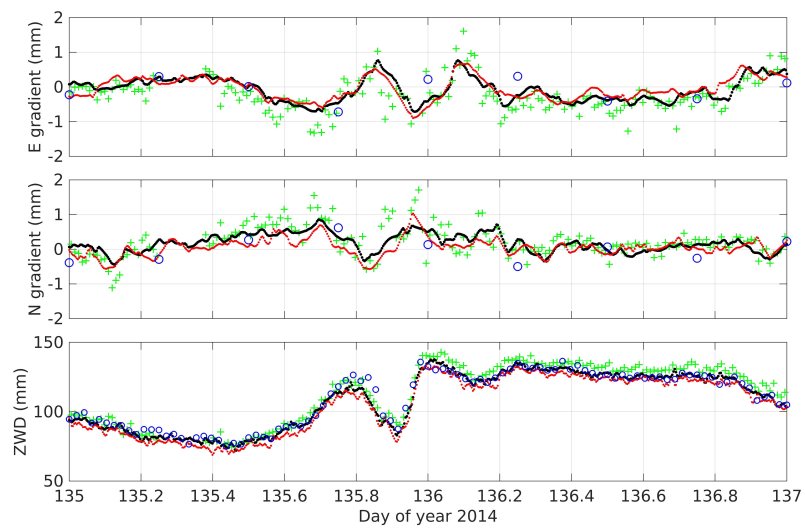


Figure 16. Zoom in on the time series in Figure 15. The symbols are as before: VLBI gradients (blue circles), GPS gradients for ONSA (red dots) and ONS1 (black dots), and WVR (green plus).

6 Conclusions and suggestions for future work

We have ~~shown that~~ estimated linear horizontal gradients from GPS data from five sites in Sweden ~~can be understood based on meteorological phenomena~~. Averaging gradients in the east and the north direction over one month gives correlation coefficients of up to 0.9 when compared to gradients calculated from meteorological analyses of the ECMWF. Monthly averages of the
15 gradients are dominated by the hydrostatic component.

No significant long-term trends were detected for the ~~horizontal-GPS~~ gradients. If small gradient trends are detected in the future we recommend to critically assess if they could be caused by station problems or confirmed by a nearby (or even collocated) station.

When studying gradients averaged over shorter time scales, e.g. 15 min, we find the wet component of the gradients to cause
20 most of the variability. We confirm the result from Kačmařík et al. (2018), that an elevation cutoff angle of 3° implies a better agreement when comparing GPS gradients with those from a WVR, in spite of the fact that the WVR does not observe the atmosphere below elevation angles of 20° . Related to this is that by using a 3° elevation cutoff angle in the GPS processing will decrease the amplitude of the GPS gradients by approximately 20 % compared to a 20° cutoff angle. We interpret this result as the combined impact of two possible causes: (1) the averaging of a larger air mass results in a similar decrease in gradient
25 amplitudes as the averaging of gradients over longer time periods, and (2) the higher cutoff angle implies larger uncertainties and a larger scatter and thereby also an increase of the mean amplitude of the estimated gradients. The relative importance of these two effects are recommended to be studied further, e.g. by using simulations based on high resolution numerical weather models.

Correlation coefficients between wet gradients ~~simultaneously~~ estimated from GPS and the WVR data can for specific
30 months reach up to 0.8. Based on the four years of results we note a strong seasonal dependence, from 0.3 during months with smaller gradients to 0.8 during months with larger gradients, typically during the warmer, and more humid, part of the year. Related to this we suggest further studies of large wet gradients estimated from GPS, again in combination with meteorological high-resolution models ~~, both for evaluation of the performance of the model and for~~ for verification of the quality of the gradients.

In general we also note slightly higher correlation coefficients for the GPS derived gradients in the east compared to the north direction. We interpret this difference to be caused by an inhomogeneous spatial sampling on the sky, which is important when we assume that the ~~model describing linear~~ linear model describing horizontal gradients has deficiencies. The different sampling on the sky is an important issue for any comparison between different techniques. This question remains unresolved
5 and ~~would have to be studied later~~ is also recommended for further studies.

Additional issues that deserve attention in future studies, in addition to similar studies in different climates, e.g. the tropics, can include multi-GNSS observations. At latitudes similar to those in this study, the use of GNSS satellites with a higher orbit inclination will reduce the part of the sky not sampled by GPS.

For VLBI the use of VGOS (twin) telescopes will also dramatically improve the sampling of the atmosphere. When WVR data are used to evaluate gradients from the space geodetic techniques one may consider to also apply different constraints for the temporal variability of these estimates.

Data availability. The input GNSS data, in RINEX format, are available from EUREF, <https://igs.bkg.bund.de/dataandproducts/browse>. The input VLBI data are available from the IVS, <ftp://ivs.bkg.bund.de/pub/vlbi/ivsdata/db/2014/>. The ECMWF gradients are accessible from the Technical University of Vienna, http://vmf.geo.tuwien.ac.at/trop_products/GNSS/LHG/. The estimated gradients from GPS, VLBI, and WVR data have been registered and archived by the Swedish National Data Service (SND): doi:10.5878/nswt-yr39.

Author contributions. Gunnar Elgered coordinated and wrote the major part of the manuscript and together with Tong Ning planned the different GNSS data analyses during the COST Action ES1206. Tong Ning performed the GNSS data analyses, resulting in the estimated gradients. Peter Forkman and Rüdiger Haas carried out the same task for WVR and VLBI data, respectively. All authors contributed in the writing process, in particular to the sections presenting the results produced by each author and approved the entire manuscript before the submission.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. We appreciate the constructive comments and suggestions from the editor and the three referees. They resulted in a significantly improved paper, offering additional possible explanations to the obtained results as well as additional studies. For example, the use of a 3° elevation cutoff angle in the GPS data processing was not included in our original manuscript. The map in Figure 1 was produced using the Generic Mapping Tools (Wessel and Smith, 1998).

References

- Bar-Sever, Y.-E., Kroger, P. M., and Börjesson, J. A.: Estimating horizontal gradients of tropospheric path delay with a single GPS receiver, *J. Geophys. Res.*, 103(B3), 5019–5035, doi:10.1029/97jb03534, 1998.
- 15 Bertiger, W., Desai, S.D., Haines, B., Harvey, N., Moore, A.W., Owen, S., and Weiss, J.P.: Single receiver phase ambiguity resolution with GPS data, *J. Geod.*, 84:327–337, doi:10.1007/s00190-010-0371-9, 2010.
- Boehm, J., Werl, B. and Schuh, H.: Troposphere mapping functions for GPS and very long baseline interferometry from European Centre for Medium-Range Weather Forecasts operational analysis data, *J. Geophys. Res.*, 111, B02406, doi:10.1029/2005JB003629, 2006.
- Boehm, J. and Schuh, H.: Troposphere gradients from the ECMWF in VLBI analysis, *J. Geod.*, 81:403–408, doi: 10.1007/s00190-007-0144-2, 2007.
- 20 Brown, R. A.: A secondary flow model for the planetary boundary layer, *J. Atmos. Sci.*, 27, 742–757, 1970.
- Bruyninx, C., Habrich, H., Söhne, W., Kenyeres, A., Stangl, G., and Völksen, C.: Enhancement of the EUREF Permanent Network Services and Products, *Geodesy for Planet Earth, IAG Symposia Series*, 136, 27–35, doi:10.1007/978-3-642-20338-1_4, 2012.
- Chen, G., and Herring, T. A.: Effects of atmospheric azimuthal asymmetry on the analysis of space geodetic data, *J. Geophys. Res.*, 25 102(B9):20489–20502, doi:10.1029/97JB01739, 1997.
- Craig, R. A., I. Katz, I., and P. J. Harney, P. J.: Sea breeze cross sections from psychrometric measurements, *Bull. Am. Meteorol. Soc.*, 26(10), 405–410, 1945.
- Davis, J. L., Herring, T. A., Shapiro, I. I., Rogers, A. E. E., and G. Elgered, *Geodesy by radio interferometry: Effects of atmospheric modeling errors on estimates of baseline length*, *Radio Sci.*, 20, 1593–1607, doi:10.1029/RS020i006p01593, 1985.
- 30 Davis, J. L., Elgered, G., Niell, A. E., and Kuehn, C. E.: Ground-based measurement of gradients in the “wet” radio refractivity of air, *Radio Sci.*, 28(6), 1,003–1,018, doi:10.1029/93RS01917, 1993.
- Douša, J., Václavovic, P., Eliaš, M.: Tropospheric products of the second European GNSS reprocessing (1996–2014), *Atmos. Meas. Tech.*, 10:1–19, doi:10.5194/amt-10-1-2017, 2017.
- Elgered, G., and Jarlemark, P.O.J.: Ground-Based Microwave Radiometry and Long-Term Observations of Atmospheric Water Vapor, *Radio Sci.*, 33, 707–717, doi:10.1029/98RS00488, 1998.
- 35 Gradinarsky, L. P., Haas, R., Elgered, G., and Johansson, J. M.: Wet path delay and delay gradients inferred from microwave radiometer, GPS and VLBI observations, *Earth Planets Space*, 52(10), 695–698, doi:10.1186/BF03352266, 2000.
- Haas, R., Hobiger, T., Kurihara S., and Hara, T.: Ultra-rapid earth rotation determination with VLBI during CONT11 and CONT14, *Journal of Geod.*, 91(7), 831–837, doi:10.1007/s00190-016-0974-x2016, 2017.
- Hewson, E. W. and Longley, R. W.: *Meteorology: Theoretical and Applied*, New York, John Wiley & Sons, 1944
- IERS Conventions: Gérard Petit and Brian Luzum (eds.). (IERS Technical Note; 36) Frankfurt am Main: Verlag des Bundesamts für Kartographie und Geodäsie, 179 pp., ISBN 3-89888-989-6, 2010.
- 5 Jarlemark, P.O.J., Emardson, T.R., and Johansson, J.M.: Wet Delay Variability Calculated from Radiometric Measurements and Its Role in Space Geodetic Parameter Estimation, *Radio Sci.*, 33, 719–730, doi:10.1029/98RS00551, 1998.
- Kačmařík, M., Douša, J., Zus, F., Václavovic, P., Balidakis, K., Dick, G., Wickert, J.: Sensitivity of GNSS tropospheric gradients to processing options, *Ann. Geophys. Discuss.*, doi:10.5194/angeo-2018-93, 2018.
- 10 Koulali, A., Ouazar, D., Bock, O., and Fadil, A.: Study of seasonal-scale atmospheric water cycle with ground-based GPS receivers, radiosondes and NWP models over Morocco, *Atmos. Res.*, 104–105, 273–291, doi:10.1016/j.atmosres.2011.11.002

- Li, X., Zus, F., Lu, C., Ning, T., Dick, G., Ge, M., Wickert, J., and Schuh, H.: Retrieving high-resolution tropospheric gradients from multiconstellation GNSS observations, *Geophys. Res. Lett.*, 42(10), 4173–4181, doi:10.1002/2015GL063856, 2015.
- Lu, C., Li, X., Li, Z., Heinkelmann, R., Nilsson, T., Dick, G., Ge, M., and Schuh, H.: GNSS tropospheric gradients with high temporal resolution and their effect on precise positioning, *J. Geophys. Res. Atmos.*, 121, 912–930, doi:10.1002/2015JD024255, 2016.
- 15 Lyard, F., Lefevre, F., Letellier, T., and Francis, O.: Modelling the global ocean tides: Modern insights from FES2004, *Ocean Dyn.*, 56, 394, doi:10.1007/s10236-006-0086-x, 2006.
- Ma, C., Sauber, J. M., Bell, L. J., Clark, T. A., Gordon, D., Himwich, W. E., and Ryan, J. W.: Measurement of horizontal motions in Alaska using very long baseline interferometry, *J. Geophys. Res.*, 95, 21991–2011, doi:10.1029/JB095iB13p21991, 1990.
- 20 MacMillan, D. S.: EOP and scale from continuous VLBI observing: CONT campaigns to future VGOS networks, *J. Geod.*, 91, doi:10.1007/s00190-017-1003-4, 2017.
- Matteo, N. A., and Morton, Y. T.: Ionosphere geomagnetic field: Comparison of IGRF model prediction and satellite measurements 1991–2010, *Radio Sci.*, 46, RS4003, doi:10.1029/2010RS004529, 2011.
- Meindl, M., Schaer, S., Hugentobler, U., and Beutler, G.: Tropospheric Gradient Estimation at CODE: Results from Global Solutions, *J. Meteorol. Soc. Japan*, 82, 331–338, doi:10.2151/jmsj.2004.331, 2004.
- 25 Miller, S. T. K., Keim, B. D., Talbot, R. W., and Mao, H.: Sea breeze: Structure, forecasting, and impacts, *Rev. Geophys.*, 41(3), 1011, doi:10.1029/2003RG000124, 2003
- Nahmani, S., Bock, O., and Guichard, F.: Sensitivity of GPS tropospheric estimates to mesoscale convective systems in West Africa, *Atmos. Chem. Phys. Discuss.*, doi:10.5194/acp-2018-1242, in review, 2019.
- 30 Niell, A. E.: Global mapping functions for the atmosphere delay at radio wavelengths, *J. Geophys. Res.*, 101(B2), 3227–3246, doi:10.1029/95JB03048, 1996.
- Niell, A., Barrett, J., Burns, A., Cappallo, R., Corey, B., Derome, M., C. Eckert, C., Elosegui, P., McWhirter, R., Poirier, M., Rajagopalan, G., Rogers, A., Rusczyk, C., SooHoo, J., Titus, M., Whitney, A., Behrend, D., Bolotin, S., Gipson, J., Gordon, D., Himwich, E., and Petrachenko, B.: Demonstration of a broadband very long baseline interferometer system: A new instrument for high-precision space geodesy, *Radio Sci.*, 53, doi:10.1029/2018RS006617, 2018.
- 35 Nilsson, T., and Elgered, G.: Long-term trends in the atmospheric water vapor content estimated from ground-based GPS data, *J. Geophys. Res.*, 113(D19), D19101, doi:10.1029/2008JD010110, 2008.
- Ning, T., Elgered, G., Willén, U., and Johansson, J.M.: Evaluation of the atmospheric water vapor content in a regional climate model using ground-based GPS measurements, *J. Geophys. Res.*, 118, 1–11, doi: 10.1029/2012JD018053, 2013.
- Nothnagel, A., Artz, T., Behrend, D., and Malkin, Z.: International VLBI Service for Geodesy and Astrometry Delivering high-quality products and embarking on observations of the next generation *J. Geod.*, 91, 711–721, doi: 10.1007/s00190-016-0950-5, 2017.
- 5 Sanchez-Franks, A., Hameed, S., and Wilson, R. E.: The Icelandic Low as a Predictor of the Gulf Stream North Wall Position, *J. Phys. Oceanography*, 46, 3, 817–826, doi:10.1175/JPO-D-14-0244.1, 2016.
- Schmid, R., Steigenberger, P., Gendt, G., Ge, M., Rothacher, M.: Generation of a consistent absolute phase center correction model for GPS receiver and satellite antennas, *J. Geod.*, 81, 781–798, doi: 10.1007/s00190-007-0148-y, 2007.
- Sibois, A., Amiri, N., Bertiger, W., Miller, M., Murphy, D., Ries, P., Sakamura, C., and Sibthorpe, A.: Ensuring a smooth operational transition from GIPSY-OASIS to GipsyX: product verification and validation overview, poster presented at the IGS Workshop, Paris, France, available from <http://www.igs.org/presents/workshop2017>, 2017.
- 10

- Teke, K., Nilsson, T., Böhm, J., Hobiger, T., Steigenberger, P., Garcia-Espada, S., Haas, R., and Willis, P.: Troposphere delays from space geodetic techniques, water vapor radiometers, and numerical weather models over a series of continuous VLBI campaigns, *J. Geod.*, 87, 981–1001, doi: 10.1007/s00190-013-0662-z, 2013.
- 540 Thompson, D. W. J., and Wallace, J. M.: The Arctic oscillation signature in the wintertime geopotential height and temperature fields, *Geophys. Res. Lett.*, 25, 1297–1300, doi: 10.1029/98GL00950, 1998.
- Webb, F. H. & Zumberge, J. F.: An Introduction to the GIPSY/OASIS-II, JPL Publ., D-11088, Jet Propulsion Laboratory, Pasadena, California, 1993.
- Wessel, P. and Smith, W. H. F.: New, improved version of generic mapping tools released, *EOS Trans. Amer. Geophys. U.*, 79(47), 579, 545 doi:10.1029/98EO00426, 1998.
- Westwater, E.R., and Guiraud, F.O.: Ground-based microwave radiometric retrieval of precipitable water vapor in presence of clouds with high liquid content, *Radio Sci.*, 15, 947–957, doi:10.1029/RS015i005p00947, 1980.
- Zumberge, J. F., Heflin, M. B., Jefferson, D. C., Watkins, M. M., and Webb, F. H.: Precise point positioning for the efficient and robust analysis of GPS data from large networks, *J. Geophys. Res.*, 102, 5005–5017, doi:10.1029/96JB03860, 1997.